AIR FORCE TO 35C2-3-442-14
ARMY TM5-6115-600-24P
NAVY PUBLICATION NAVFAC P-3-628-24P
MARINE CORPS SL-4-07464B

---

# TECHNICAL MANUAL

## ORGANIZATIONAL, INTERMEDIATE
## (FIELD)(DIRECT AND GENERAL SUPPORT)
## AND DEPOT MAINTENANCE
## REPAIR PARTS AND SPECIAL TOOLS LIST

# GENERATOR SET, DIESEL ENGINE DRIVEN, TACTICAL SKID MTD. 100 KW, 3 PHASE, 4 WIRE, 120/208 AND 240/416 VOLTS

BASIC AND ALL CHANGES HAVE BEEN MERGED TO MAKE THIS A COMPLETE PUBLICATION

| DOD MODEL | CLASS | HERTZ | NSN |
|---|---|---|---|
| MEP007B | PRECISE | 50/60 | 6115-01-036-6374 |

INCLUDING OPTIONAL KITS

| DOD MODEL | NOMENCLATURE | NSN |
|---|---|---|
| MEP007BWF | WINTERIZATION KIT, FUEL BURNING | 6115-01-131-7228 |
| MEP007BWE | WINTERIZATION KIT, ELECTRIC | 6115-01-135-6165 |
| MEP116AQM | WHEEL MOUNTING KIT | 6115-01-135-6165 |

DISTRIBUTION STATEMENT A - Approved for public release; distribution is unlimited.

Published Under the Authority of the Secretary of the Air Force, Army, Navy, and Marine Corps

**4 MAY 1992** **CHANGE 4 - 21 DECEMBER 2001**

| | |
|---|---|
| **AIR FORCE** | **TO 35C2-3-442-14** |
| **ARMY** | **TM 5-6115-600-24P** |
| **NAVY** | **NAVFAC P-8-628-24P** |
| **MARINE CORPS** | **SL-4-07464B** |

## LIST OF EFFECTIVE PAGES

INSERT LATEST CHANGED PAGES, DESTROY SUPERSEDED PAGES

Note: The portion of the text effected by the changes is indicated by a vertical line in the outer margins of the page. Changes to illustrations are indicated by miniature pointing hands. Changes to diagrams are indicated by shaded areas.

Dates of issue for original and changed pages are:

| | | | | | |
|---|---|---|---|---|---|
| Original | 0 | 4 May 1992 | Change | 3 | 3 January 2000 |
| Change | 1 | 6 June 1994 | Change | 4 | 21 December 2001 |
| Change | 2 | 2 December 1996 | | | |

TOTAL NUMBER OF PAGES IN THIS PUBLICATION IS 400, CONSISTING OF THE FOLLOWING:

| Page No. | *Change No. | Page No. | *Change No. | Page No. | *Change No. |
|---|---|---|---|---|---|
| **Title** | **4** | 2-193 – 2-201 | 0 | | |
| Title Blank | 0 | **2-202** | **1** | | |
| **A** | **4** | 2-203 – 2-216 | 0 | | |
| B Blank | 0 | **2-217** | **2** | | |
| I - iii | 0 | 2-218 – 2-295 | 0 | | |
| **iv-v** | **4** | 3-0 – 3-2 | 0 | | |
| vi-vii | 0 | **4-1** | **2** | | |
| Viii Blank | 0 | 4-2 – 4-38 | 0 | | |
| 1-1 – 1-13 | 0 | **4-39** | **2** | | |
| 2-0 – 2-2 | 0 | 4-40 – 4-45 | 0 | | |
| **2-3 – 2-4** | **4** | **4-46** | **2** | | |
| 2-5 – 2-6 | 0 | 4-47 – 4-60 | 0 | | |
| **2-7** | **4** | 5-1 – 5-4 | 0 | | |
| 2-8 – 2-10 | 0 | | | | |
| **2-11** | **4** | | | | |
| 2-12 – 2-142 | 0 | | | | |
| **2-143 – 2-144** | **4** | | | | |
| 2-145 – 2-190 | 0 | | | | |
| **2-191 – 2-192** | **3** | | | | |

* Zero in this column indicates an original page.

# TABLE OF CONTENTS

| | | | Page | Illustration |
|---|---|---|---|---|
| Section I | | Introduction | 1-1 | |
| Section II | Repair Parts List | | 2-1 | |

Group 01 Housing

| | | Page | Illustration |
|---|---|---|---|
| 0101 | Housing Doors and Covers | 2-1 | 1 |
| 0102 | Identification Plates | 2-5 | 2 |
| 0103 | Front Housing Panel and Related Parts | 2-7 | 3 |
| 0104 | Rear Housing Panel and Related Parts | 2-9 | 4 |
| 0105 | Document Stowage box, Tool Box, and Related Parts | 2-11 | 5 |
| 0106 | Generator Set Wrench Assembly and Related Parts | 2-13 | 6 |

Group 02 DC Electrical and Control System

| | | Page | Illustration |
|---|---|---|---|
| 0201 | Batteries and Related Parts | 2-15 | 7 |
| 0202 | Slave Receptacles | 2-17 | 8 |
| 0203 | Alternator Guard, Belt, and Related Parts | 2-19 | 9 |
| 0204 | Battery Charging Alternator | 2-21 | 10 |
| 0205 | DC Electrical Wiring Harness | 2-25 | 11 |
| 0206 | Speed Switch and Magnetic Pickup | 2-33 | 12 |
| | Speed Switch and Magnetic Pickup Alternate P/N 90-4002 | 2-35 | 13 |
| 0207 | Low Oil Pressure and High Coolant Temperature Switches | 2-37 | 14 |
| 0208 | DC Circuit Breaker | 2-39 | 15 |
| 0209 | Starter Motor | 2-41 | 16 |
| 0210 | Electrical Shutoff | 2-45 | 17 |

Group 03 Set Control and Instrumentation

| | | Page | Illustration |
|---|---|---|---|
| 0301 | Fault Indicator Assembly and Related Parts | 2-47 | 18 |
| 0302 | Control Cubicle Assembly | 2-51 | 19 |
| 0303 | Throttle Cable Assembly | 2-59 | 20 |
| 0304 | Coolant Temperature, Oil Pressure, and Fuel Level Transmitters | 2-61 | 21 |

Group 04 AC Electrical Control System

| | | Page | Illustration |
|---|---|---|---|
| 0401 | Tactical Relay Box Assembly and Related Parts | 2-63 | 22 |
| 0402 | Special Relay Box and Related parts | 2-67 | 23 |
| 0403 | Exciter-Regulator and Related Parts | 2-73 | 24 |
| 0404 | Voltage Regulator Assembly | 2-77 | 25 |
| 0405 | Reconnection Terminal Board Assembly and Related Parts | 2-85 | 26 |
| 0406 | Circuit Breaker Assembly | 2-89 | 27 |
| | Alternate Circuit Breaker | 2-92 | 28 |
| 0407 | Load Terminal Board and Related Parts | 2-93 | 29 |
| 0408 | Convenience Receptacle and Related Parts | 2-95 | 30 |
| 0409 | Current Transformer Assembly | 2-97 | 31 |
| 0410 | Load Measuring Unit and Related Parts | 2-99 | 32 |
| 0411 | AC Electrical Wiring Harness | 2-101 | 33 |

## TABLE OF CONTENTS (Continued)

Page Illustration

**Group 05** Fuel System

0501 Fuel Filter and Pump Assembly and Related Parts 2-109 34
0502 Fuel Lines and Filter and Related Parts 2-113 35
0503 Day Tank, Ether Kit, and Related Parts 2-115 36
0504 Fuel Lines and Related Parts 2-119 37
0505 Fuel Tank Assembly 2-125 38
0506 Fuel Priming Pump 2-127 39
0507 Fuel Injection Pump 2-129 40
0508 Fuel Injection Valves and Lines 2-135 41
0509 Filter Neck and Cap 2-137 42

**Group 06** Exhaust and Breather System

0601 Exhaust and Breather System 2-139 43

**Group 07** Cooling System

0701 Radiator and Shutter Assembly and Related Parts 2-143 44
0702 Water Pump 2-147 45
0703 Water Lines 2-149 46
0704 Coolant Thermostat 2-151 47
0705 Fan Belts 2-153 48

**Group 08** Lifting and Support System

0801 Lifting Frame 2-155 49
0802 Control Panel Supports 2-157 50

**Group 09** Power Generation System

0901 Generator Assembly and Related Parts 2-159 51
0902 Generator Assembly 2-161 52

**Group 10** Engine

1001 Air Cleaner and Related Parts 2-169 53
1002 Air Lines 2-171 54
1003 Turbocharger 2-173 55
1004 Governor Fastener 2-179 56
1005 Governor Drive 2-181 57
1006 Governor 2-191 58
1007 Engine Fan and Related parts 2-199 59
1008 Engine Oil Cooler 2-201 60
1009 Oil Filter 2-203 61
1010 Damper, Crankshaft Pulley, Trunnion, and Trunnion Support 2-207 62
1011 Exhaust Manifold 2-209 63
1012 Valve Mechanism Cover 2-211 64
1013 Valve Mechanism and Attaching Parts 2-213 65
1014 Cylinder Head Assembly and Related Parts 2-217 66

| | | | | |
|---|---|---|---|---|
| Group 10 (Cont) | 1015 | Oil Pan | 2-219 | 67 |
| | 1016 | Engine Oil Lines | 2-221 | 68 |
| | 1017 | Engine Oil Pump | 2-223 | 69 |
| | 1018 | Connecting Rod and Piston | 2-227 | 70 |
| | 1019 | Flywheel and Flywheel Housing | 2-229 | 71 |
| | 1020 | Front Housing Cover | 2-231 | 72 |
| | 1021 | Battery Charging Alternator Mounting | 2-233 | 73 |
| | 1022 | Front Housing Fastener | 2-235 | 74 |
| | 1023 | Front Housing | 2-237 | 75 |
| | 1024 | Timing Gears | 2-239 | 76 |
| | 1025 | Camshaft | 2-241 | 77 |
| | 1026 | Crankshaft and Crankshaft Seal | 2-243 | 78 |
| | 1027 | Oil Filter and Related Parts | 2-245 | 79 |
| | 1028 | Cylinder Block | 2-247 | 80 |
| Group 11 | Support System | | | |
| | 1101 | Skid Base | 2-251 | 81 |
| Group 12 | Fuel Burning Winterization Kit | | | |
| | 1201 | Fuel Burning Winterization Kit | 2-255 | 82 |
| Group 13 | Electrical Winterization Kit | | | |
| | 1301 | Electrical Winterization Kit | 2-269 | 83 |
| Group 14 | Bulk Materials | | | |
| | 1401 | Bulk Materials List | 2-281 | |
| Group 15 | 1501 | Wheel Mounting Kit | 2-283 | 84 |
| | | Wheel Assembly – Wheel Mounting Kit | 2-285 | 85 |
| | | Rear Axle Assembly – Wheel Mounting Kit | 2-287 | 86 |
| | | Front Axle Assembly – Wheel Mounting Kit | 2-289 | 87 |
| | | Brake Assembly – Wheel Mounting Kit | 2-293 | 88 |
| | | Handbrake and Shaft Assembly | 2-295 | 89 |
| Section III | Special Tools List | | 3-1 | |
| Section IV | NSN, Reference Number Index | | 4-1 | |
| Section V | Reference Designator Index | | 5-1 | |

# LIST OF ILLUSTRATIONS

| Figure | Title | Page |
|---|---|---|
| 1. | Housing Doors and Covers | 2-0 |
| 2. | Identification Plates | 2-6 |
| 3. | Front Housing Panel and Related Parts | 2-8 |
| 4. | Rear Housing Panel and Related Parts | 2-10 |
| 5. | Document Stowage Box, Tool Box, and Related Parts | 2-12 |
| 6. | Generator Set Wrench Assembly and Related Parts | 2-14 |
| 7. | Batteries and Related Parts | 2-16 |
| 8. | Slave Receptacles | 2-18 |
| 9. | Alternator Guard, Belt, and Related Parts | 2-20 |
| 10. | Battery Charging Alternator | 2-22 |
| 11. | DC Electrical Wiring Harness | 2-26 |
| 12. | Speed Switch and Magnetic Pickup | 2-34 |
| 13. | Speed Switch and Magnetic Pickup | 2-36 |
| 14. | Low Oil Pressure and High Coolant Temperature Switches | 2-38 |
| 15. | DC Circuit Breaker | 2-40 |
| 16. | Starter Motor | 2-42 |
| 17. | Electrical Shutoff | 2-46 |
| 18. | Fault Indicator Assembly and Related Parts | 2-48 |
| 19. | Control Cubicle Assembly | 2-52 |
| 20. | Throttle Cable Assembly | 2-58 |
| 21. | Coolant Temperature, Oil Pressure, and Fuel Level Transmitters | 2-60 |
| 22. | Tactical Relay Box Assembly and Related Parts | 2-62 |
| 23. | Special Relay Box and Related Parts | 2-66 |
| 24. | Exciter-Regulator and Related Parts | 2-72 |
| 25. | Voltage Regulator Assembly | 2-78 |
| 26. | Reconnection Terminal Board Assembly and Related Parts | 2-84 |
| 27. | Circuit Breaker Assembly | 2-88 |
| 28. | Alternate Circuit Breaker (Load Contractor Assembly) | 2-92 |
| 29. | Load Terminal Board and Related Parts | 2-94 |
| 30. | Convenience Receptacle and Related Parts | 2-96 |
| 31. | Current Transformer Assembly | 2-98 |
| 32. | Load Measuring Unit and Related Parts | 2-100 |
| 33. | AC Electrical Wiring Harness | 2-102 |
| 34. | Fuel Filter and Pump Assembly and Related Parts | 2-110 |
| 35. | Fuel Lines and Filter and Related Parts | 2-114 |
| 36. | Day Tank, Ether Kit, and Related Parts | 2-116 |
| 37. | Fuel Lines and Related Parts | 2-118 |
| 38. | Fuel Tank Assembly | 2-124 |
| 39. | Fuel Priming Pump | 2-126 |
| 40. | Fuel Injection Pump | 2-128 |
| 41. | Fuel Injection Valves and Lines | 2-136 |
| 42. | Filler Neck and Cap | 2-138 |
| 43. | Exhaust Breather System | 2-140 |
| 44. | Radiator and Shutter Assembly and Related Parts | 2-142 |
| 45. | Water Pump | 2-146 |
| 46. | Water Lines | 2-150 |
| 47. | Coolant Thermostat | 2-152 |
| 48. | Fan Belts | 2-154 |

# LIST OF ILLUSTRATIONS (Continued)

| Figure | Title | Page |
|---|---|---|
| 49. | Lifting frame | 2-156 |
| 50. | Control Panel Supports | 2-158 |
| 51. | Generator Assembly and Related Parts | 2-160 |
| 52. | Generator Assembly | 2-162 |
| 53. | Air Cleaner and Related Parts | 2-170 |
| 54. | Air Lines | 2-172 |
| 55. | Turbocharger | 2-174 |
| 56. | Governor Fastener | 2-178 |
| 57. | Governor Drive | 2-182 |
| 58. | Governor | 2-190 |
| 59. | Engine Fan and Related Parts | 2-198 |
| 60. | Engine Oil Cooler | 2-200 |
| 61. | Oil Filter | 2-202 |
| 62. | Damper, Crankshaft Pulley, Trunnion, and Trunnion Support | 2-208 |
| 63. | Exhaust Manifold | 2-210 |
| 64. | Valve Mechanism Cover | 2-212 |
| 65. | Valve Mechanism and Attaching Parts | 2-214 |
| 66. | Cylinder Head Assembly and Related Parts | 2-216 |
| 67. | Oil Pan | 2-220 |
| 68. | Engine Oil Lines | 2-222 |
| 69. | Engine Oil Pump | 2-224 |
| 70. | Connecting Rod and Piston | 2-226 |
| 71. | Flywheel and Flywheel Housing | 2-228 |
| 72. | Front Housing Cover | 2-230 |
| 73. | Battery Charging Alternator Mounting | 2-232 |
| 74. | Front Housing Fastener | 2-234 |
| 75. | Front Housing | 2-236 |
| 76. | Timing Gears | 2-238 |
| 77. | Camshaft | 2-240 |
| 78. | Crankshaft and Crankshaft Sea | 2-242 |
| 79. | Oil Filler and Related Parts | 2-244 |
| 80. | Cylinder Block | 2-246 |
| 81. | Skid Base | 2-250 |
| 82. | Fuel Burning Winterization Kit | 2-254 |
| 83. | Electrical Winterization Kit | 2-268 |
| 84. | Wheel Mounting Kit | 2-282 |
| 85. | Wheel Assy - Wheel Mounting Kit | 2-286 |
| 86. | Rear Axle Assy - Wheel Mounting Kit | 2-288 |
| 87. | Front Axle Assy - Wheel Mounting Kit | 2-290 |
| 88. | Brake Assy - Wheel Mounting Kit | 2-292 |
| 89. | Hand Brake and Shaft Assy | 2-294 |
| 90. | Special Tools List | 3-0 |

# Example 1

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 02- DC ELECTRICAL AND CONTROL SYSTEM | | | | |
| 9 | | | | | | | | | ALTERNATOR GUARD, BELT, AND RELATED PARTS | | | | |
| 9 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-225-8497 | SCREW, HEX HEAD<br>MS90725-32 | 96906 | EA | 1 | 28 |
| 9 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-407-9566 | WASHER, LOCK<br>MS35338-45 | 96906 | EA | 2 | 67 |
| 9 | 3 | XBOZZ | XBOZZ | XBFZZ | XBFZZ | | | | GUARD, FAN, ALTERNATOR<br>76-4139 | 30554 | EA | 1 | 1 |
| 9 | 4 | PAOFF | PAOZZ | PAOZZ | PAOZZ | D | .035 | | BELT, ALTERNATOR DRIVE<br>71-4938-03<br>5-8113 | 30554<br>20796 | EA | 1 | 1 |

# EXAMPLE 2

## JOINT MILITARY SERVICES UNIFORM SMR CODING MATRIX

| SOURCE | | | | MAINTENANCE | | | | RECOVERABILITY | | ERRC CODE | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | USE | | REPAIR | | | | | |
| 1st Position | | 2nd Position | | 3 rd Position | | 4th Position | | 5th Position | | 6th Position | |
| | | A | Stocked | | | Z | No Repair | Z | Nonreparable Condemn by 3rd Position Level | N | Nonrecoverable XB3 Condemn by Any Level |
| | | B | Insurance | | | | | | | | |
| | | C | Deteriorative | | | | | | | | |
| P | Procurable | E | Support Equipment, Stocked | O | Remove/ Replace by Organizational level | B | No Repair Recondition | O | Reparable Condemn by Orgaizational (or Field or Depot) | P | Recoverable XF3 Condemn by Field |
| | | F | Support Equipment, Nonstocked | | | | | | | | |
| | | G | Life of System Support | | | | | | | C | Recoverable XD1 (SCARS) Condemn by Depot |

**EXAMPLE 1 -**

SMR CODE with line and pointer leading to EXAMPLE 2 (JOINT MILITARY SERVICES UNIFORM SMR CODING MATRIX), indicates Army, Air Force, Navy and Marine Corps multi-service matrix.

**EXAMPLE 2 -**

Reference the circled item (PAOZZ), the connecting lines, pointers and circles define the SMR CODE: PAOZZ.

## JOINT MILITARY SERVICES UNIFORM SMR CODING MATRIX

| SOURCE | | | | MAINTENANCE | | | | RECOVERABILITY | | ERRC CODE | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | USE | | REPAIR | | | | | |
| 1st Position | | 2nd Position | | 3rd Position | | 4th Position | | 5th Position | | 6th Position | |
| P | Procurable | A | Stocked | O | Remove/ Replace by Organizational level | Z | No Repair | Z | Nonreparable Condemn by 3rd Position Level | N | Nonrecoverable XB3 Codemn by Any Level |
| | | B | Insurance | | | | | | | | |
| | | C | Deteriorative | | | | | | | | |
| | | E | Support Equipment, Stocked | | | B | No Repair Recondition | | | P | Recoverable XF3 Condemn by Field |
| | | F | Support Equipment, Nonstocked | | | | | O | Reparable Condemn by Organizational (or Field or Depot) | | |
| | | G | Life of System Support | | | | | | | C | Recoverable XD1 (SCARS) Condemn by Depot |
| K | Component of a Repair Kit | F | Intermediate Kit | F | Remove/ Replace by Intermediate Level | O | Repair by Organizational | F | Reparable Condemn by Intermediate (or Depot) | | |
| | | D | Depot Kit | | | | | | | T | Recoverable XD2 Condemn by Depot |
| | | B | In Both Kits | | | F | Repair by Intermediate | | | | |
| M | Manufacture | O | Organization | | | | | | | | |
| | | F | Intermediate | | | | | | | | |
| | | D | Depot | D | Remove/ Replace by Depot Level | D | Limited Repair by O or F Level<br>Overhaul by Depot | D | Reparable Condemn by Depot Only | S | Nonexpendable Support Equipment, Depot ND2 |
| A | Assemble | O | Organizational | | | | | | | | |
| | | F | Intermediate | | | | | | | | |
| | | D | Depot | | | | | | | U | Nonexpendable Support Equipment, Organizational, Intermediate and Nonprime Depot NF2 |
| X | Nonprocured | A | Requisition NHA | | | | | A | Special Handling | | |
| | | B | Reclamation or Requisition by Part Number | | | L | Repair by Depot | | | | |
| | | C | Mfg Drawings | | | | | | | | |

NOTE: Recoverability Code "L" is no longer valid. When this code is encountered in existing TOs, apply this definition: Reparable item. Condemn and dispose of at Depot Level only.

# ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT SUPPORT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE REPAIR PARTS AND SPECIAL TOOLS LIST

## Section I. INTRODUCTION

1. SCOPE. This Joint Air Force, Army, Navy, and Marine Corps manual lists repair parts and special tools required for the performance of organizational intermediate (field), (direct and general support) and depot maintenance of the generator set. The following paragraphs are keyed to applicable users. All users should read paragraph 4, Special Information, prior to using this manual.

2. GENERAL. This Repair Parts and Special Tools List is divided into the following sections:

a. (ALL) Repair Parts - Section II. A list of repair parts authorized for the performance of maintenance at the organizational, intermediate (field), direct support, general support and depot level in figure and item number sequence.

b. (ALL) Special Tools, Test and Support Equipment - Section III. A list of special tools, test and support equipment authorized for the performance of maintenance at the organizational, intermediate (field), (direct support and general support) and depot level.

c. National Stock Number and Reference Number Index - Section IV. A list of National stock numbers in numerical sequence, followed by a list of reference numbers appearing in all the listings, in alphanumeric sequence, cross-referenced to the illustration figure number and item number.

d. Reference Designator Index - Section V. The reference designator column includes all assigned reference designators arranged first in alphabetical order, second in numeric order. Opposite each symbol is listed the figure and item number of the part in Section II and the reference number.

3. EXPLANATION OF COLUMNS. The following provides an explanation of columns in the tabular lists in Sections II and III.

a. (ALL) Illustrations. (Column 1.) This column is divided as follows:

(1) Figure Number. Indicates the figure number of the illustration on which the item is shown.

(2) Item Number. Indicates the number used to identify the item on the illustration.

b. (ALL) Source. Maintenance, and Recoverability Codes (SMR) (Column 2.)

(1) Uniform Source Codes applicable to all Military Services.

GENERAL: Source Codes are assigned to support items to indicate the manner of acquiring support items for maintenance, repair, or overhaul of end items. Source codes are entered in the first and second positions of the Uniform SMR Code format as follows:

| CODE | DEFINITION |
|---|---|
| PA | Item procured and stocked for anticipated or known usage. |
| PB | Item procured and stocked for insurance purposes because essentiality dictates that a minimum quantity be available in the supply system. |
| PC | Item procured and stocked and which otherwise would be coded PA except that it is deteriorative in nature. |
| PD | Support item, excluding support equipment, procured for initial issue or outfitting and stocked only for subsequent or additional initial issues or outfittings. Not subject to automatic replenishment. |
| PE | Support equipment procured and stocked for initial issue or outfittings to specified maintenance repair activities. |
| PF | Support equipment which will not be stocked but which will be centrally procured on demand. |
| PG | Item procured and stocked to provide for substained support for the life of the equipment. It is applied to an item peculiar to the equipment which because of probable discontinuance or shutdown of production facilities would prove uneconomical to reproduce at a later time. |
| KD | An item of depot overhaul/repair kit and not purchased separately. Depot kit defined as a kit that provides items required at the time of overhaul or repair. |
| KF | An item of maintenance kit and not purchased separately. Maintenance kit defined as a kit that provides an item that can be replaced at organizational or intermediate levels of maintenance. |
| KB | Item included in both a depot overhaul/repair kit and a maintenance kit. |
| MO | Item to be manufactured or fabricated at organizational level. |
| MF | Item to be manufactured or fabricated at intermediate maintenance levels.<br>Air Force - Intermediate (*)<br>Army - General Support (*)<br>Marine Corps - 4th Echelon<br>Navy - Ashore |
| MG | Item to be manufactured or fabricated at both afloat and ashore intermediate maintenance levels — Navy use only. |
| MD | Item to be manufactured or fabricated at depot maintenance level. |
| AO | Item to be assembled at organizational level. |
| AF | Item to be assembled at intermediate maintenance levels.<br>Air Force - Intermediate (*)<br>Army - Direct Support (*)<br>Marine Corps - 3rd Echelon<br>Navy - Afloat |

| CODE | DEFINITION |
|---|---|
| AH | Item to be assembled at intermediate maintenance levels.<br>Air Force - Intermediate (*)<br>Army - General Support (*)<br>Marine Corps - 4th Echelon<br>Navy - Ashore |
| AG | Item to be assembled at both afloat and ashore intermediate maintenance level -- Navy use only. |
| AD | Item to be assembled at depot maintenance levels. |
| XA | Item is not procured or stocked because the requirements for the item will result in the replacement of the next higher assembly. |
| XB | Item is not procured or stocked. If not available through salvage, requisition. |
| XC | Installation drawings, diagram, instruction sheet, field service drawing, that is identified by manufacturer's part number. |
| XD | A support item that is not stocked. When required, item will be procured through normal supply channels. |

(*) NOTE: For USAF and the USA Safeguard Program, only Code "F" will be used to denote intermediate maintenance. On joint programs, use of either code F or H by the joining service will denote intermediate maintenance to USAF and USA Safeguard Program.

(2) Uniform Maintenance Codes applicable to all Military Services: GENERAL: Maintenance Codes are assigned to indicate the levels of maintenance authorized to USE and REPAIR support items. The Maintenance Codes are in the third and fourth position of the Uniform SMR Code Format.

(a) USE (THIRD POSITION): The Maintenance Code entered in the third position indicates the lowest level maintenance level authorized to remove, replace, and use the support item. The Maintenance Code entered in the third position indicates one of the following levels of maintenance.

| CODE | APPLICATION/EXPLANATION |
|---|---|
| O | Support item is removed, replaced, used at the organizational level of maintenance. |
| F | Support item is removed, replaced, used at the following intermediate levels:<br>USAF - Intermediate (*)<br>USA - Direct Support (*)<br>USN - Ashore (only)<br>USMC - Third Echelon |
| G | Support item is removed, replaced, used at both afloat and ashore intermediate levels: Navy only. |
| H | Support item is removed, replaced, used at the following intermediate levels:<br>USAF - Intermediate (*)<br>USA - General Support (*)<br>USN - Ashore (only)<br>USMC - Fourth Echelon |

| CODE | APPLICATION/EXPLANATION |
|---|---|
| D | Support items that are rmoved, replaced, used at Depot only:<br>USAF - Depot, Mobile Depot and Specialized Repair Activity.<br>USA - Depot, Mobile Depot and Specialized Repair Activity.<br>USN - Aviation Rework, Avionics and Ordinance facilities, and Shipyards.<br>USMC - Depot |

(b) REPAIR (FOURTH POSITION): The maintenance code entered in the fourth position indicates whether the item is to be repaired and identifies the lowest maintenance level with the capability to perform complete repair (i.e., all authorized maintenance functions).

| CODE | APPLICATION/EXPLANATION |
|---|---|
| O | The lowest maintenance level capable of complete repair of the support item is the organizational level. |
| F | The lowest maintenance level capable of complete repair of the support item is the following intermediate level:<br>USAF - Intermediate (*)<br>USA - General Support (*)<br>USN - Ashore (only)<br>USMC - fourth Echelon |
| H | The lowest maintenance level capable of complete repair of the support item is the following intermediate level:<br>USAF - Intermediate (*)<br>USA - General Support (*)<br>USN - Ashore (only)<br>USMC - Fourth Echelon |

(*) NOTE: For USAF programs and the USA Safeguard Program, Code F will be used to denote intermediate maintenance. On joint programs, use of either Code F or H by the joining Service will denote intermediate maintenance to USAf and the USA Safeguard Program.

| CODE | APPLICATION/EXPLANATION |
|---|---|
| G | Both afloat and shore intermediate levels are capable of complete repair of support item: Navy only. |
| D | The lowest maintenance level capable of complete repair of the support item is the depot level.<br>USAF - Depot, Mobile Depot, and Specialized Repair Activity.<br>USA - Depot, Mobile Depot, and Specialized Repair Activity.<br>USN - Aviation Rework, Avion ics and Ordinance Facilities, and Shipyards.<br>USMC - Depot. |
| L | Repair restricted to designated Specialized Repair Activity. |
| Z | Nonreparable. No repair is authorized. |
| B | No repair is authorized. The item may be reconditioned by adjusting, lubricating, etc., at the user level. No parts or special tools are procured for the maintenance of this item. |

(3) Uniform Recoverability Codes applicable to all Military Services: GENERAL: Recoverability Codes are assigned to support items to indicate the disposition action on unserviceable items. The recoverability code is entered in the fifth position of the uniform SMR Code format as follows:

| RECOVERABILITY CODES | DEFINITION |
|---|---|
| Z | Nonreparable item. When unserviceable, condemn and dispose at the level indicated in column 3. |
| O | Reparable item. When uneconomically reparable, condemn and dispose at organizational level. |
| H | Reparable item. When uneconomically reparable, condemn and dispose at the following levels:<br>USAF - Intermediate (*)<br>USA - General Support (*)<br>USN - Ashore<br>USMC - Fourth Echelon |
| F | Reparable item. When uneconomically reparable, condemn and dispose at the following intermediate levels:<br>USAF - Intermediate (*)<br>USA - Direct Support (*)<br>USN - Afloat<br>USMC - Third Echelon |
| D | Reparable item. When beyond lower level repair capability, return to depot. Condemnation and disposal not authorized below depot level. |

(*) NOTE: For USAF programs and the USA Safeguard Program, Code F will be used to denote intermediate maintenance. On joint programs, use of either Code F or H by the joining Service will denote intermediate level of USAF and the USA Safeguard Program.

| RECOVERABILITY CODES | DEFINITION |
|---|---|
| L | Reparable item. Repair, condemnation and disposal not authorized below depot/ Specialized Repair Activity level. |
| A | Item requires special handling or condemnation procedure because of specific reasons (i.e., Precious metal content, high-dollar value, critical material or hazardous material). Refer to appropriate manuals/directives for specific instructions. |

c. (USMC) Special Stockage Indicator Code and Replacement Factor (Column 3).

(1) Special Stockage Indicator Code. This column reflects the condition under which certain maintenance parts, (parts assigned NSN's and coded in the "P" series source code of the SMR code), are stocked. The codes are explained as follows:

| | |
|---|---|
| No Code | Indicates that the part may or may not be authorized in initial allowances to using or supporting organizations. The manner of determining initial allowances is explained in paragraph (2) below. |
| I | Applied to maintenance parts for which predicted consump- |

| | |
|---|---|
| | tion would not warrant inclusion in Mount-Out but, for which a quantity of one (i) is authorized as insurance for Mount-Out using a 360 day criteria. This criteria is based on the total density of equipments employed by the DIV/WING TEAM. Mount-OuT allowances, so authorized, will be stocked by the FSR or the MWSG in the case of Marine Wing preculiar equipment, as applicable. |
| D | Applied to maintenance parts that are not considered critical or essential to be on hand and are, therefore, not authorized in initial allowances; however, these items are based upon usage. |
| T | Indicates that the part is authorized in garrison operating allowances in order to comply with state and local laws; however, the part is not authorized in Mount-Out since it is not combat essential. |

(2) Replacement factor. This column reflects the replacement factor assigned to each nationally stock numbered maintenance repair part. This factor is assigned to the repair part at every appearance in the publication The replacement factor, expressed as a decimal, indicates the average rate at which the type of item so coded has been used by Marine Corps field units or the rate at which design engineers anticipate the item will fail, wear out, or otherwise require replacement. All computations are based on a replacement period of one year. Therefore, a replacement factor of 0.08, applied to an item in this stock list, indicates that eight out of every one hundred of such items used in the item of equipment to which this publication pertains, is predicted to need replacement in one year. Likewise, 0.004 reflects that four out of every thousand in use are predicted to require replacement in one year, while 2.0 shows that every one in use is predicted to be replaced twice during each year.

(a) Initial authorized stockaqe levels of consumable and salvageable items for an organization are to be computed for predicted consumption based on the number of items employed and/or supported by an organization within the number of days for which stockage is authorized. In computing Garrison Operating Stock or Mount-Out, authorized levels can be determined by the requiring Marine Corps unit by multiplying the replacement factor times the quantity used per equipment times the number of end items employed by the using organization or supported by the service organization times the authorized day level expressed in and divided by 12. Specific formulas and examples are provided in Marine Corps Order, MCO P4400.79.

The replacement factors used in initial stockage computations should be revised, if warranted, after significant usage is experienced in accordance with the guidelines of MCO 4400.32A. The following formula replacement factor, "X" represents actual usage experience (1 year). "A" represents the application per equipment, and "B" represents the number of equipments supported.

$$W = \frac{X}{A \times B}$$

(b) Initial allowances for maintenance float items (recoverability codes "R" and "D") for the FMF and appropriate post and stations are as furnished by Initial Issue Actions.

Changes to maintenance replacement rates resulting from actual usage may require recomputation of maintenance float allowances by holding units. Any required recomputation of maintenance float allowances will be made in accordance with MCO 4000.6.

d. (ALL) National Stock Number (Column 4) Indicates the National Stock Number assigned to the item and will be used for requisitioning purposes.

e. (ALL) Description (Column 5). Indicates the Federal item name and any additional descriptions of the item required. The abbreviation "w/e" when used as part of the nomenclature, indicates that the National Stock Number includes all armament, equipment, accessories and repair parts issued with the item. A part number or other reference number is followed by the applicable five digit Federal Supply Code for manufacturer. If two reference numbers and Federal Supply Codes for manufactuer are listed, the first listing refers to the Department of Defense Drawing Number, the second listing refers to the actual part manufacturer. Items that are included in kits and sets are listed below the name of the kit or set with the quantity of each item in the kit or set indicated in the quantity incorporated in unit column.

f. (ALL) Unit of Measure (U/M) (Column 6). Indicates the standard of the basic quantity of the listed item as used in performing the actual maintenance function. This measure is expressed by a two-character alphabetical abbreviation (e.g., ea, in, pr, etc.). When the unit of measure differs from the unit of issue, the lowest unit of issue that will satisfy the required units of measure will be requisitioned.

g. (ALL) Quantity Incorporated in Unit (Column 7). Indicates the quantity of the item used in the assembly group. A "V" appearing in this column in lieu of a quantity indicates that a definite quantity cannot be indicated (e.g., shims, spacers, etc.).

h. (MC) Quantity per Equipment (Column 8). Indicates the consolidated quantity of a maintenance part used on an end item upon every appearance in this publication.

4. SPECIAL INFORMATION.

a. Items are indented in the parts listing to show disassembly parts relationship within a figure of text.

b. Army organizational maintenance personnel will extract the items which they require from Section II, 3rd or 4th position of column 2 of the direct and general support RPSTL. Parts which are manufactured or assembled at a higher level than that authorized to install the part are indicated by the use of higher level code in the source column.

c. Stockage Information.

(1) Air Force stockage information is contained in Initial Supply Support Lists issued separately from this publication by Sacramento Air Logistics Center in accordance with AFM 6701, part I, Chapter 12.

(2) Navy stockage objectives are contained in Consolidated Shipboard Allowance List as furnished separately from this publication by the Ship Parts Control Center.

(3) Marine Corps stockage information is contained in Block 3 of this publication.

(4) Army stockage is demand based in accordance with AR 710-2. Repair parts listed in this publication represent those authorized for use at indicated maintenance levels and will be requisitioned on an as-required basis until stockage is justified in accordance with AR 710-2.

## 5. HOW TO LOCATE REPAIR PARTS.

a. (ALL) When National Stock Number or reference number is unknown:

(1) Using the table of contents, determine the functional group; i.e. batteries and related parts, exhaust and breather pipes, within which the repair part belongs. This is necessary since illustrations are prepared for functional groups, and listings are divided into the same groups.

(2) Find the illustration covering the functional group to which repair part belongs.

(3) Identify the repair part on the illustration and note the illustration figure and item number of the repair part.

(4) Using the Repair Parts Listing, find the figure and item number noted on the illustration.

b. (ALL) When national stock number or reference number is known:

(1) Using the index of National Stock Numbers and Reference Numbers, find the pertinent national stock number or reference number. This index is in ascending NSN sequence followed by a list of reference numbers in alphanumeric sequence, cross-referenced to the illustration figure number and item number.

(2) After finding the figure and item number, locate the figure and item number in the repair parts list.

6. (F) USE OF THE REFERENCE DESIGNATOR INDEX SECTION. This Section (Section V) is used when the reference designator is known or identified by other technical manuals supporting this equipment. The reference number is given in this Section. If description or location is desired, note the figure and item number. Turn to Section II to the noted figure and item number. The location of the part and description is given in this listing.

## 7. ABBREVIATIONS.

| ABBREVIATIONS | EXPLANATION |
|---|---|
| cd-or | cadmium-ore |
| zn-pltd | Zinc-plated |
| MOD | Model |
| opn | opening |

## 8. FEDERAL SUPPLY CODES FOR MANUFACTURERS.

| CODE | MANUFACTURER |
|---|---|
| 00656 | Aerovox, Inc.<br>740 Belleville Ave<br>New Bedford, MA<br>02741 |
| 00779 | AMP, Inc.<br>P.O. Box 3608<br>Harrisburg, PA 17105 |
| 00970 | Koppers Co., Inc.<br>1301 Koppers Bldg.<br>Pittsburgh, PA 15219 |
| 01276 | Eroquip Corp.<br>Industrial Division<br>1225 W. Main St.<br>Van Wert, OH 43891 |
| 02368 | Rolex Co.<br>National Disc Spring<br>Div. 385 Hillside Ave<br>Hillside, NJ 07205 |

| CODE | MANUFACTURER |
|---|---|
| 04009 | Crouse-Hinds Arrow<br>Hart, Inc.<br>Arrow Hart Division<br>103 Hawthorne St.<br>Hartford, CT 06105 |
| 04034 | Transamerica Delaval<br>Inc. Gems Sensor Div.<br>Cowles Rd.<br>Plainview, CT 06062 |
| 04713 | Motorola, Inc.<br>Semiconductor Group<br>5005 E. McDowell Rd.<br>Phoenix, AZ 85008 |
| 05574 | Viking Connectors, Inc.<br>21001 Nordhoff St.<br>Chatsworth, CA 91311 |
| 06288 | Edal Industries, Inc.<br>4 Short Beach Rd.<br>East Haven, CT 06512 |
| 06540 | Mite Corp.<br>Amaton Electronic<br>Hardware Division<br>446 Blake St.<br>New Haven, CT 06515 |
| 07707 | USM Corp.<br>Sub of Emhart Industries,<br>Inc. USM Fastener<br>Div. 510 River Rd.<br>Shelton, CT 06484 |
| 07988 | Fluid Power Systems<br>Div. Ambac Industries,<br>Inc. 511 Glenn Ave<br>Wheeling, IL 60090 |
| 08179 | Airesearch Industrial<br>Div. Garret Corp.<br>P.0. Box 92930<br>Los Angeles, CA 90009 |
| 08244 | Moeller Mfg. Co., Inc.<br>47725 Michigan Ave<br>Canton, MI 48188 |
| 08752 | Parker-Hannifin Corp.<br>Mobile Hydraulics Div.<br>17375 Euclid Ave<br>Cleveland, OH 44112 |
| 08805 | General Electric Co.<br>Lamp Business Div.<br>Nela Park<br>Cleveland, OH 44112 |
| 10009 | Raybestos-Manhattan,<br>Inc. Division of:<br>Raybestos Industrial<br>Products Garco and<br>O'Hear Aves<br>P.0. Box 5205<br>North Charleston, SC<br>29408 |
| 11083 | Caterpillar Tractor Co.<br>100 NE Adams St.<br>Peoria, IL 61629 |
| 12014 | Chicago Rivet and Machine<br>Co.<br>950 South 25th Ave<br>Bellwood, IL 60104 |
| 12670 | Square D Co.<br>Electromagnetic Industries Plant<br>2005 Calmut St.<br>Clearwater, FL 33515 |
| 13103 | Malloy Co., Inc.<br>2021 W. Valley View La.<br>P.O. Box 340839<br>Dallas, TX 75234 |
| 14432 | Patrick and Co.<br>560 Market St.<br>San Francisco, CA<br>94104 |
| 14926 | Lacy-Luci Products<br>28 Second Ave<br>Long Branch, NJ 07740 |
| 16024 | Glauber Valve Co., Inc.<br>4520 South 36th St.<br>Omaha, NE 68107 |
| 16258 | Space-Lok, Inc.<br>2526 N. Ontario<br>Burbank, CA 91504 |

| CODE | MANUFACTURER |
|---|---|
| 18876 | Dept. of Army<br>U.S. Missile Command<br>Reds tone Arsenal, AL<br>35809 |
| 19027 | Textool Production Co.,<br>Inc.<br>Gardena, CA |
| 19728 | The Prestolite Co.<br>Div. of Eltra Corp.<br>511 Hamilton St.<br>P.O. Box 931<br>Toledo, OH 43601 |
| 20796 | Dayco Corp.<br>Rubber Products Div.<br>Battlefield Rd.<br>Springfield, MO 65804 |
| 21760 | Schatz Federal Bearings<br>Co., Fairview Ave<br>P.O. Box 1191<br>Poughkeepsie, NY<br>12601 |
| 21845 | Solitron Devices, Inc.<br>Semiconductor Group<br>Florida Opers.<br>1177 Blue Heron Blvd.<br>Riviera Beach, FL 33404 |
| 22031 | Air-Way Mfg. Co.<br>586 North Main at<br>US 27<br>Olivet, MI 49076 |
| 22038 | Brookside Corp.<br>79th and Oilwell Rd.<br>McCordsville, IN 46055 |
| 23050 | Products Components<br>Corp. 30 Lorraine Ave<br>Mt. Vernon, NY 10553 |
| 24617 | General Motors Corp.<br>3044 Grand Blvd. W<br>Detroit, MI 48202 |
| 27192 | Eaton Corp.<br>Power Control Opera<br>tions 4265 N. 30th St.<br>Milwaukee, WI 53216 |
| 30327 | I-T-E Imperial Corp.<br>Subsidiary of:<br>Gould Inc.,<br>Valve and Fittings Div.<br>6300 W. Howard St.<br>Chicago, IL 60648 |
| 30554 | Project Manager -<br>Mobile Electric Power<br>U.S. Army Materiel Command<br>Washington, DC 20135 |
| 30757 | Parker-Hannifin Corp.<br>Cliff Div.<br>33800 Lakeland Blvd.<br>Eastlake, OH 44094 |
| 30780 | Parker-Hannifin Corp.<br>Tube Fittings Div.<br>17325 Euclid Ave<br>Cleveland, OH 44112 |
| 31061 | Aavid Engineering, Inc.<br>30 Cook Court<br>Laconia, NH 03248 |
| 31211 | Motorola, Inc.<br>Motorola Automotive<br>Prod. Div. Motorola Ctr.<br>1299 E. Alognquin Rd.<br>Schaumberg, IL 60196 |
| 31361 | Woodward Governor Co.<br>1000 E. Drake Rd.<br>P.O. Box 1519<br>Ft. Collins, CO 80522 |
| 43334 | General Motors Corp.<br>New Departure -<br>Hyatt Bearings Div.<br>2509 Hayes Ave<br>Sandusky, OH 44870 |
| 43990 | C.A. Norgren Co.<br>5400 S. Delaware St.<br>Littleton, CO 80120 |
| 44655 | Ohmite Mfg. Co.<br>3601 W. Howard St.<br>Skokie, IL 60076 |

| CODE | MANUFACTURER |
|---|---|
| 45681 | Parker-Hannifin Corp.<br>17325 Euclid Ave<br>Cleveland, OH 44112 |
| 46522 | White Consolidated Industries, Inc.<br>Hupp - Cleveland -<br>Mobile Products Div.<br>1135 Ivanhoe Rd.<br>Cleveland, OH 44110 |
| 57733 | Stewart-Warner Corp.<br>1826 Diversky Pky.<br>Chicago, IL 60614 |
| 61112 | Turner Co.<br>Div. of Cleanweld Prod.<br>Co. 821 Park Ave<br>Sycamore, IL 60178 |
| 62119 | Universal Electric Co.<br>300 E. Main St.<br>Owossa, MI 48867 |
| 63743 | Ward Leonard Electric Co.,<br>Inc. 31 South St.<br>Mount Vernon, NY<br>10550 |
| 64560 | Weldon Tool Co.<br>3000 Woodhill Rd.<br>Cleveland, OH 44104 |
| 55092 | Weston Instruments Div.<br>Sangamo Weston, Inc.<br>614 Frelinghuysen Ave<br>Newark, NJ 07114 |
| 70040 | AC Spark Plug<br>General Motors Corp.<br>1300 No. Dort Hwy.<br>Flint, MI 48556 |
| 70210 | Airesearch Mfg. Co.<br>of California A Div. of<br>The Garret Corp.<br>2525 W. 190th St.<br>Torrance, CA 90509 |
| 70270 | Stewart-Warner<br>Alemite Sales Co., Inc.<br>9250 Ivanhoe St.<br>Schiller PK, FL 60176 |
| 70411 | Anderson Brass Co.<br>100 S. Campbell Ave<br>Detroit, MI 48209 |
| 70903 | Belden Corp.<br>200 S. Batavia Ave<br>Geneva, IL 60134 |
| 72582 | Detroit Diesel<br>Allison Div.<br>of General Motors Corp.<br>13400 W. Outer Drive<br>Detroit, MI 48228 |
| 72619 | Dialight Div.<br>Amperex Electronic<br>Corp. 203 Harrison Pl.<br>Brooklyn, NY 11237 |
| 72850 | Facet Enterpizes, Inc.<br>Motor Components Div.<br>18th St. and Oakwood<br>Ave<br>Elmira, NY 14903 |
| 72962 | Esna Div.<br>of Amerace Corp.<br>2330 Vauxhall Rd.<br>Union, NJ 07083 |
| 73134 | Heim Div.<br>Incom International, Inc.<br>60 Round Hill Rd.<br>Fairfield, CT 06430 |
| 73370 | Fram Corp. Automotive<br>Div.<br>150 Pawtucket Ave<br>Providence, RI 02916 |
| 73389 | Adalet Mfg.<br>Div. of Scott and Fetzer<br>Co.<br>4801 W. 150th St.<br>Cleveland, OH 44135 |

| CODE | MANUFACTURER |
|---|---|
| 73540 | G and 0 Mfg. Co.<br>138 Winchester<br>New Haven, CT 06508 |
| 74400 | Hobbs Div.<br>Stewart-Warner Corp.<br>Yale Blvd. and Ash St.<br>Springfield, IL 62705 |
| 75382 | Kulka Electric Corp.<br>Subsidiary of:<br>North American Philips Co.<br>520 S. Fulton St.<br>Mt. Vernon, NY 10551 |
| 75418 | Kysor Insdustrial Corp.<br>One Madison Ave<br>Cadillac, MI 49641 |
| 75915 | Littlefuse, Inc.<br>800 E. Northwest Hwy.<br>Des Plains, IL 60016 |
| 76530 | TRW, Inc.<br>TRW Electronics Components TRW Cinch-Monadnock Div.<br>18301 E. Arenth Ave<br>City of Industry, CA 91749 |
| 78189 | Illinois Tool Works, Inc.<br>Shakeproof Div.<br>St. Charles Rd.<br>Elgin, IL 60120 |
| 78388 | Synchro-Start Prod., Inc.<br>8109 N. Lawndale Ave<br>P.0. Box 147<br>Skokie, IL 60076 |
| 78493 | Standard-Thomson Corp.<br>152 Grove St.<br>Waltham, MA 02154 |
| 79136 | Waldes Kohinoor, Inc.<br>47-16 Austel Place<br>Long Island City, NY 11101 |
| 79260 | Walker Mfg. Co.<br>1201 Michigan Blvd.<br>Racine, WI 53420 |
| 79470 | Dana Corp.<br>Weatherhead Div.<br>300 E. 131st St.<br>Cleveland, OH 44108 |
| 80205 | National Aerospace Standards Committee, Aerospace Industries Association of America, Inc.<br>1725 De Sales NW<br>Washington, DC 20036 |
| 80463 | AC Spark Plug<br>Div. of General Motors Corp.<br>1300 N. Port Hwy.<br>Flint, MI 48556 |
| 80672 | Alexander Tagg Industries, Inc.<br>395 Jacksonville Rd.<br>Warminister, PA 18974 |
| 81349 | Military Specifications Promulgated by Military Department/Agencies Under Authority of Defense Standardization Manual 4120 # 3-M |
| 81978 | Honeywell, Inc.<br>Skinner Valve Division<br>95 Edgewood Ave<br>New Britain, CT 06050 |
| 82121 | Electro-Switch Corp.<br>King Ave<br>Weymouth, MA 02188 |
| 83259 | Parker-Hannifin Corp.<br>O-Seal Division<br>10567 Jefferson Blvd.<br>Culver City, CA 90230 |
| 84971 | TA Manufacturing Corp.<br>375 W. Arden Ave<br>P.0. Box 2500<br>Glendale, CA 91209 |

| CODE | MANUFACTURER |
|---|---|
| 85814 | The Nason Co.<br>10388 Enterprize Dr.<br>Davisburg, MI 48019 |
| 88044 | Aeronautical Standards Group<br>Dept. of the Navy and Air Force |
| 90202 | Columbus McKinnon Corp.<br>Midland Forge Div.<br>101 50th Ave SW<br>P.O. Box 1627<br>Cedar Rapids, IA 52406 |
| 93568 | Condec Corp.<br>Condiesel Mobile Equipment Div.<br>1700 E. Putnam Ave<br>Old Greenwich, CT 06870 |
| 93742 | Fermont Div., DCA<br>141 North Ave<br>Bridgeport, CT 06606 |
| 94222 | Southco, Inc.<br>Lester, PA 19113 |
| 94990 | Motorola, Inc.<br>Government Electronics Div.<br>8201 E. McDowell Rd<br>P.O. Box 1417<br>Scottsdale, AZ 85252 |
| 95408 | Kim Hotstart Mfg. Co.<br>917 W. Broadway<br>P.O. Box 42<br>Spokane, WA 99210 |
| 96309 | Evans Products Co.<br>Race St.<br>Coldwater, MI 49036 |
| 96906 | Military Standards Promulyat-ed by Military Departments Under Authority of Defense Standardization Manual 4120 # 3-M |
| 98245 | General Signal Corp.<br>OZ/Gedney Co. Unit<br>262 Bond St.<br>Brooklyn, NY 11217 |
| 99103 | Formite Tube Co.<br>1816 Tenth St.<br>Two Rivers, WI 54241 |

9. RECOMMENDATION FOR MAINTENANCE PUBLICATION IMPROVEMENTS. Report errors, omissions, and recommendations for improving this publication by the individual user is encouraged. Reports should be submitted as follows:

a. Air Force AFTO Form 22 in accordance with T.O. 00-5-1, directly to: Commander, Sacramento Air Logistics Center, ATTN: MMEDT, McClellan AFB, CA 95652.

b. Army DA Form 2028, directly to: Commander, U.S. Army Troop Support Command, ATTN: DRSTS-MTT, 4300 Good-fellow Boulevard, St. Louis, MO 63120.

c. (MC) Marine Corps by NAVMC Form10772 directly to: Commandant, Headquarters, U.S. Marine Corps, ATTN: LMA-1, Washington, DC 20380.

d. Navy Letter, directly to: Commanding Officer, U.S. Navy Ship Parts Control Center, ATTN: Code 783, Mechanicsburg, PA 17055.

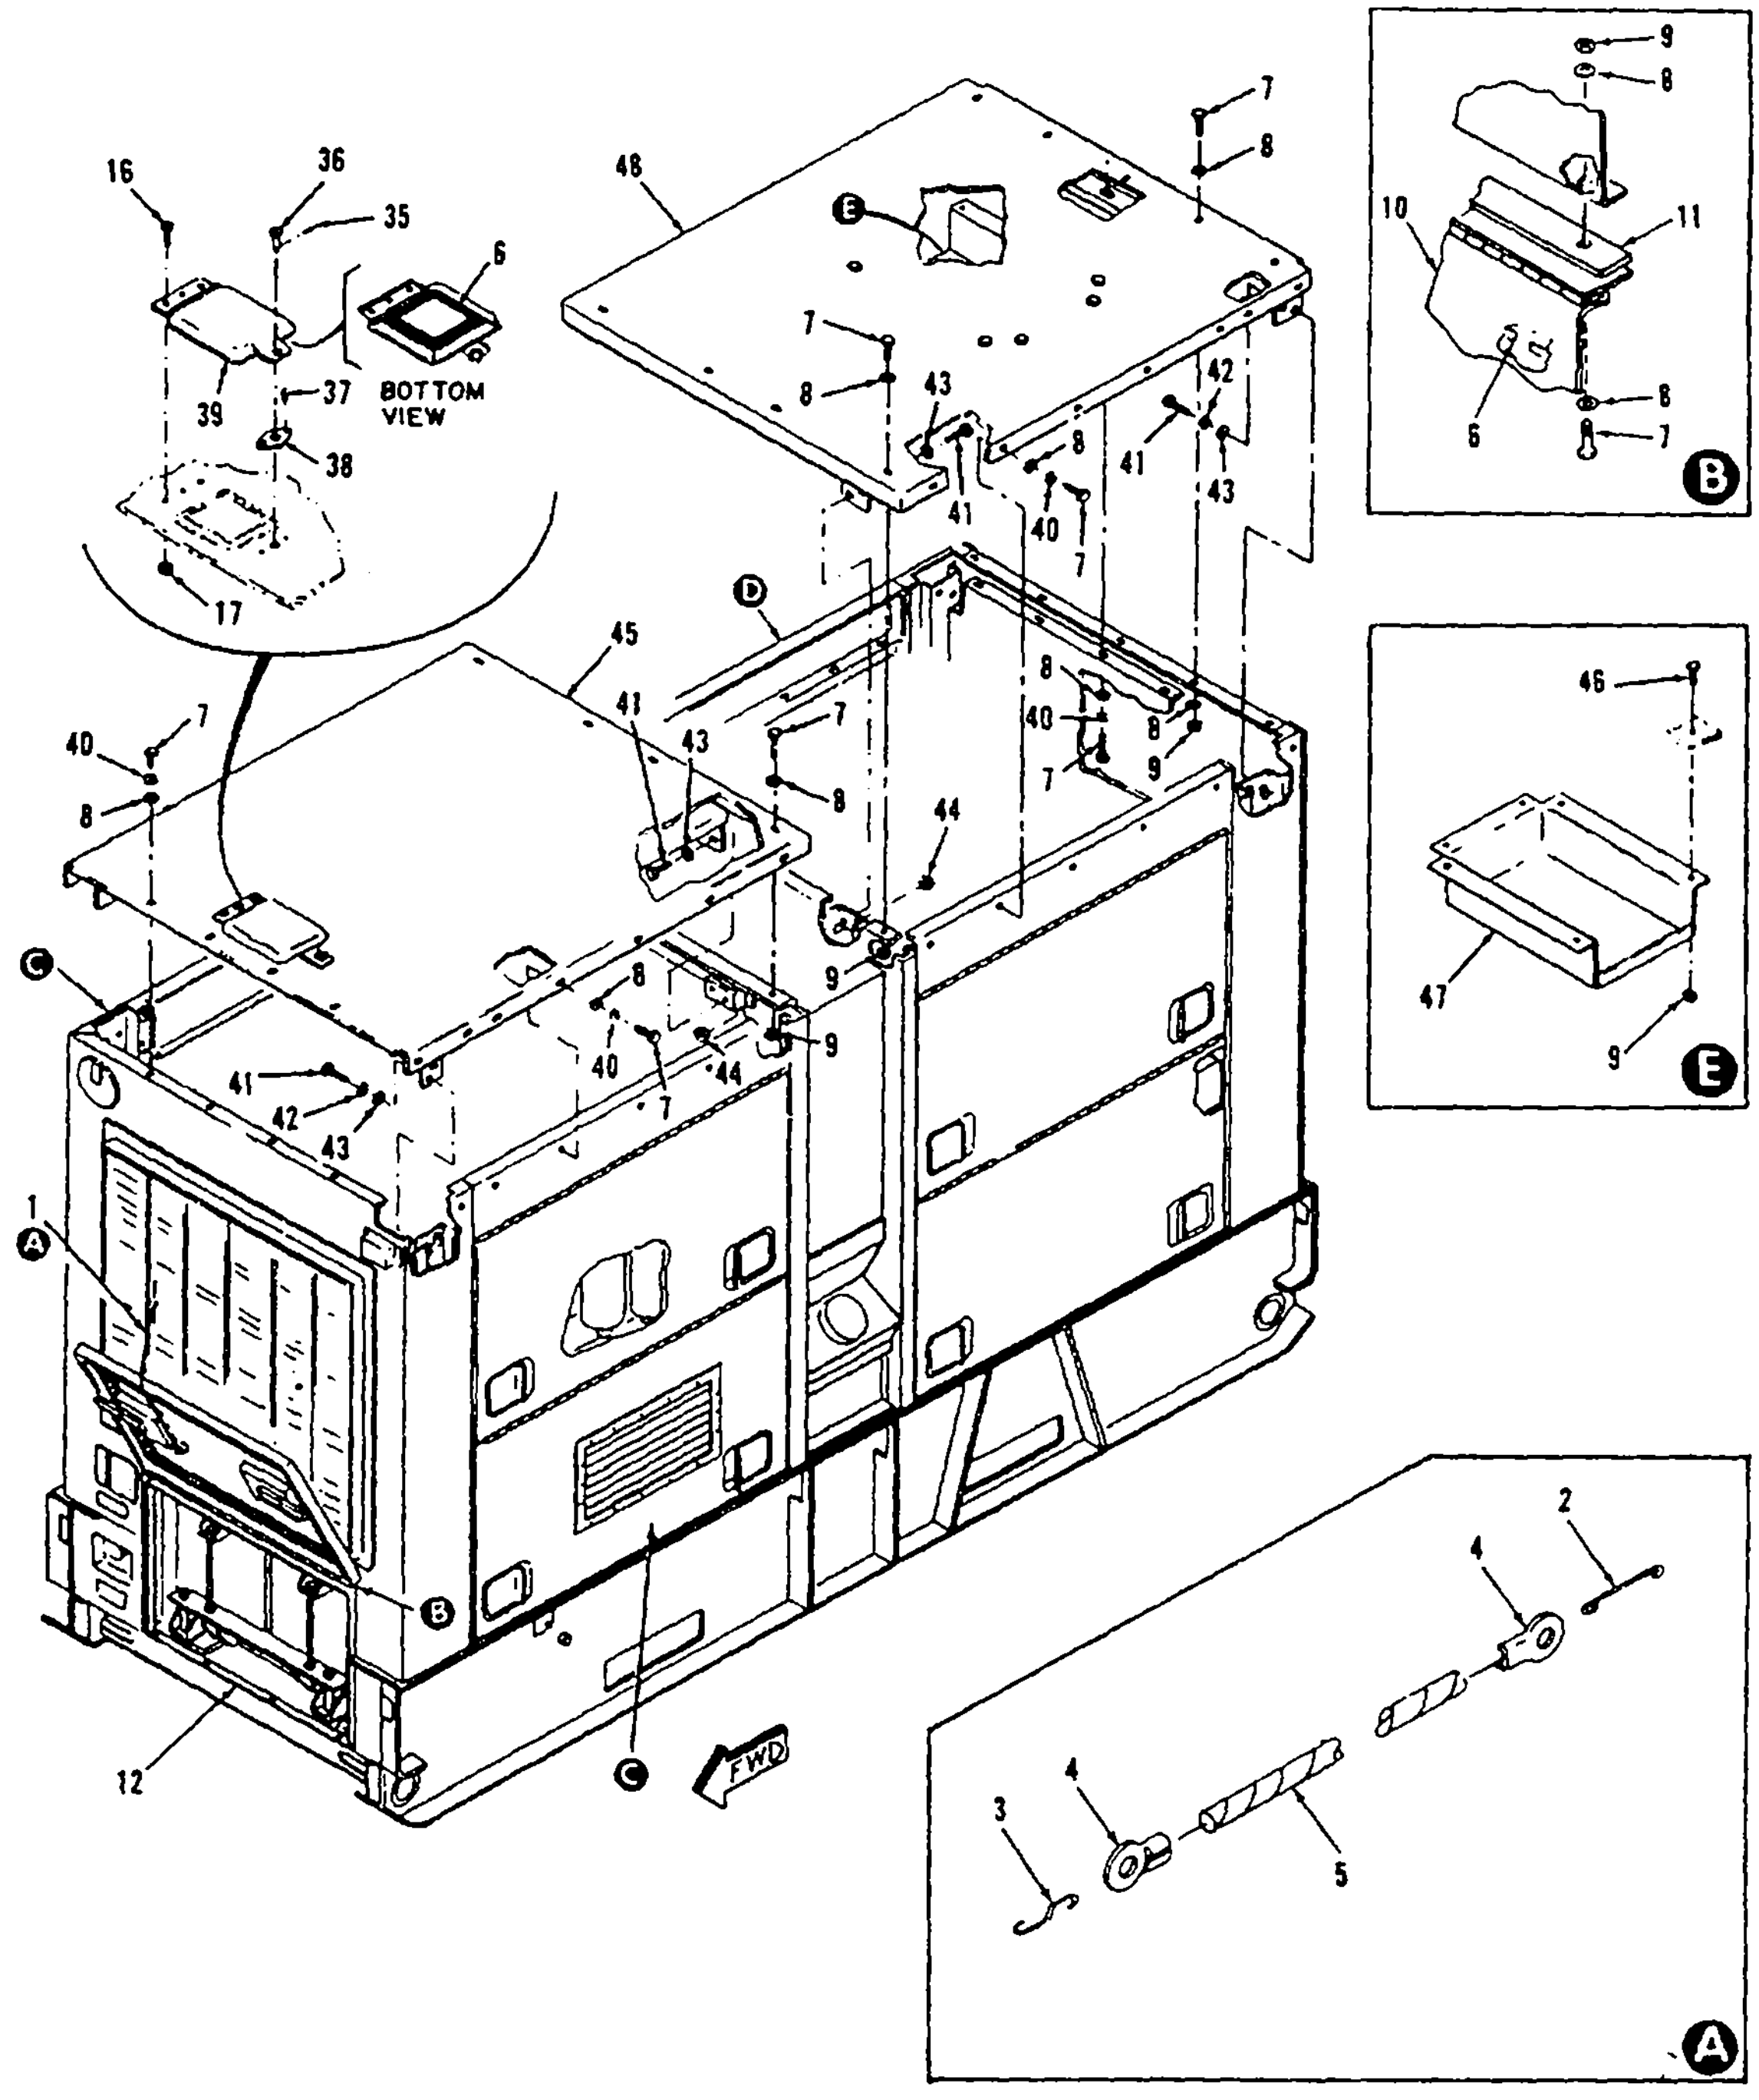
16
36
35
6
39
37
BOTTOM VIEW
38
17
48
E
7
8
43
42
41
40
D
45
C
44
9
1
A
B
12
FWD
10
11
2
3
4
5
46
47

Figure 1. Housing Doors and Covers (Sheet 1 of 2)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 01 - HOUSING | | | | |
| 1 | | | | | | | | | HOUSING DOORS AND COVERS | | | | |
| 1 | 1 | AOO | AOO | AFO | AFO | | | | HOLDER, DOOR<br>71-4726 | <br>30554 | EA | 1 | 1 |
| 1 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5340-00-244-3875 | HOOK<br>71-4751 | <br>30554 | EA | 1 | 1 |
| 1 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 4030-00-780-9350 | HOOK, CHAIN SASH<br>MS87006-13 | <br>96906 | EA | 1 | 3 |
| 1 | 4 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-115-2677 | TERMINAL LUG<br>MS20659-144 | <br>96906 | EA | 2 | 6 |
| 1 | 5 | XB | XB | XB | XB | | | | ROPE, NYLON<br>71-472601 | <br>30554 | EA | 1 | 1 |
| 1 | 6 | PAOZZ | PAOZZ | PAOZZ | PAFZZ | D | .030 | 5330-00-036-6995 | SEAL, DOOR<br>69-771<br>RL-2955 | <br>30554<br>10009 | FT | 100 | 87 |
| 1 | 7 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0502 | SCREW, HEX HEAD<br>MS90725-6 | <br>96906 | EA | 71 | 118 |
| 1 | 8 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | <br>96906 | EA | 90 | 252 |
| 1 | 9 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS178294C | <br>96906 | EA | 71 | 167 |
| 1 | 10 | XB | XB | XB | XB | | | | DOOR, ACCESS<br>704362 | <br>30554 | EA | 1 | 1 |
| 1 | 11 | XB | XB | XB | XB | | | | FRAME, BATTERY ACCESS<br>704340 | <br>30554 | EA | 1 | 1 |
| 1 | 12 | XB | XB | XB | XB | | | | STRIP, DOOR FRAME<br>71-4753 | <br>30554 | EA | 1 | 1 |
| 1 | 13 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5320-00-582-3304 | RIVET<br>MS20600AD4W2 | <br>96906 | EA | 16 | 34 |
| 1 | 14 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .030 | 6115-01-092-4498 | CLIP RETAINER<br>71-4893 | <br>30554 | EA | 8 | 8 |
| 1 | 15 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 6115-01-092-4499 | ROD<br>71-4546 | <br>30554 | EA | 8 | 8 |
| 1 | 16 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6906 | SCREW AND WASHER<br>69-662-50<br>61-100841-40-0142B-0542B | <br>30554<br>78189 | EA | 61 | 98 |
| 1 | 17 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-094-3421 | NUT AND WASHER<br>69-5614<br>511-101800-00 | <br>30554<br>78189 | EA | 57 | 95 |
| 1 | 18 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0501 | SCREW, HEX HEAD<br>MS90725-5 | <br>96906 | EA | 20 | 114 |
| 1 | 19 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 6115-01-105-2149 | SHUTTER ASSY<br>71-4944<br>1045-04741-01 | <br>30554<br>75418 | EA | 2 | 2 |
| 1 | 20 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-038-3103 | SCREW AND WASHER<br>69-662-35<br>61-080841-40-0142B-0542B | <br>30554<br>78189 | EA | 4 | 16 |
| 1 | 21 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-014-5850 | WASHER, FLAT<br>MS27183-42 | <br>96906 | EA | 8 | 20 |

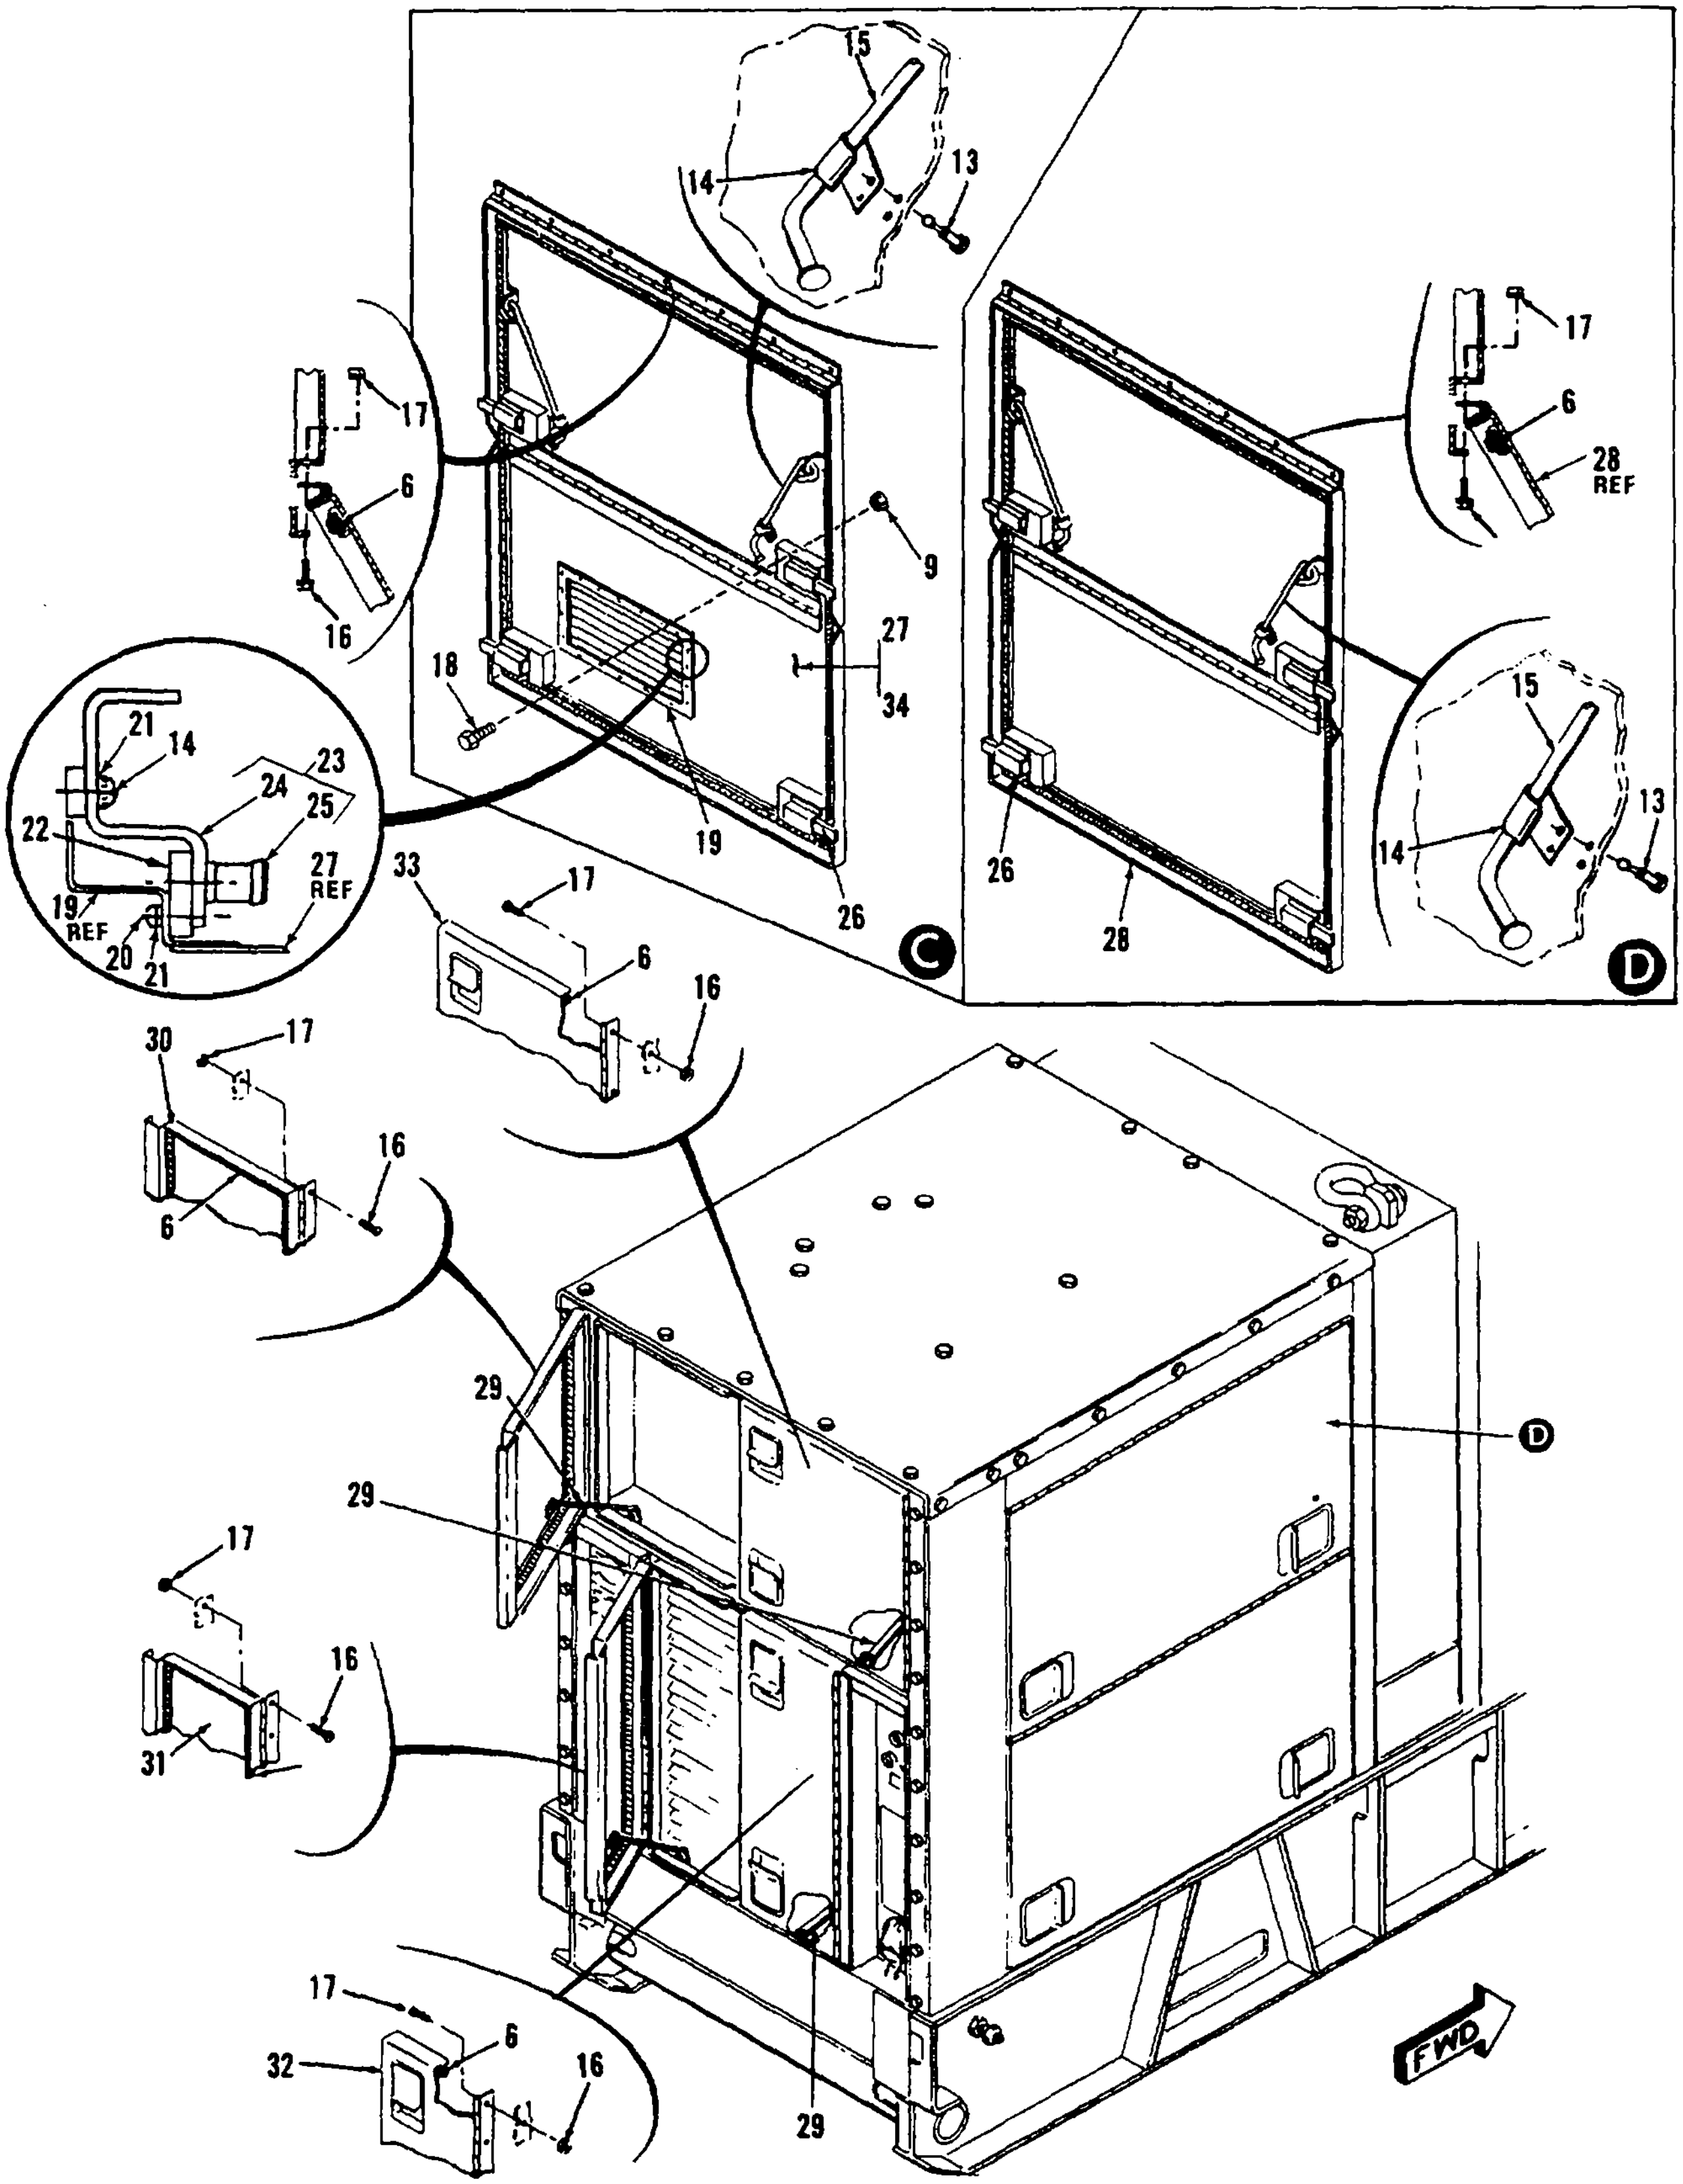
15
14
13
17
6
16
9
27
34
18
19
26
21
14
23
24
25
22
27
REF
19
REF
20
21
33
17
6
16
C
17
6
28
REF
15
13
14
26
28
D
30
17
16
6
29
29
D
17
16
31
17
6
32
16
29
FWD

Figure 1. Housing Doors and Covers (Sheet 2 of 2)

# SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO | b ITEM NO | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| 1 | | | | | | | | | GROUP 01 -HOUSING-CONTINUED | | | | |
| 1 | | | | | | | | | HOUSING DOORS AND COVERS-CONTINUED | | | | |
| 1 | 22 | XB | XB | XB | XB | | | | PLATE<br>71-4425 | <br>30554 | EA | 2 | 2 |
| 1 | 23 | XB | XB | XB | XB | | | | LOUVER CONTROL BRACKET ASSY<br>71-4427 | <br>30554 | EA | 2 | 2 |
| 1 | 24 | XA-- | XA-- | XA-- | XA-- | | | | BRACKET<br>71-4427-01 | <br>30554 | BA | 2 | 2 |
| 1 | 25 | XA-- | XA-- | XA-- | XA-- | | | | PLUNGER SPRING LOADED<br>71-4945<br>56-10-801-10 | <br>30554<br>94222 | EA | 2 | 2 |
| 1 | 26 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .005 | 5340-00-229-3643 | PADDLE LOCK<br>69-657 | <br>30554 | EA | 2 | 18 |
| 1 | 27 | MOO | MOO | MOO | MOO | | | | DOOR ACCESS<br>71-4557 | <br>30554 | EA | 1 | 1 |
| 1 | 28 | XB | XB | XB | XB | | | | DOOR ACCESS<br>71-4535 | <br>30554 | EA | 2 | 2 |
| 1 | 29 | XB | XB | XB | XB | | | | ROD,DOOR HOLDER<br>71-4704 | <br>30554 | EA | 4 | 4 |
| 1 | 30 | XB | XB | XB | XB | | | | DOOR ACCESS<br>71-4536 | <br>30554 | EA | 1 | 1 |
| 1 | 31 | XB | XB | XB | XB | | | | DOOR ACCESS<br>71-4538 | <br>30554 | EA | 1 | 1 |
| 1 | 32 | XB | XB | XB | XB | | | | DOOR, ACCESS<br>71-4539 | <br>30554 | EA | 1 | 1 |
| 1 | 33 | XB | XB | XB | XB | | | | DOOR ACCESS<br>71-4537 | 30554 | EA | 1 | 1 |
| 1 | 34 | XB | XB | XB | XB | | | | DOOR, ACCESS<br>76-4184 | 30554 | EA | 1 | 1 |
| 1 | 35 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5315-00-449-2945 | PIN, CROSS<br>69-695<br>99836 | <br>30554<br>60119 | EA | 1 | 8 |
| 1 | 36 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5325-00-641-2802 | STUD<br>69-694-1<br>98265-4-308 | <br>30554<br>60119 | EA | 1 | 1 |
| 1 | 37 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5320-00-582-3561 | RIVET<br>MS20601AD4W2 | <br>96906 | EA | 2 | 14 |
| 1 | 38 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .023 | 5325-00-449-2967 | RECEPTACLE<br>69693-2<br>99947-P130 | <br>30554<br>60119 | EA | 1 | 7 |
| 1 | 39 | XB | XB | XB | XB | | | | DOOR, RADIATOR ACCESS<br>70-4324 | <br>30554 | EA | 1 | 1 |
| 1 | 40 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK<br>MS35338-44 | <br>96906 | EA | 40 | 154 |
| 1 | 41 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-225-8500 | SCREW, HEX HEAD<br>MS90725-35 | <br>96906 | EA | 16 | 17 |
| 1 | 42 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-407-9566 | WASHER, LOCK<br>MS35338-45 | <br>96906 | EA | 8 | 67 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO | b ITEM NO | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 01- HOUSING - CONTINUED | | | | |
| 1 | | | | | | | | | HOUSING DOORS AND COVERS- CONTINUED | | | | |
| 1 | 43 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-081-4219 | WASHER, FLAT<br>MS27183-12 | 96906 | EA | 16 | 62 |
| 1 | 44 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-245-3424 | NUT, SELF-LOCKING<br>MS17829-5C | 96906 | EA | 8 | 27 |
| ■ 1 | 45 | MOO | MOO | MOO | MOO | | | | COVER, FRONT<br>70-4328 | 30554 | EA | 1 | 1 |
| 1 | 46 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0500 | SCREW, HEX HEAD<br>MS90725-3 | 96906 | EA | 4 | 24 |
| ■ 1 | 47 | MOO | MOO | MOO | MOO | | | | BOX, CABLE STOWAGE<br>71-4487 | 30554 | EA | 1 | 1 |
| ■ 1 | 48 | MO | MO | MO | MO | | | | COVER, REAR<br>70-4329 | 30554 | EA | 1 | 1 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 01 - HOUSING | | | | |
| 2 | | | | | | | | | IDENTIFICATION PLATES | | | | |
| 2 | 1 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-036-6968 | SCREW AND WASHER<br>69662-18<br>61-060641-40-0142B-0542B | <br>30554<br>78189 | EA | 64 | 103 |
| 2 | 2 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5310-00-081-8087 | NUT, SELF-LOCKING<br>MS21044-N06 | <br>96906 | EA | 64 | 68 |
| 2 | 3 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-983-8483 | WASHER, FLAT<br>MS27183-5 | <br>96906 | EA | 64 | 73 |
| 2 | 4 | MDO | MDO | MDO | MDO | | | | PLATE, INSTRUCTION<br>79-4509 | <br>30554 | EA | 1 | 1 |
| 2 | 5 | MDO | MDO | MDO | MDO | | | | PLATE, DESIGNATION<br>71-4503 | <br>30554 | EA | 1 | 1 |
| 2 | 6 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .050 | 5320-00-582-3304 | RIVET<br>MS20600AD4W2 | <br>96906 | EA | 18 | 34 |
| 2 | 7 | MDO | MDO | MDO | MDO | | | | PLATE, INSTRUCTION<br>71-4512 | <br>30554 | EA | 1 | 1 |
| 2 | 8 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION<br>71-4502-05 | <br>30554 | EA | 1 | 1 |
| 2 | 9 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION<br>76-410802 | <br>30554 | EA | 1 | 1 |
| 2 | 10 | MDO | MDO | MDO | MDO | | | | PLATE, SCHEMATIC, AC<br>76-4117-10 | <br>30554 | EA | 1 | 1 |
| 2 | 11 | MDO | MDO | MDO | MDO | | | | PLATE, DIAGRAM, AC<br>76-4117-08 | <br>30554 | EA | 1 | 1 |
| 2 | 12 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5320-00-582-3495 | RIVET<br>MS20600AD4W6 | <br>96906 | EA | 10 | 10 |
| 2 | 13 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION<br>71-4502-02 | <br>30554 | EA | 1 | 1 |
| 2 | 14 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION<br>71-4502-07 | <br>30554 | EA | 1 | 1 |
| 2 | 15 | MDO | MDO | MDO | MDO | | | | PLATE, CAUTION<br>71-4513 | <br>30554 | EA | 1 | 1 |
| 2 | 16 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION<br>71-4514 30554 | | EA | 1 | 1 |
| 2 | 17 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION<br>71-4502-08 | <br>30554 | EA | 1 | 1 |
| 2 | 18 | MDO | MDO | MDO | MDO | | | | PLATE, INSTRUCTION<br>71-4524 | <br>30554 | EA | 1 | 1 |
| 2 | 19 | MDO | MDO | MDO | MDO | | | | PLATE, DIAGRAM, DC<br>76-4117-07 | <br>30554 | EA | 1 | 1 |
| 2 | 20 | MDO | MDO | MDO | MDO | | | | PLATE, INSTRUCTION<br>71-4525 | <br>30554 | EA | 1 | 1 |
| 2 | 21 | MDO | MDO | MDO | MDO | | | | PLATE, SCHEMATIC, DC<br>76-4117-09 | <br>30554 | EA | 1 | 1 |
| 2 | 22 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION<br>71-4502-03 | <br>30554 | EA | 1 | 1 |

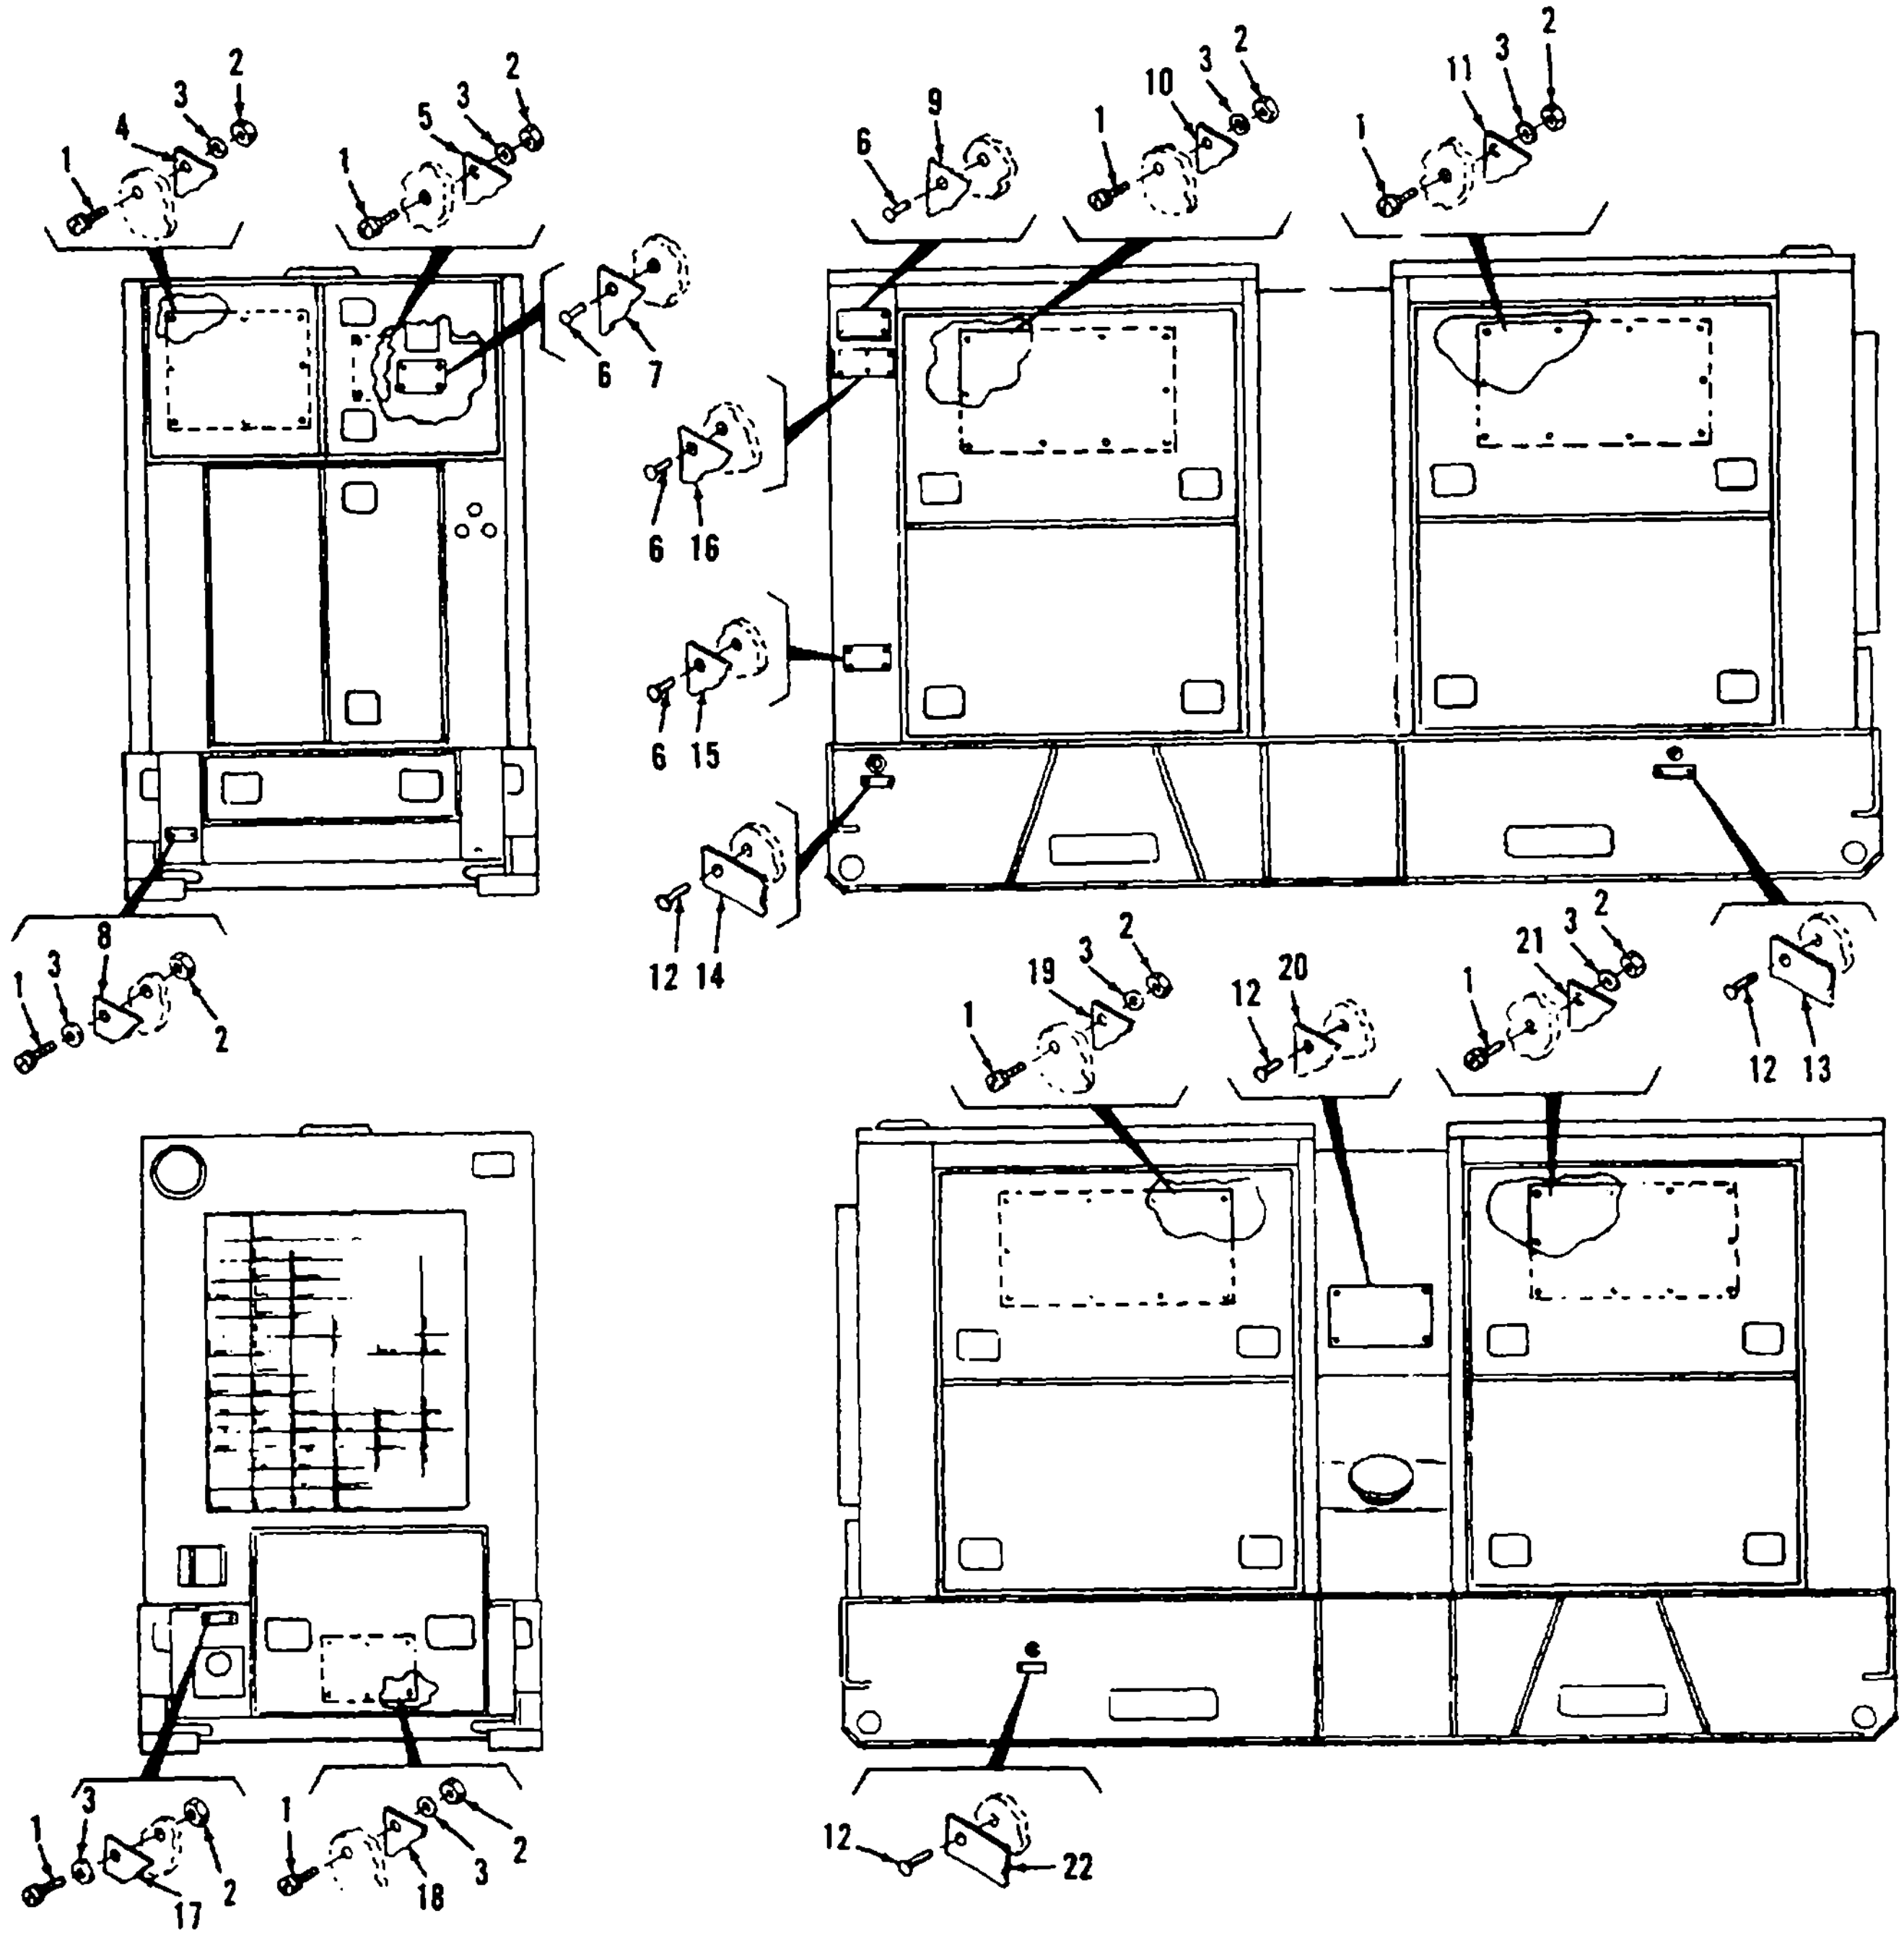
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22

Figure 2. Identification Plates

# SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRA-TION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO | b ITEM NO | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP | |
| | | | | | | | | | GROUP 01-HOUSING | | | | | |
| 3 | | | | | | | | | FRONT HOUSING PANEL AND RELATED PARTS | | | | | |
| 3 | 1 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-225-8497 | SCREW, HEX HEAD<br>MS90725-32 | 96906 | EA | 14 | 27 | |
| 3 | 2 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-407-9566 | WASHER, LOCK<br>MS35338-45 | 96906 | EA | 14 | 67 | |
| 3 | 3 | MOO | MOO | MOO | MOO | | | | GRILLE<br>70-4337 | 30554 | EA | 1 | 1 | ■ |
| 3 | 4 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6906 | SCREW AND WASHER<br>69662-50<br>61-100841-40-0142B-0542B | 30554<br>78189 | EA | 2 | 98 | |
| 3 | 5 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-094-3421 | NUT AND WASHER<br>69-561-4<br>511-101800-00 | 30554<br>78189 | EA | 2 | 95 | |
| 3 | 6 | XB | XB | XB | XB | | | | COVER, ELEC. CONN<br>70-4338 | 30554 | EA | 1 | 2 | |
| 3 | 7 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0501 | SCREW, HEX HEAD<br>MS90725-5 | 96906 | EA | 16 | 114 | |
| 3 | 8 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | 96906 | EA | 36 | 232 | |
| 3 | 9 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C | 96906 | EA | 32 | 167 | |
| 3 | 10 | XB | XB | XB | XB | | | | HOUSING, SIDE, UPPER<br>71-4453 | 30554 | EA | 4 | 4 | |
| 3 | 11 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-225-3839 | SCREW, HEX HEAD<br>MS90725-8 | 96906 | EA | 2 | 35 | |
| 3 | 12 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK<br>MS35338-44 | 96906 | EA | 2 | 154 | |
| 3 | 13 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0502 | SCREW, HEX HEAD<br>MS90725-6 | 96906 | EA | 10 | 118 | |
| 3 | 14 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-269-3213 | SCREW, HEX HEAD<br>MS90725-62 | 96906 | EA | 4 | 17 | |
| 3 | 15 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8790 | NUT, SELF-LOCKING<br>MS17829-6C | 96906 | EA | 4 | 25 | |
| 3 | 16 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-080-6004 | WASHER, FLAT<br>MS27183-14 | 96906 | EA | 8 | 43 | |
| 3 | 17 | XB | XB | XB | XB | | | | HOUSING<br>70-4326 | 30554 | EA | 1 | 1 | |
| 3 | 18 | MOO | MOO | MOO | MOO | | | | PANEL, FRONT, LH<br>70-4336 | 30554 | EA | 1 | 1 | ■ |
| 3 | 19 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5325-00-263-6632 | GROMMET<br>MS35489-6 | 96906 | EA | 1 | 1 | |
| 3 | 20 | MOO | MOO | MOO | MOO | | | | PANEL, RCPT MTG<br>70-4333 | 30554 | EA | 1 | 1 | ■ |

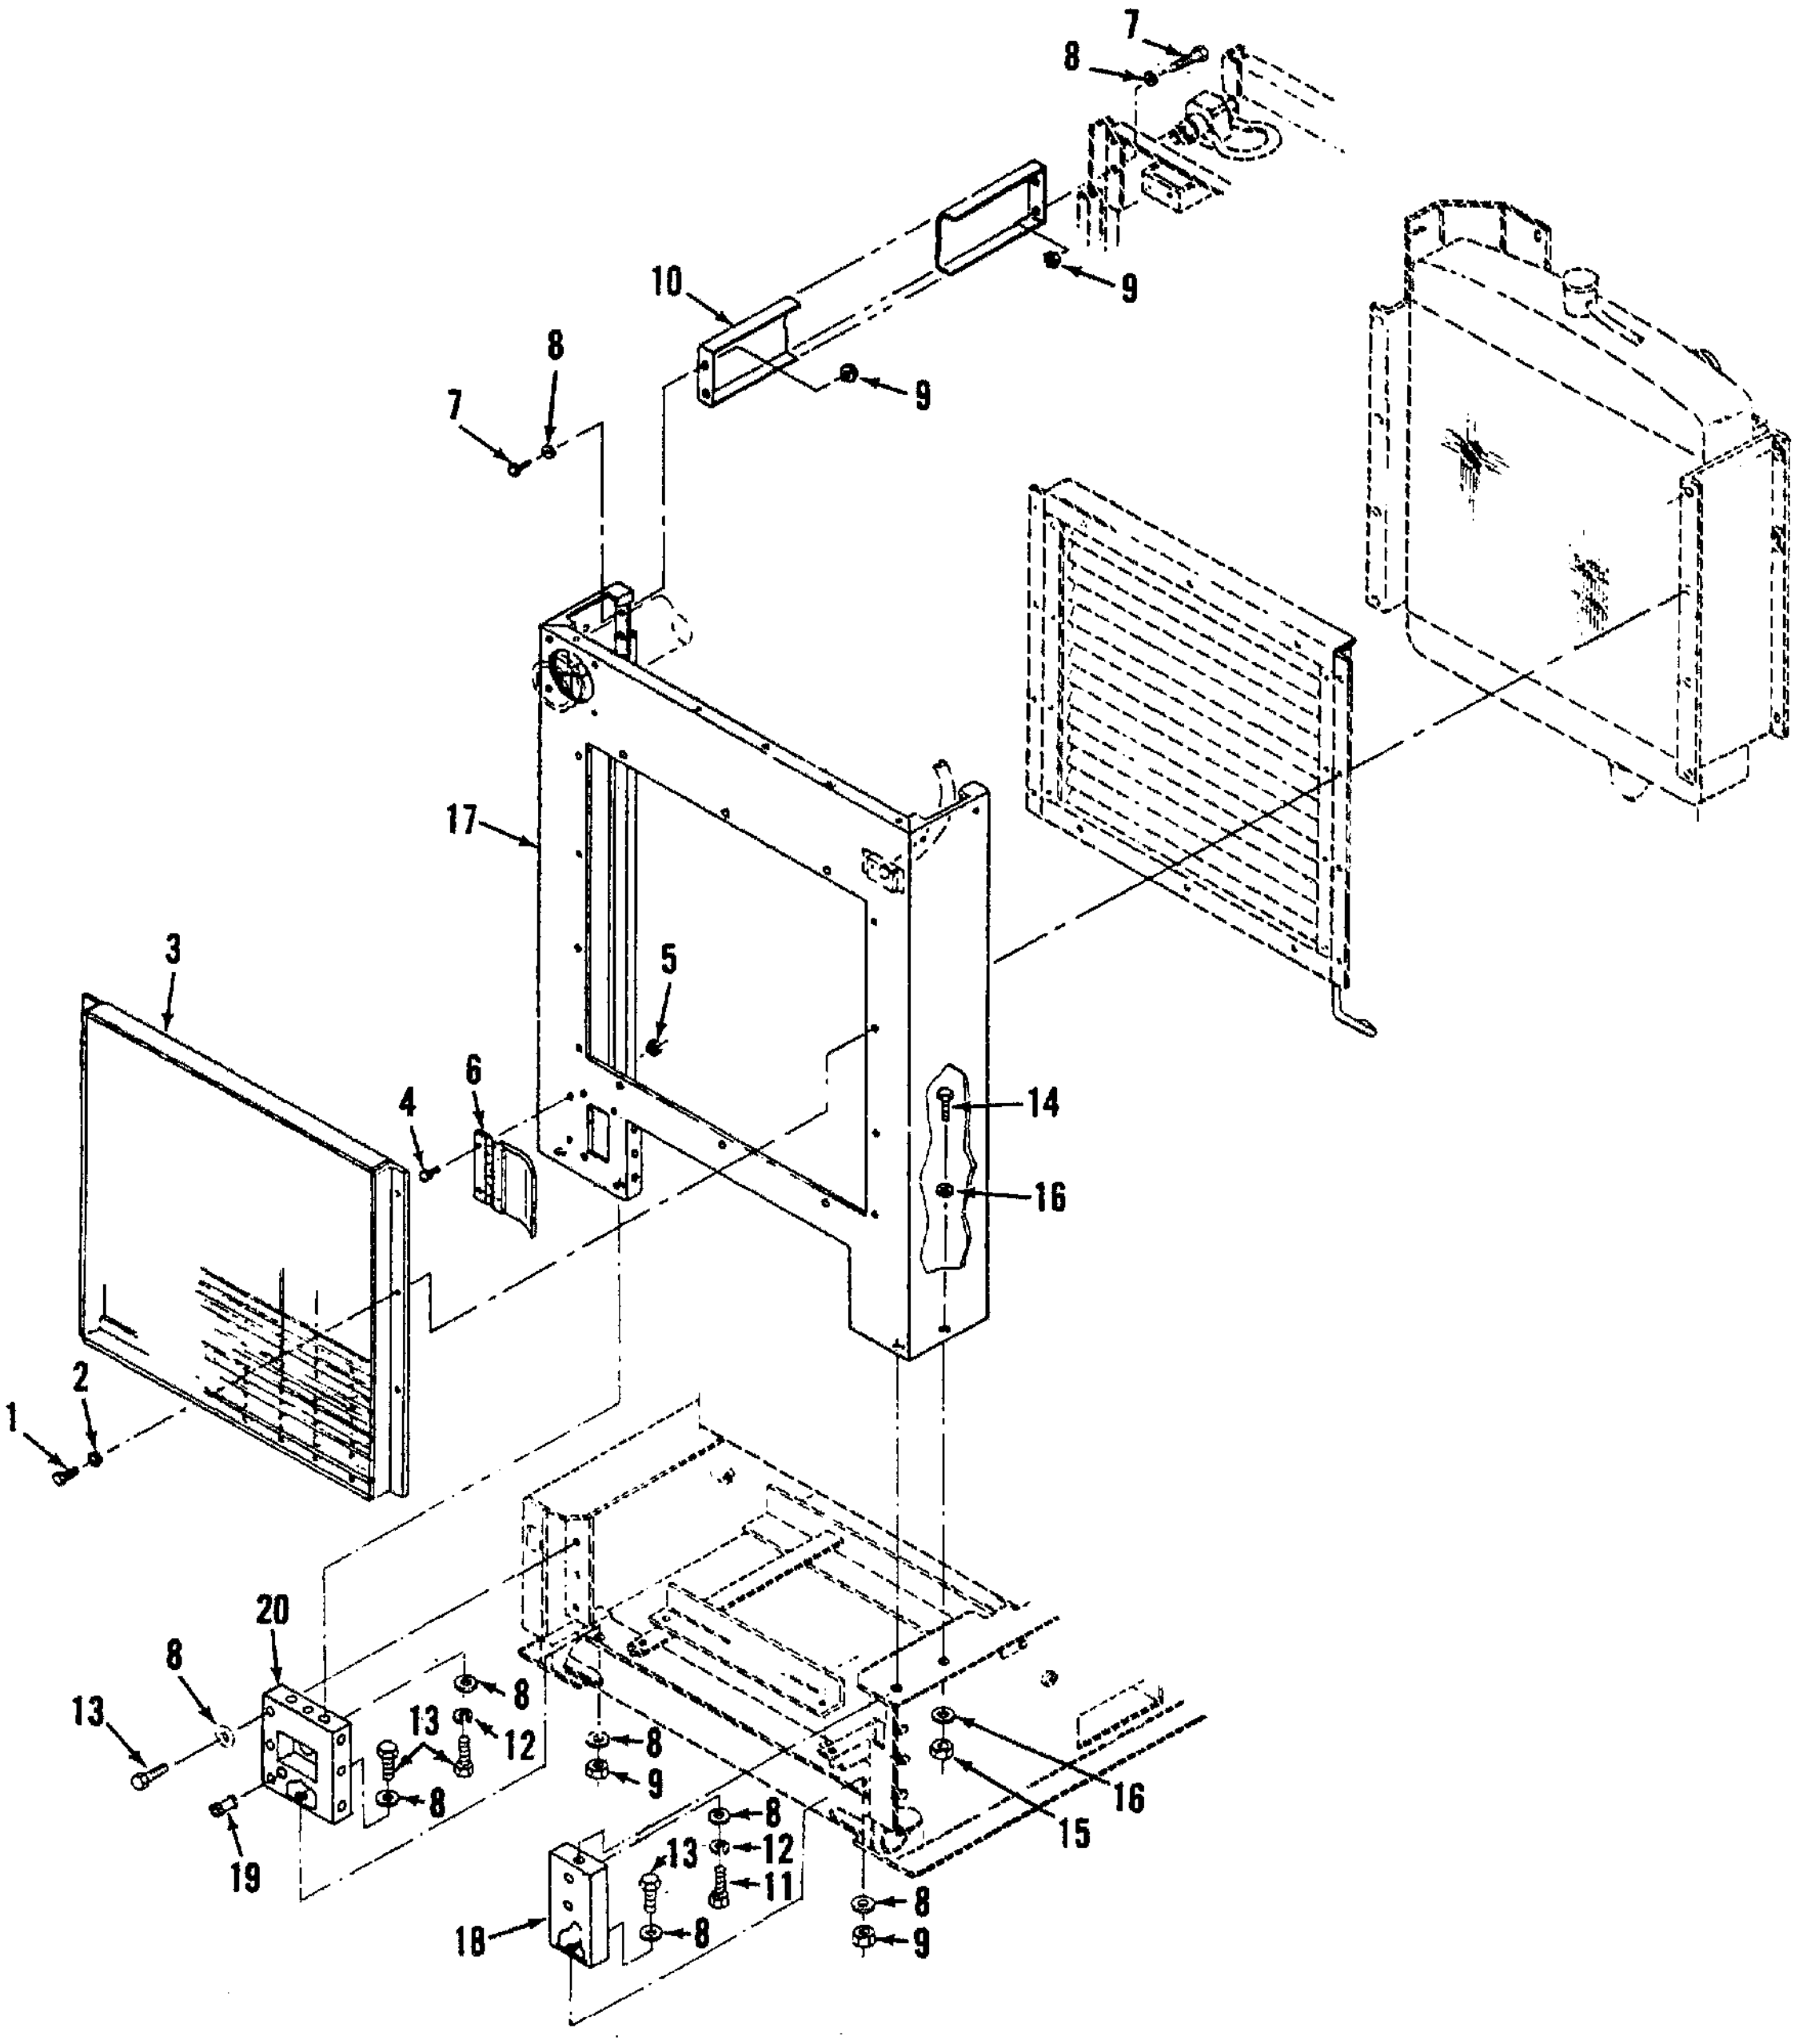
7
8
10
9
8
7
9
17
3
5
4
6
14
16
2
1
20
8
13
8
13
12
8
8
9
16
15
19
8
13
12
11
18
8
8
9

Figure 3. Front Housing Panel and Related Parts

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 01 - HOUSING | | | | |
| 4 | | | | | | | | | REAR HOUSING PANEL ASSEMBLY AND RELATED PARTS | | | | |
| 4 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0501 | SCREW, HEX HEAD<br>MS90725-5 | <br>96906 | EA | 38 | 114 |
| 4 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK<br>MS35338-44 | <br>96906 | EA | 38 | 154 |
| 4 | 3 | XB | XB | XB | XB | | | | PLATE<br>70-502 | <br>30554 | EA | 1 | 1 |
| 4 | 4 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 6115-00-033-6323 | PLATE AND SLEEVE ASSY<br>69-580 | <br>93742 | EA | 1 | 1 |
| 4 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-984-6193 | SCREW<br>MS35206-245 | <br>96906 | EA | 4 | 13 |
| 4 | 6 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-052-3632 | NUT AND WASHER<br>69-561-3<br>511-081800-00 | <br>30554<br>78189 | EA | 4 | 73 |
| 4 | 7 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5970-00-257-8055 | BUSHING, INSULATING<br>69-570-3<br>C70412-30 | <br>30554<br>98245 | EA | 1 | 1 |
| 4 | 8 | MOO | MOO | MOO | MOO | | | | PLATE, RETAINER<br>69-583 | <br>30554 | EA | 1 | 1 |
| 4 | 9 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .030 | 5975-00-421-6952 | SLEEVE<br>69-582 | <br>93742 | EA | 1 | 1 |
| 4 | 10 | MOO | MOO | MOO | MOO | | | | PLATE, COVER<br>69-581 | <br>93742 | EA | 1 | 1 |
| 4 | 11 | PAOZZ | PAOZZ | PAOZZ | PAFZZ | D | .008 | 5305-00-068-0502 | SCREW, HEX HEAD<br>MS90725-6 | <br>96906 | EA | 12 | 118 |
| 4 | 12 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C | <br>96906 | EA | 12 | 167 |
| 4 | 13 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | <br>96906 | EA | 34 | 252 |
| 4 | 14 | MOO | MOO | MOO | MOO | | | | LOUVER, AIR INTAKE<br>71-4390 | <br>30554 | EA | 1 | 1 |
| 4 | 15 | MOO | MOO | MOO | MOO | | | | PLATE<br>71-4491 | <br>30554 | EA | 1 | 1 |
| 4 | 16 | MOO | MOO | MOO | MOO | | | | PLATE<br>69-769 | <br>30554 | EA | 1 | 1 |
| 4 | 17 | PAOZZ | PA0ZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-225-8497 | SCREW, HEX HEAD<br>MS90725-32 | <br>96906 | EA | 6 | 27 |
| 4 | 18 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-407-9566 | WASHER, LOCK<br>MS35338-45 | <br>96906 | EA | 6 | 67 |
| 4 | 19 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-081-4219 | WASHER, FLAT<br>MS27183-12 | <br>96906 | EA | 6 | 62 |
| 4 | 20 | MOO | MOO | MOO | MOO | | | | HOUSING, GENERATOR, REAR<br>79-4515 | <br>30554 | EA | 1 | 1 |

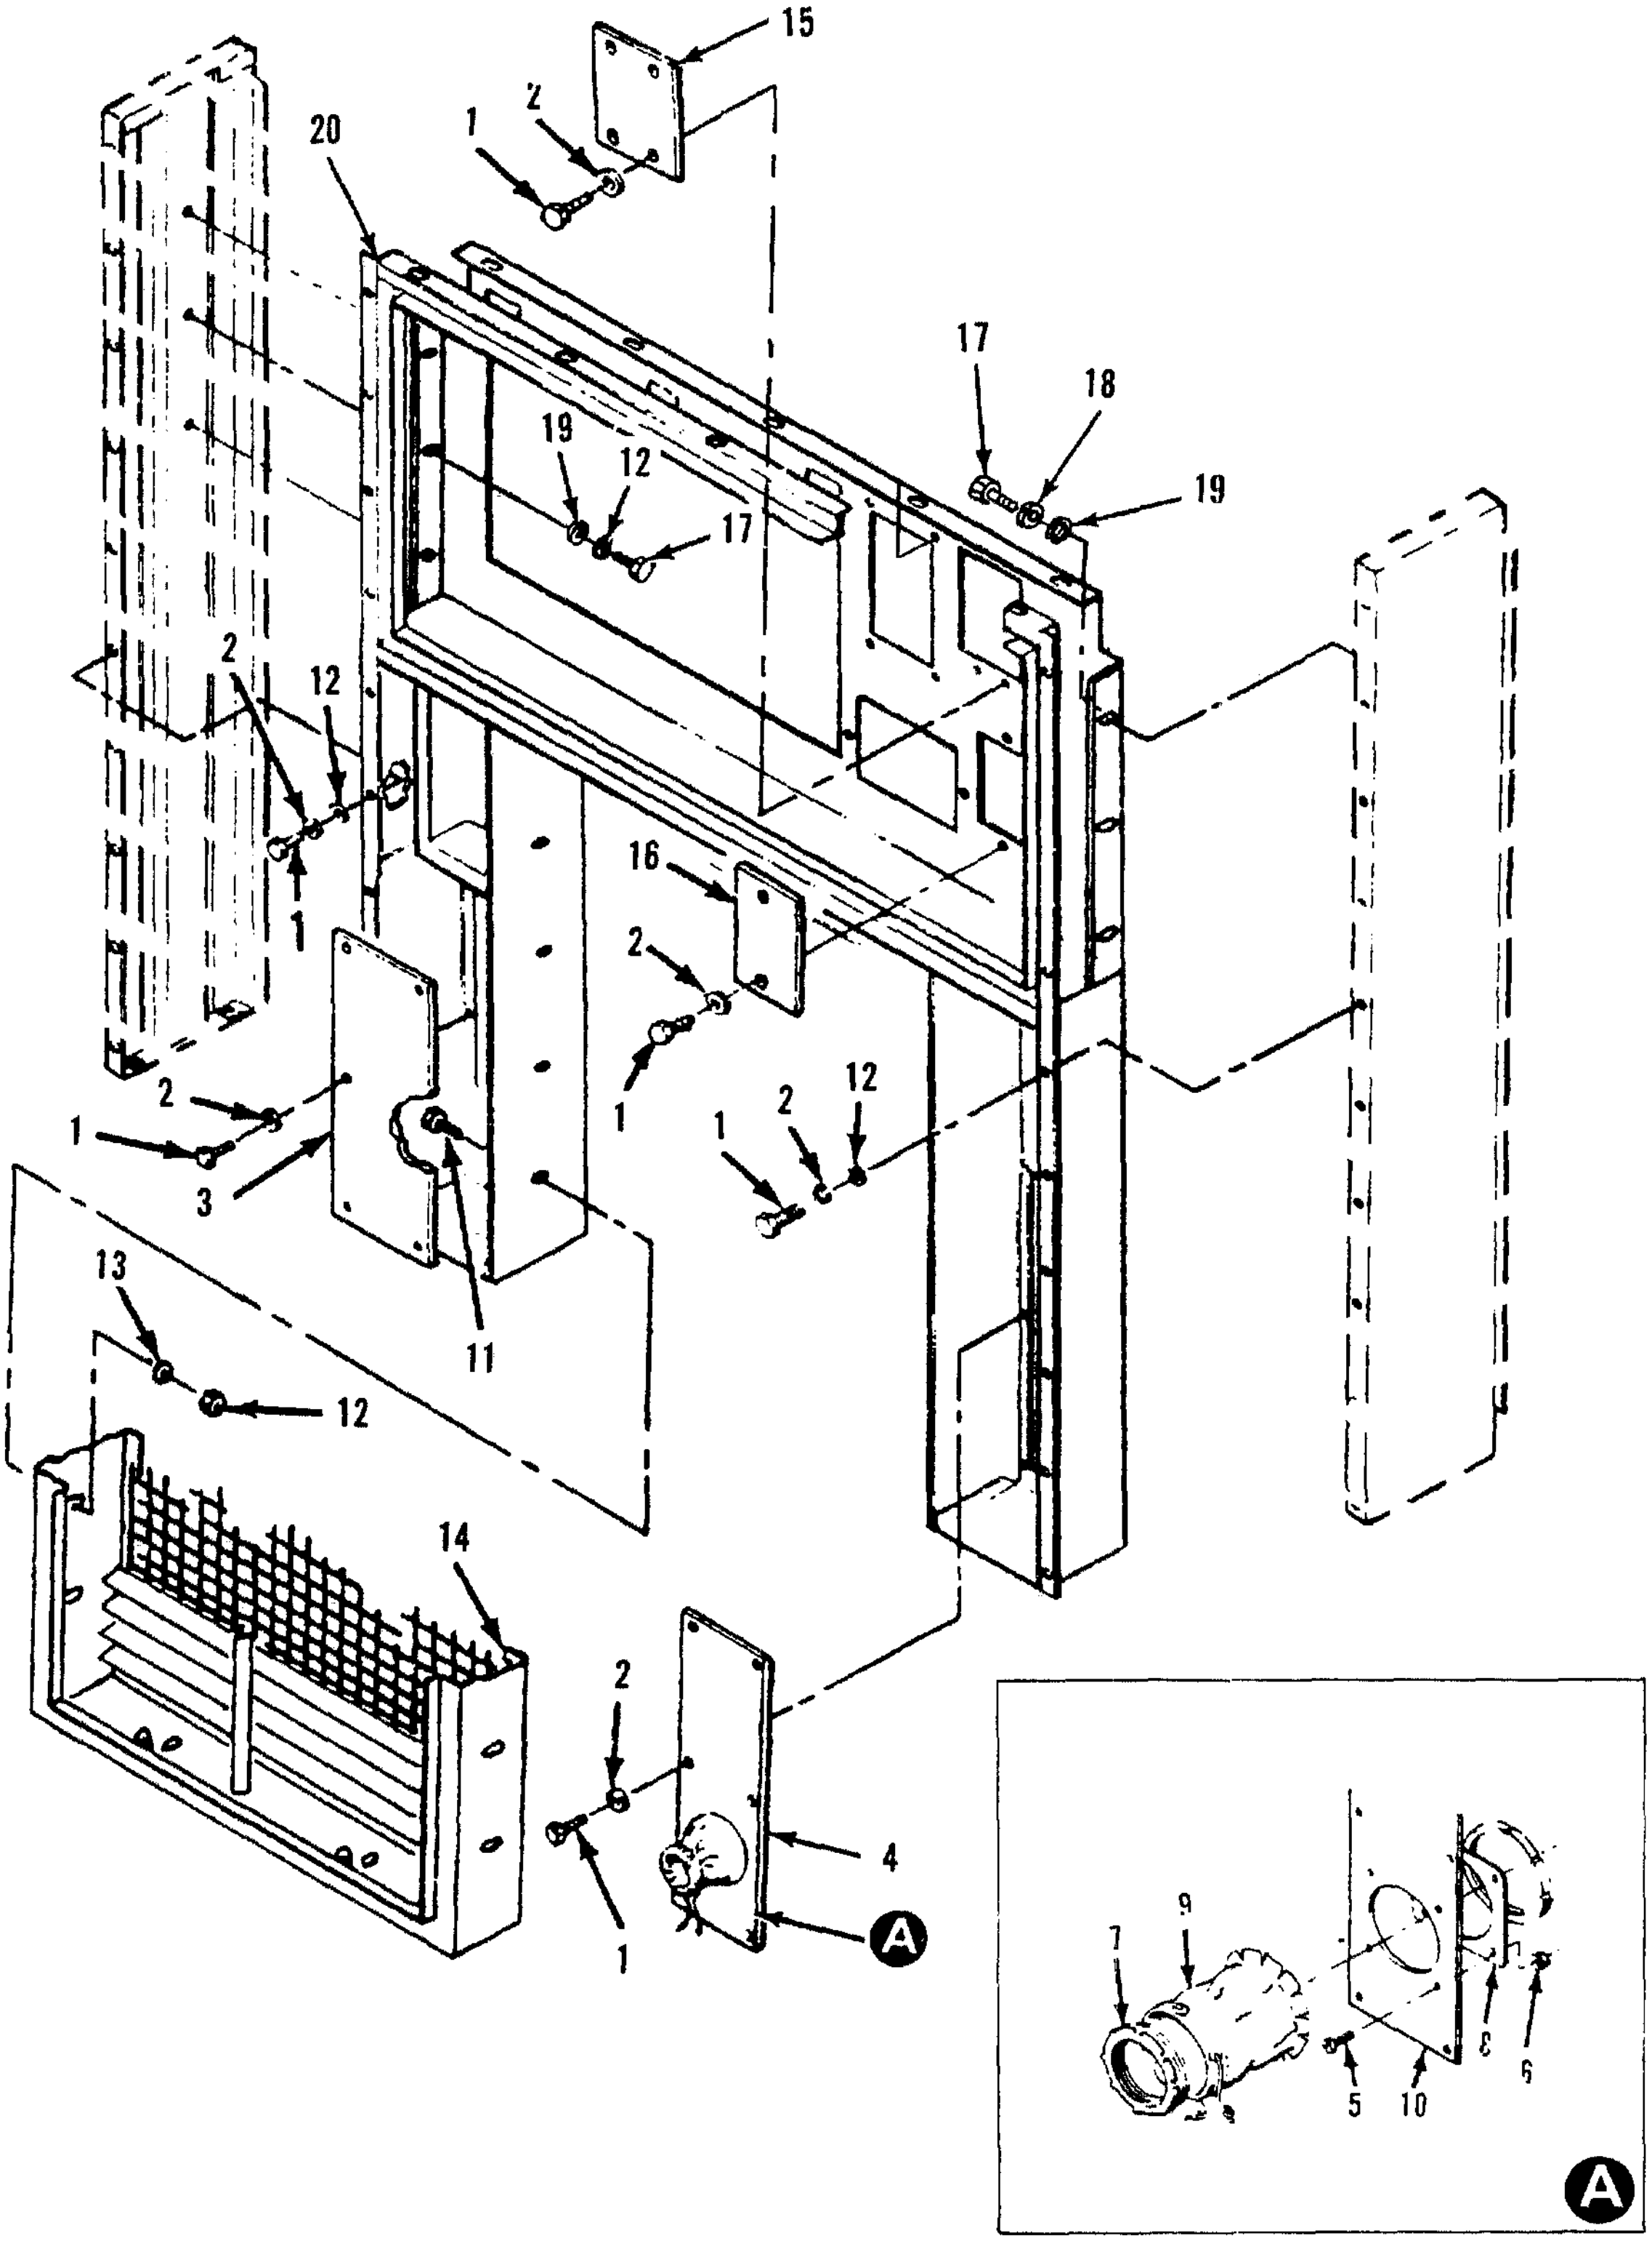
15
2
1
20
17
18
19
19
12
17
2
12
1
16
2
1
2
12
1
2
1
3
11
13
12
14
2
4
1
A
9
7
5
10
8
6
A

Figure 4. Rear Housing Panel and Related Parts

# SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO | (1) ILLUSTRATION b ITEM NO | (2) SMR CODE a ARMY | (2) SMR CODE b AIR FORCE | (2) SMR CODE c NAVY | (2) SMR CODE d USMC | (3) USMC a SSI | (3) USMC b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | (5) DESCRIPTION USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 01- HOUSING | | | | |
| 5 | | | | | | | | | DOCUMENT STOWAGE BOX, TOOL BOX, AND RELATED PARTS | | | | |
| 5 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0502 | SCREW, HEX HEAD<br>MS90725-6 | 96906 | EA | 8 | 118 |
| 5 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK<br>MS35338-44 | 96906 | EA | 18 | 154 |
| 5 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | 96906 | EA | 12 | 252 |
| 5 | 4 | XB | XB | XB | XB | | | | BOX, DOCUMENT STOWAGE<br>71-4484 | 30554 | EA | 1 | 1 |
| 5 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5305-00-225-3840 | SCREW, HEX HEAD<br>MS90725-7 | 96906 | EA | 8 | 18 |
| 5 | 6 | MOO | MOO | MOO | MOO | | | | PANEL, FILLER UPPER<br>70-4364-01 | 30554 | EA | 1 | 1 |
| 5 | 7 | MOO | MOO | MOO | MOO | | | | PANEL, FILLER, UPPER<br>70-4364-02 | 30554 | EA | 1 | 1 |
| 5 | 8 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C | 96906 | EA | 4 | 167 |
| 5 | 9 | MOO | MOO | MOO | MOO | | | | BRACKET, SUPPORT<br>70-4371 | 30554 | EA | 1 | 1 |
| 5 | 10 | MOO | MOO | MOO | MOO | | | | PANEL, FILLER<br>70-4373 | 30554 | EA | 1 | 1 |
| 5 | 11 | XB | XB | XB | XB | | | | BOX, TOOL STOWAGE ASSY<br>71-4401 | 30554 | EA | 1 | 1 |
| 5 | 12 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0501 | SCREW, HEX HEAD<br>MS90725-5 | 96906 | EA | 5 | 114 |
| 5 | 13 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C | 96906 | EA | 5 | 167 |
| 5 | 14 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | 96906 | EA | 10 | 252 |
| 5 | 15 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .030 | 5330-00-036-6995 | SEAL, RUBBER STRIP<br>RL-2955<br>69-771 | 10009<br>30554 | FT | 6 | 87 |
| 5 | 16 | MO | MO | MO | MO | | | | COVER ASSY<br>70-4370 | 30554 | EA | 1 | 1 |
| 5 | 17 | XB | XB | XB | XB | | | | BOX, TOOL STOWAGE<br>70-4367 | 30554 | EA | 1 | 1 |
| 5 | 18 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-225-8499 | SCREW, HEX HEAD<br>MS90725-34 | 96906 | EA | 4 | 20 |
| 5 | 19 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-245-3424 | NUT, SELF-LOCKING<br>MS17829-5C | 96906 | EA | 4 | 27 |
| 5 | 20 | MOO | MOO | MOO | MOO | | | | TANK STOP, REAR<br>70-4372 | 30554 | EA | 2 | 2 |

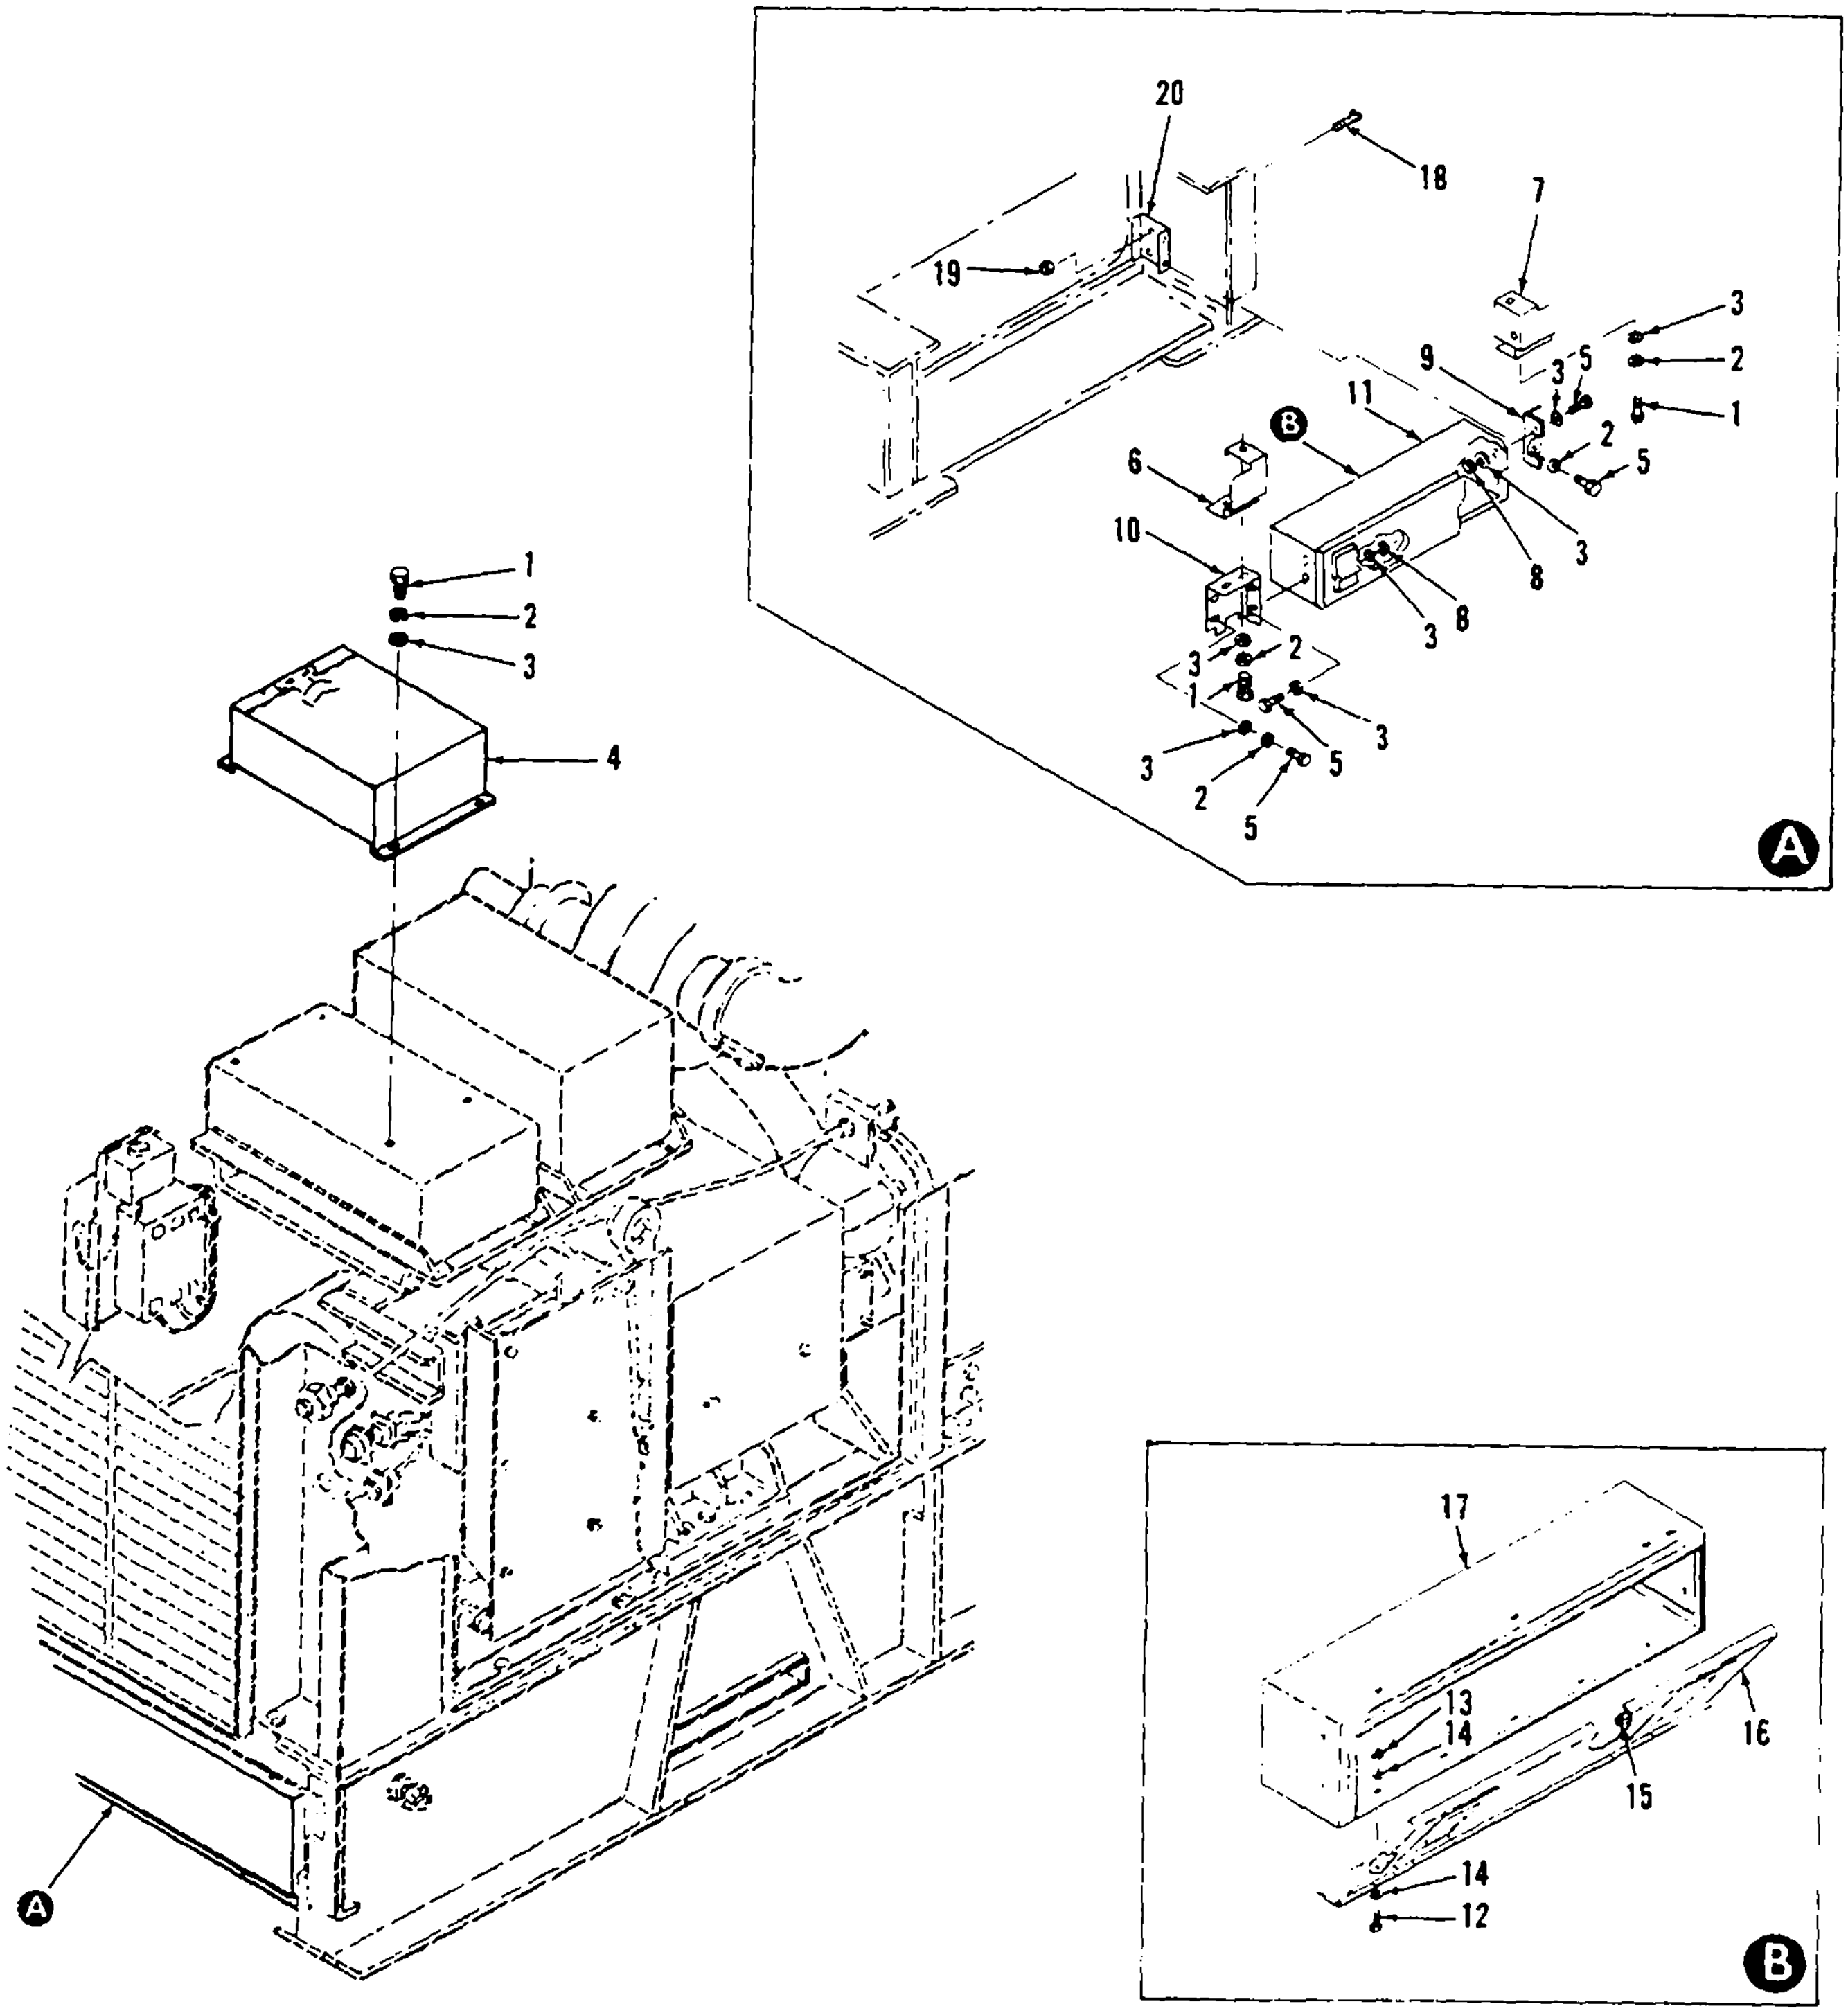
20
18
7
19
3
2
9
3
5
1
11
B
2
5
6
3
8
10
3
3
8
3
2
1
3
3
5
3
2
5
A
1
2
3
4
A
17
13
14
16
15
14
12
B

Figure 5. Document Stowage Box, Tool Box, and Related Parts

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 01 - HOUSING | | | | |
| 6 | | | | | | | | | GENERATOR SET WRENCH ASSEMBLY AND RELATED PARTS | | | | |
| 6 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0501 | SCREW, HEX HEAD<br>MS90725-5 | <br>96906 | EA | 4 | 114 |
| 6 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK<br>MS35338-44 | <br>96906 | EA | 4 | 154 |
| 6 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | <br>96906 | EA | 5 | 252 |
| 6 | 4 | XB | XB | XB | XB | | | | SHIELD ASSY, XFMR<br>71-4739 | <br>30554 | EA | 1 | 1 |
| 6 | 5 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-068-0502 | SCREW, HEX HEAD<br>MS90725-6 | <br>96906 | EA | 1 | 118 |
| 6 | 6 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C | <br>96906 | EA | 1 | 167 |
| 6 | 7 | XB | XB | XB | XB | | | | BRACKET, WRENCH SUPPORT<br>71-4679 | <br>30554 | EA | 1 | 1 |
| 6 | 8 | XB | XB | XB | XB | | | | WRENCH ASSY<br>76-4190 | <br>30554 | EA | 1 | 1 |
| 6 | 9 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .050 | 5840-00-115-2674 | TERMINAL LUG<br>MS20659-108 | <br>96906 | EA | 1 | 1 |
| 6 | 10 | XB | XB | XB | XB | | | | ROPE, NYLON<br>76-4190-01 | <br>30554 | EA | 1 | 1 |
| 6 | 11 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .003 | 5120-01-046-4948 | WRENCH<br>71-4960<br>00364-0354 | <br>30554<br>93568 | EA | 1 | 1 |
| 6 | 12 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5315-00-449-2945 | PIN, CROSS<br>69-695<br>99836 | <br>30554<br>76530 | EA | 6 | 8 |
| 6 | 13 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5325-00-290-5012 | STUD<br>69-694-7<br>98292-3-310 | <br>30554<br>76530 | EA | 6 | 6 |
| 6 | 14 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .050 | 6115-01-101-4059 | COVER, PROTECTIVE<br>71-4463 | <br>30554 | EA | 1 | 1 |

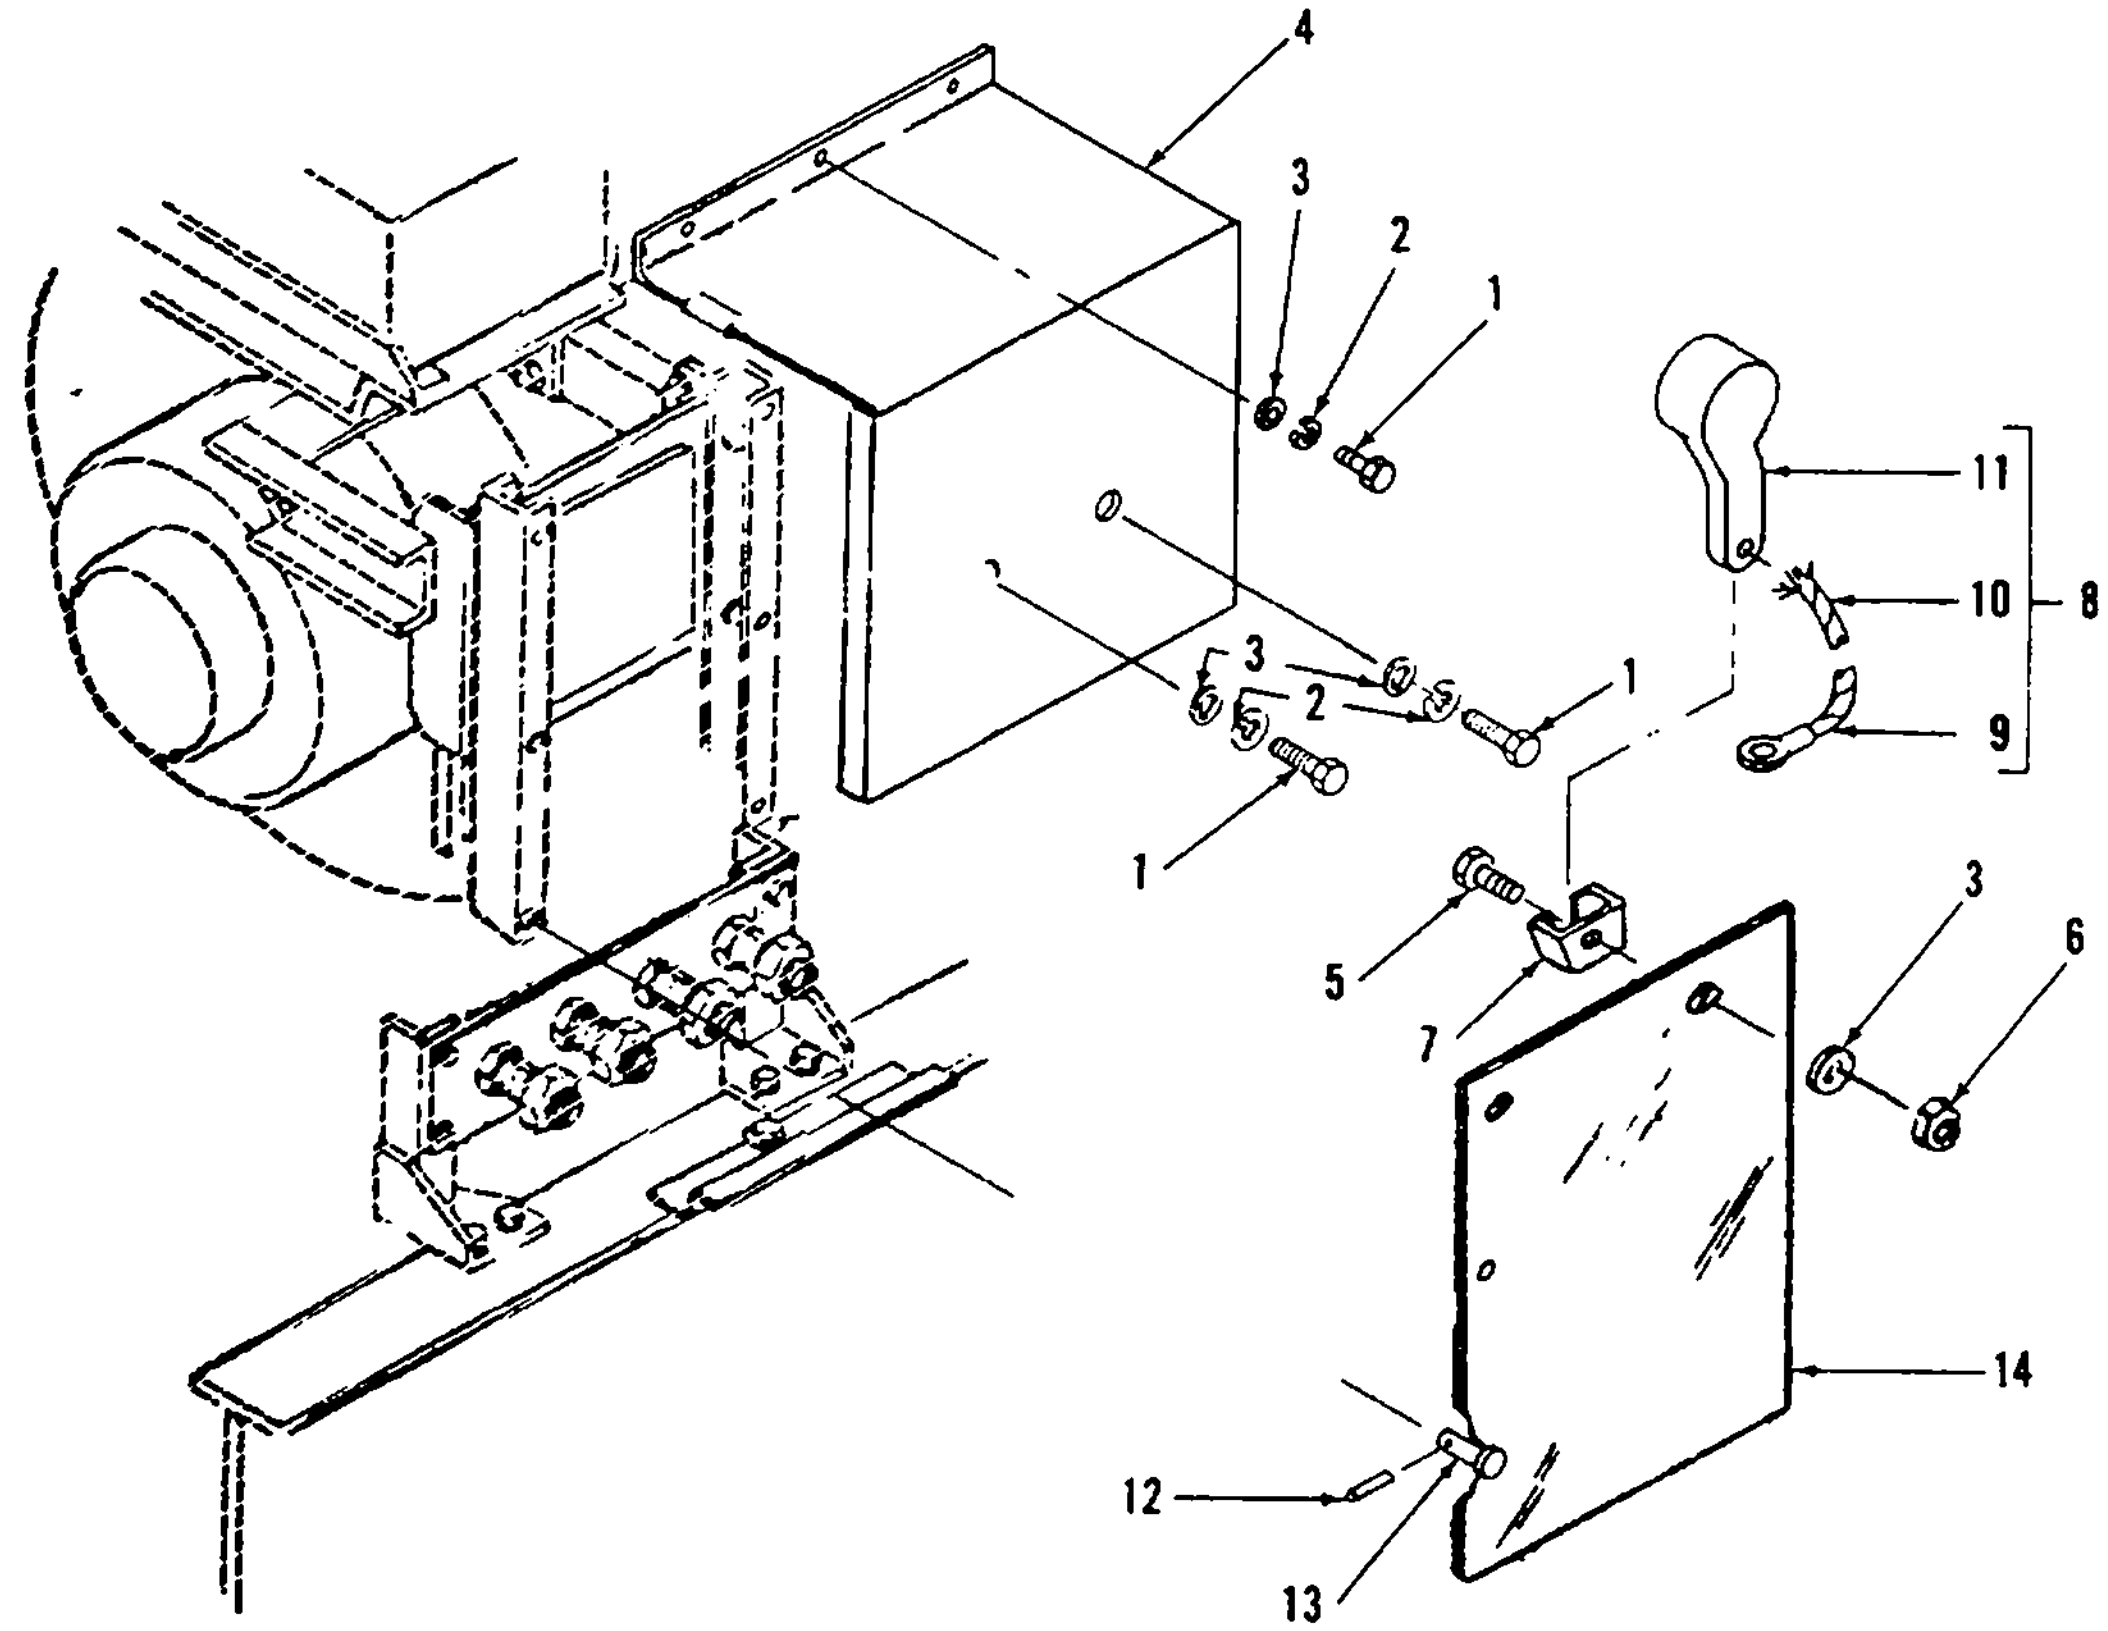
4
3
2
1
11
10
8
3
2
1
9
1
5
7
3
6
14
12
13

Figure 6. Generator Set Wrench Assembly and Related Parts

# SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 02 - DC ELECTRICAL AND CONTROL SYSTEM | | | | |
| 7 | | | | | | | | | BATTERIES AND RELATED PARTS | | | | |
| 7 | 1 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5310-00-245-3424 | NUT, SELF-LOCKING<br>MS17829-5C 96906 | | EA | 7 | 27 |
| 7 | 2 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-081-4219 | WASHER, FLAT<br>MS27183-12 96906 | | EA | 18 | 62 |
| 7 | 3 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .050 | 6135-01-192-3143 | RETAINER<br>70-4263 30554 | | EA | 2 | 2 |
| 7 | 4 | PAOBZ· | PAOBZ | PAOZZ | PAOZZ | D | .370 | 6140-01-210-1964 | BATTERY<br>MS52149-1 96906 | | EA | 2 | 2 |
| 7 | 5 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5310-00-931-8167 | NUT, PLAIN HEX<br>MS51967-6 96906 | | EA | 8 | 2 |
| 7 | 6 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-407-9566 | WASHER, LOCK<br>MS35338-45 96906 | | EA | 18 | 67 |
| 7 | 7 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5307-00-237-8829 | STUD, PLAIN<br>70-4268-01 30554<br>04306-0311 93568 | | EA | 4 | 4 |
| 7 | 8 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .013 | 4030-00-948-7315 | HOOK<br>MS87006-33 96906 | | EA | 2 | 4 |
| 7 | 9 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 4010-00-171-4506 | CHAIN, SASH<br>RR-C-271TY2CL3 81349<br>42C14154 10001 | | FT | 1 | 1 |
| 7 | 10 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5340-00-213-5112 | PIN, OUICK RELEASE<br>MS17987-843 96906 | | EA | 2 | 2 |
| 7 | 11 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-226-4831 | SCREW, HEX HEAD<br>M390728-38 96906 | | EA | 2 | 2 |
| 7 | 12 | MOO | MOO | MOO | MOO | | | | BRACKET, STOP<br>71-4754 30554 | | EA | 2 | 2 |
| 7 | 13 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-225-8498 | SCREW, HEX HEAD<br>MS90725-33 96906 | | EA | 8 | 8 |
| 7 | 14 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .023 | 3110-00-100-6155 | BALL, BEARING<br>MS19059-2418 96906 | | EA | 2 | 2 |
| 7 | 15 | MOO | MOO | MOO | MOO | | | | RUNNER<br>70-4264-01 30554 | | EA | 1 | 1 |
| 7 | 16 | MOO | MOO | MOO | MOO | | | | RUNNER<br>70-4264-02 30554 | | EA | 1 | 1 |
| 7 | 17 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5315-00-842-3044 | PIN, COTTER<br>MS24665-283 96906 | | EA | 12 | 12 |
| 7 | 18 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 6115-00-248-6126 | SHAFT, BATTERY TRAY<br>70-4266 30554 | | EA | 6 | 6 |
| 7 | 19 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .023 | 5365-00-216-1232 | ROLLER<br>70-4267 30554 | | EA | 6 | 6 |
| 7 | 20 | PA0ZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 6115-00-248-6125 | TRAY<br>70-4262 30554<br>04306-0304 93568 | | EA | 1 | 1 |
| 7 | 21 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-225-8499 | SCREW<br>MS90725-34 96906 | | EA | 2 | 20 |
| 7 | 22 | MOO | MOO | MOO | MOO | | | | STOP, BATTERY<br>71-4402 30554 | | EA | 1 | 1 |

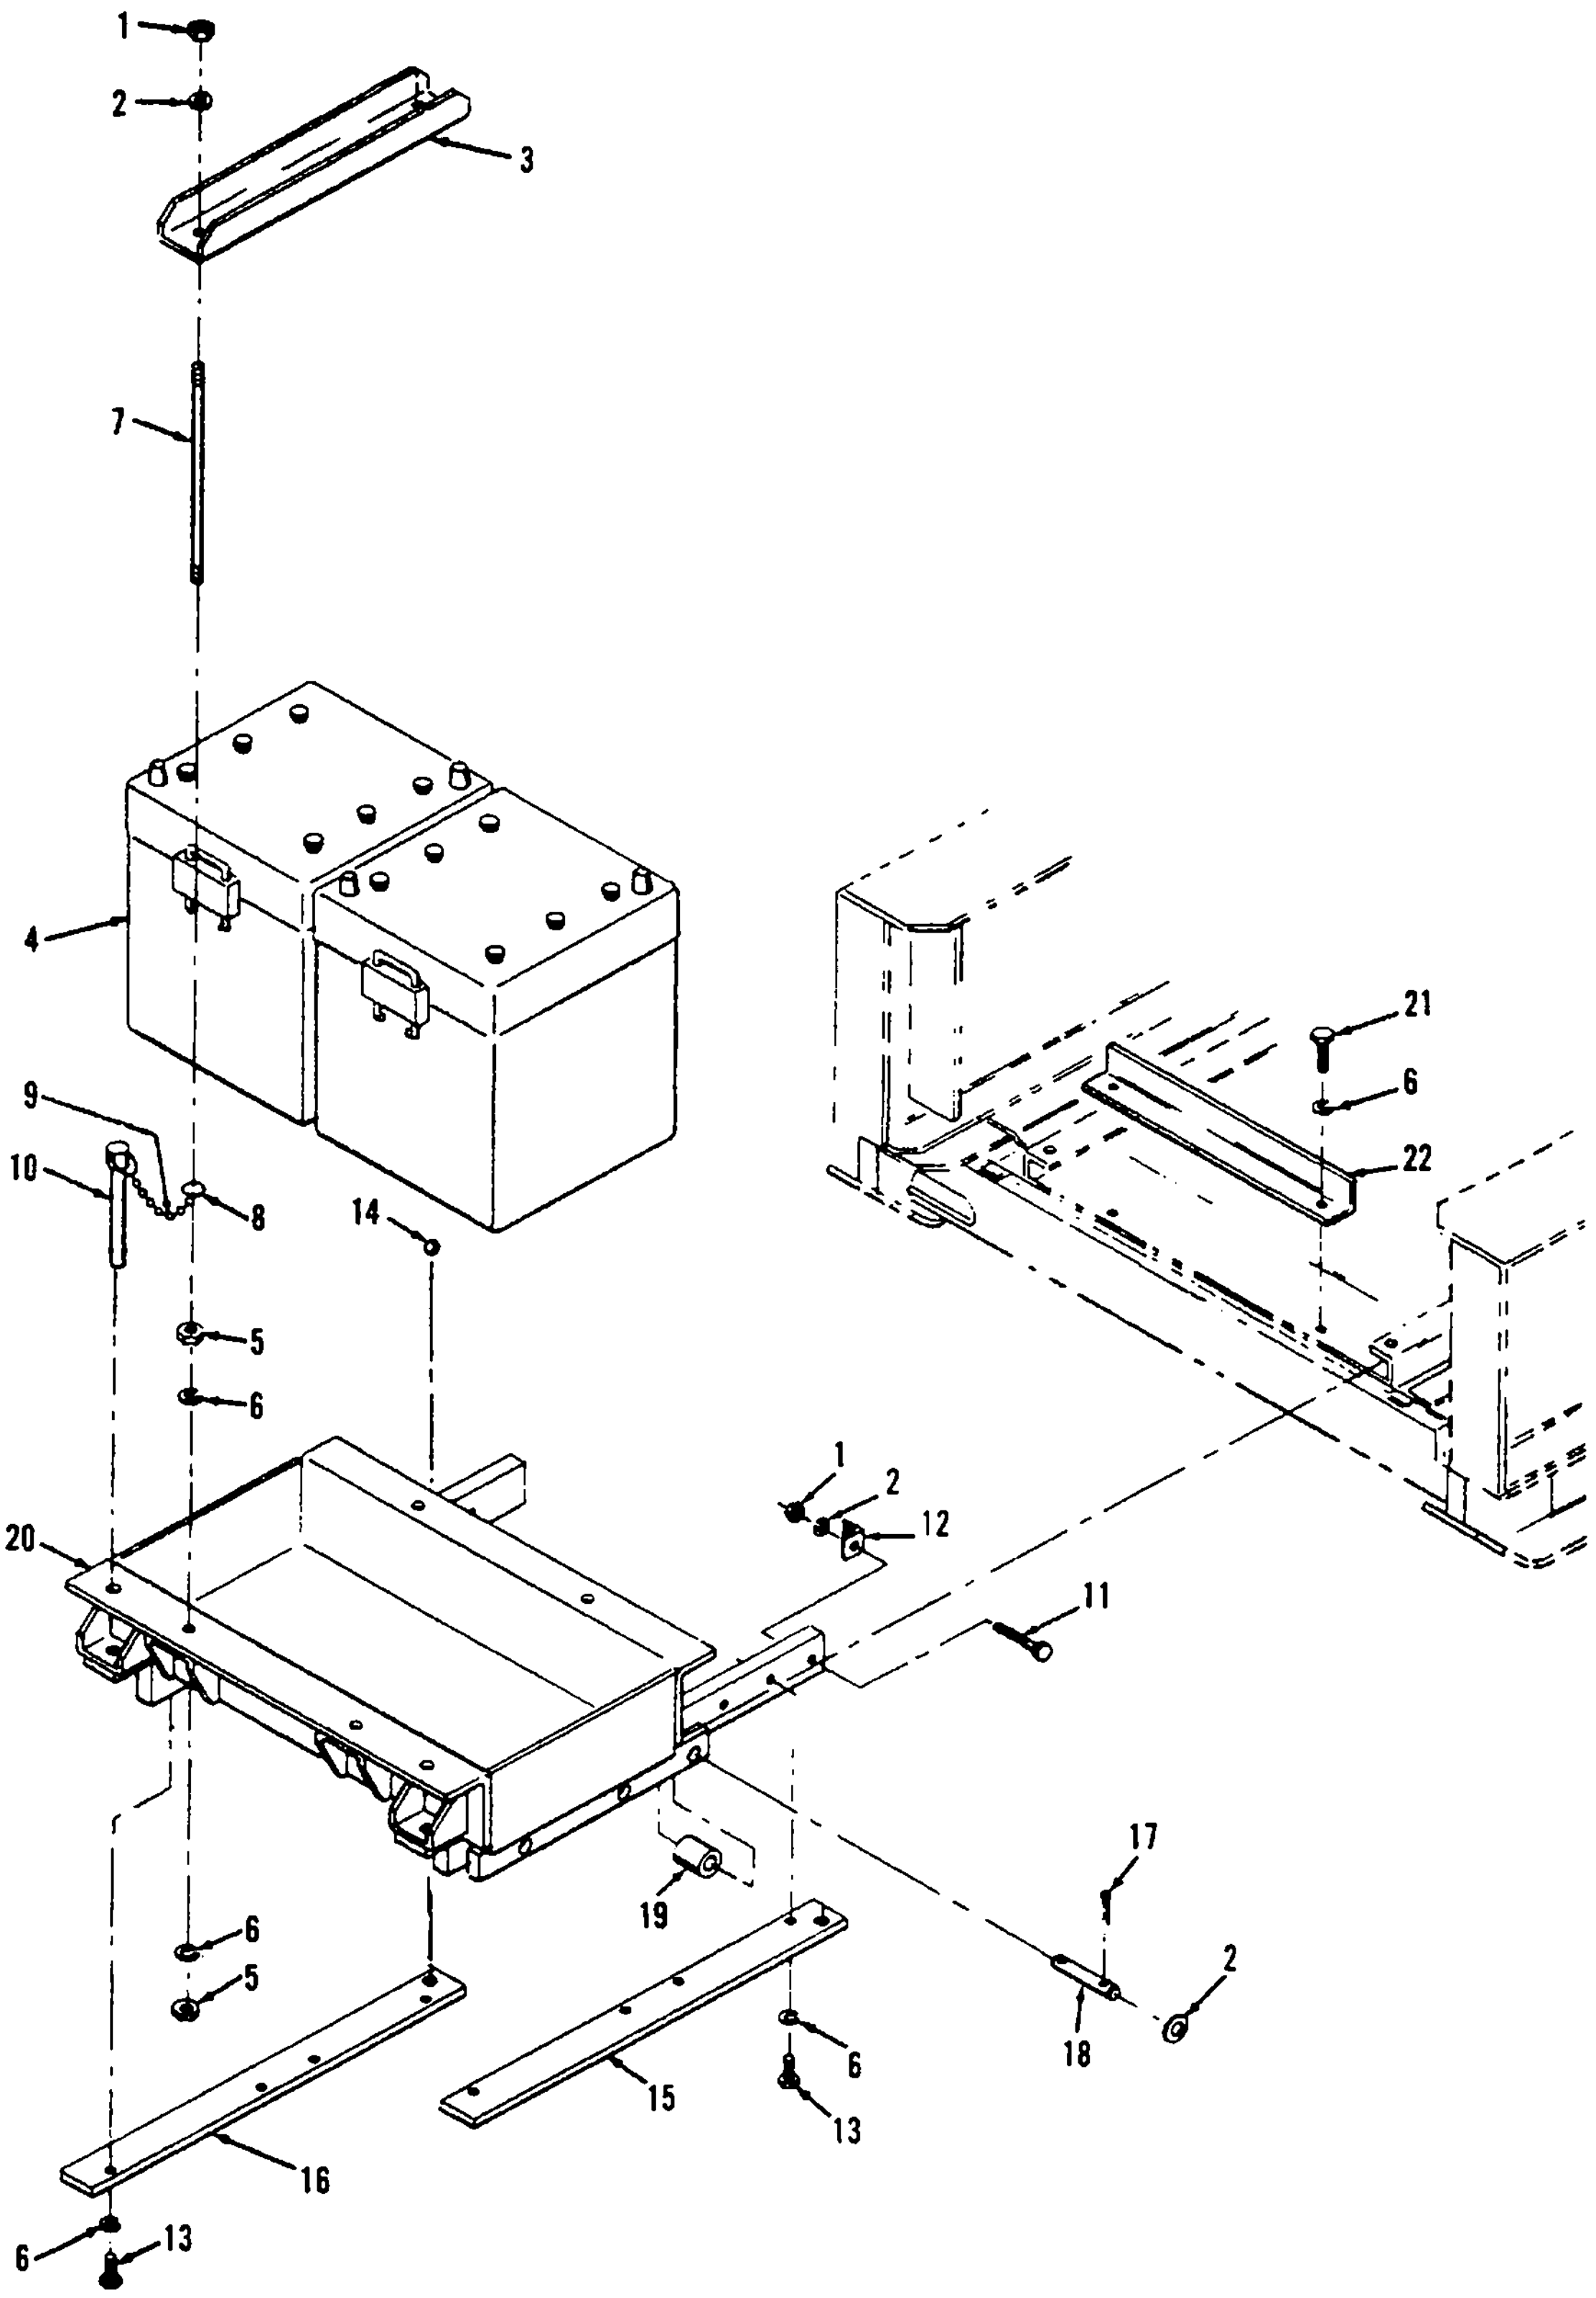
1
2
3
7
4
21
6
22
9
10
8
14
5
6
1
2
12
20
11
17
19
6
5
2
18
15
6
13
16
6
13

Figure 7. Batteries and Related Parts

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 02 - DC ELECTRICAL AND CONTROL SYSTEM | | | | |
| 8 | | | | | | | | | SLAVE RECEPTACLES | | | | |
| 8 | 1 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-038-3150 | SCREW AND WASHER<br>69-662-53<br>61-101441-40-0142B-0542B | <br>30554<br>78189 | EA | 2 | 2 |
| 8 | 2 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-094-3421 | NUT AND WASHER<br>69-5614<br>511-101800-00 | <br>30554<br>78189 | EA | 2 | 95 |
| 8 | 3 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-8546 | WASHER, FLAT<br>MS27183-8 | <br>96906 | EA | 2 | 26 |
| 8 | 4 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .030 | 5935-01-050-7485 | RECEPTACLE, EXT PWR<br>MS3506-1 | <br>69906 | EA | 1 | 1 |
| 8 | 5 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0502 | SCREW, HEX HEAD<br>MS907256 | <br>96906 | EA | 4 | 118 |
| 8 | 6 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-761-6882 | NUT, PLAIN HEX<br>MS51967-2 | <br>96906 | EA | 4 | 22 |
| 8 | 7 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK<br>MS35338-44 | <br>96906 | EA | 4 | 154 |
| 8 | 8 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | <br>96906 | EA | 4 | 252 |
| 8 | 9 | XB | XB | XB | XB | | | | BRACKET<br>70-4339 | <br>30554 | EA | 1 | 1 |
| 8 | 10 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-071-2241 | SCREW, HEX HEAD<br>MS90725-10 | <br>96906 | EA | 4 | 10 |
| 8 | 11 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C | <br>96906 | EA | 4 | 167 |
| 8 | 12 | AOO | AOO | AOO | AOO | | | | CONNECTOR AND LEAD WIRE ASSY<br>71-4561 | <br>30554 | EA | 1 | 1 |
| 8 | 13 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-115-2684 | TERMINAL LUG<br>MS20659-118 | <br>96906 | EA | 2 | 10 |
| 8 | 14 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-815-1300 | SLEEVING<br>M23053/5-110-0 | <br>81349 | FT | 1 | 4 |
| 8 | 15 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-978-7677 | SLEEVING<br>M23053/5-110-2 | <br>81349 | FT | 1 | 6 |
| 8 | 16 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-643-1255 | WIRE, ELECTRICAL<br>CW1331-1-1-0 | <br>24457 | FT | 3 | 3 |
| 8 | 17 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .030 | 5935-00-493-5854 | CONNECTOR, RECEPTACLE<br>MS75057-1 | <br>96906 | EA | 1 | 1 |

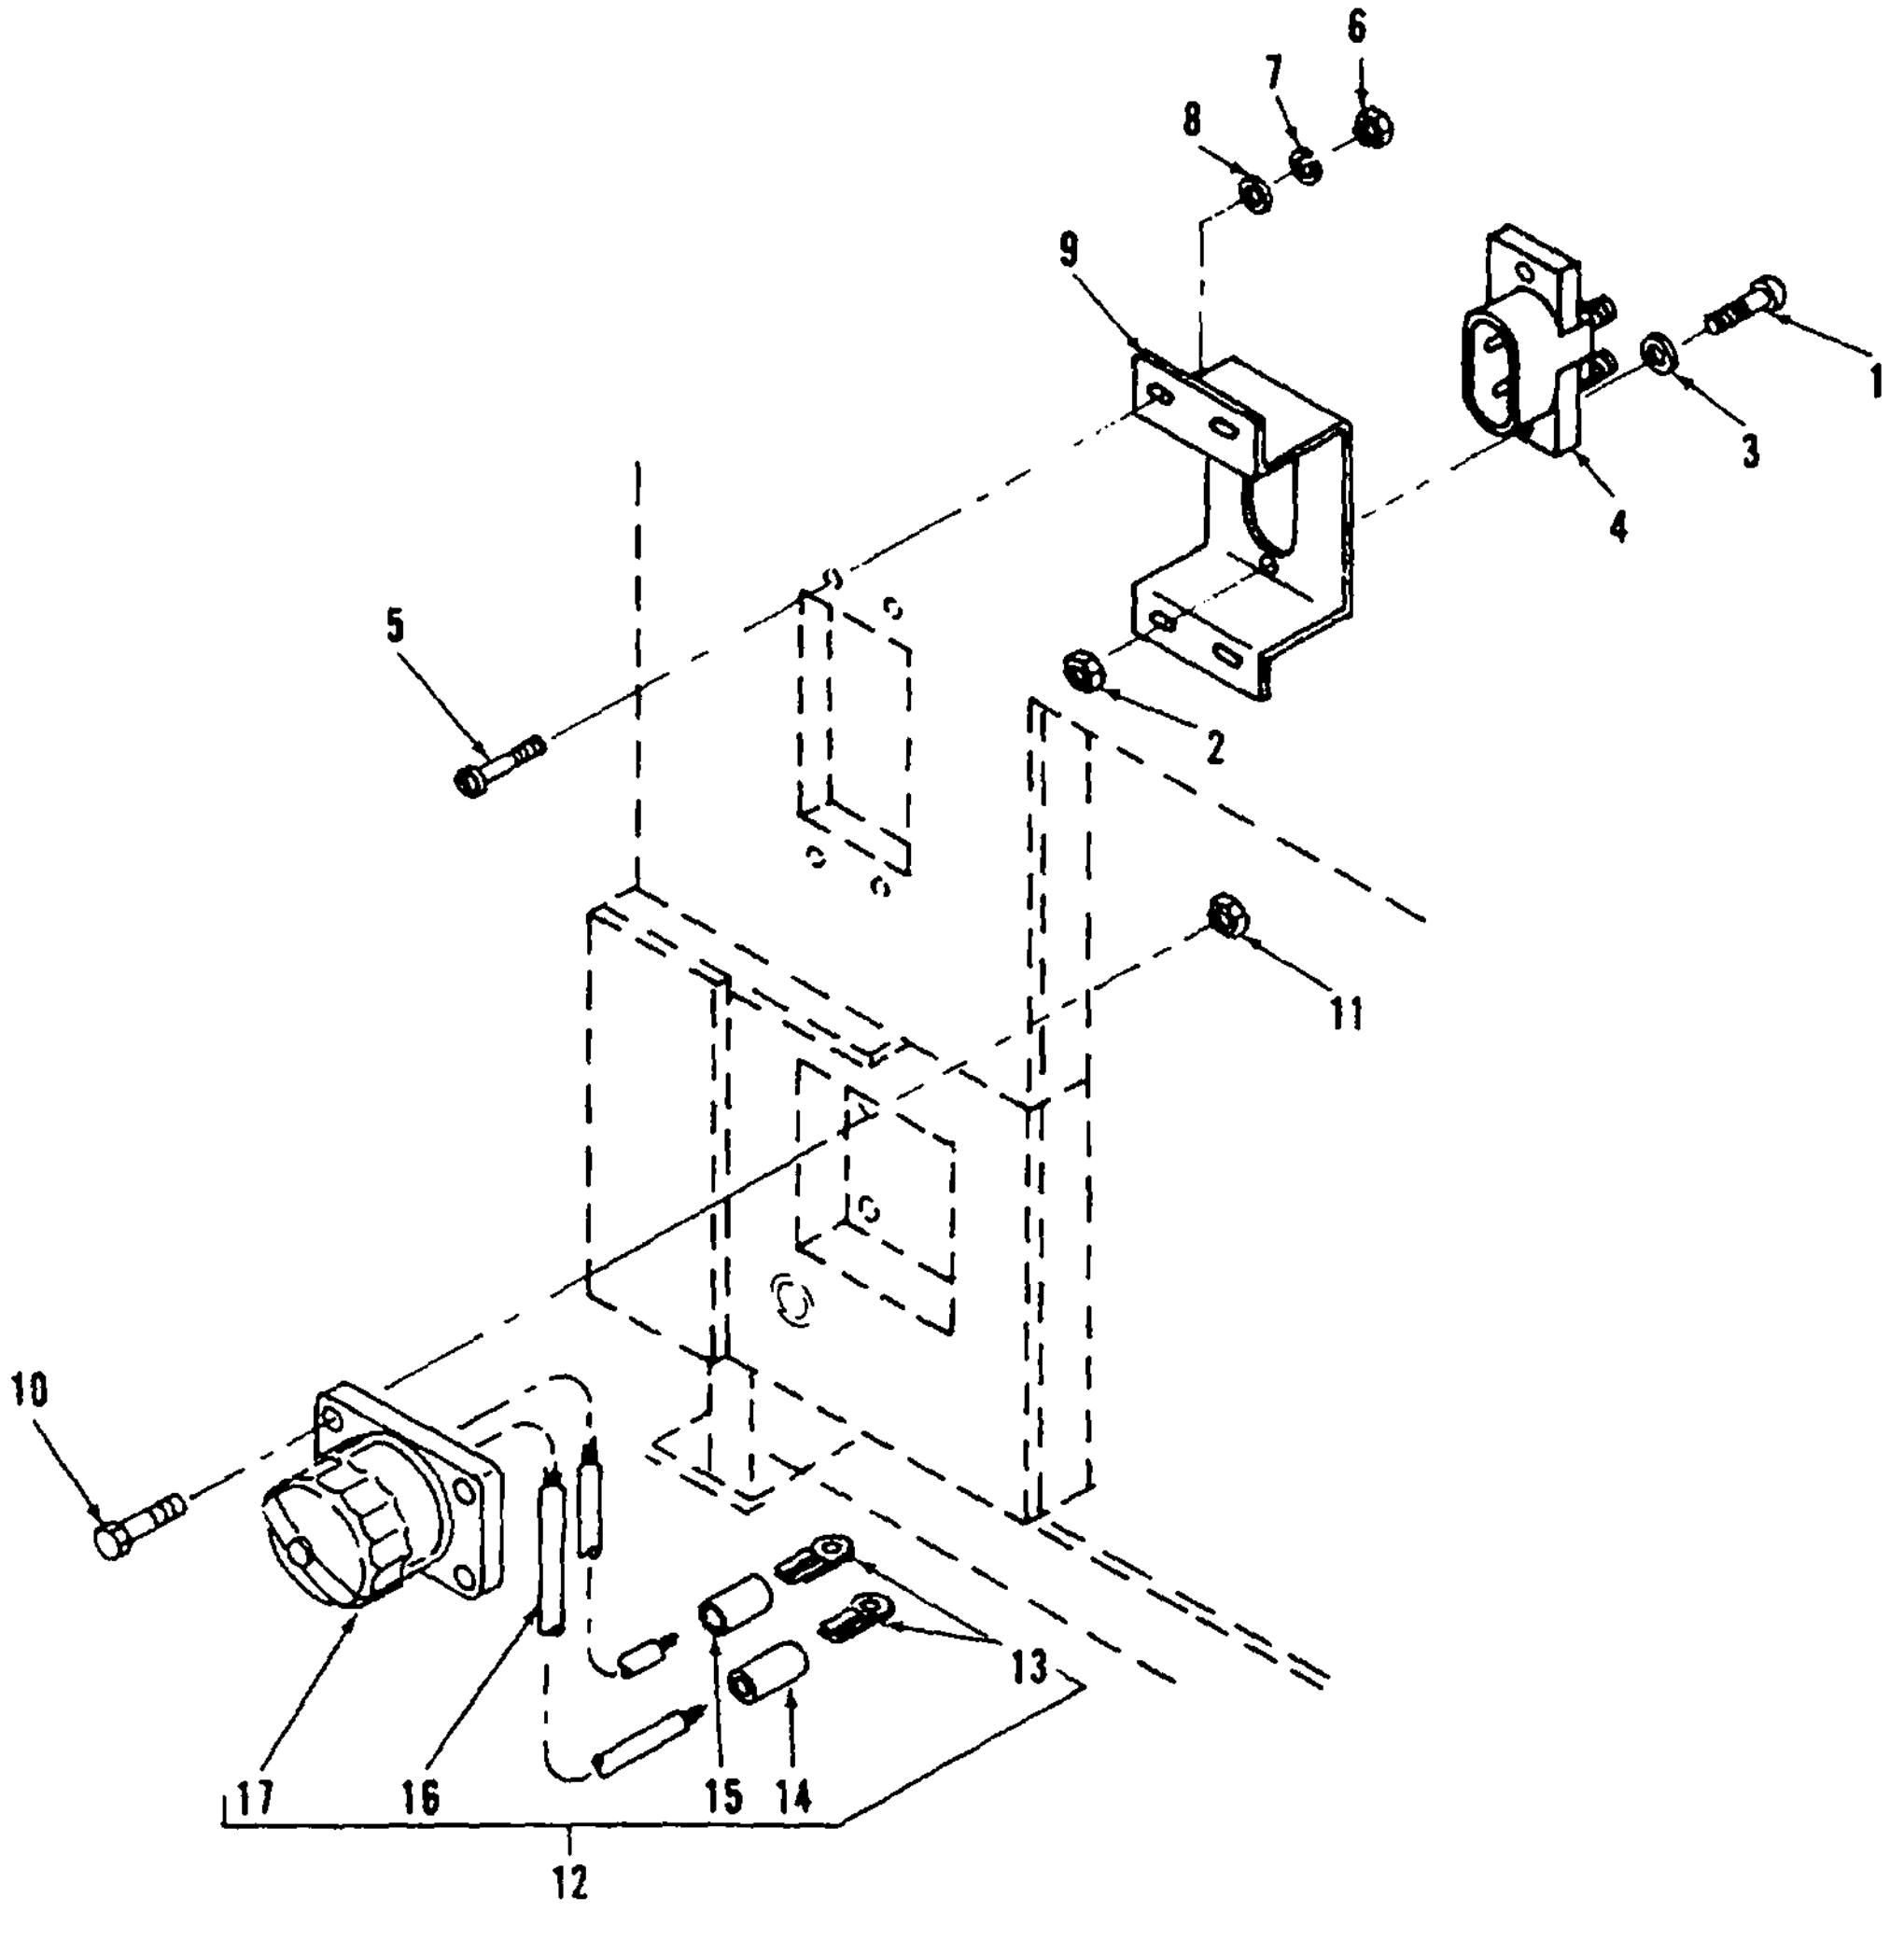
6
7
8
9
1
3
4
5
2
11
10
13
17
16
15
14
12

Figure 8. Slave Receptacles

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 02-DC ELECTRICAL AND CONTROL SYSTEM | | | | |
| 9 | | | | | | | | | ALTERNATOR GUARD, BELT, AND RELATED PARTS | | | | |
| 9 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-225-8497 | SCREW, HEX HEAD<br>MS90725-32 | 96906 | EA | 1 | 28 |
| 9 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-407-9566 | WASHER, LOCK<br>MS35338-45 | 96906 | EA | 2 | 67 |
| 9 | 3 | XB | XB | XB | XB | | | | GUARD, FAN, ALTERNATOR<br>76-4139 | 30554 | EA | 1 | 1 |
| 9 | 4 | PAOFF | PAOZZ | PAOZZ | PAOZZ | D | .035 | 3030-00-554-8315 | BELT, ALTERNATOR DRIVE<br>16-462 | 72781 | EA | 1 | 1 |

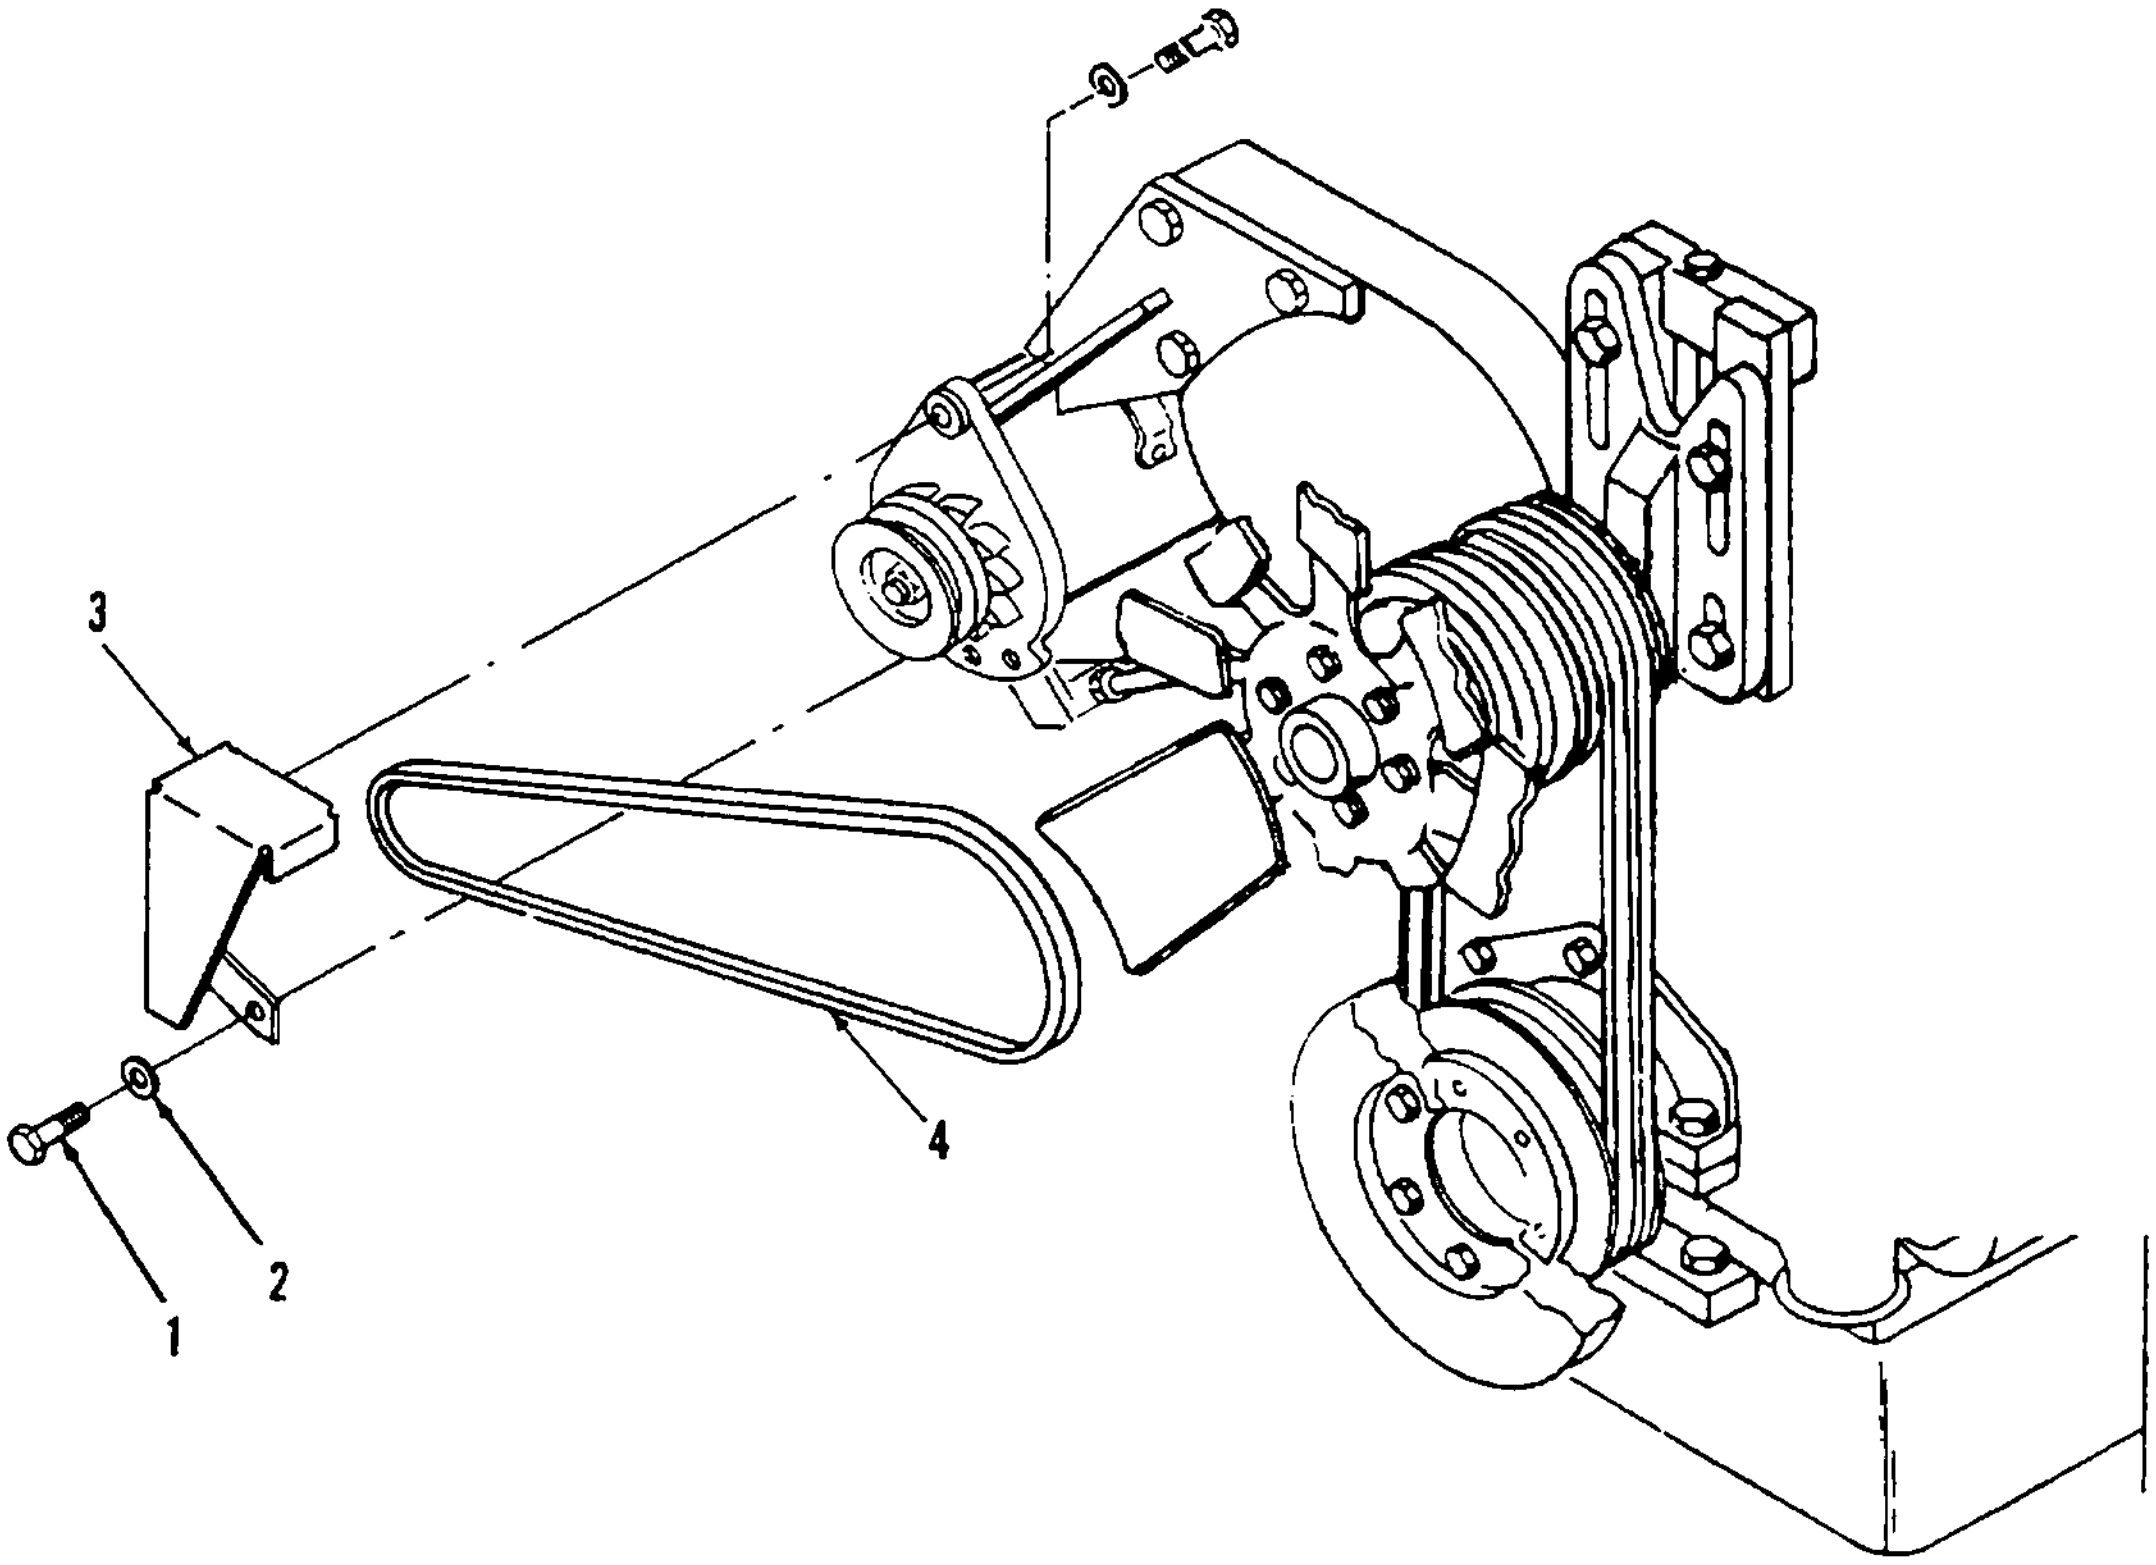

Figure 9. Alternator Guard, Belt, and Related Parts

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 02 DC ELECTRICAL AND CONTROL SYSTEM | | | | |
| 10 | | PAOFF | PAOFF | PAFHH | PAFHH | | .030 | 2920-00-118-1222 | BATTERY CHARGING ALTERNATOR<br>69-780-2 30554<br>70D44672B-02 31211 | | EA | 1 | 1 |
| 10 | 1 | PAFZZ | PAFZZ | PAOZZ | PAOZZ | D | .030 | 5920-00-892-9311 | FUSE, HOLDER<br>2-8 31211<br>FHN26G1 81349 | | EA | 1 | 1 |
| 10 | 2 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | 2.000 | 5920-00-131-9897 | FUSE, CARTRIDGE<br>2-9 31211<br>AGC40 71400 | | EA | 1 | 1 |
| 10 | 3 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-026-2577 | SCREW, TAPPING<br>20-121 31211 | | EA | 8 | 10 |
| 10 | 4 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-224-0488 | NUT, HEX<br>20-81 94990 | | EA | 1 | 1 |
| 10 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-216-8392 | WASHER, LOCK<br>20-62 94990 | | EA | 1 | 1 |
| 10 | 6 | MOO | MOO | MOO | MOO | | | | LEAD, CONNECTOR, RED<br>16-80 31211 | | EA | 1 | 1 |
| 10 | 7 | MOO | MOO | MOO | MOO | | | | LEAD, CONNECTOR, YELLOW<br>16-82 31211 | | EA | 1 | 1 |
| 10 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-020-4737 | NUT, HEX<br>20-34 31211 | | EA | 4 | 4 |
| 10 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5970-00-148-6300 | WASHER, INSULATING<br>15-3 31211 | | EA | 16 | 16 |
| 10 | 10 | MOO | MOO | MOO | MOO | | | | LEAD, CONNECTOR, BLACK<br>16-81 31211 | | EA | 1 | 1 |
| 10 | 11 | MOO | MOO | MOO | MOO | | | | LEAD, CONNECTOR, FUSE<br>16-93 31211 | | EA | 1 | 1 |
| 10 | 12 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 2920-00-764-7913 | COVER AND PLUG ASSY<br>14-34 31211 | | EA | 1 | 1 |
| 10 | 13 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .007 | 5920-00-106-1454 | PROTECTOR, CIRCUIT<br>9-11 31211 | | EA | 1 | 1 |
| 10 | 14 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 2920-00-764-7912 | HOUSING AND SHIELD ASSY<br>14-33 31211 | | EA | 1 | 1 |
| 10 | 15 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-132-1527 | NUT, LOCK<br>20-33 94990 | | EA | 2 | 2 |
| 10 | 16 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5920-00-144 -7307 | WASHER, INSULATING<br>15-4 31211 | | EA | 2 | 2 |
| 10 | 17 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5970-00-436-5271 | SLEEVE, INSULATING<br>15-2 31211 | | EA | 1 | 2 |
| 10 | 18 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5961-00-484-3034 | SEMICONDUCTOR<br>1-65 31211<br>48B44003F06 31211 | | EA | 1 | 1 |
| 10 | 19 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-026-2597 | SCREW, TAPPING<br>20-99 31211 | | EA | 2 | 2 |
| 10 | 20 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5905-00-401-6563 | VOLTAGE REGULATOR AND RHEOSTAT ASSY<br>5-58 31211 | | EA | 1 | 1 |

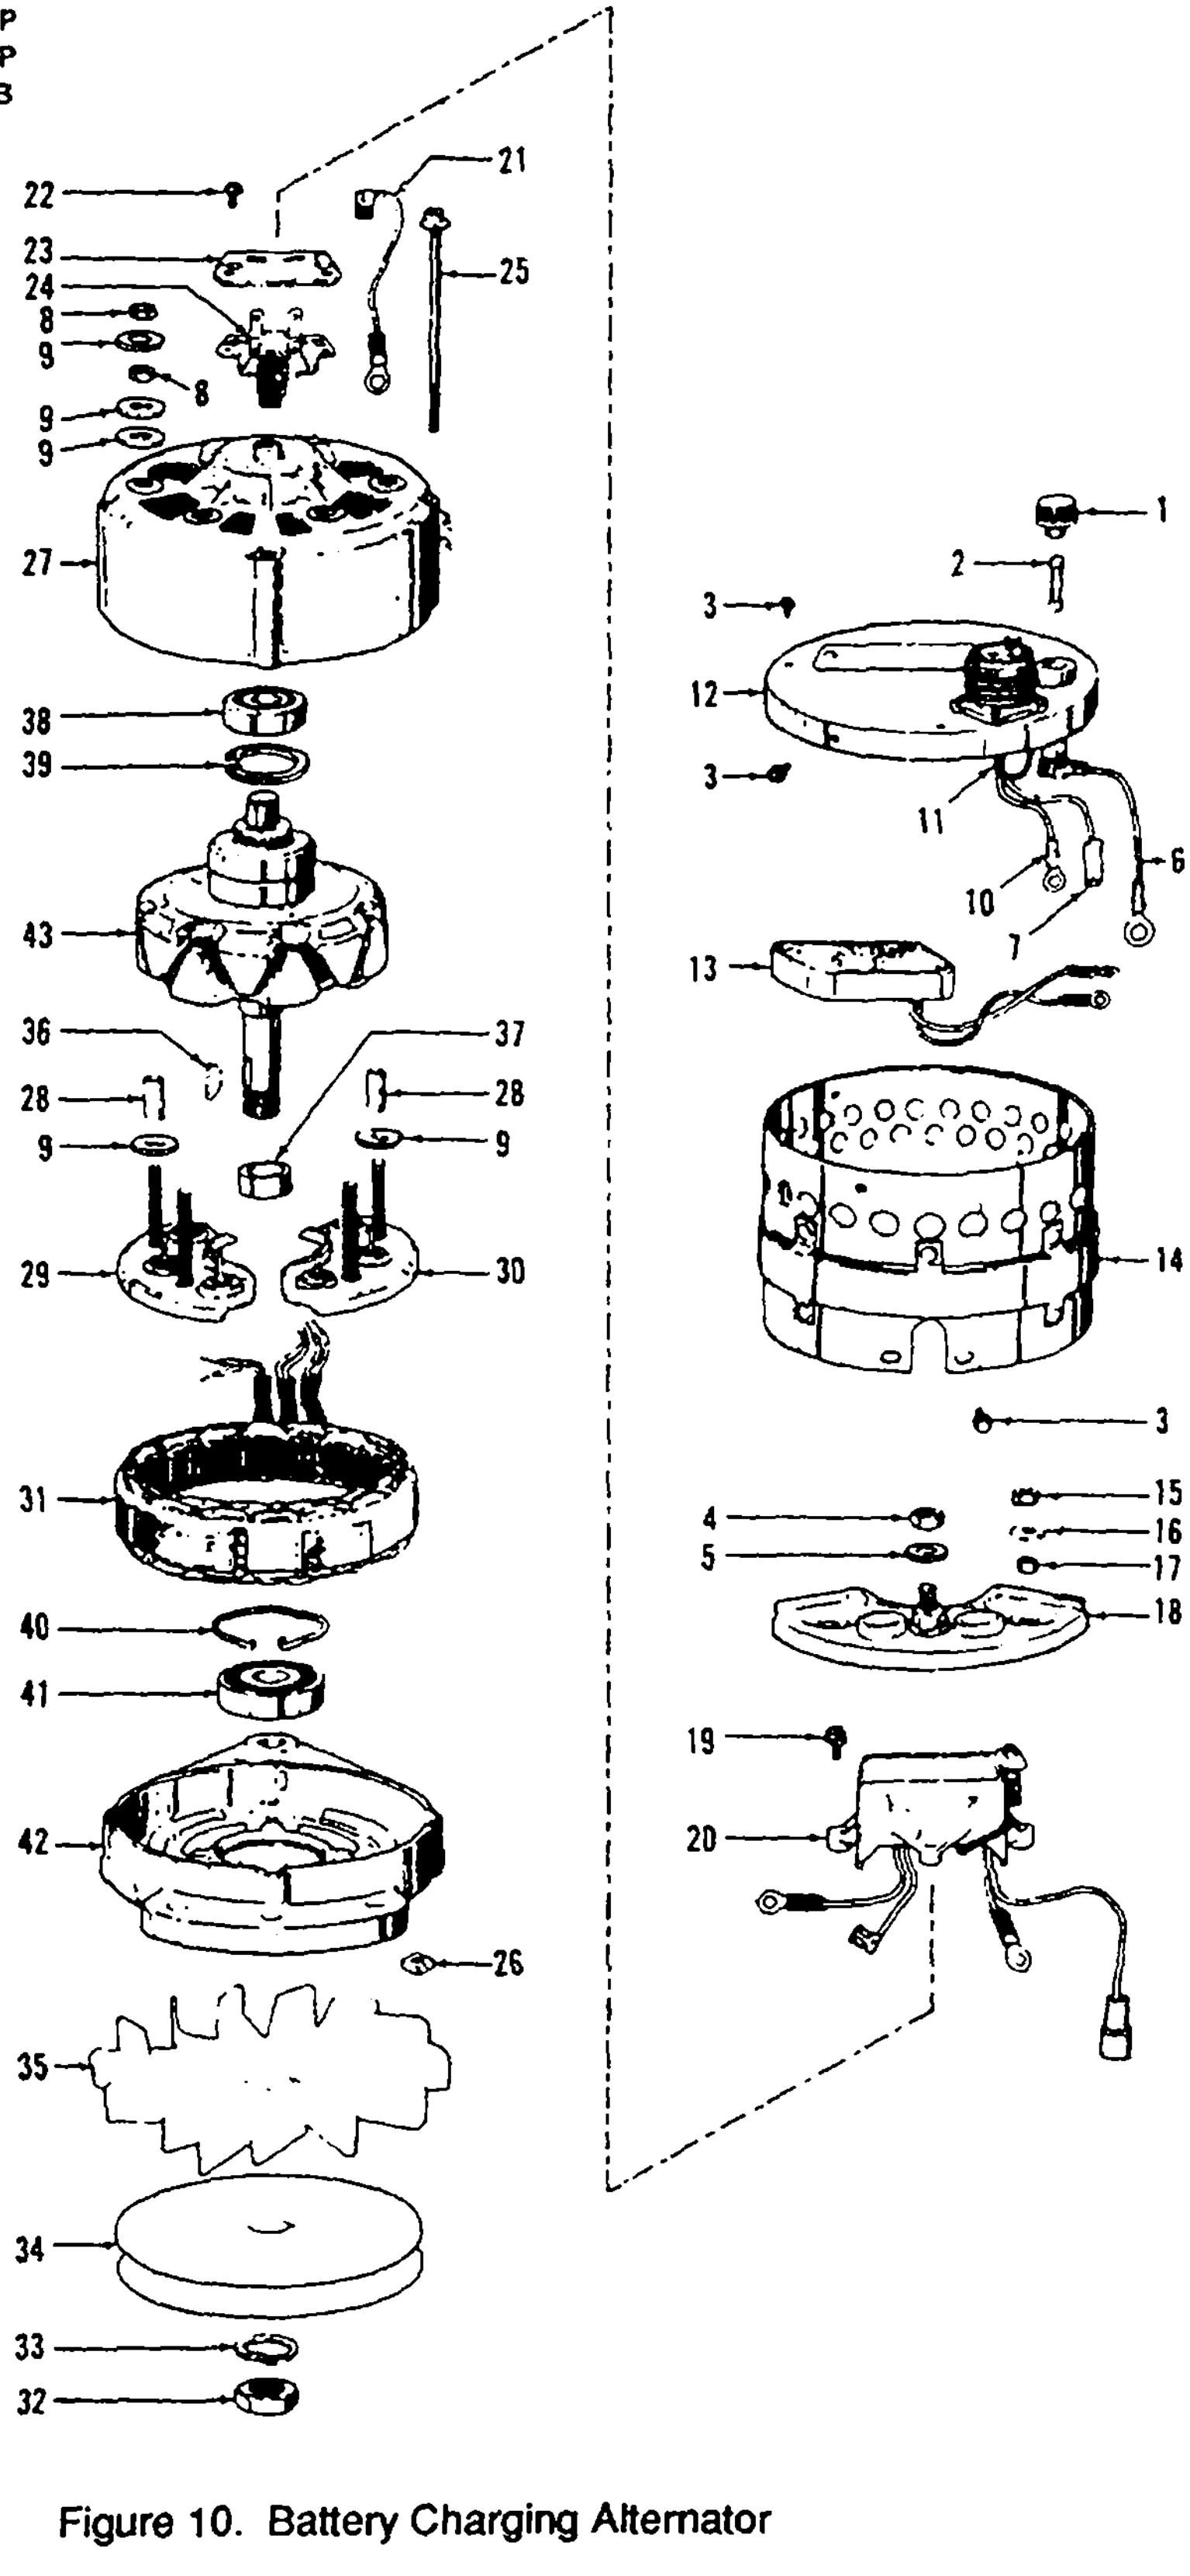
22
23
24
8
9
8
9
9
21
25
27
38
39
43
36
28
9
37
28
9
29
30
31
40
41
42
26
35
34
33
32
1
2
3
12
3
11
10
7
6
13
14
3
4
5
15
16
17
18
19
20

Figure 10. Battery Charging Alternator

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 02 DC ELECTRICAL AND CONTROL SYSTEM - CONTINUED | | | | |
| 10 | | | | | | | | | BATTERY CHARGING ALTERNATOR - CONTINUED | | | | |
| 10 | 21 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .040 | 5995-00-248-4020 | LEAD, ELECTRICAL<br>16-79 | 31211 | EA | 1 | 1 |
| 10 | 22 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-132-7816 | SCREW, TAPPING<br>20-32 | 94990 | EA | 2 | 2 |
| 10 | 23 | MOO | MOO | MOO | MOO | | | | COVER, BRUSH<br>3-5 | 31211 | EA | 1 | 1 |
| 10 | 24 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .470 | 2925-00-927-1460 | BRUSH ASSY<br>3-2 | 31211 | EA | 1 | 1 |
| 10 | 25 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-137-0024 | BOLT, SPECIAL<br>20-2 | 31211 | EA | 4 | 4 |
| 10 | 26 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-132-1525 | NUT, PLAIN, SQUARE<br>20-3 | 94990 | EA | 4 | 4 |
| 10 | 27 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 2920-00-764-7914 | HOUSING, REAR<br>14-35 | 31211 | EA | 1 | 1 |
| 10 | 28 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5340-00-110-5679 | SLEEVE, INSULATING<br>15-1 | 94990 | EA | 4 | 4 |
| 10 | 29 | PAFZZ | PAFZZ | PAHZZ | PABZZ | | .050 | 5961-00-136-4145 | SEMICONDUCTOR DEVICE<br>1-10 | 31211 | EA | 1 | 1 |
| 10 | 30 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5961-00-136-4146 | SEMICONDUCTOR DEVICE<br>1-11 | 94990 | EA | 1 | 1 |
| 10 | 31 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .005 | 6105-00-105-8290 | STATOR, MOTOR<br>13-5 | 31211 | EA | 1 | 1 |
| 10 | 32 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-132-1526 | NUT, PLAIN HEX<br>20-4 | 94990 | EA | 1 | 1 |
| 10 | 33 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-436-1975 | WASHER, LOCK<br>20-5 | 31211 | EA | 1 | 1 |
| 10 | 34 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 3020-00-207-9284 | PULLEY<br>7-75 | 31211 | EA | 1 | 1 |
| 10 | 35 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .004 | 2920-00-135-6398 | FAN<br>7-8 | 94990 | EA | 1 | 1 |
| 10 | 36 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-133-3625 | KEY, WOODRUFF<br>20-7 | 94990 | EA | 1 | 1 |
| 10 | 37 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5365-01-012-3600 | SPACER, FAN AND PULLEY<br>20-92 | 31211 | EA | 1 | 1 |
| 10 | 38 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .024 | 3110-00-130-7718 | BEARING, BALL<br>11-41 | 31211 | EA | 1 | 1 |
| 10 | 39 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5330-01-100-2073 | RETAINER, BEARING<br>11-25 | 31211 | EA | 1 | 1 |
| 10 | 40 | PAFZZ | PAFZZ | PAHZZ | P4HZZ | | .024 | 6365-00-133-0904 | RETAINER, BEARING<br>11-3 | 31211 | EA | 1 | 1 |
| 10 | 41 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .024 | 3110-00-123-2583 | BEARING, BALL<br>11-42 | 31211 | EA | 1 | 1 |
| 10 | 42 | XA | XA | XA | XA | | | | HOUSING, FRONT<br>14-1 | 31211 | EA | 1 | 1 |
| 10 | 43 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .005 | 2120-00-133-9888 | ROTOR, GENERATOR<br>12-11 | 31211 | EA | 1 | 1 |

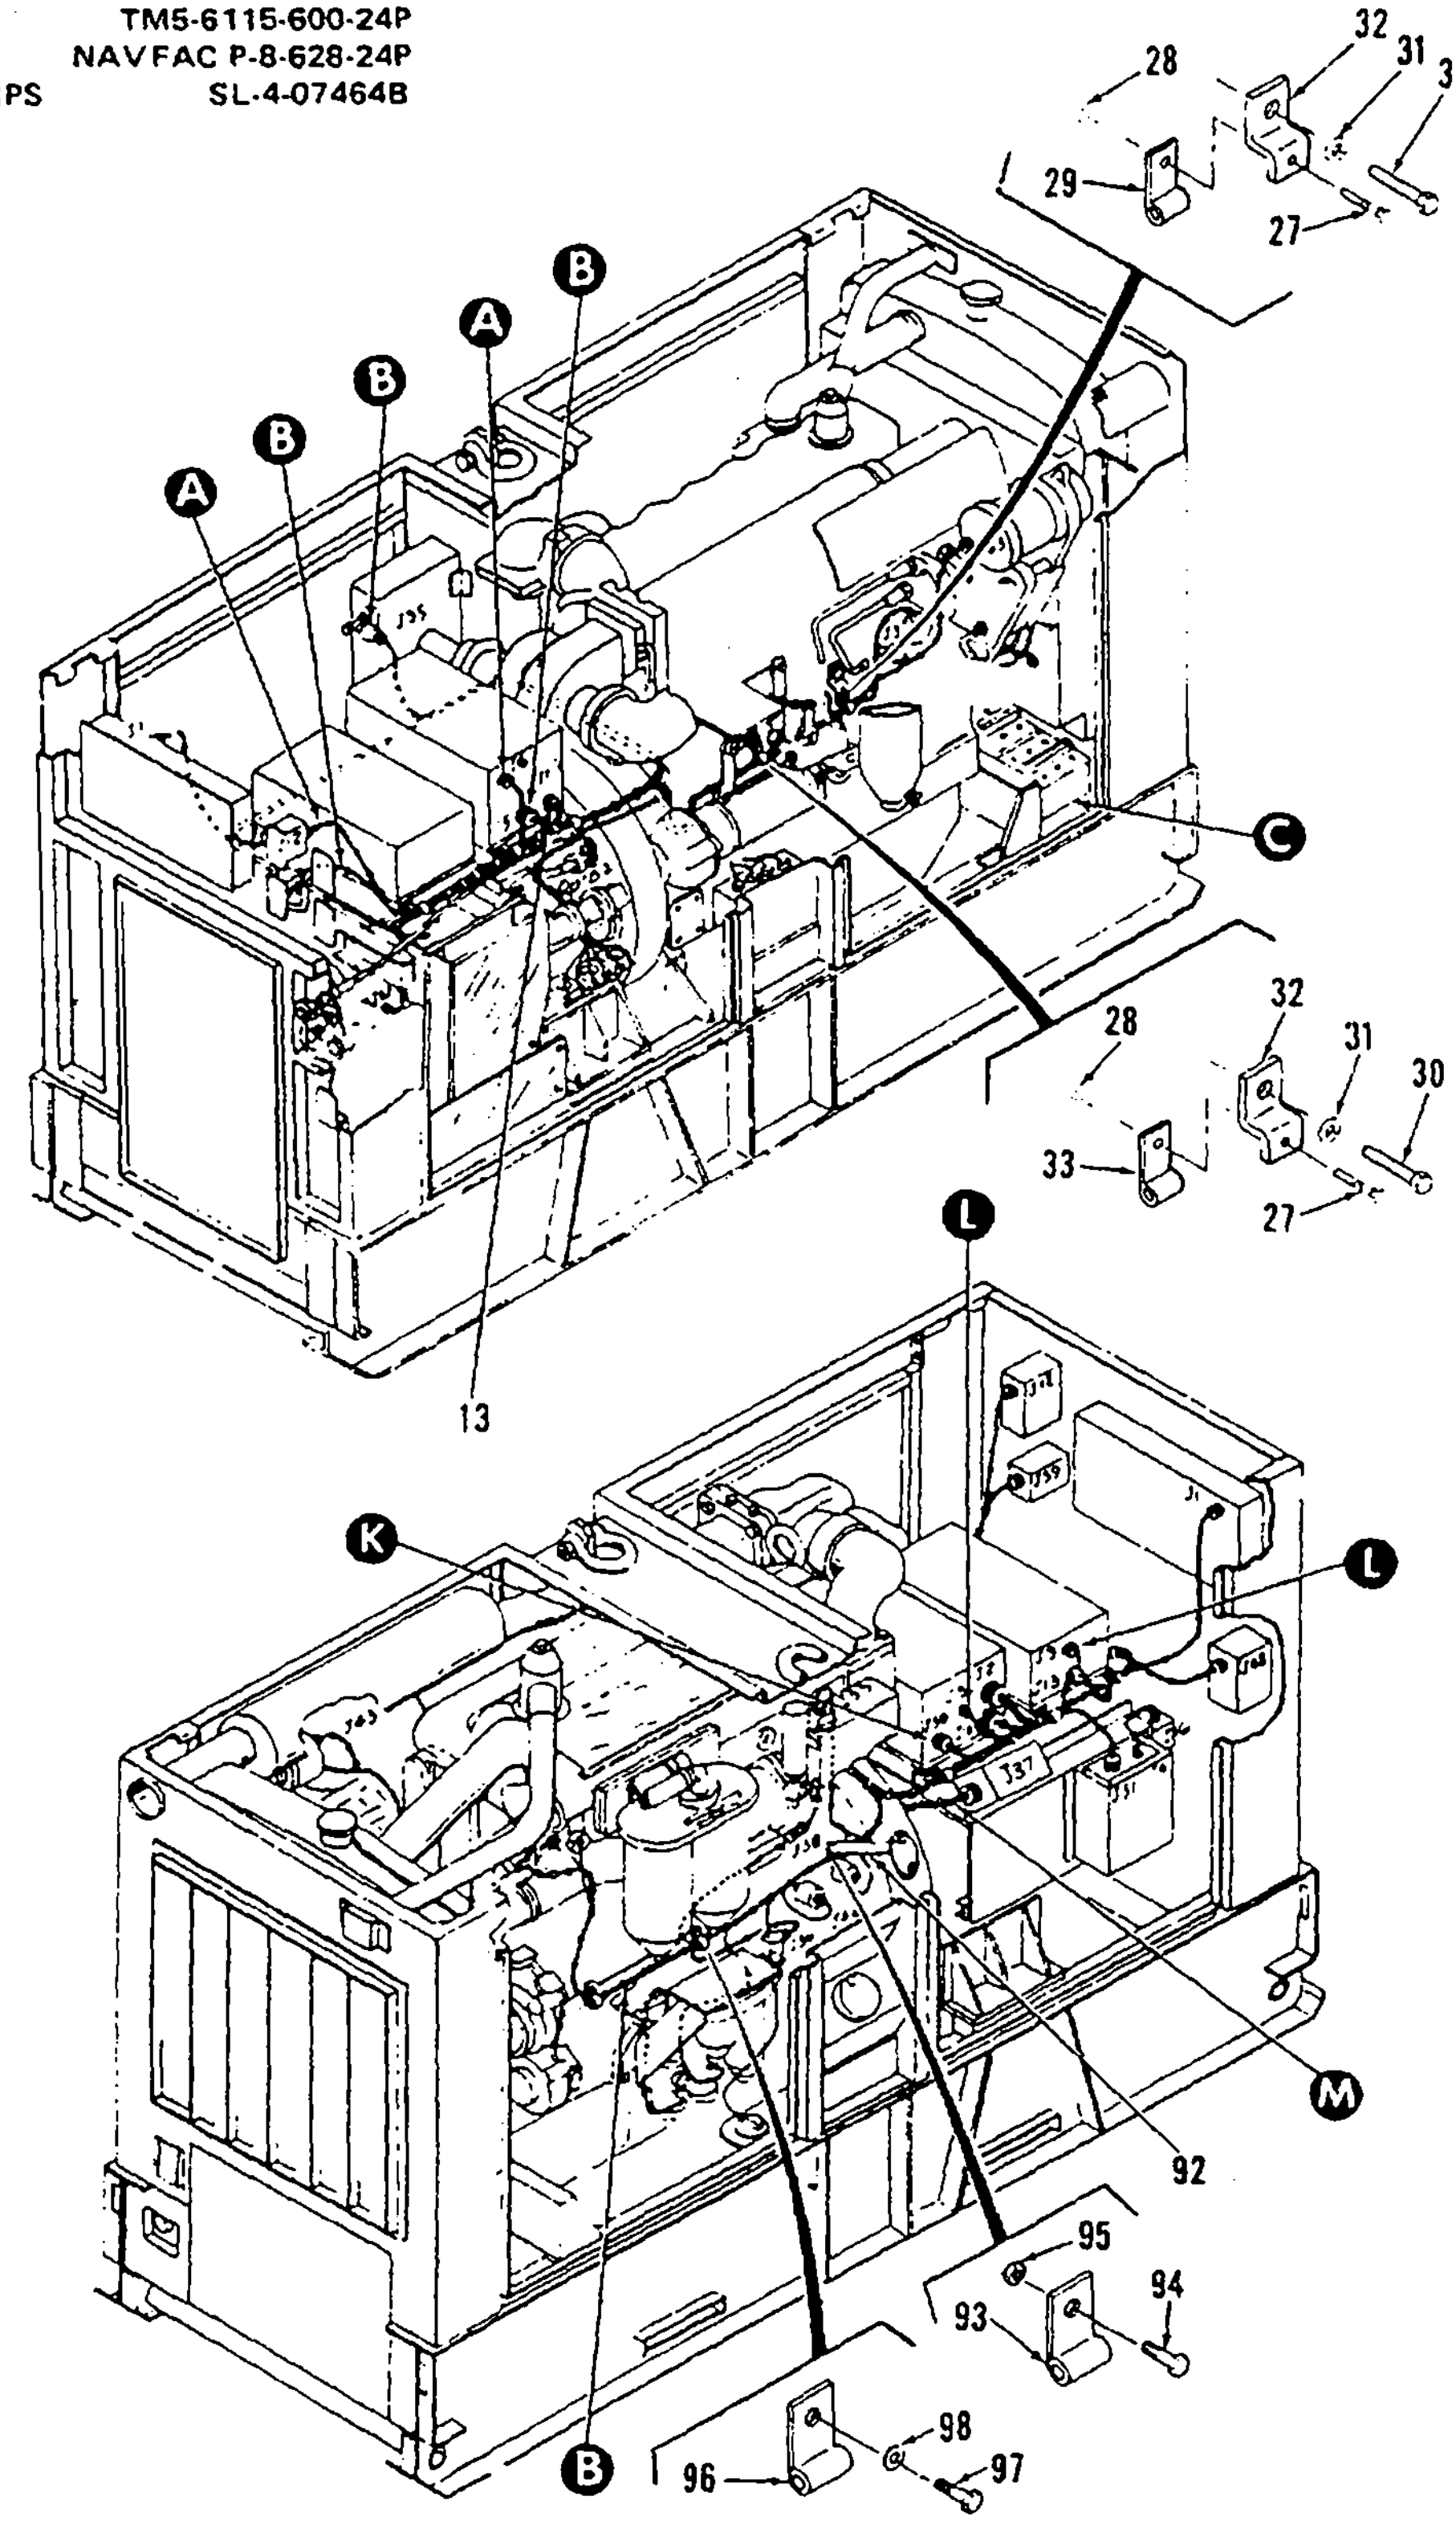
28
32
31
30
29
27
B
A
B
B
A
B
C
28
32
31
30
33
27
13
L
K
L
M
92
95
94
93
98
97
96
B

Figure 11. DC Electrical Wiring Harness (Sheet 1 of 4)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 02 - DC ELECTRICAL AND CONTROL SYSTEM | | | | |
| 11 | | | | | | | | | DC ELECTRICAL WIRING HARNESS | | | | |
| 11 | 1 | AOO | AOO | AOO | AOO | | | | WIRING HARNESS, RELAY BOX TO FAULT CIRCUIT<br>79-4503 | 30554 | EA | 1 | 1 |
| 11 | 2 | PAOZZ | PAOZZ | PAOZZ | PAFZZ | D | .050 | 5935-00-755-3144 | CONNECTOR, PLUG, P6<br>MS3106R20-27P | 96906 | EA | 1 | 1 |
| 11 | 3 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5340-00-823-5322 | PLUG, END SEAL<br>MS25251-16 | 96906 | EA | 6 | 82 |
| 11 | 4 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-846-2329 | CONNECTOR, PLUG, P12<br>MS3106R20-27S | 96906 | EA | 1 | 1 |
| 11 | 5 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 | 81349 | FT | 44 | 1178 |
| 11 | 6 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-074-2072 | STRAP, TIE DOWN<br>MS3367-1-9 | 96906 | EA | 15 | 344 |
| 11 | 7 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-944<br>-1499 | BAND, MARKER<br>MS3368-1-9A | 96906 | EA | | 1 1 |
| 11 | 8 | AOO | AOO | AFF | AFF | | | | WIRING HARNESS. ENGINE ACCESORIES<br>79-4514 | 30554 | EA | 1 | 1 |
| 11 | 9 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-723-5281 | CONNECTOR, PLUG, P5<br>MS3106R36-7S | 96906 | EA | 1 | 2 |
| 11 | 10 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5935-00-565-9503 | PLUG, END SEAL<br>MS25251-12 | 96906 | EA | 3 | 7 |
| 11 | 11 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5340-00-823-5322 | PLUG, END SEAL<br>MS25251-16 | 96906 | EA | 12 | 2 |
| 11 | 12 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-755 -3493 | CONNECTOR, PLUG, P35<br>MS3106R16-10S | 96906 | EA | 1 | 1 |
| 11 | 13 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-189-3932 | CONNECTOR, PLUG, P37<br>MS3106F18-1S | 96906 | EA | 1 | 1 |
| 11 | 14 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-115-2307 | CONNECTOR ASSY, MALE, B2, B3, MT3<br>MS27144-2 | 96906 | EA | 3 | 3 |
| 11 | 15 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-432-8967 | CONNECTOR, PLUG, P36, P38, P39<br>M8372/23R1104N | 81349 | EA | 3 | 3 |
| 11 | 16 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-813-4717 | CONNECTOR, PLUG, P14, P33, P42<br>MS3106R14S-2S | 96906 | EA | 3 | 3 |
| 11 | 17 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-845-1701 | CONNECTOR, PLUG, P43<br>MS3106R18-5P | 96906 | EA | 1 | 1 |
| 11 | 18 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4780 | LUG, TERMINAL<br>MS25036-108 | 96906 | EA | 3 | 35 |
| 11 | 19 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4774 | LUG, TERMINAL<br>MS25036-153 | 96906 | EA | 2 | 2 |
| 11 | 20 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-682-2445 | LUG, TERMINAL<br>MS25036-158 | 96906 | EA | 2 | 4 |

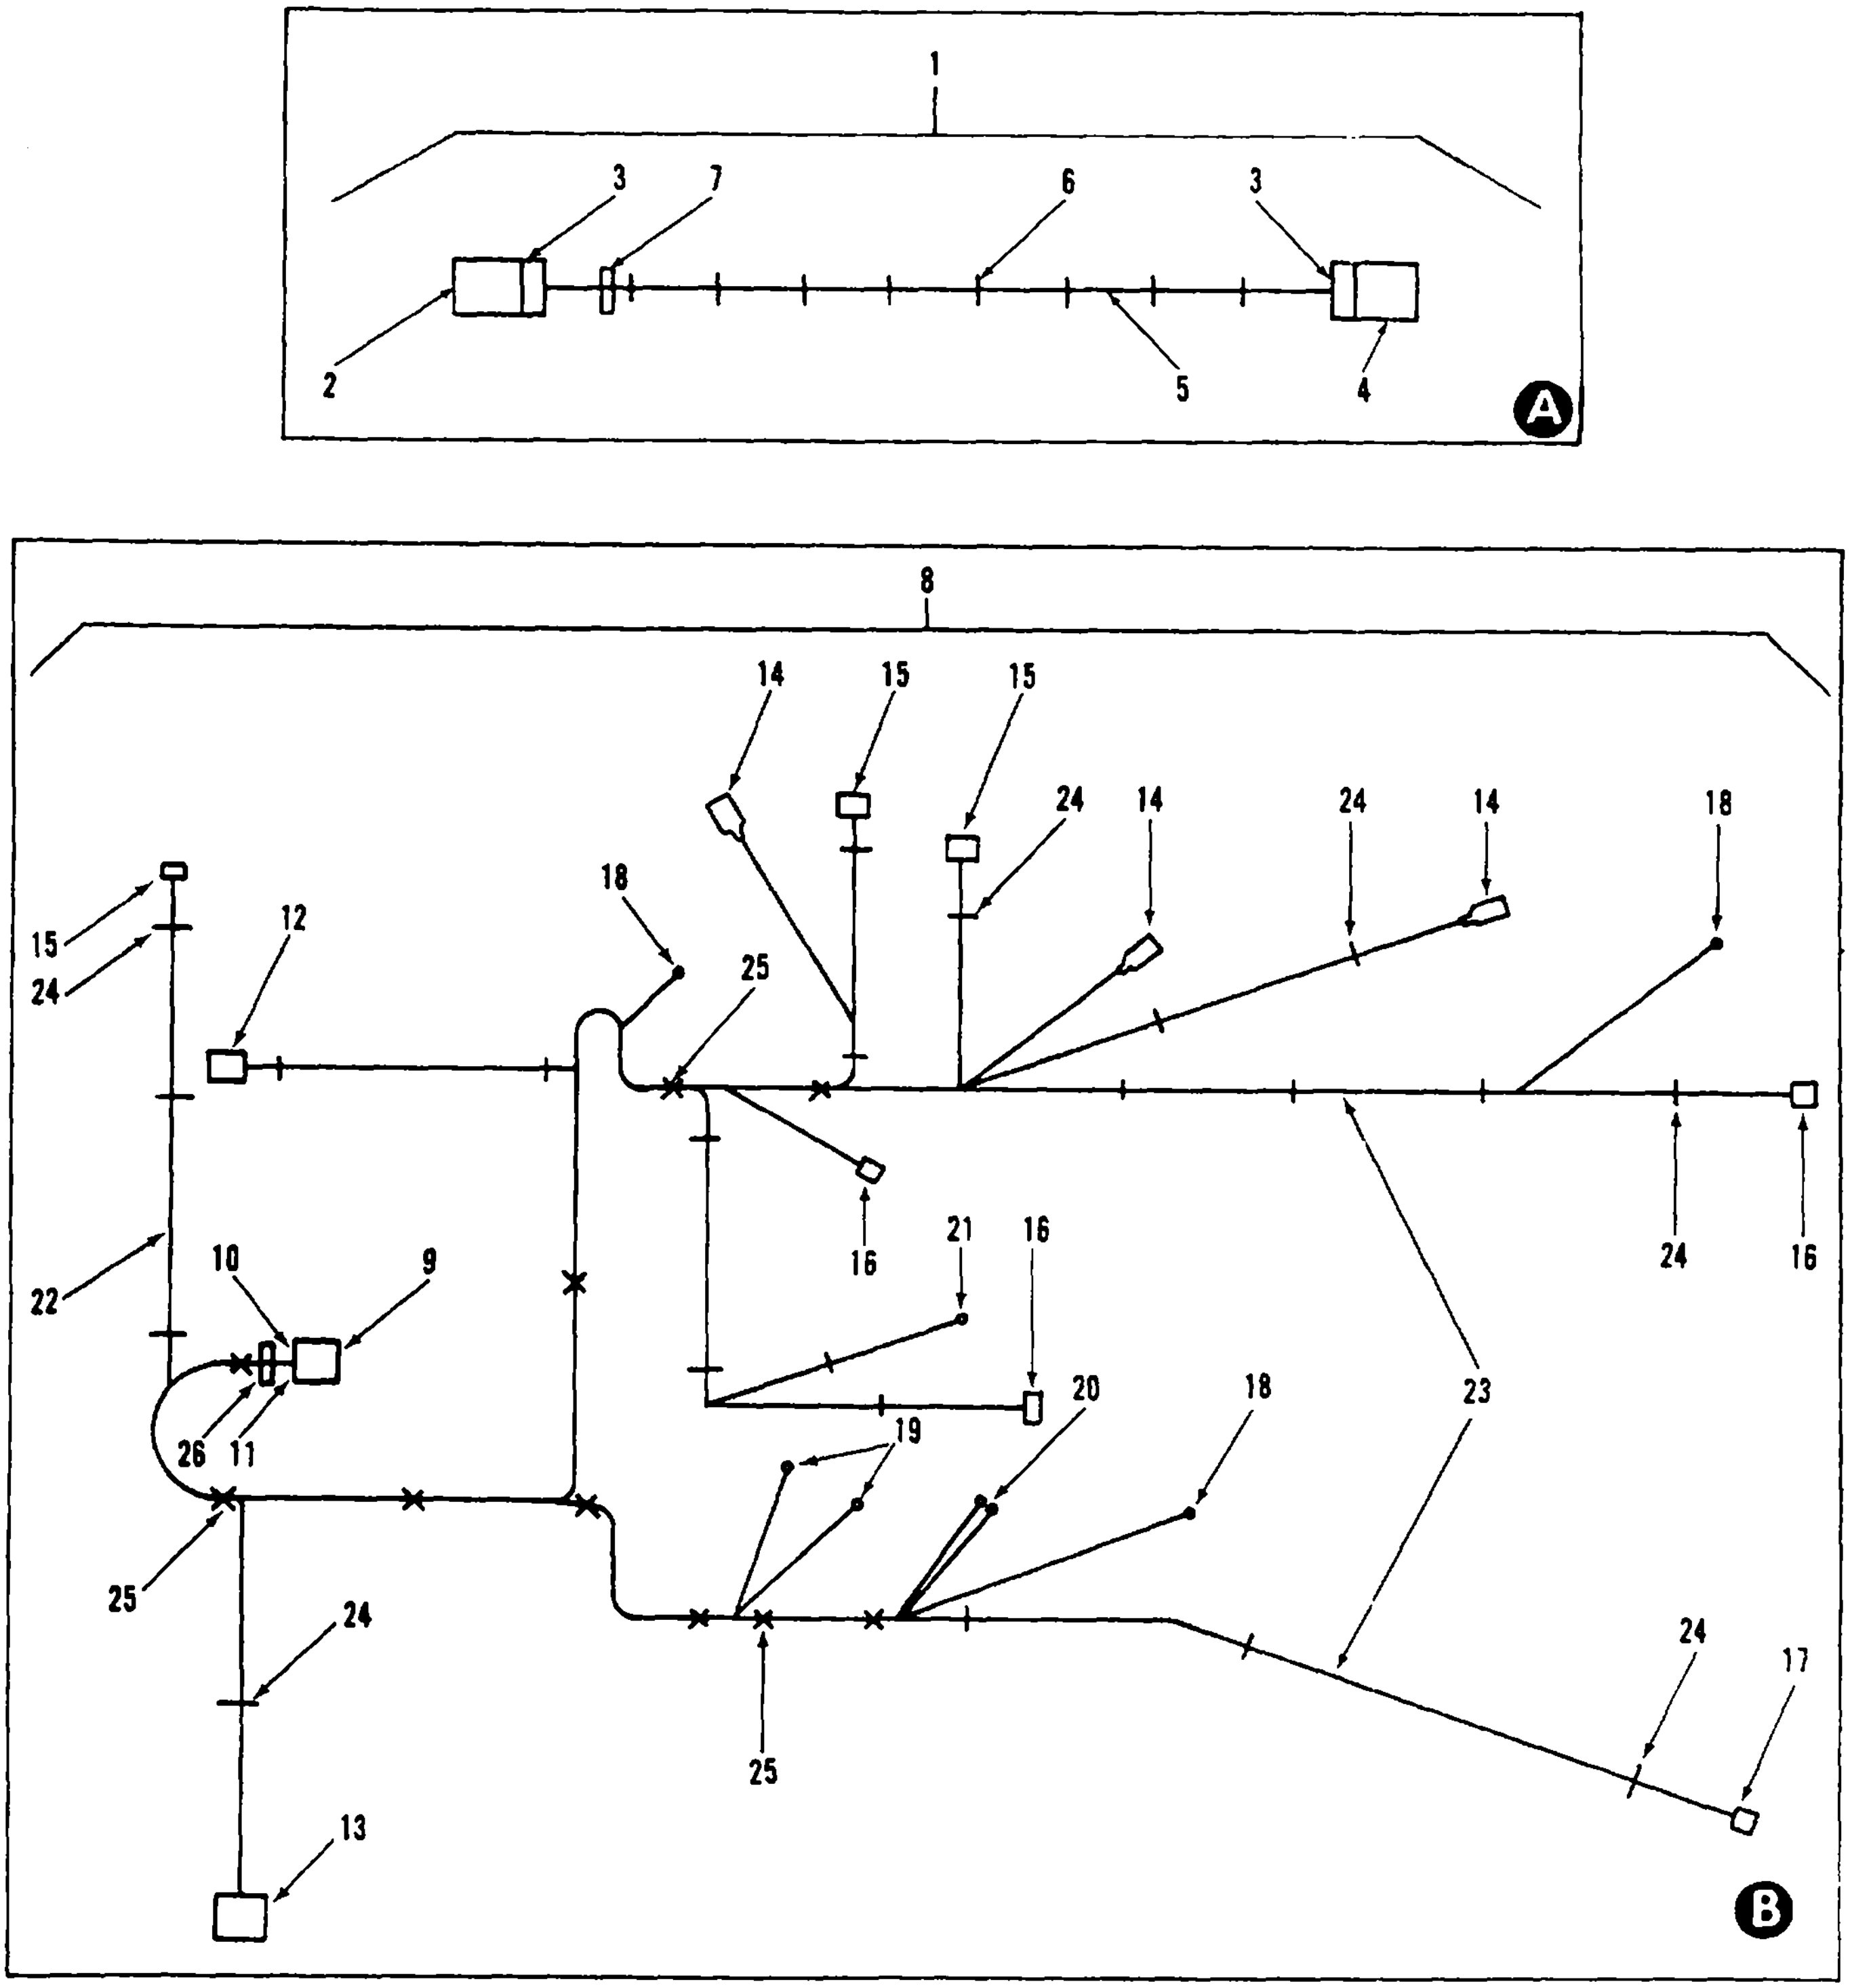
1
3
7
6
3
2
5
4
A
8
14
15
15
24
14
24
14
18
18
12
15
24
25
22
10
9
16
21
16
24
16
20
18
23
26
11
19
25
24
24
17
25
13
B

Figure 11. DC Electrical Wiring Harness (Sheet 2 of 4)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 02 - DC ELECTRICAL AND CONTROL SYSTEM - CONTINUED | | | | |
| 11 | | | | | | | | | DC ELECTRICAL WIRING HARNESSES - CONTINUED | | | | |
| 11 | 21 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-283-5280 | LUG, TERMINAL<br>MS25036-106 96906 | | EA | 4 | 268 |
| 11 | 22 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-7514 | WIRE, ELECTRICAL<br>M5086/2-1 2-9 81349 | | FT | 100 | 200 |
| 11 | 23 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 81349 | | FT | 100 | 1178 |
| 11 | 24 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-727-5153 | STRAP, TIE DOWN<br>MS3367-4-9 96906 | | EA | 70 | 239 |
| 11 | 25 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-074-2072 | STRAP, TIE DOWN<br>MS3367-1-9 96906 | | EA | 29 | 344 |
| 11 | 26 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .005 | 5975-00-944-1499 | BAND, MARKER<br>MS3368-1-9A 96906 | | EA | 1 | 3 |
| 11 | 27 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-209-1570 | SCREW<br>MS90725-6 96906 | | EA | 2 | 118 |
| 11 | 28 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT<br>MS17829-4C 96906 | | EA | 2 | 167 |
| 11 | 29 | PAOZZ | PAOZZ | PAOZZ | PAFZZ | D | .008 | 5340-00-088-6655 | CLAMP<br>MS21333-101 96906 | | EA | 1 | 1 |
| 11 | 30 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-724-5906 | SCREW<br>MS90725-156 96906 | | EA | 2 | 1 |
| 11 | 31 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-820-6653 | WASHER<br>MS35338-50 96906 | | EA | 2 | 11 |
| 11 | 32 | MOO | MOO | MOO | MOO | | | | BRACKET<br>71-4758 30554 | | EA | 2 | 2 |
| 11 | 33 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-854-6729 | CLAMP<br>MS21333-103 96906 | | EA | 1 | 1 |
| 11 | 34 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-225-3839 | SCREW<br>MS90725-8 96906 | | EA | 1 | 35 |
| 11 | 35 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT<br>MS17829-4C 96906 | | EA | 1 | 167 |
| 11 | 36 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-080-6004 | WASHER<br>MS27183-14 96906 | | EA | 2 | 43 |
| 11 | 37 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .013 | 5340-00-596-7614 | CLAMP<br>71-4919-04 30554<br>TA774S2-14 84971 | | EA | 2 | 2 |
| 11 | 38 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6906 | SCREW<br>69-662-50 30554<br>61-100841-40-0142B-0542B 78189 | | EA | 2 | 98 |
| 11 | 39 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-094-3421 | NUT<br>69-561-4 30554<br>511-101800-00 78189 | | EA | 2 | 95 |
| 11 | 40 | MOO | MOO | MOO | MOO | | | | BRACKET, CLAMP MOUNTING<br>71-4705 30554 | | EA | 1 | 2 |
| 11 | 41 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .013 | 5340-00-988-1162 | CLAMP<br>MS21333-113 96906 | | EA | 1 | 1 |

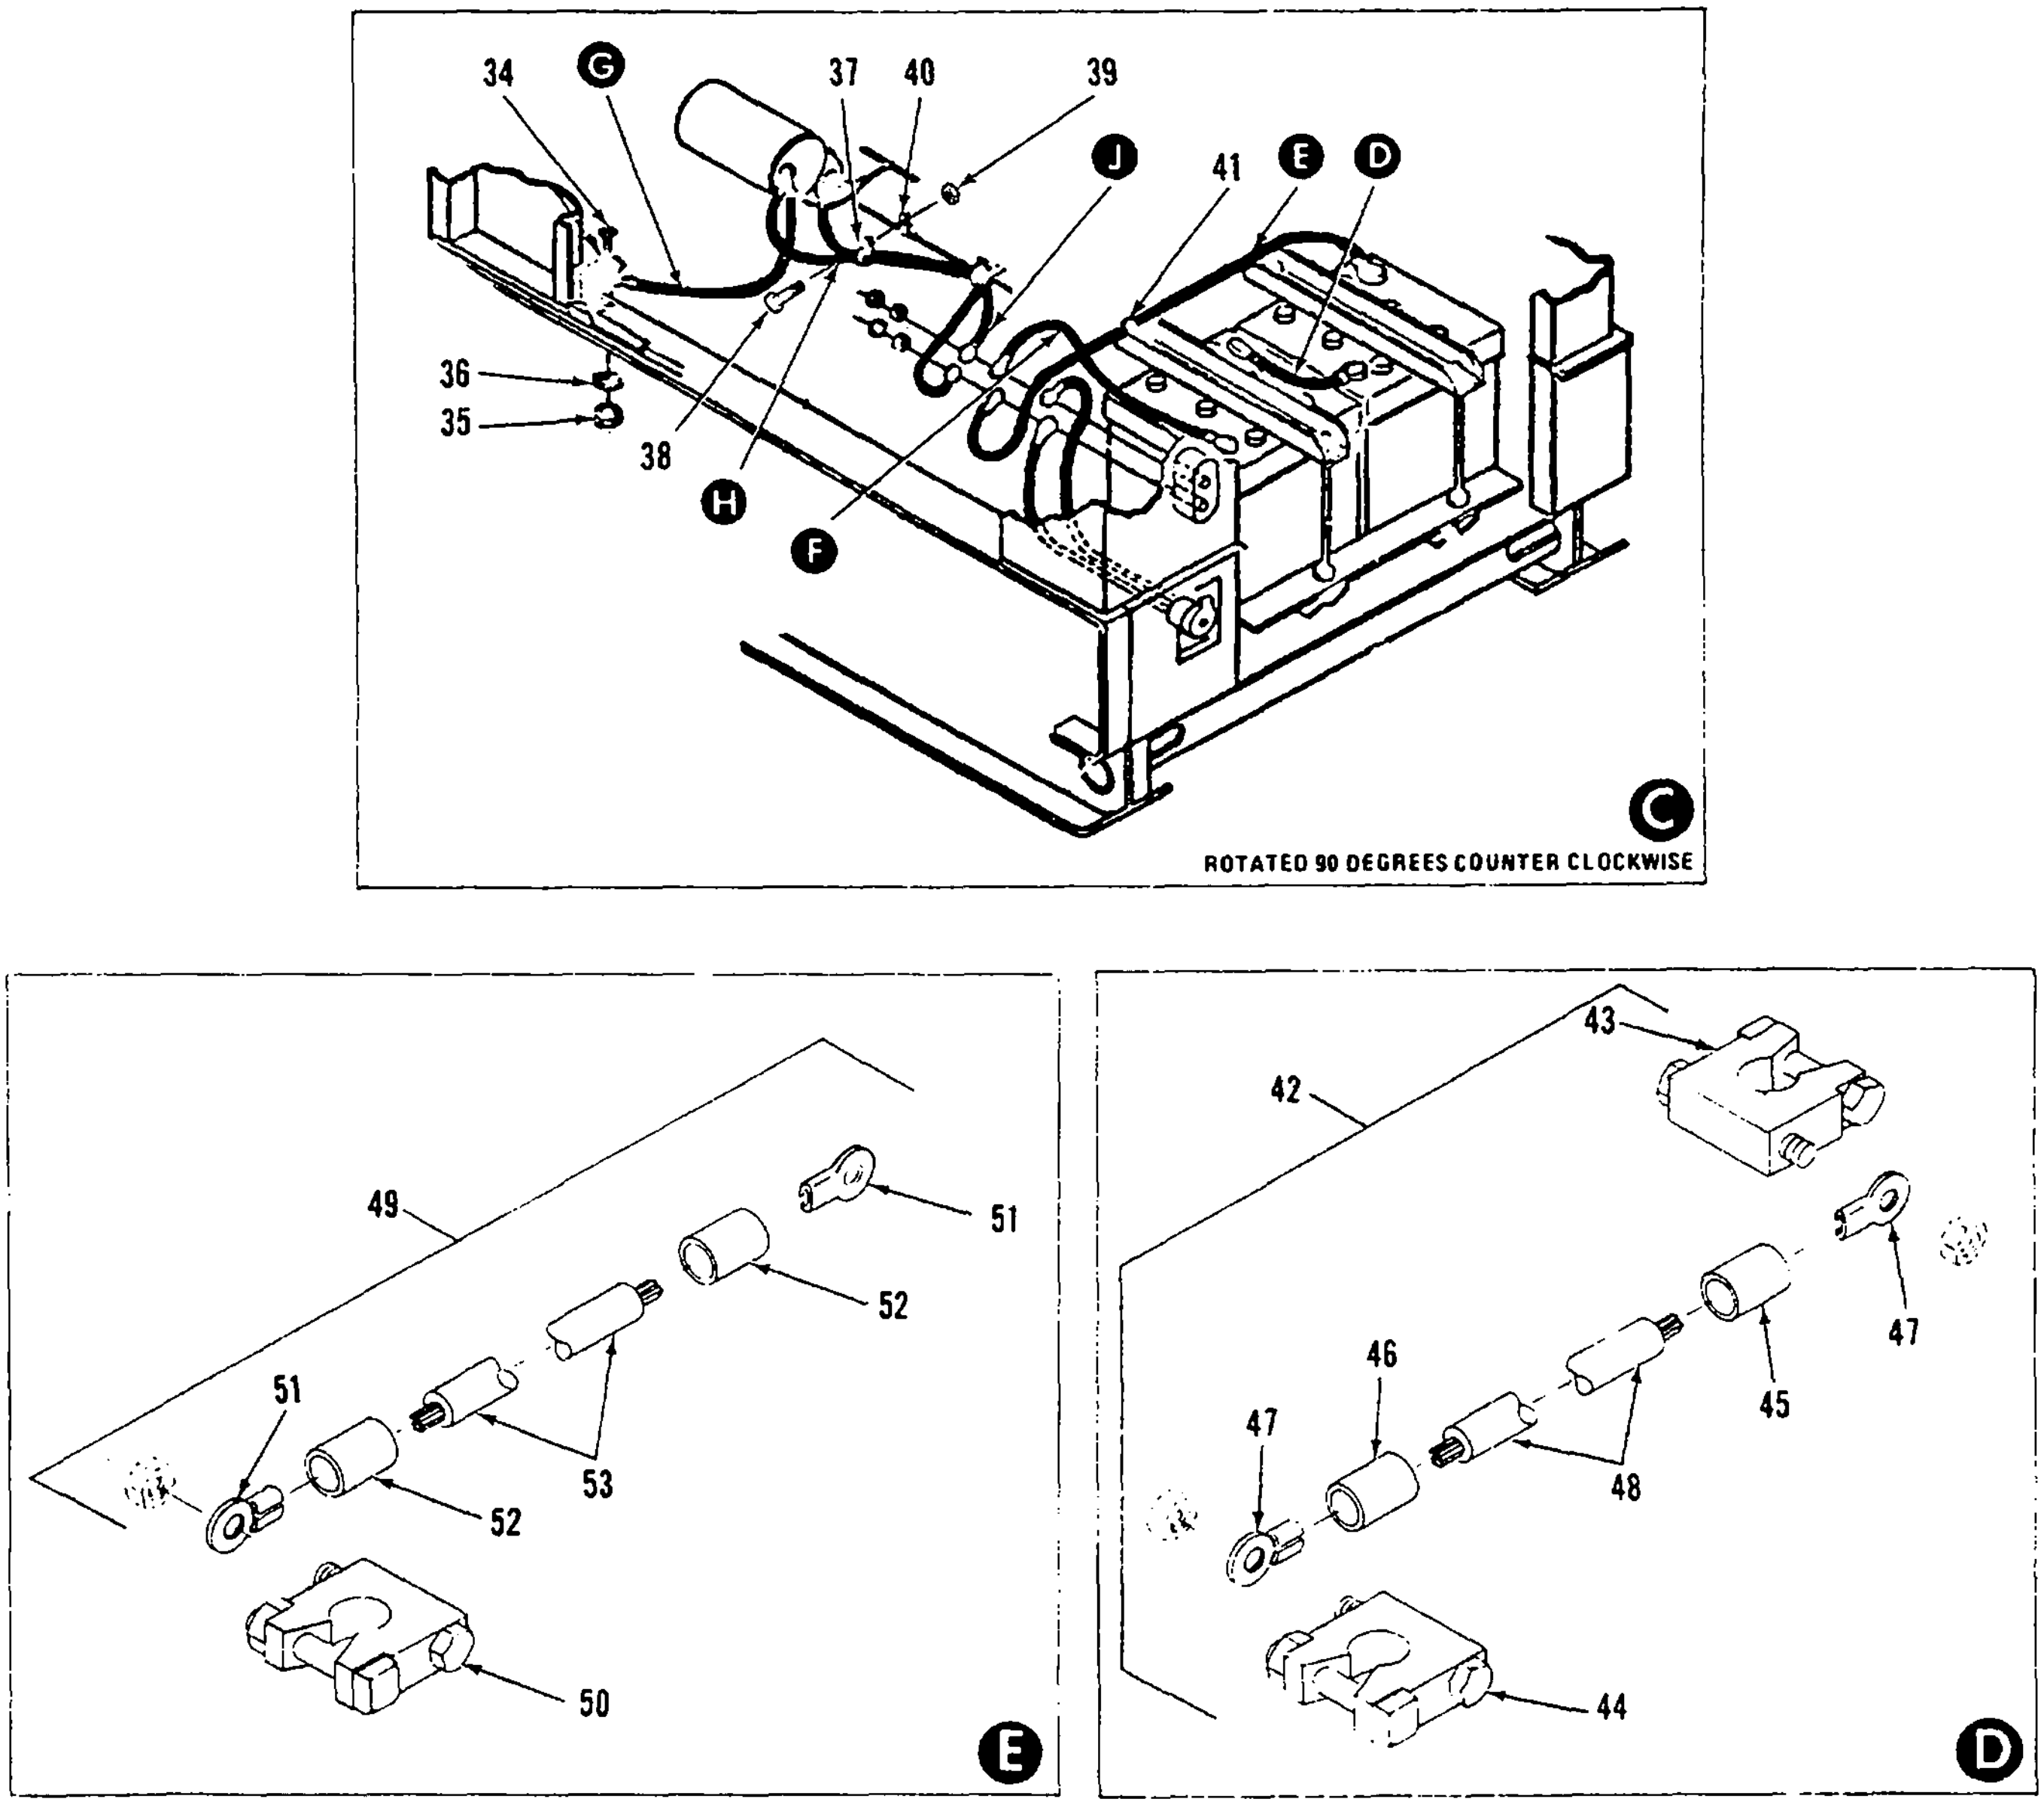
34
G
37
40
39
J
41
E
D
36
35
38
H
F
C
49
51
52
51
53
52
50
E
43
42
47
46
47
45
48
44
D

ROTATED 90 DEGREES COUNTER CLOCKWISE

Figure 11. DC Electrical Wiring Harness (Sheet 3 of 4)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 02 - DC ELECTRICAL AND CONTROL SYSTEM - CONTINUED | | | | |
| 11 | | | | | | | | | DC ELECTRICAL WIRING HARNESSES - CONTINUED | | | | |
| 11 | 42 | AOO | AOO | AOO | AOO | | | | LEAD, ELECTRICAL<br>71-4562-01 | 30554 | EA | 1 | 1 |
| 11 | 43 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .030 | 5940-00-549 -6581 | ADAPTER, BATTERY TERMINAL<br>MS75004-1 | 96906 | EA | 1 | 2 |
| 11 | 44 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .030 | 5940-00-549-6583 | ADAPTER, BATTERY TERMINAL<br>MS75004-2 | 96906 | EA | 1 | 2 |
| 11 | 45 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-978-7677 | SLEEVING, INSULATION<br>MIL-I-23053 CL 1 RED | 81349 | IN | 3 | 3 |
| 11 | 46 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-815-1300 | SLEEVING, INSULATION<br>M23053/5-110-0 | 81349 | IN | 3 | 4 |
| 11 | 47 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-115-2684 | LUG, TERMINAL<br>MS20659-118 | 96906 | EA | 2 | 10 |
| 11 | 48 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-643-1255 | WIRE, ELECTRICAL<br>MILC-5756-1-0 | 81349 | IN | 24 | 24 |
| 11 | 49 | AOO | AOO | AOO | AOO | | | | LEAD, ELECTRICAL<br>71-4564-03 | 30554 | EA | 1 | 1 |
| 11 | 50 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .030 | 5940-00-549-6583 | ADAPTER, BATTERY TERMINAL<br>MS75004-2 | 96906 | EA | 1 | 2 |
| 11 | 51 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-115-2684 | LUG, TERMINAL<br>MS20659-118 | 96906 | EA | 2 | 10 |
| 11 | 52 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-815-1300 | SLEEVING, INSULATION<br>M23053/5-110-0 | 81349 | IN | 6 | 4 |
| 11 | 53 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-643-1255 | WIRE, ELECTRICAL<br>MIL-C-5756-1-0 | 81349 | FT | 2 | 2 |
| 11 | 54 | AOO | AOO | AOO | AOO | | | | LEAD, ELECTRICAL<br>71-4563-03 | 30554 | EA | 1 | 1 |
| 11 | 55 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .030 | 5940-00-549-6581 | ADAPTER, BATTERY TERMINAL<br>MS75004-1 | 96906 | EA | 1 | 2 |
| 11 | 56 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-978-7677 | SLEEVING, INSULATION<br>M23053/5-110-2 | 81349 | IN | 6 | 6 |
| 11 | 57 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-115-2684 | LUG, TERMINAL<br>MS20659-118 | 96906 | EA | 2 | 10 |
| 11 | 58 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-643-1255 | WIRE, ELECTRICAL<br>MIL-C-5756/1-0 | 81349 | FT | 2 | 2 |
| 11 | 59 | AOO | AOO | AOO | AOO | | | | LEAD, ELECTRICAL<br>71-4568-02 | 30554 | EA | 1 | 1 |
| 11 | 60 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-815 -1300 | SLEEVING, INSULATION<br>M23053/5-110-0 | 81349 | IN | 6 | 4 |
| 11 | 61 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-115-2684 | LUG, TERMINAL<br>MS20659-118 | 96906 | EA | 1 | 10 |

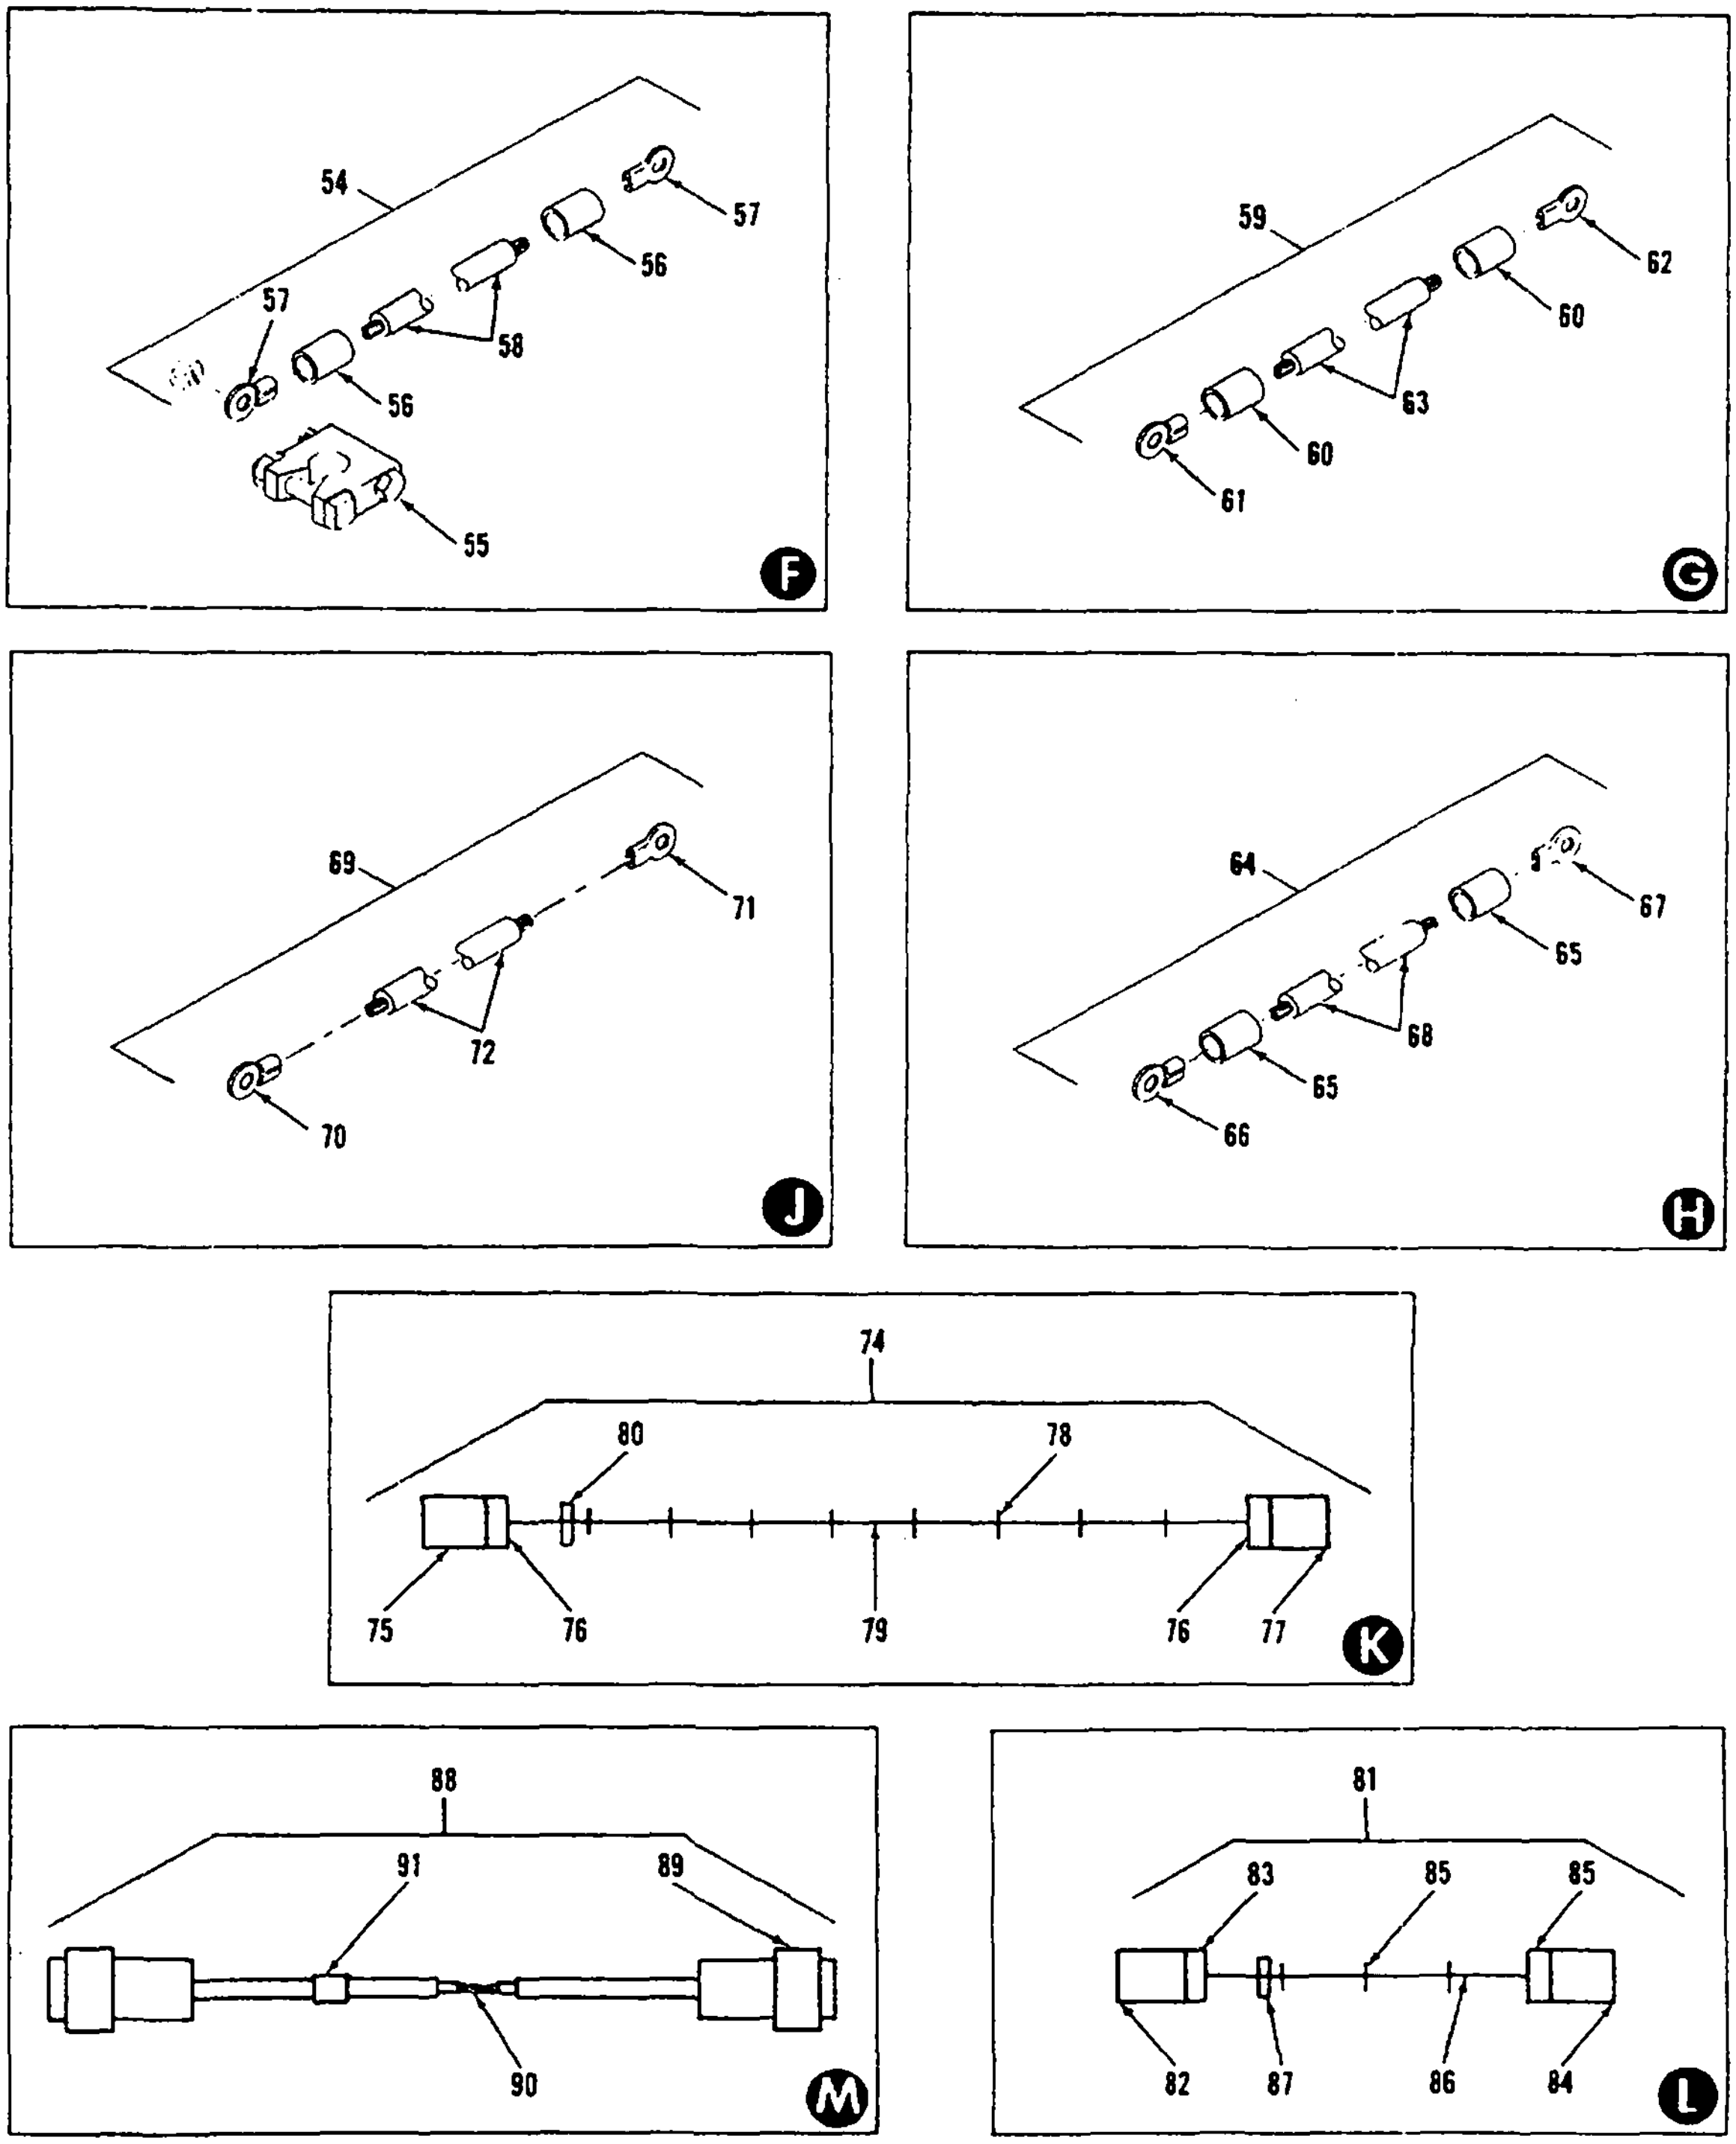
54
57
57
56
58
56
55
F
59
62
60
63
60
61
G
69
71
72
70
J
64
67
65
68
65
66
H
74
80
78
75
76
79
76
77
K
88
91
89
90
M
81
83
85
85
82
87
86
84
L

Figure 11. DC Electrical Wiring Harness (Sheet 4 of 4)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 02 - DC ELECTRICAL AND CONTROL SYSTEM - CONTINUED | | | | |
| 11 | | | | | | | | | DC ELECTRICAL WIRING HARNESSES - CONTINUED | | | | |
| 11 | 62 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-115-5001 | LUG, TERMINAL<br>MS20659-135 96906 | | EA | 1 | 2 |
| 11 | 63 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-643-1255 | WIRE, ELECTRICAL<br>MIL-C-5756-1-0 81349 | | FT | 2 | 15 |
| 11 | 64 | AOO | AOO | AOO | AOO | | | | LEAD, ELECTRICAL<br>71-4567-02 30554 | | EA | 1 | 1 |
| 11 | 65 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-978-7677 | SLEEVING, INSULATION<br>M23053/5-110-2 81349 | | IN | 6 | 6 |
| 11 | 66 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-115-2684 | LUG, TERMINAL<br>MS20659-118 96906 | | EA | 1 | 10 |
| 11 | 67 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-115-5001 | LUG, TERMINAL<br>MS20659-135 96906 | | EA | 1 | 2 |
| 11 | 68 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-643-1255 | WIRE, ELECTRICAL<br>MIL-C-5756-1-0 81349 | | FT | 5 | 15 |
| 11 | 69 | AOO | AOO | AOO | AOO | | | | LEAD, ELECTRICAL<br>71-4789 30554 | | EA | 1 | 1 |
| 11 | 70 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-804-0520 | LUG, TERMINAL<br>MS25036-134 96906 | | EA | 1 | 13 |
| 11 | 71 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-114-1325 | LUG, TERMINAL<br>MS25036-132 96906 | | EA | 1 | 1 |
| 11 | 72 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6601 | WIRE, ELECTRICAL<br>M5086/2-01-9 81349 | | FT | 2 | 4 |
| 11 | 73 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-809-1499 | CLAMP<br>MS21333-105 96906 | | EA | 1 | 1 |
| 11 | 74 | AOO | AOO | AOO | AOO | | | | WIRING HARNESS<br>79-4502 30554 | | EA | 1 | 1 |
| 11 | 75 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-752-2793 | CONNECTOR, PLUG, P50<br>MS3106R28-12P 96906 | | EA | 1 | 1 |
| 11 | 76 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5340-00-823-5322 | PLUG, END SEAL<br>MS25251-16 96906 | | EA | 8 | 82 |
| 11 | 77 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-682-0570 | CONNECTOR, PLUG, P51<br>MS3106R28-12S 96906 | | EA | 1 | 1 |
| 11 | 78 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-074-2072 | STRAP, TIE DOWN<br>MS3367-1-9 96906 | | EA | 8 | 344 |
| 11 | 79 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 81349 | | FT | 3 | 1178 |
| 11 | 80 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 9905-00-893-3570 | BAND, MARKER<br>MIL-B43436/1-3 81349 | | EA | 1 | 1 |
| 11 | 81 | AOO | AOO | AOO | AOO | | | 6115-00-252-0799 | WIRING HARNESS<br>70-4307 30554 | | EA | 1 | 1 |
| 11 | 82 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-721-1081 | CONNECTOR, PLUG, P3<br>MS3106R14S-6P 96906 | | EA | 1 | 1 |
| 11 | 83 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5340-00-823-5322 | PLUG, END SEAL<br>MS25251-16 96906 | | EA | 4 | 82 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO. | b ITEM NO. | (2) SMR CODE a ARMY | b AIR FORCE | c NAVY | d USMC | (3) USMC a SSI | b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 02 - DC ELECTRICAL AND CONTROL SYSTEM - CONTINUED | | | | |
| 11 | | | | | | | | | DC ELECTRICAL WIRING HARNESSES - CONTINUED | | | | |
| 11 | 84 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-721-0488 | CONNECTOR, PLUG, P9<br>MS3106R14S-6S | 96906 | EA | 1 | 1 |
| 11 | 85 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-074-2072 | STRAP, TIE DOWN<br>MS3367-1-9 | 96906 | EA | 4 | 239 |
| 11 | 86 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 | 81349 | FT | 3 | 1178 |
| 11 | 87 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 9905-00-841-4445 | BAND, MARKER<br>MIL-B43436/1-2 | 81349 | EA | 1 | 1 |
| 11 | 88 | AOO | AOO | AOO | AOO | | | 6145-00-013-8659 | CABLE ASSY<br>8441 | 16428 | RL | 1 | 1 |
| 11 | 89 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-755-3493 | CONNECTOR<br>MS3106R16-10S | 96906 | EA | 1 | 2 |
| 11 | 90 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .030 | 6150-01-050-8268 | CABLE ASSY, TWISTED PAIR<br>SA-1707-10 | 78388 | EA | 1 | 1 |
| 11 | 91 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 5975-00-944-1499 | BAND, MARKER<br>MS3368-1-9A | 69906 | EA | 1 | 4 |
| 11 | 92 | MOO | MOO | MOO | MOO | | | | BRACKET<br>71-4626 | 30554 | EA | 1 | 1 |
| 11 | 93 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-984-8540 | CLAMP<br>MS21333-102 | 96906 | EA | 2 | 2 |
| 11 | 94 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0502 | SCREW<br>MS90725-6 | 96906 | EA | 1 | 118 |
| 11 | 95 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT<br>MS17829-4C | 96906 | EA | 1 | 167 |
| 11 | 96 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-954-6014 | CLAMP<br>MS21333-121 | 96906 | EA | 1 | 2 |
| 11 | 97 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-115-9526 | SCREW<br>MS90725-58 | 96906 | EA | 2 | 9 |
| 11 | 98 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-637-9541 | WASHER<br>MS35338-46 | 96906 | EA | 2 | 40 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 02 - DC ELECTRICAL AND CONTROL SYSTEM | | | | |
| 12 | | | | | | | | | SPEED SWITCH AND MAGNETIC PICKUP | | | | |
| 12 | 1 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-071-2241 | SCREW, HEX HEAD<br>MS90725-10 96906 | | EA | 4 | 10 |
| 12 | 2 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 96906 | | EA | 4 | 252 |
| 12 | 3 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C 96906 | | EA | 4 | 167 |
| 12 | 4 | AFF | AFF | AFF | AFF | | | | SPEED SWITCH ASSY, S9-1,.S9-3<br>76-4123-02 30554 | | EA | 1 | 1 |
| 12 | 5 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6903 | SCREW AND WASHER<br>69-662-4 30554<br>61-040741-40-0142B-0542B 78189 | | EA | 8 | 54 |
| 12 | 6 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-836-3520 | NUT AND WASHER<br>69-561-1 30554<br>511-041800-00 78189 | | EA | 8 | 66 |
| 12 | 7 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .030 | 5935-00-806-4588 | CONNECTOR, J62<br>MS3102R16-10P 96906 | | EA | 1 | 2 |
| 12 | 8 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .030 | 5935-00-721-0490 | CONNECTOR, J37<br>MS3102R18-1P 96906 | | EA | 1 | 1 |
| 12 | 9 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .005 | 5935-00-103-5359 | SOCKET, RELAY<br>69-547 30554<br>VB8-1UA11-8000P300-1147 05574 | | EA | 1 | 3 |
| 12 | 10 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5945-00-435-1833 | RELAY, K23<br>M5757/23-003 81349 | | EA | 1 | 8 |
| 12 | 11 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6972 | SCREW AND WASHER<br>69662-20 30554<br>61-060841-40-0142B-0542B 78189 | | EA | 2 | 12 |
| 12 | 12 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-063-7360 | NUT AND WASHER<br>69-561-2 30554<br>511-061800-00 78189 | | EA | 2 | 73 |
| 12 | 13 | MOO | MOO | MOO | MOO | | | | BRACKET, RELAY MOUNTING<br>76-4125 30554 | | EA | 1 | 1 |
| 12 | 14 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6967 | SCREW AND WASHER<br>69-662-16 30554<br>61-060441-40-0142B-0542B 78189 | | EA | 2 | 14 |
| 12 | 15 | AFF | AFF | AFF | AFF | | | | DIODE ASSY<br>71-4126 30554 | | EA | 1 | 1 |
| 12 | 16 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-557-1629 | LUG, TERMINAL<br>MS25036-149 96906 | | EA | 3 | 21 |
| 12 | 17 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .005 | 5961-00-924-6981 | DIODE, CR29<br>JAN1N4245 81349 | | EA | 2 | 4 |
| 12 | 18 | MDF | MDF | MDF | MDF | | | | PLATE, OVERSPEED RESET<br>71-4506 30554 | | EA | 1 | 1 |
| 12 | 19 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5945-01-131-0763 | SPEED SWITCH<br>76-4124-02 30554 | | EA | 1 | 1 |
| 12 | 20 | PAFZZ | PAFZZ | PAHZZ | PAFZZ | D | .005 | 5950-01-136-1975 | MAGNETIC PICKUP<br>81-49-04 30554<br>SA-2171 78388 | | EA | 1 | 1 |

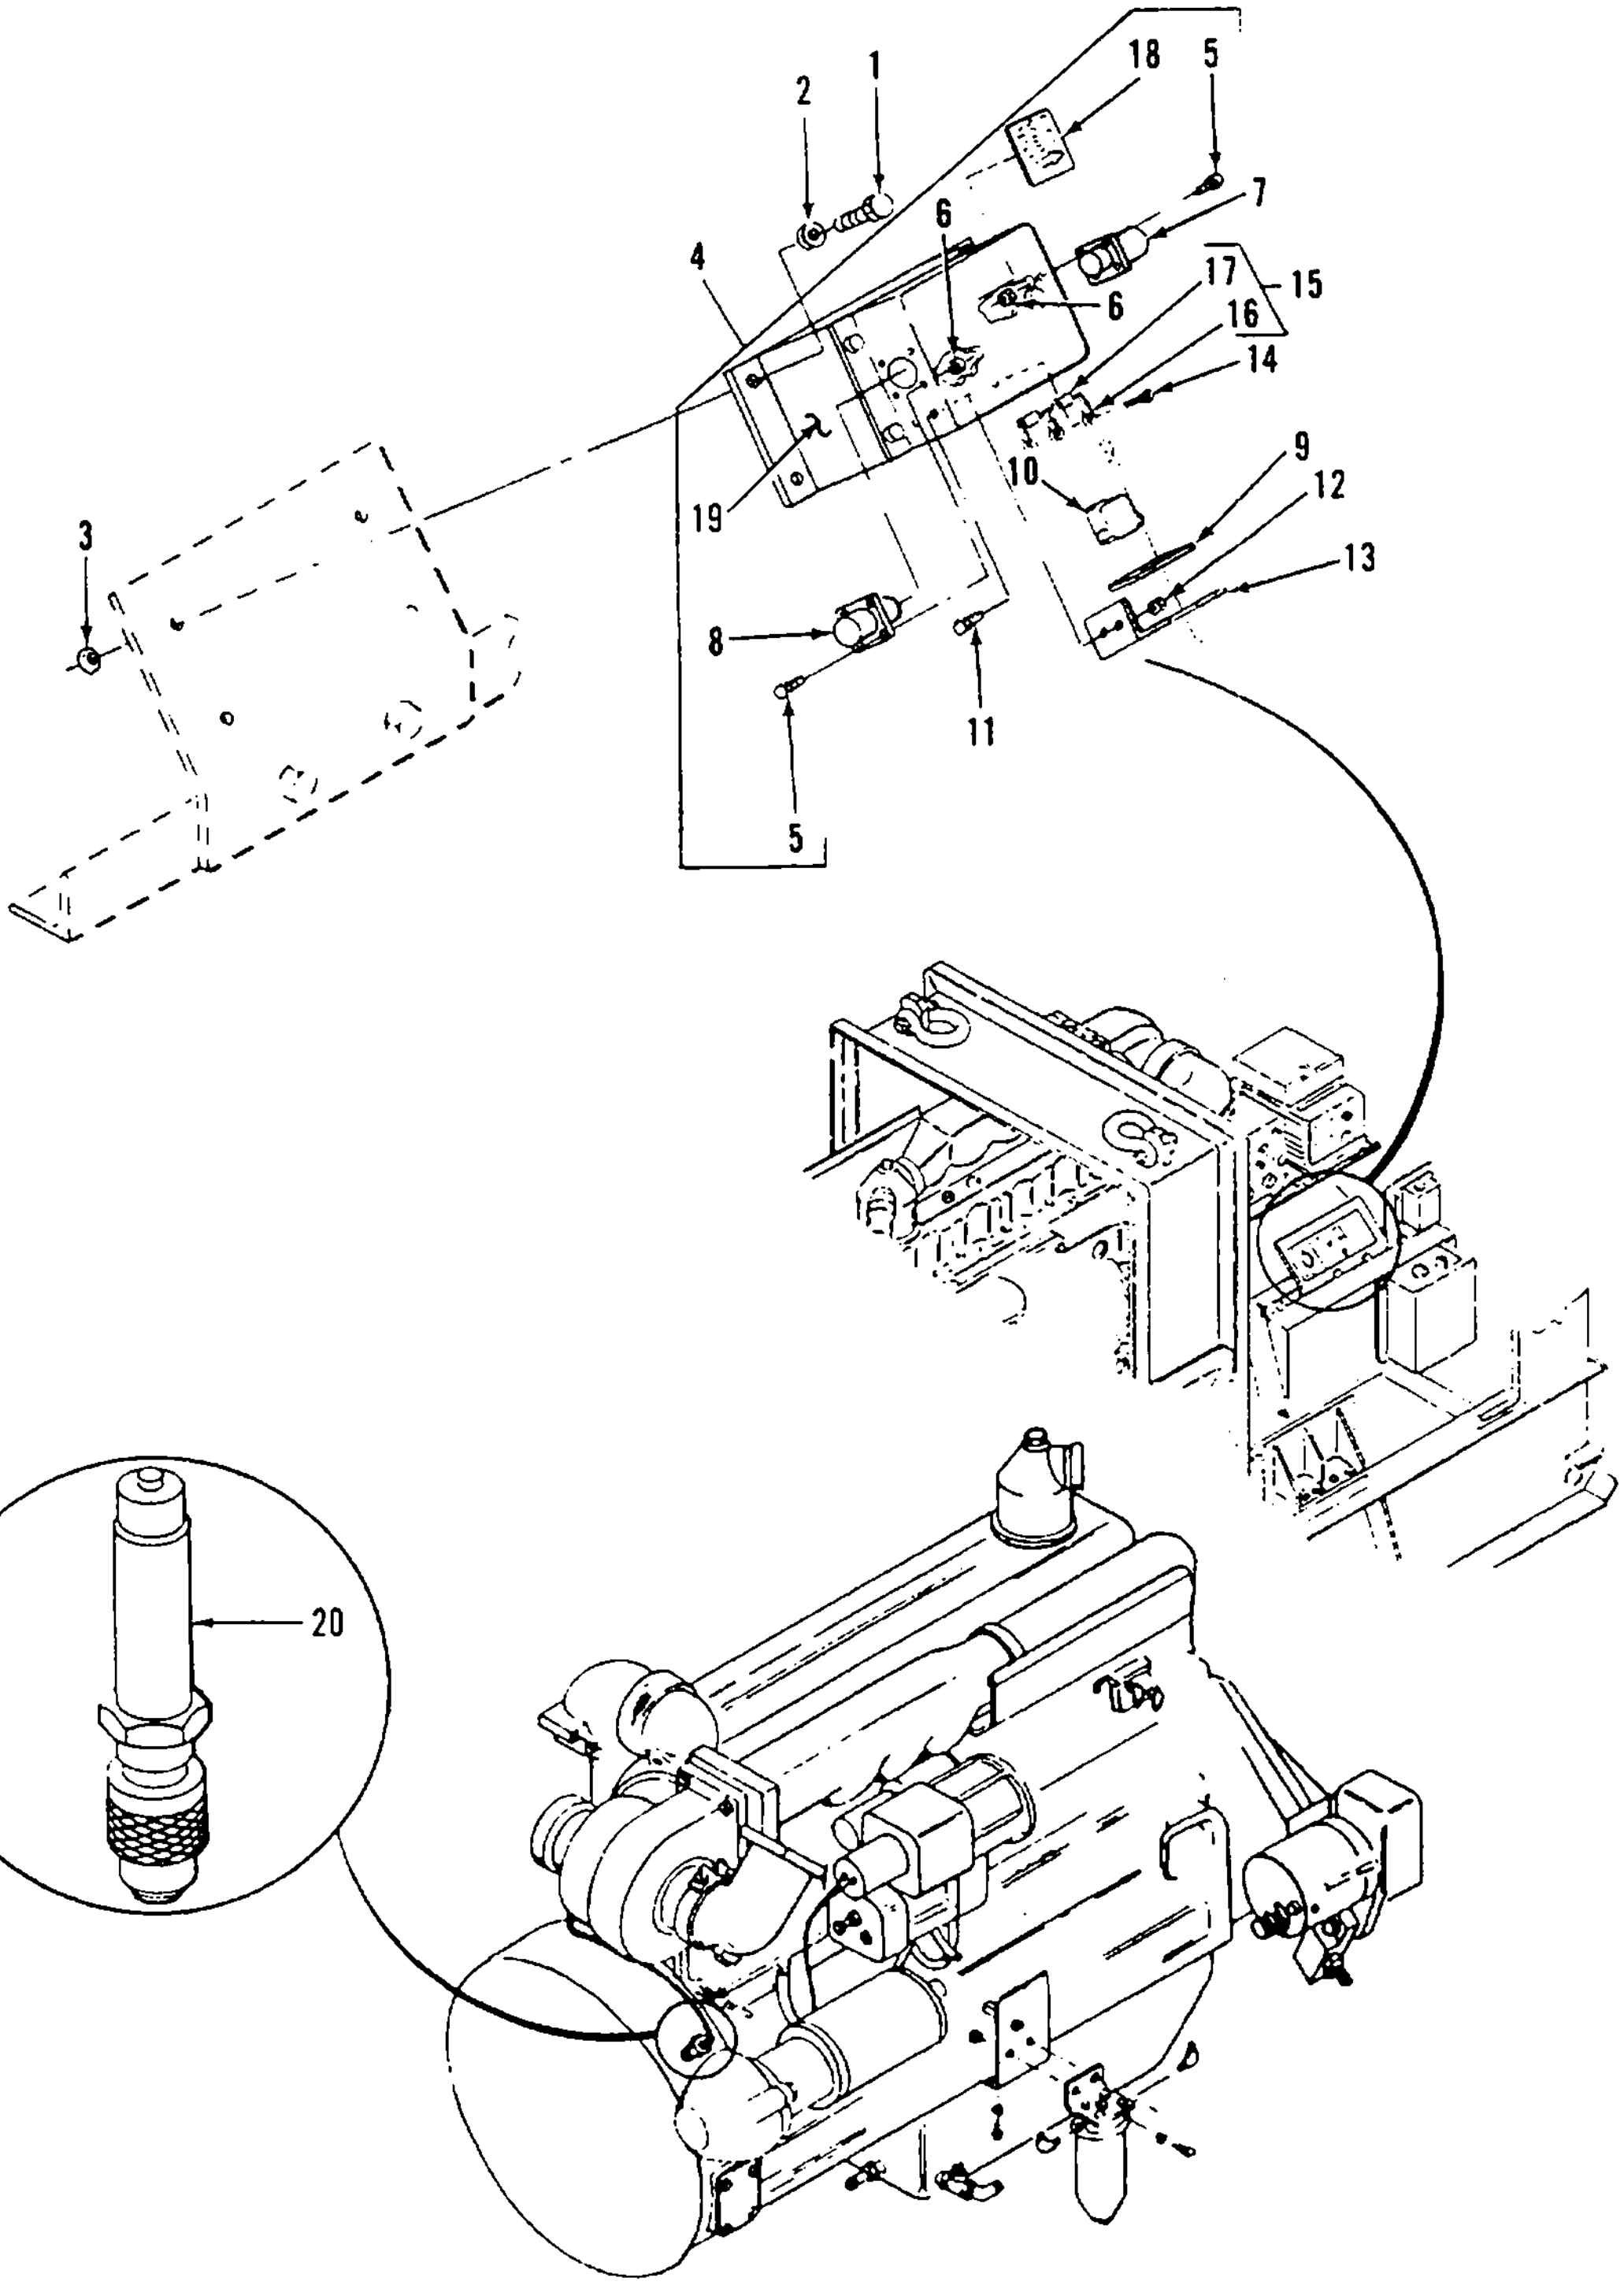
1
2
18
5
7
4
6
6
17
15
16
14
9
10
12
13
19
3
8
11
5
20

Figure 12. Speed Switch and Magnetic Pickup

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 02 - DC ELECTRICAL AND CONTROL SYSTEM. | | | | |
| 13 | | | | | | | | | SPEED SWITCH & MAGNETIC PICK-UP ALTERNATE P/N 90-4002 | | | | |
| 13 | 1 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | | .008 | 5305-00-071-2241 | SCREW, HEX HEAD<br>MS90725-10 | <br>96906 | EA | 4 | 10 |
| 13 | 2 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | <br>96906 | EA | 4 | 252 |
| 13 | 3 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | | .008 | 5310-00-483-8792 | NUT, SHELF-LOCKING<br>MS17829-4C | <br>96906 | EA | 4 | 167 |
| 13 | 4 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | | .080 | 5930-01-342-8639 | SPEED SWITCH ASSY<br>90-4002-2 | <br>30554 | EA | 1 | 1 |
| 13 | 5 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | | .005 | 6695-01-136-1975 | MAGNETIC PICK-UP<br>SA-2171<br>SB-1050 | <br>30554<br>78388 | EA | 1 | 1 |

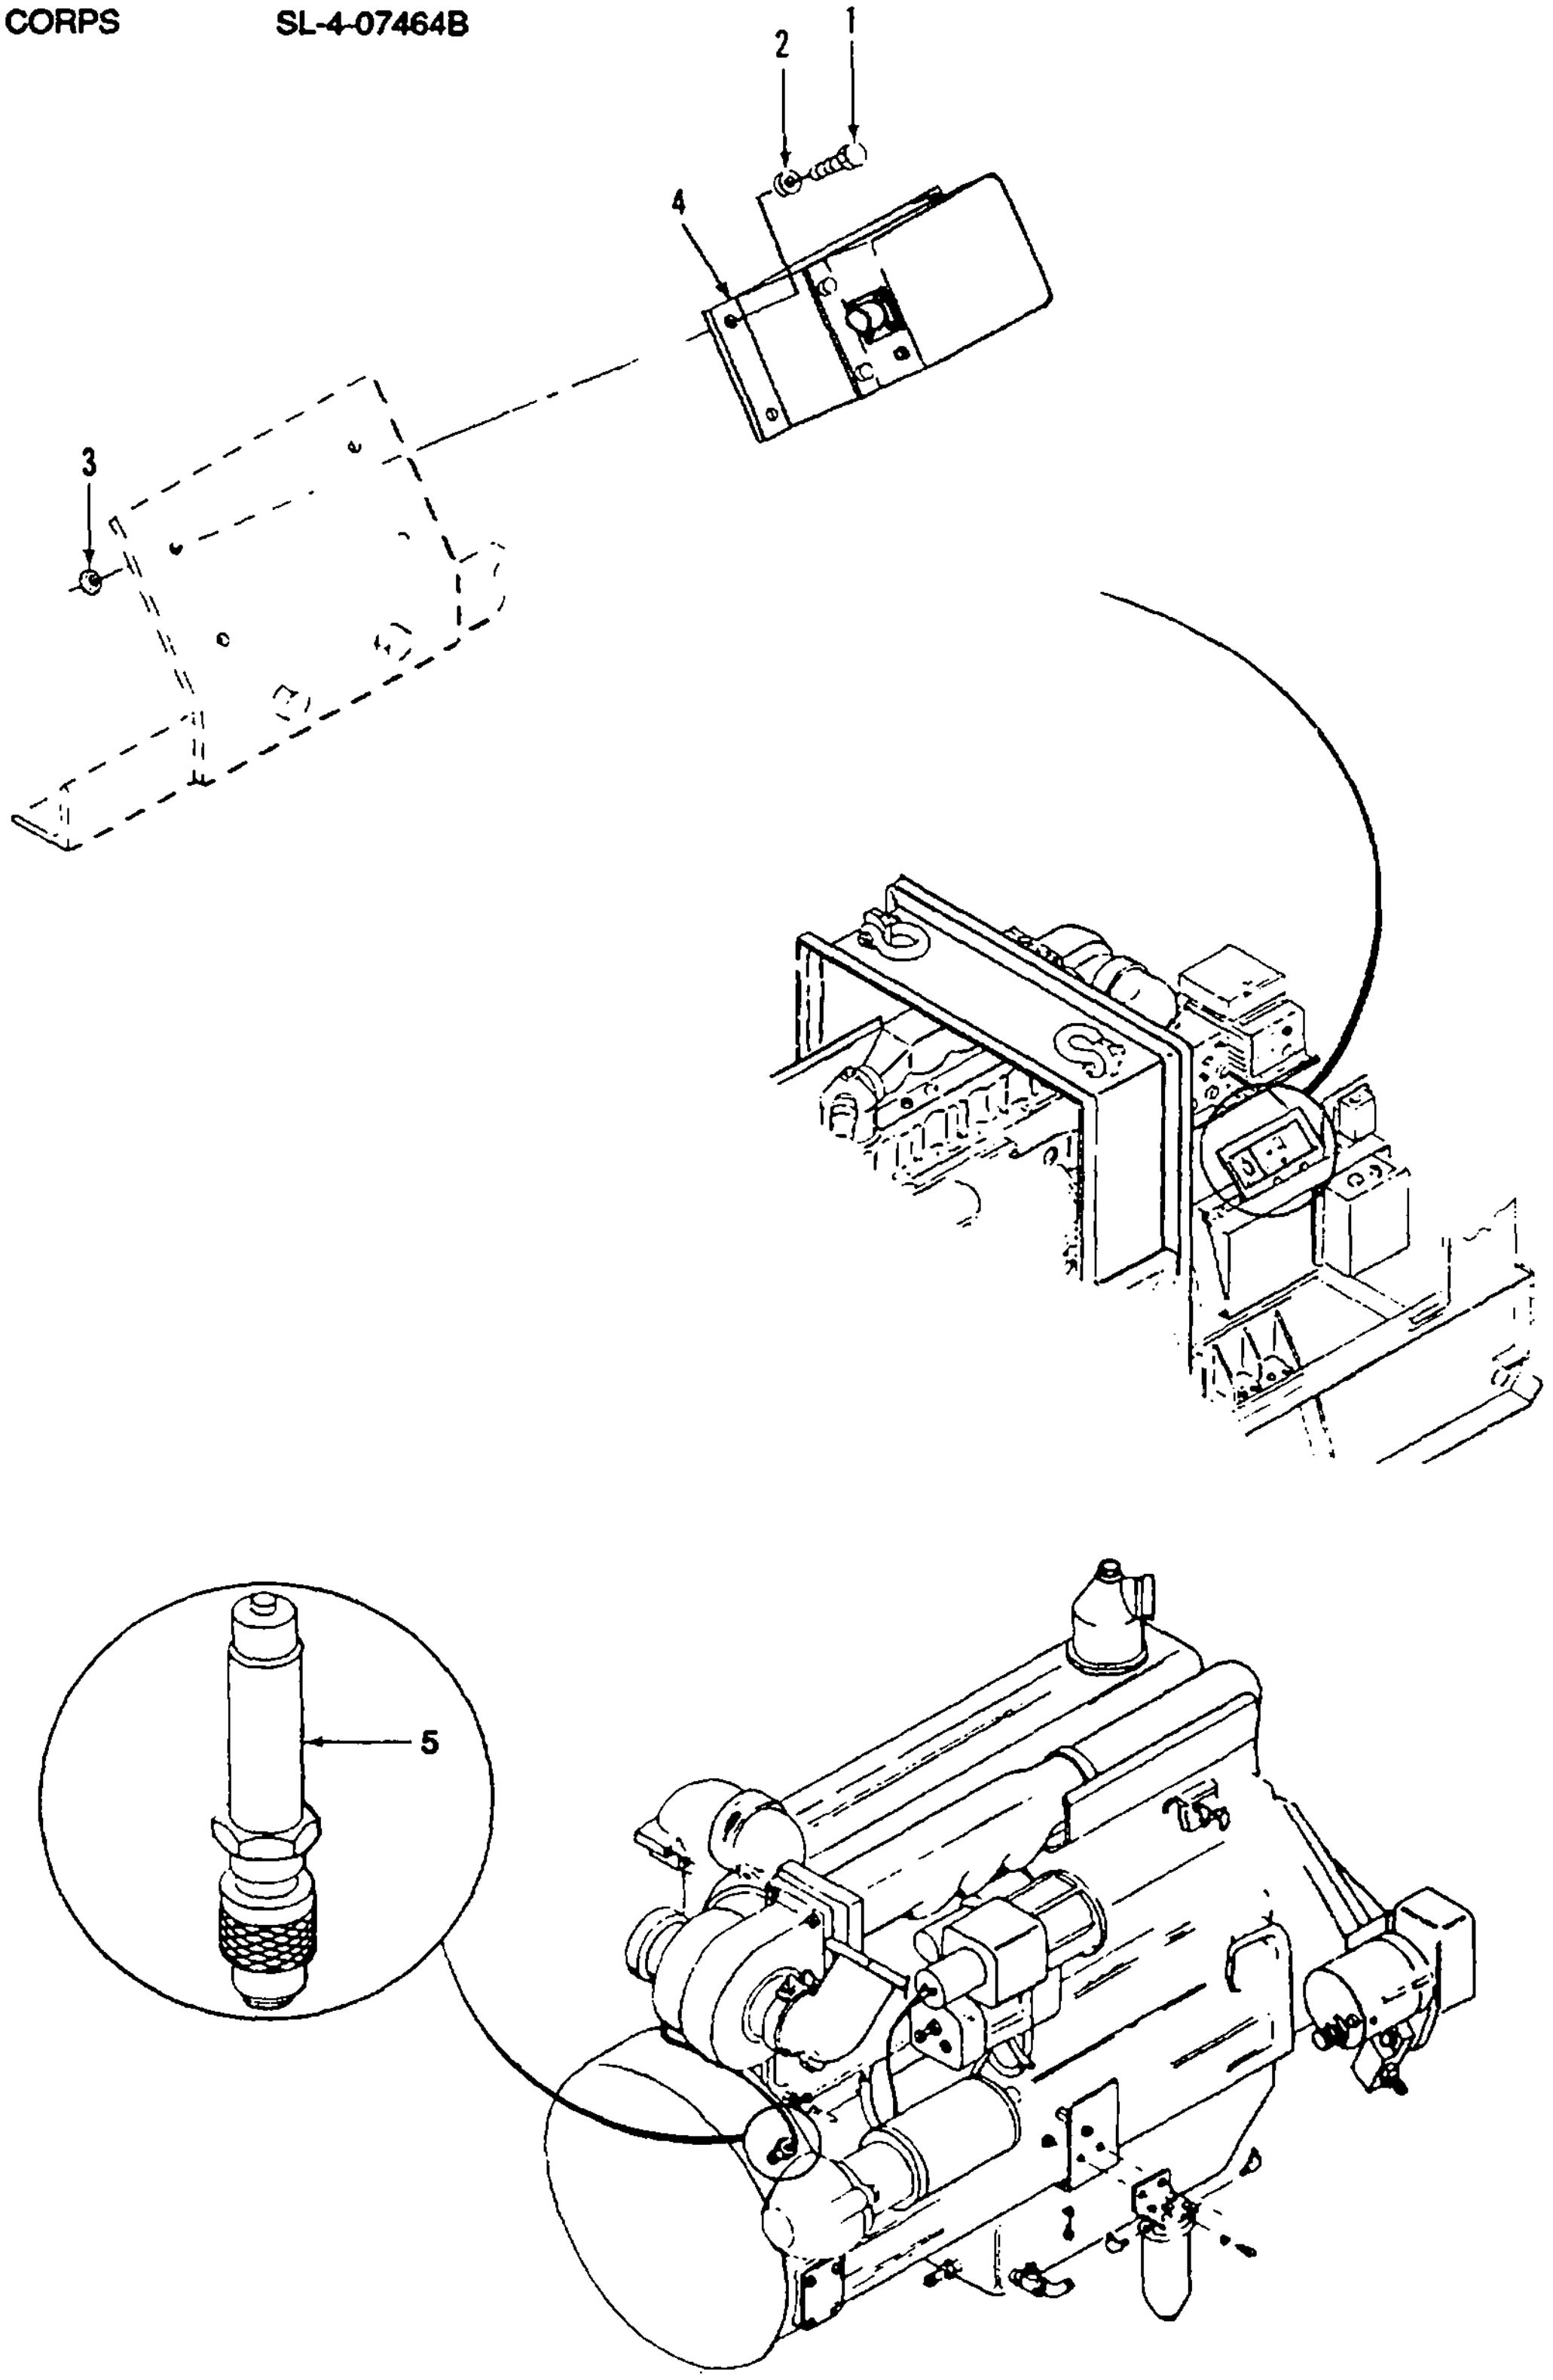

Figure 13. Speed Switch and Magnetic Pickup
(ALTERNATE P/N 90-4002)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 02 - DC ELECTRICAL AND CONTROL SYSTEM | | | | |
| 14 | | | | | | | | | LOW OIL PRESSURE AND HIGH COOLANT TEMPERATURE SWITCHES | | | | |
| 14 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .040 | 5930-00-208-4688 | SWITCH, OIL PRESSURE, LOW, OP<br>70-4043 30554<br>SPIZ15FA 85814 | | EA | 1 | 1 |
| 14 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .050 | 5930-01-009-0953 | SWITCH, TEMPERATURE, HIGH COOLANT, WT<br>69-697-4 30554<br>TC-150-222-4-ANSL 85814 | | EA | 1 | 1 |

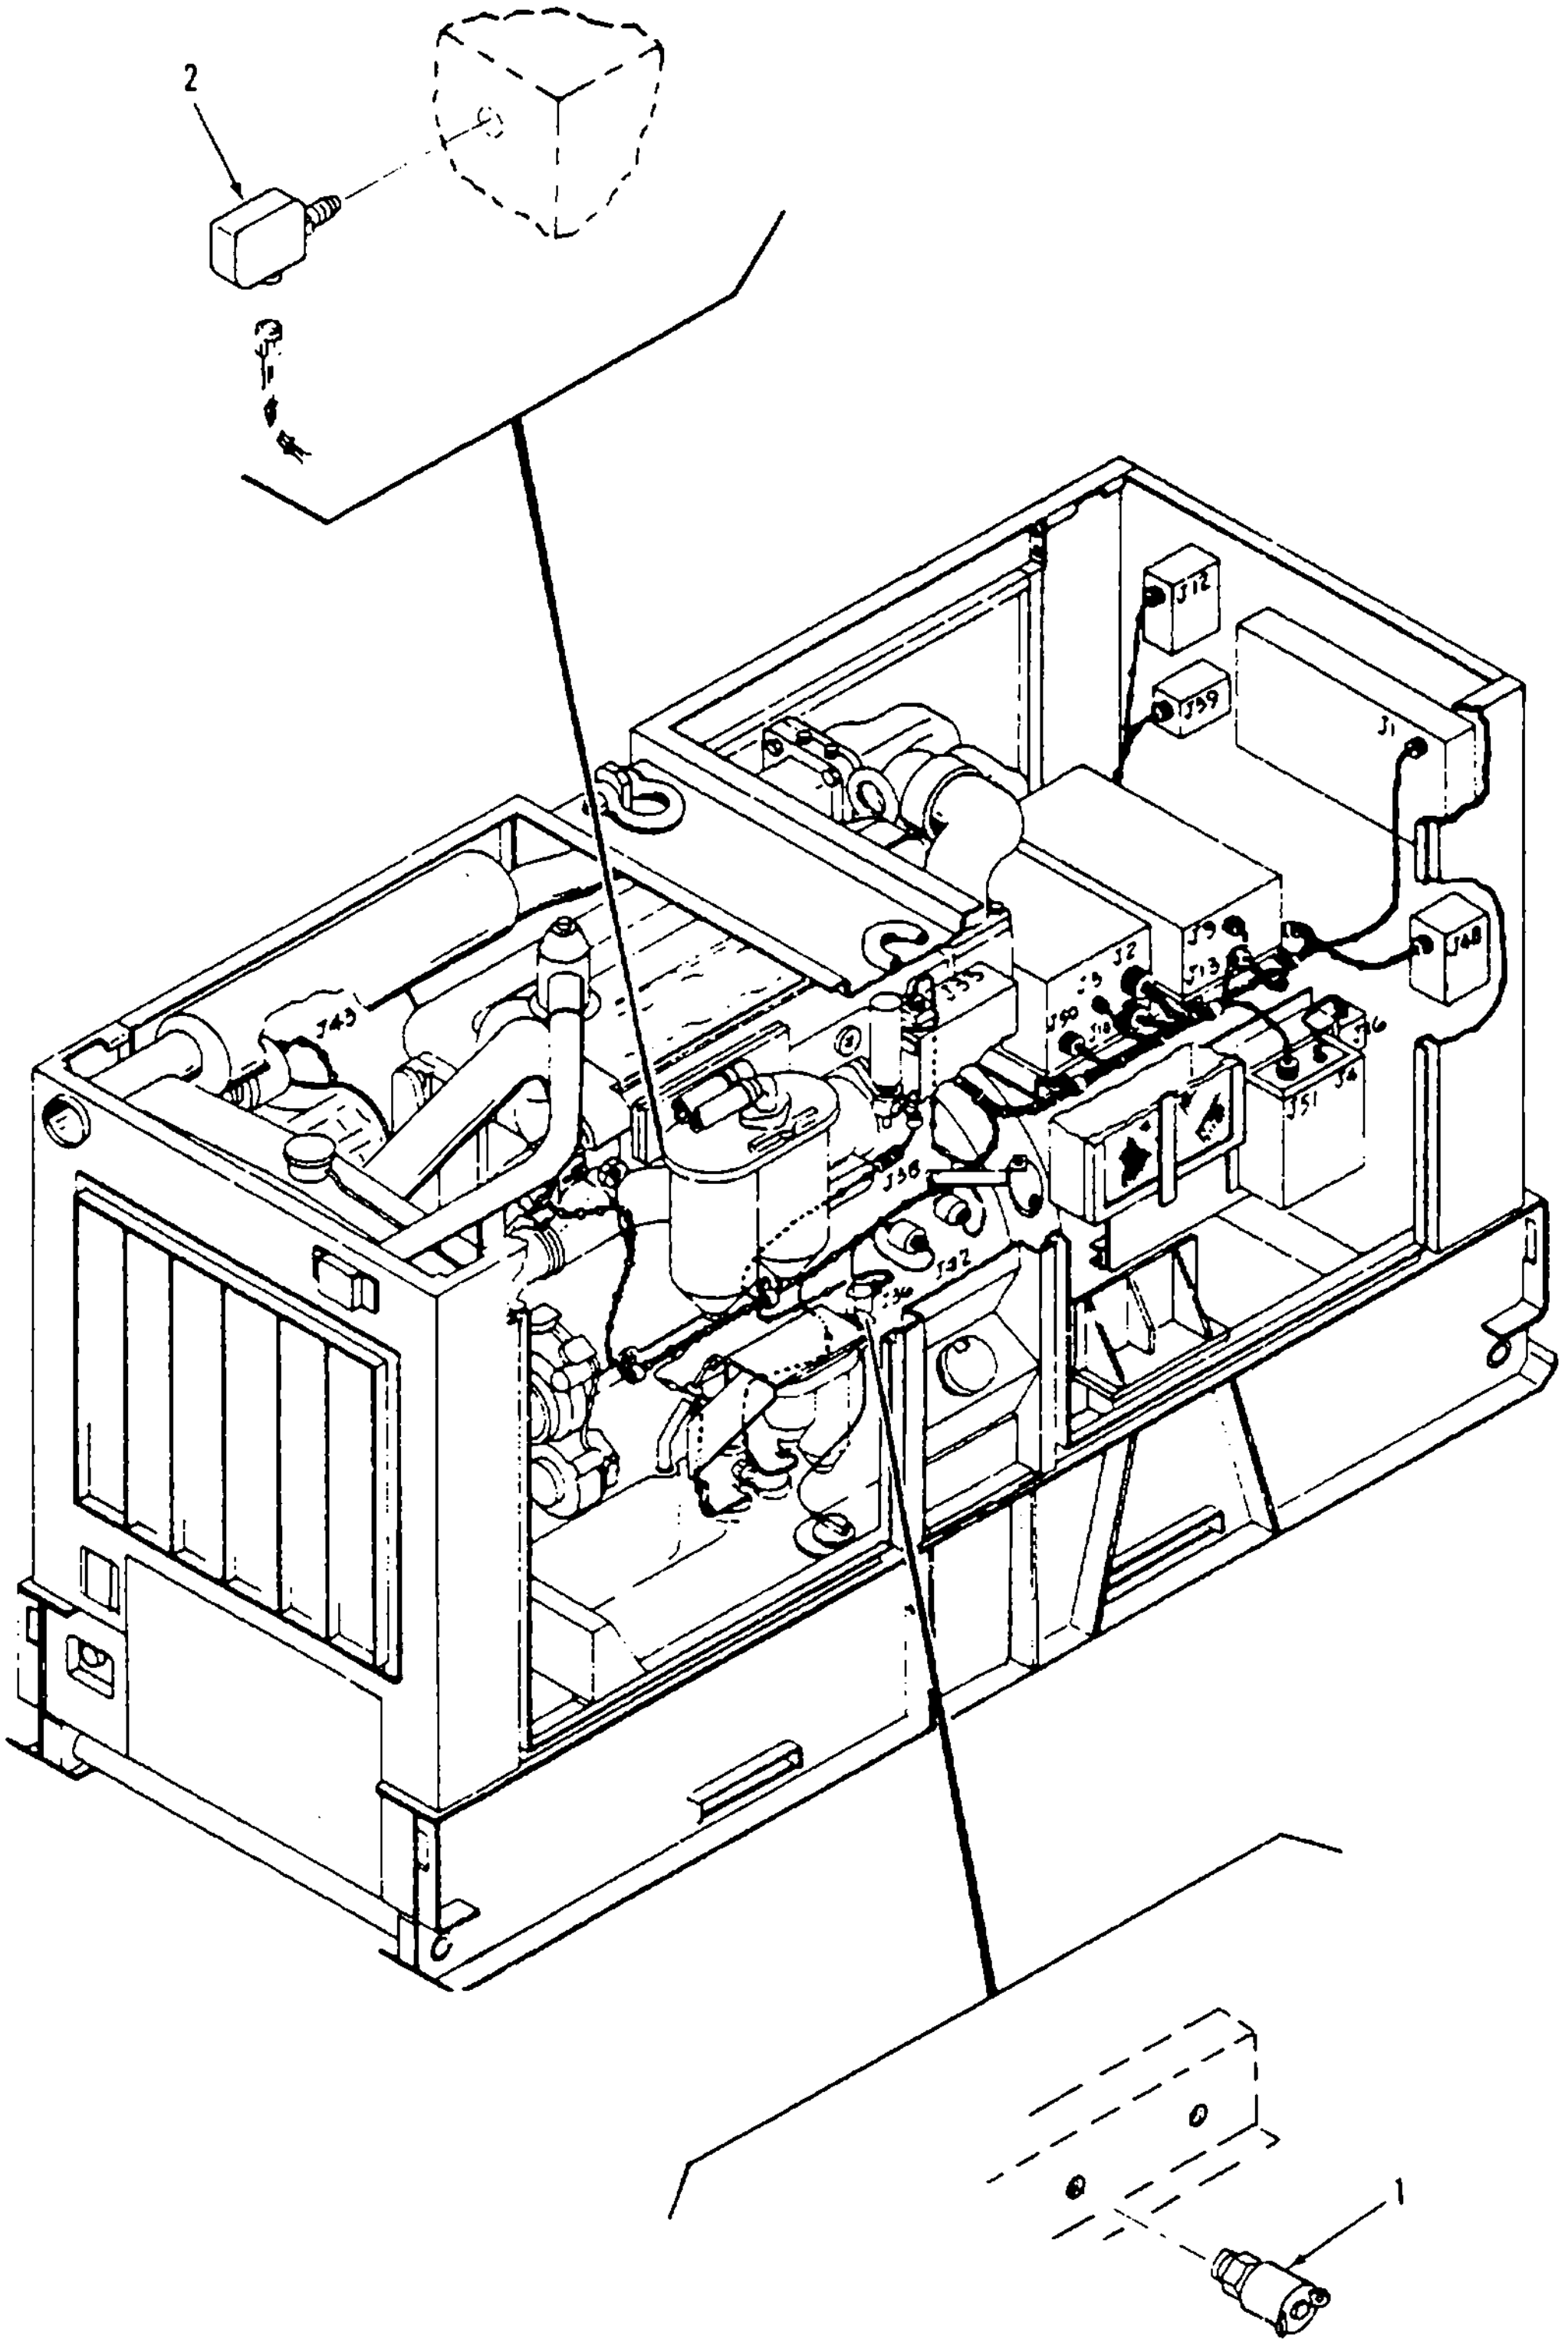
2
J12
J59
J1
J48
J43
J35
J36
J32
J51
1

Figure 14. Low Oil Pressure and High Coolant Temperature Switches

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 02 - DC ELECTRICAL AND CONTROL SYSTEM | | | | |
| 15 | | | | | | | | | DC CIRCUIT BREAKER | | | | |
| 15 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0501 | SCREW, HEX HEAD<br>MS90725-5 96906 | | EA | 2 | 114 |
| 15 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK<br>MS35338-44 96906 | | EA | 2 | 154 |
| 15 | 3 | AOO | AOO | AFF | AFF | | | | CIRCUIT BREAKER BOX, DC<br>70-4175 30554 | | EA | 1 | 1 |
| 15 | 4 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-211-9344 | SCREW AND WASHER<br>69-662-17 30554<br>61-060541-40-0142B-0542B 78189 | | EA | 4 | 4 |
| 15 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-038-3089 | SCREW AND WASHER<br>69-662-3 30554<br>61-040641-40-0142B-0542B 78189 | | EA | 4 | 8 |
| 15 | 6 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-836-3520 | NUT AND WASHER<br>69-561-1 30554<br>511-041800-00 78189 | | EA | 4 | 66 |
| 15 | 7 | XB | XB | XB | XB | | | | COVER, CB BOX<br>70-4177 30554 | | EA | 1 | 1 |
| 15 | 8 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4775 | TERMINAL LUG<br>MS25036-156 96906 | | EA | 3 | 9 |
| 15 | 9 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-543-1098 | INSULATION, ELECTRICAL<br>9034663 18876 | | FT | 1 | 1 |
| 15 | 10 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-7514 | WIRE, ELECTRICAL<br>M5086/2-12-9 81349 | | FT | 1 | 58 |
| 15 | 11 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .030 | 5935-00-806-4588 | CONNECTOR, J39<br>MS3102R16-10P 96906 | | EA | 1 | 2 |
| 15 | 12 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .007 | 5925-00-686-3298 | CIRCUIT BREAKER, CB1<br>MS25244-7-1/2 96906 | | EA | 1 | 1 |
| 15 | 13 | XB | XB | XB | XB | | | | CHASSIS, CB BOX<br>70-4176 30554 | | EA | 1 | 1 |

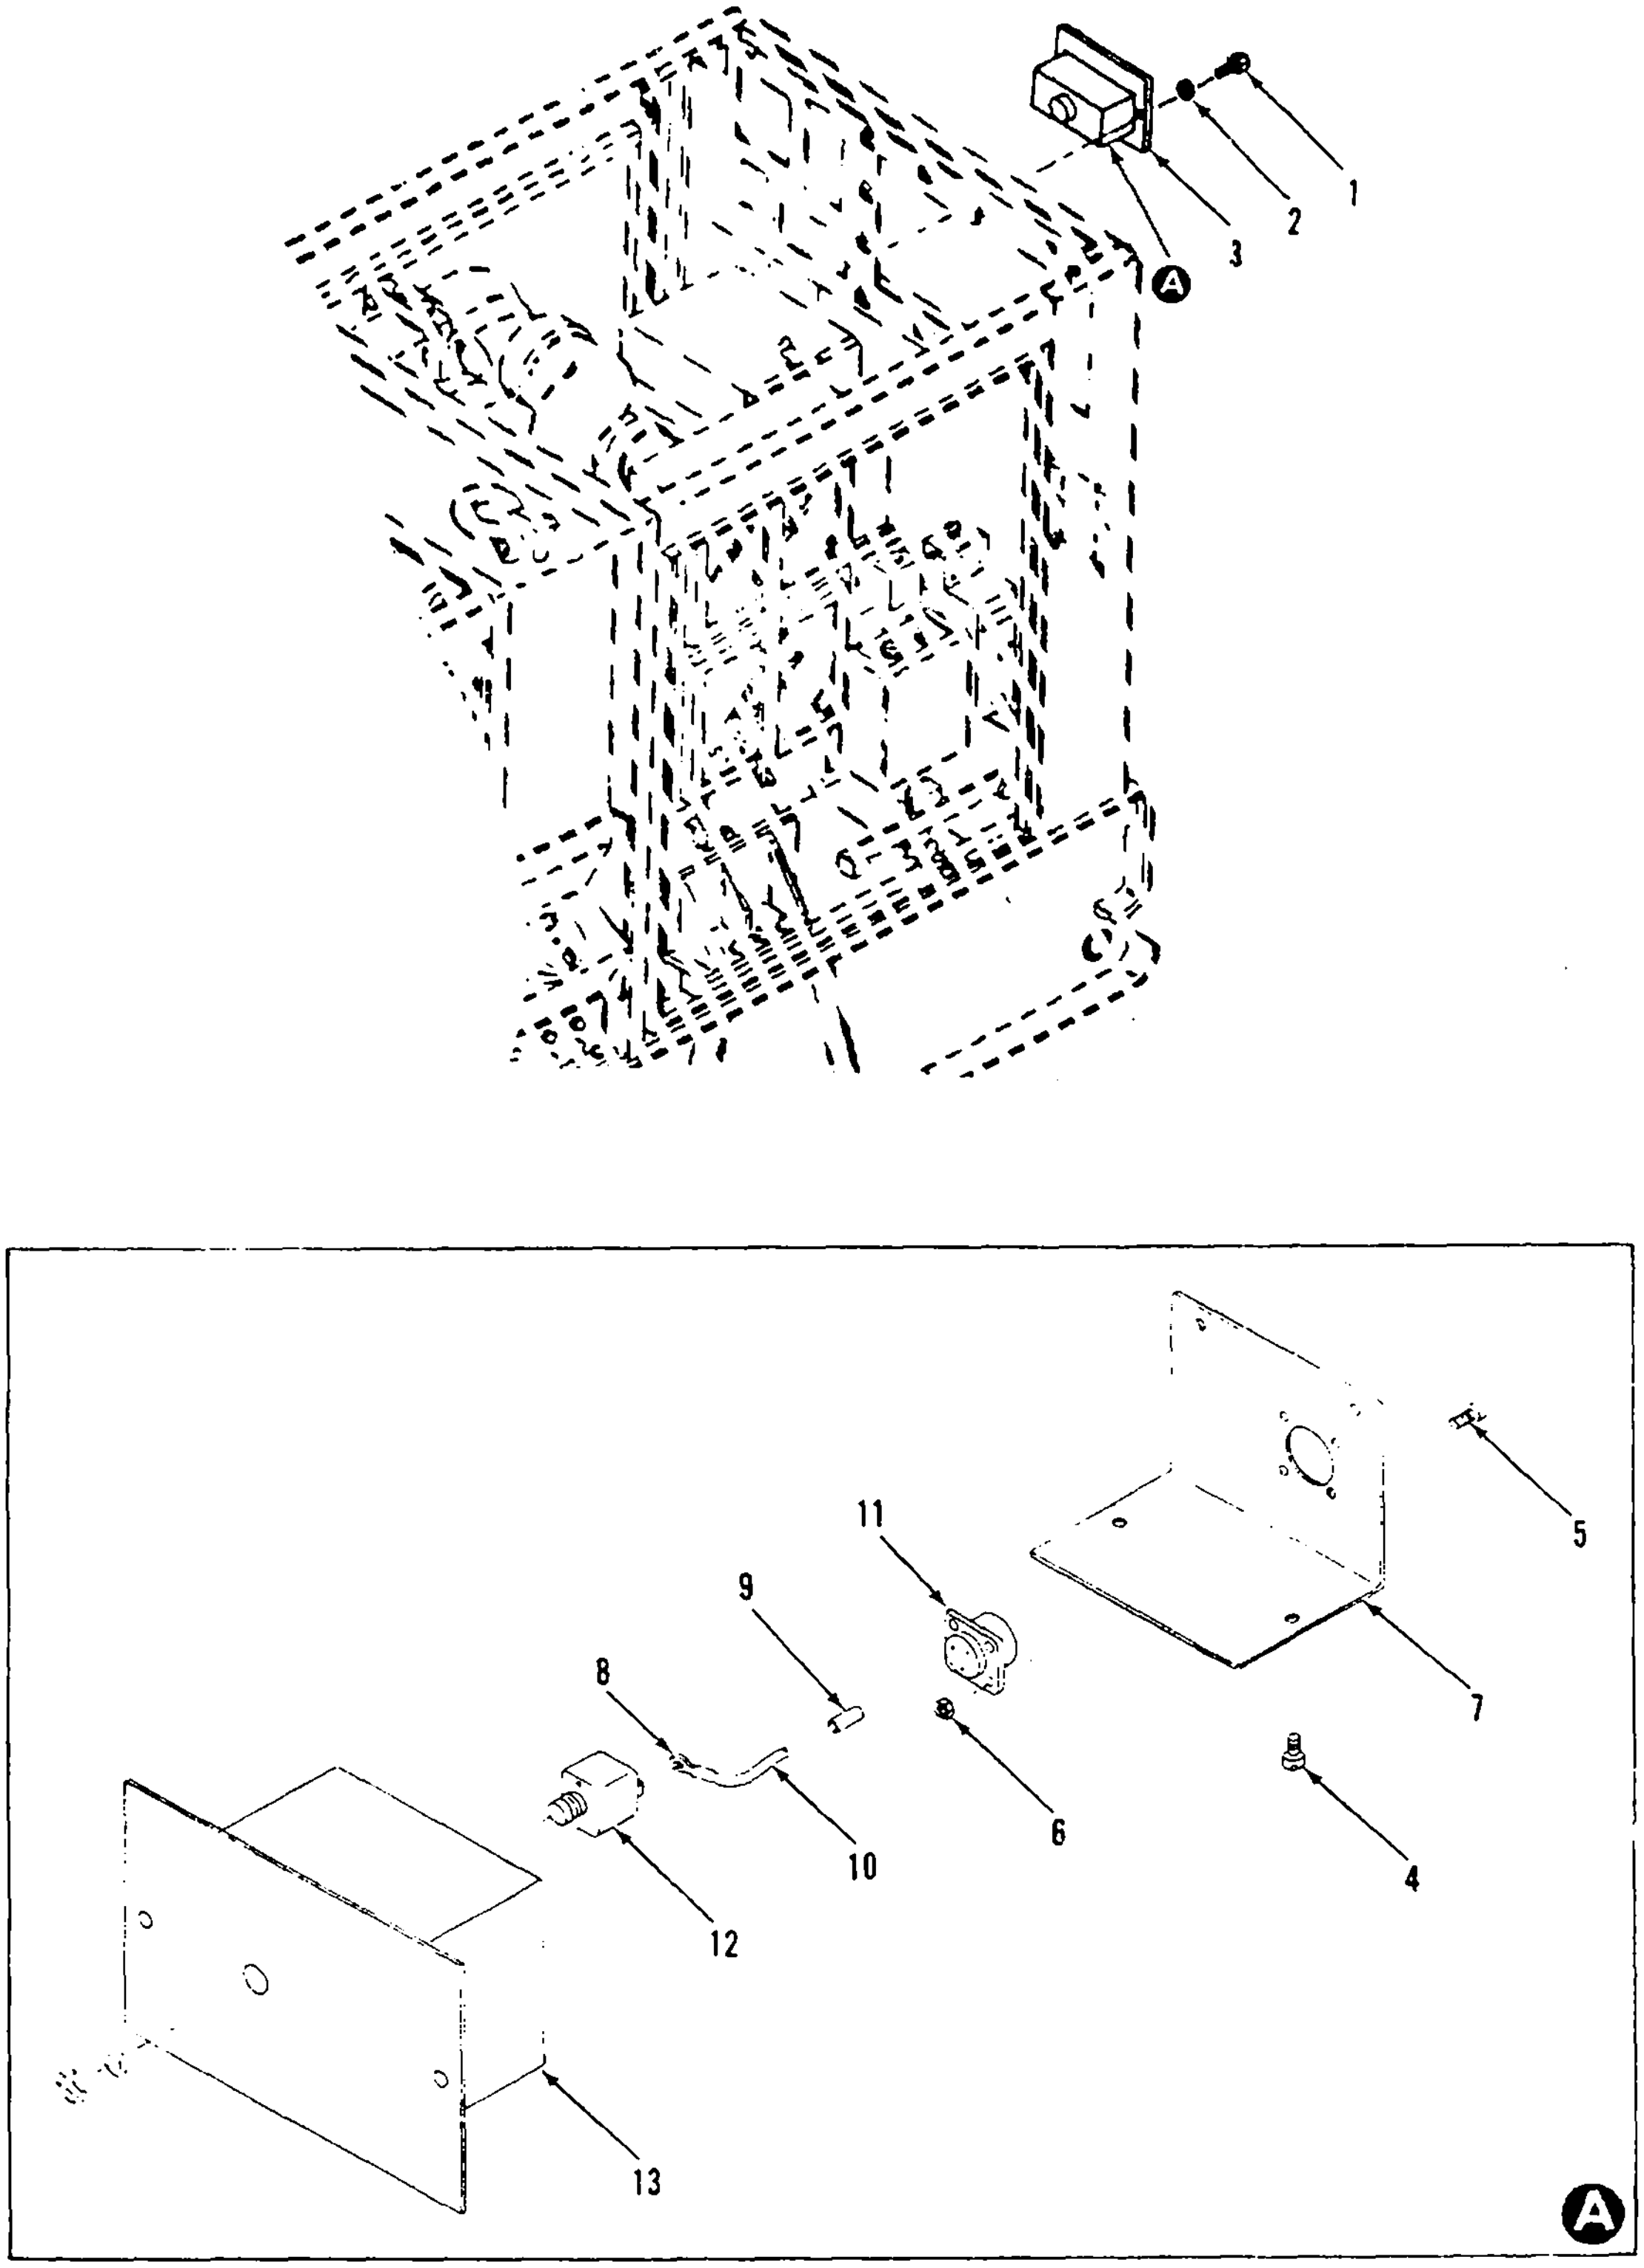
1
2
3
A
11
9
8
10
12
13
5
7
6
4
A

Figure 15. DC Circuit Breaker

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 02 - DC ELECTRICAL AND CONTROL SYSTEM | | | | |
| 16 | | PAOFF | PAFFP | PAFHH | PAFHH | | .008 | 2920-00-304-3493 | STARTER MOTOR<br>70-4046<br>MS53011-1 | <br>30554<br>96906 | EA | 1 | 1 |
| 16 | 1 | KF | KF | KF | KF | | | | SCREW, P/O KIT P/N P90-2207<br>8X3147 | | EA | 6 | 6 |
| 16 | 2 | XB | XB | XB | XB | | | | HOUSING ASSY, PINION<br>PS-139-OB | <br>68505 | EA | 1 | 1 |
| 16 | 3 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3120-00-140-2016 | BEARING, DRIVE END<br>MFY-36 | <br>68505 | EA | 1 | 1 |
| 16 | 4 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2920-00-223-6256 | PLUG PACKAGE, PINION HSG<br>MFY-34S | <br>68505 | EA | 1 | 1 |
| 16 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5330-00-137-3451 | GASKET, PINION HSG<br>36-754 | <br>59534 | EA | 1 | 1 |
| 16 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 3120-00-138-0241 | WASHER PACKAGE, THRUST,<br>P/O KIT P/N P90-809<br>MFY-35 | <br><br>68505 | EA | 1 | 1 |
| 16 | 7 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5365-00-303-0409 | PLUG, P/O KIT P/N 90-2206<br>MES61 | <br>68505 | EA | 1 | 1 |
| 16 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5330-00-288-2557 | GASKET, P/O KIT P/N 90-2206<br>MFY-63 | <br>68505 | EA | 1 | 1 |
| 16 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 2920-00-184-7515 | SWITCH, SOLENOID<br>SP6056 | <br>68505 | EA | 1 | 1 |
| 16 | 10 | PAFZZ | PAFZZ | PAHZZ | PAFZZ | D | .080 | 6150-00-212-5772 | LEAD ASSY<br>MES-120 | <br>68505 | EA | 1 | 1 |
| 16 | 11 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5935-00-325-8389 | CONNECTOR, SWITCH<br>MFY-40 | <br>68505 | EA | 1 | 1 |
| 16 | 12 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .080 | 3010-01-068-6996 | YOKE ASSY<br>MEU-2042B | <br>68505 | EA | 1 | 1 |
| 16 | 13 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .005 | 2920-01-164-8123 | DRIVE, POS TORQUE<br>PD-8A | <br>68505 | EA | 1 | 1 |
| 16 | 14 | XB | XB | XB | XB | | | | HOUSING ASSY, INT<br>MES-2116B | <br>68505 | EA | 1 | 1 |
| 16 | 15 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3120-00-425-6467 | BEARING INTERMEDIATE<br>MS17795-128 | <br>96906 | EA | 1 | 1 |
| 16 | 16 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5330-00-137-3450 | SEAL, INTERMEDIATE<br>XA-744Z | <br>68505 | EA | 1 | 1 |
| 16 | 17 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5330-00-304 -9092 | SEAL, OIL<br>XA-1086 | <br>68505 | EA | 1 | 1 |
| 16 | 18 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 2920-00-722-9103 | ARMATURE<br>MBD2466B | <br>68505 | EA | 1 | 1 |
| 16 | 19 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .008 | 2920-00-499-9974 | TERMINAL PACKAGE, STUD<br>P90-810 | <br>68505 | EA | 1 | 1 |
| 16 | 20 | XBFZZ | PAFZZ | PAHZZ | PAHZZ | D | .007 | 2920-00-184-7519 | HEAD ASSY, COMM END<br>MFY-1002BS | <br>68505 | EA | 1 | 1 |
| 16 | 21 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3120-00-293-5041 | BEARING, COMM END<br>GBF-79 | <br>68505 | EA | 1 | 1 |
| 16 | 22 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5330-00-138 -0251 | GASKET PACKAGE<br>MES-95S | <br>68505 | EA | 1 | 1 |
| 16 | 23 | XA | XA | XA | XA | | | | FIELD COIL PACKAGE<br>MFY-2052S | <br>68505 | EA | 1 | 1 |

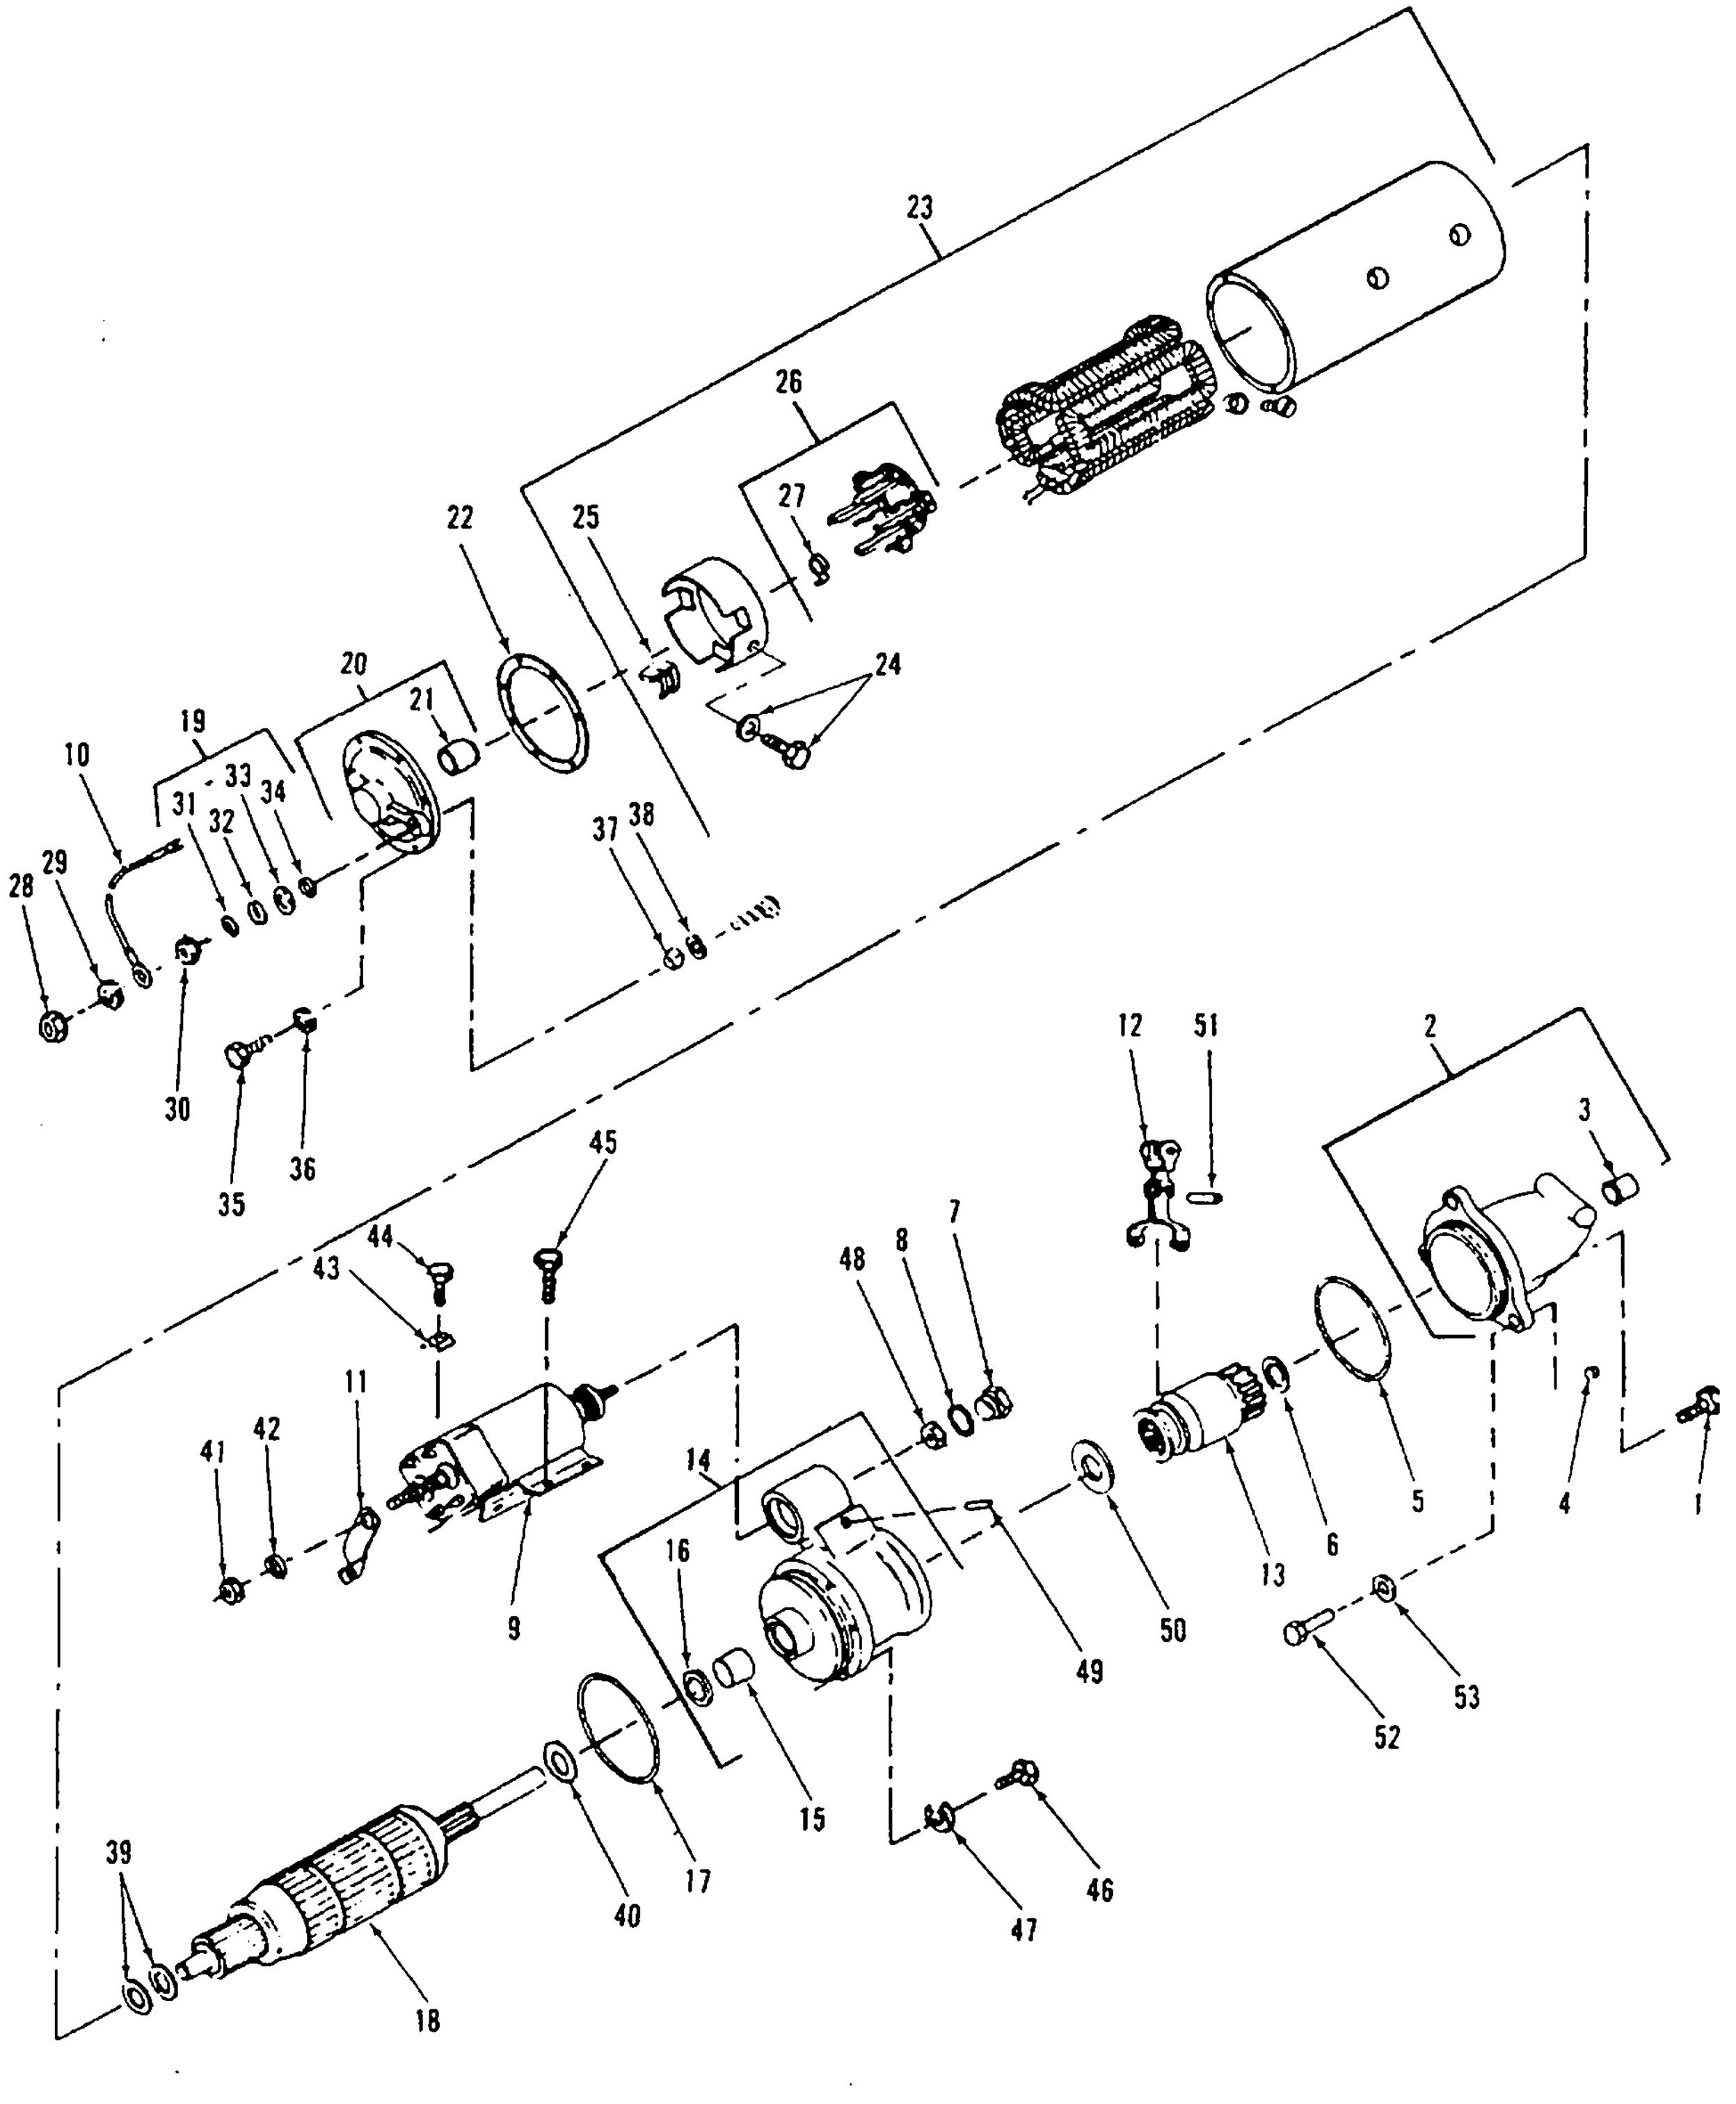
23
26
22
25
27
24
20
21
19
10
33
31
34
32
29
28
37
38
30
35
36
12
51
2
3
45
44
43
48
8
7
11
42
41
14
16
9
49
50
13
6
5
4
1
52
53
15
39
40
17
47
46
18

Figure 16. Starter Motor

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO. | (1) ILLUSTRATION b ITEM NO. | (2) SMR CODE a ARMY | (2) SMR CODE b AIR FORCE | (2) SMR CODE c NAVY | (2) SMR CODE d USMC | (3) USMC a SSI | (3) USMC b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE / USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 02 - DC ELECTRICAL<br>AND CONTROL SYSTEM - CONTINUED | | | |
| 16 | | | | | | | | | STARTER MORTOR - CONTINUED | | | |
| 16 | 24 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .008 | 2920-00-499-9975 | SCREW SEAL PACKAGE<br>XA-744APS 68505<br>P90-803 68505 | EA | 1 | 1 |
| 16 | 25 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .047 | 5977-00-091-9283 | BRUSH SET<br>MEW-10125 68505 | EA | 1 | 1 |
| 16 | 26 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .023 | 5977-00-237-1211 | BRUSH PLATE ASSY<br>MEW-1064A 68505 | EA | 1 | 1 |
| 16 | 27 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .015 | 2920-00-058-6574 | SPRING SET, BRUSH<br>MBD-9AS 68505 | EA | 1 | 1 |
| 16 | 28 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 5310-00-228-7546 | NUT<br>19X3439 68505 | EA | 1 | 3 |
| 16 | 29 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .080 | 5310-00-137-3427 | WASHER, LOCK<br>12X198 68505 | EA | 1 | 1 |
| 16 | 30 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 5310-00-228 -7546 | NUT<br>19X3439 68505 | EA | 1 | 3 |
| 16 | 31 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5310-00-461 -2764 | WASHER, P/O KIT P/N P90-810<br>MES78A 68505 | EA | 1 | 1 |
| 16 | 32 | KF | KF | KF | KF | | | | WASHER, INSULATING<br>P/O KIT P/N P90-810<br>MES93 68505 | EA | 1 | 1 |
| 16 | 33 | KF | KF | KF | KF | | | | WASHER, CAP, P/O KIT<br>P/N P90-810<br>MES99 68505 | EA | 1 | 1 |
| 16 | 34 | KF | KF | KF | KF | | | | WASHER, NEOPRENE,<br>P/O KIT P/N P90-810<br>MES94 68505 | EA | 1 | 1 |
| 16 | 35 | KF | KF | KF | KF | | | | SCREW, P/O KIT,<br>P/N P90-2207<br>8X4632 19728 | EA | 7 | 7 |
| 16 | 36 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .080 | 5310-00-637 -9541 | WASHER, LOCK, P/O KIT<br>MS352338-46 96906 | EA | 7 | 7 |
| 16 | 37 | KF | KF | KF | KF | | | | BUSHING, P/O KIT,<br>P/N P90-810<br>MES72 68505 | EA | 1 | 1 |
| 16 | 38 | KF | KF | KF | KF | | | | WASHER, INSULATING<br>P/O KIT P/N P90-810 68505<br>MES71 | EA | 1 | 1 |
| 16 | 39 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5310-00-282 -6112 | WASHER, THRUST,<br>P/O KIT P/N P90-809<br>MU54B 68505<br>MU54 | EA | 2 | 2 |
| 16 | 40 | KF | KF | KF | KF | | | | WASHER, THRUST,<br>P/O KIT P/N P90-809<br>ML129 68505 | EA | 1 | 1 |
| 16 | 41 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .080 | 5310-00-228-7546 | NUT<br>19X3439 68505 | EA | 1 | 3 |
| 16 | 42 | KF | KF | KF | KF | D | .080 | 5310-00-137-3427 | WASHER, LOCK<br>12X198 68505 | EA | 1 | 1 |
| 16 | 43 | KF | KF | KF | KF | | | | CLIP<br>VRB50B 68505 | EA | 1 | 1 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 02 - DC ELECTRICAL AND CONTROL SYSTEM - CONTINUED | | | | |
| 16 | | | | | | | | | STARTER MOTOR - CONTINUED | | | | |
| 16 | 44 | XB | XB | XB | XB | | | | SCREW<br>X3060 68505 | | EA | 1 | 1 |
| 16 | 45 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 5306-00-775-5209 | SCREW AND WASHER ASSY<br>1930611 24617 | | EA | 4 | 4 |
| 16 | 46 | | | | | | | | SCREW, P/O KIT, P/N 90-2207<br>8X3360 68505 | | EA | 7 | 7 |
| 16 | 47 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 5310-00-92-53661 | WASHER, LOCK<br>9421423 68505 | | EA | 7 | 7 |
| 16 | 48 | KF | KF | KF | KF | | | 5310-00-026-2622 | NUT, P/O KIT P/N 90-2206<br>8X1681 68505 | | EA | 1 | 1 |
| 16 | 49 | KF | KF | KF | KF | | | | PLUG, P/O KIT, P/N 90-2206<br>20X4222 68505 | | EA | 1 | 1 |
| 16 | 50 | KF | KF | KF | KF | | | | WASHER, P/O KIT, P/N P90-809<br>MFY33 68505 | | EA | 1 | 1 |
| 16 | 51 | KF | KF | KF | KF | | | | PIN, P/O KIT P/N 90-2206<br>MES117 68505 | | EA | 1 | 1 |
| 16 | 52 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | | 5306-00-218-5625 | SCREW<br>71-4879 30554 | | EA | 3 | 3 |
| 16 | 53 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | | 5310-00-820-6653 | WASHER, LOCK<br>MS35338-50 96906 | | EA | 3 | 11 |
| 16 | | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .008 | 2920-00-351-2208 | SCREW PACKAGE, MTG<br>90-2207 68505 | | EA | 1 | |
| 16 | 1 | | | | | | | | SCREW | | EA | 6 | |
| | 35 | | | | | | | | SCREW | | EA | 7 | |
| | 46 | | | | | | | | SCREW | | EA | 7 | |
| | | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .010 | 3120-00-138 -0241 | ARMATURE THRUST WASHER KIT<br>P90-809 68505 | | EA | 1 | 1 |
| 16 | 6 | | | | | | | | WASHER | | EA | 1 | |
| | 39 | | | | | | | | WASHER | | EA | 2 | |
| | 39 | | | | | | | | WASHER | | EA | 4 | |
| | 40 | | | | | | | | WASHER | | EA | 1 | |
| | 50 | | | | | | | | WASHER | | EA | 1 | |
| 16 | | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 2920-00-302-6342 | PARTS KIT, YOKE<br>90-2206 68505 | | EA | 1 | 1 |
| | 7 | | | | | | | | PLUG | | EA | 1 | |
| | 8 | | | | | | | | GASKET | | EA | 1 | |
| | 48 | | | | | | | | NUT | | EA | 1 | |
| | 49 | | | | | | | | PLUG | | EA | 1 | |
| | 51 | | | | | | | | PIN | | EA | 1 | |
| | | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .010 | 2920-00-499-9974 | TERMINAL WASHER PARTS KIT<br>P90-810 68505 | | EA | 1 | 1 |
| | 31 | | | | | | | | WASHER | | EA | 1 | |
| | 32 | | | | | | | | WASHER | | EA | 1 | |
| | 33 | | | | | | | | WASHER | | EA | 1 | |
| | 34 | | | | | | | | WASHER | | EA | 1 | |
| | 37 | | | | | | | | BUSHING | | EA | 1 | |
| | 38 | | | | | | | | WASHER | | EA | 1 | |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| 17 | | | | | | | | | GROUP 02 DC ELECTRICAL AND CONTROL SYSTEM | | | | |
| | | | | | | | | | ELECTRICAL SHUTOFF | | | | |
| 17 | 1 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-7837 | BOLT, HEX<br>2A762<br>MS90728-5 | <br>11083<br>96906 | EA | 2 | 8 |
| 17 | 2 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5961-01-12-06241 | DIODE ASSY<br>3N8085 | <br>11083 | EA | 1 | 1 |
| 17 | 3 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 2910-01-125-9476 | SHAFT<br>7N9635 | <br>11083 | EA | 1 | 1 |
| 17 | 4 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .015 | 5360-01-147-0056 | SPRING<br>9L6588 | <br>11083 | EA | 1 | 1 |
| 17 | 5 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5330-01-024 -3360 | GASKET, P/O KIT P/N6N133<br>4N117 | <br>11083 | EA | 1 | 1 |
| 17 | 6 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5945-01-149 -2905 | SOLENOID<br>4N3890 | <br>11083 | EA | 1 | 1 |

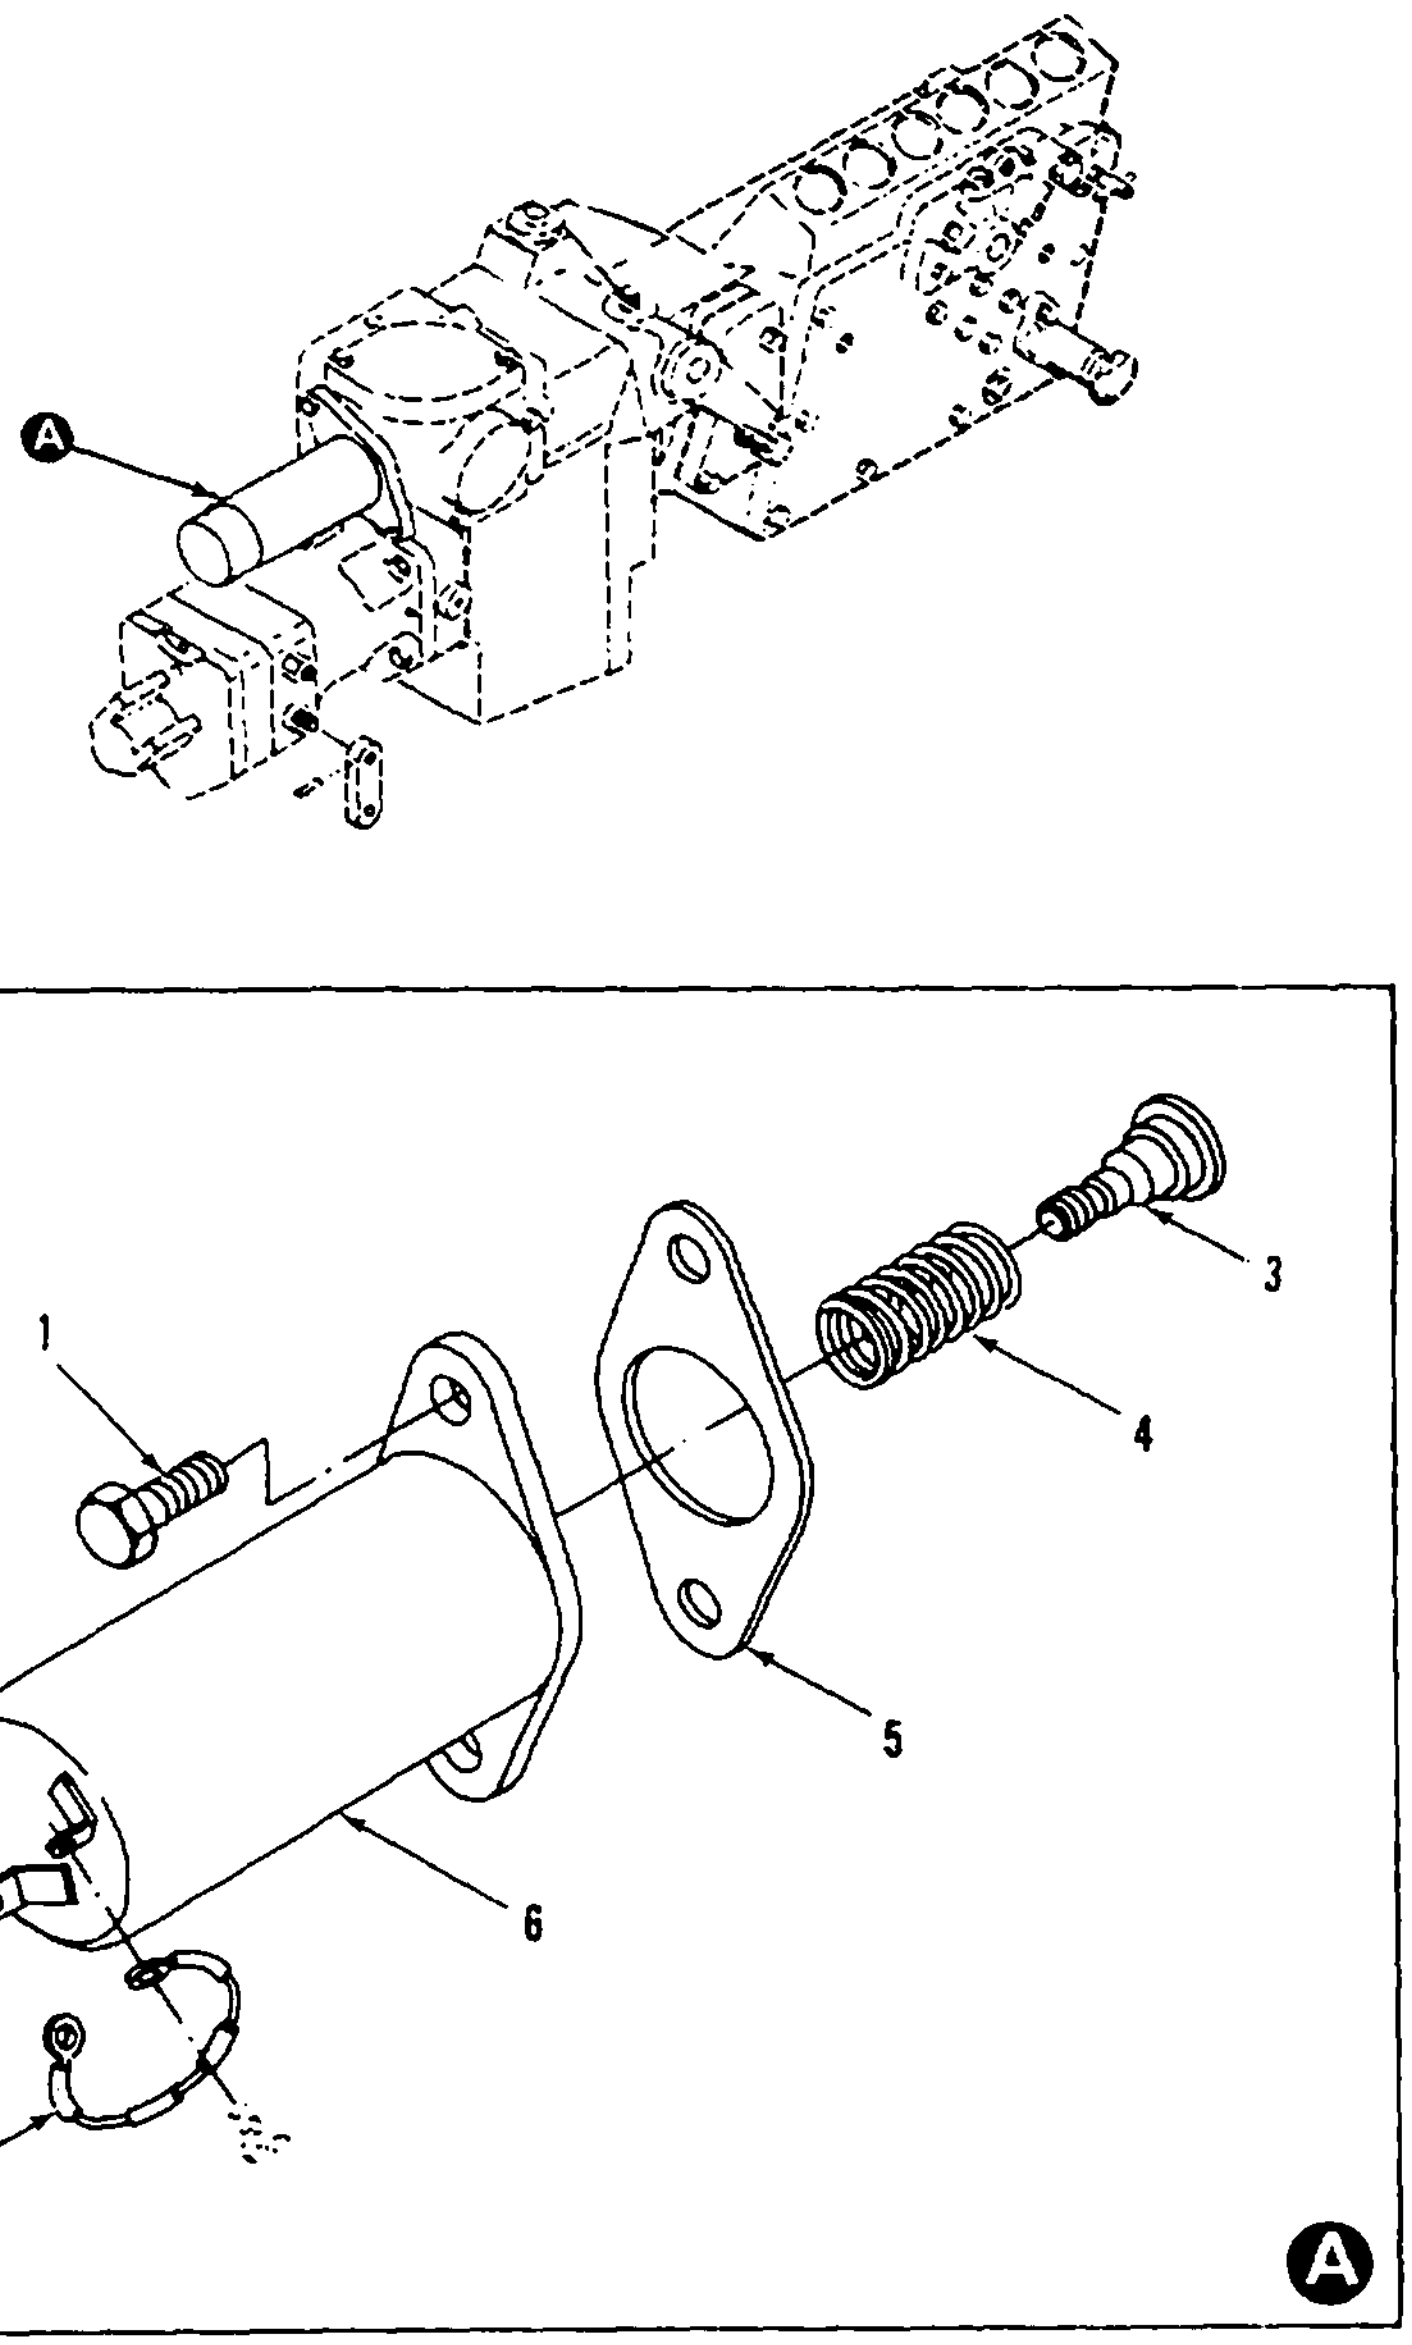

Figure 17. Electrical Shutoff

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 03 - SET CONTROLS AND INSTRUMENTATION | | | | |
| | | | | | | | | | FAULT INDICATOR ASSEMBLY AND RELATED PARTS | | | | |
| 18 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-038-3148 | SCREW AND WASHER<br>69-662-51 30554<br>61-101041-40-0142B-0542B 78189 | | EA | 4 | 24 |
| 18 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFFF | | .250 | 6625-00-003-0976 | INDICATOR, FAULT LOCATOR, A9<br>69-530 30554 | | EA | 1 | 1 |
| 18 | 3 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6968 | SCREW AND WASHER<br>69-662-18 30554<br>61-060641-40-0142B-0542B 78189 | | EA | 18 | 103 |
| 18 | 4 | MOO | MOO | MOO | MOO | | | | COVER<br>69-536 30554 | | EA | 1 | 1 |
| 18 | 5 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6977 | SCREW AND WASHER<br>69-662-33 30554<br>61-080641-40-0142B-0542B 78189 | | EA | 6 | 44 |
| 18 | 6 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 5995-00-512-1024 | WIRING HARNESS<br>70-515 30554 | | EA | 1 | 1 |
| 18 | 7 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .023 | 5935-00-007-2179 | CONNECTOR, RECEPTACLE, A9J12<br>69502-7 81349 | | EA | 1 | 1 |
| 18 | 8 | PAFZZ | PAFZZ | PAFZZ | PAEZZ | D | .008 | 5970-00-954-1622 | SLEEVING, INSULATION<br>M23053/5-105-0 81349 | | FT | 1 | 6 |
| 18 | 9 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-074-2072 | STRAP, TIE DOWN<br>MS3367-1-9 96906 | | EA | 30 | 344 |
| 18 | 10 | PAFZZ | PAFZZ | PAFZZ | PAEZZ | D | .080 | 6145-00-548-0969 | WIRE, ELECTRICAL<br>30S130498-6-9 98738 | | FT | 26 | 26 |
| 18 | 11 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-11-32081 | STRAP, TIE DOWN<br>MS3367-5-9 96906 | | EA | 2 | 2 |
| 18 | 12 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-543-1098 | INSULATION<br>69979-11 81349 | | FT | 1 | 1 |
| 18 | 13 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5910-00-009 -9998 | CAPACITOR<br>M39006/02-1300 81349 | | EA | 1 | 1 |
| 18 | 14 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-113-3757 | NUT, PLAIN HEX<br>MS35650-3394 96906 | | EA | 2 | 2 |
| 18 | 15 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .060 | 5930-00-615-2280 | SWITCH<br>MS35059-26 96906 | | EA | 1 | 1 |
| 18 | 16 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | 2.000 | 5920-00-280-4465 | FUSE<br>F02A250V1AS 81349 | | EA | 1 | 1 |
| 18 | 17 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .030 | 5920-00-875-4100 | FUSEHOLDER<br>FHN26G2 81349 | | EA | 1 | 1 |
| 18 | 18 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 6210-00-990-4637 | LENS<br>MIL-C-3661/12 81349<br>LC12RN2 81349 | | EA | 10 | 10 |
| 18 | 19 | PAOZZ | PAOZZ | PAFZZ | PAOZZ | | .230 | 6240-00-155-7836 | LAMPS, INCANDESCENT<br>MS25237-327 96906 | | EA | 10 | 10 |
| 18 | 20 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 6210-00-813-8265 | HOUSING, A9DS1, THROUGH A9DS10<br>MIL-I-3661/5 81349<br>LH73/1 81349 | | EA | 10 | 10 |
| 18 | 21 | XB | XB | XB | XBFZZ | | | | PANEL FAULT INDICATOR<br>69-532 30554 | | EA | 1 | 1 |
| 18 | 22 | MDO | MDO | MDO | MDO | | | | PLATE, BOTTOM<br>69-533 30554 | | EA | 1 | 1 |
| 18 | 23 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-984-4982 | SCREW, PAN HEAD<br>MS35206-225 96906 | | EA | 2 | 12 |
| 18 | 24 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-045-4007 | WASHER, LOCK<br>MS35338-41 96906 | | EA | 2 | 22 |

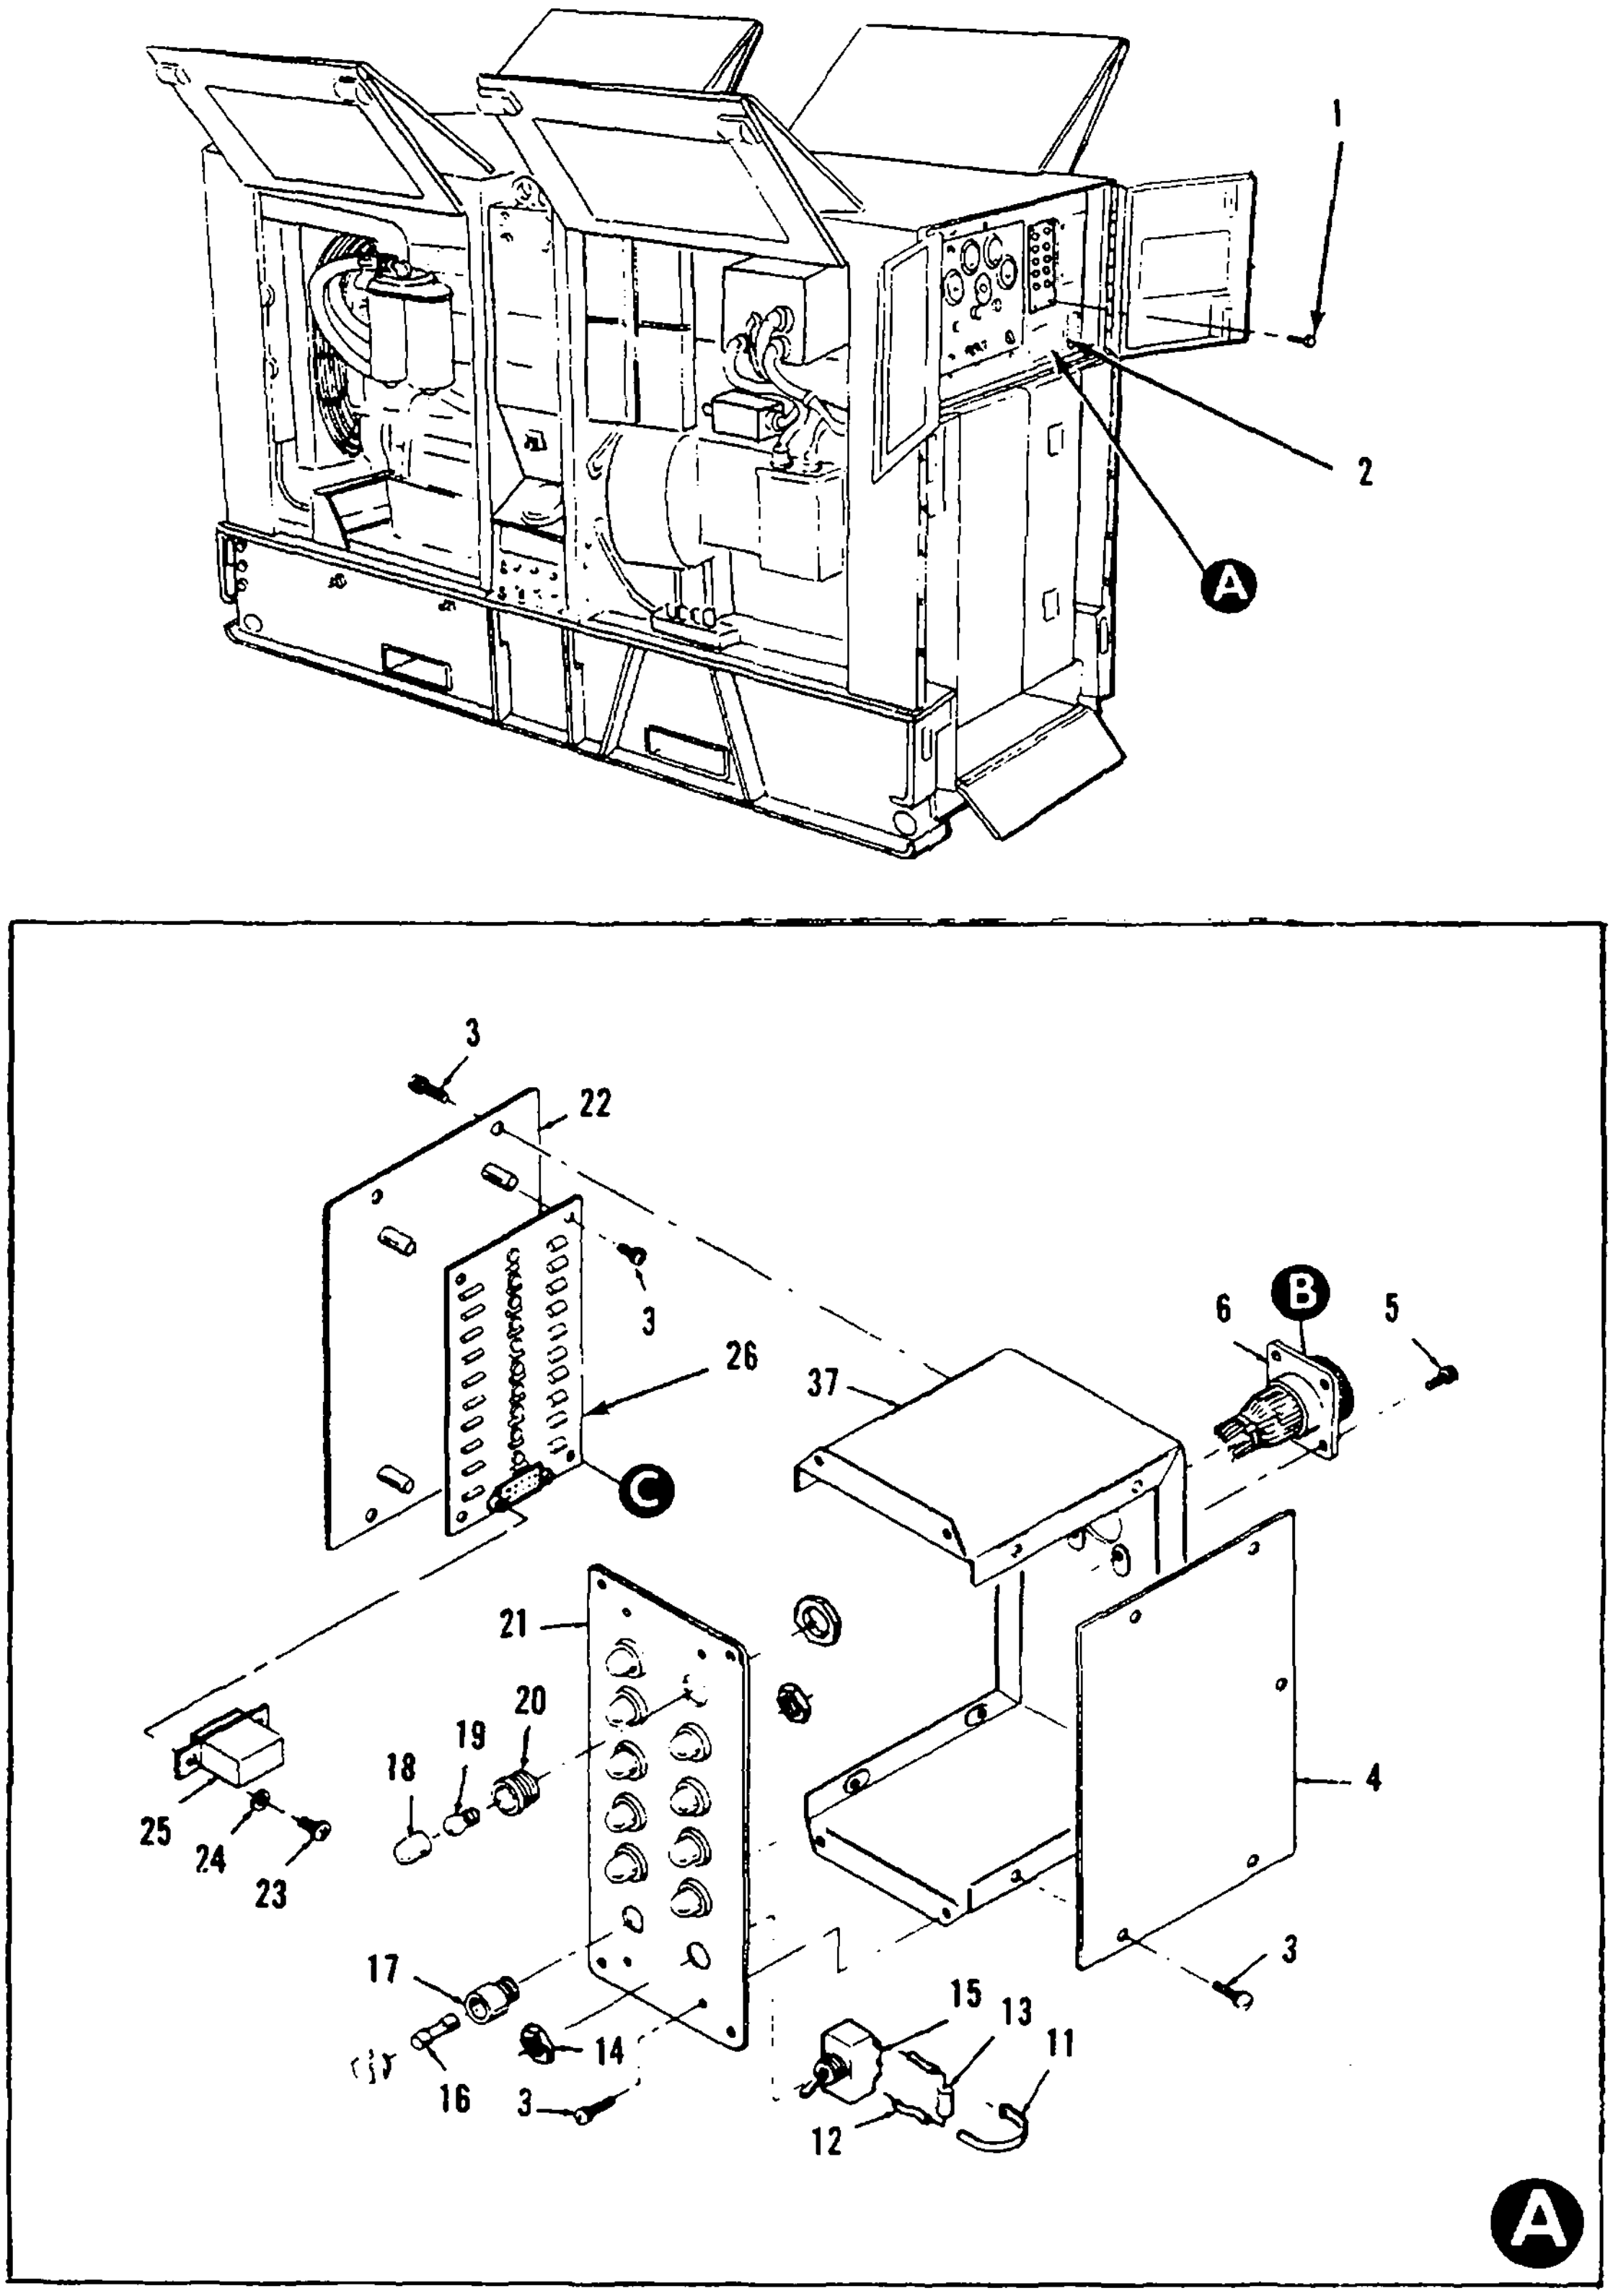
1
2
A
3
22
3
26
37
6
B
5
C
21
20
19
18
25
24
23
4
17
3
15
13
11
14
16
3
12
A

Figure 18. Fault Indicator Assembly and Related Parts (Sheet 1 of 2)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 03 - SET CONTROLS AND INSTRUMENTATION - CONTINUED | | | |
| 18 | | | | | | | | | FAULT INDICATOR ASSEMBLY AND RELATED PARTS - CONTINUED | | | |
| 18 | 25 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5945-00-435-1833 | RELAY<br>M5757/23-003 81349 | EA | 1 | 8 |
| 18 | 26 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | | 5998-00-119-1278 | INDICATOR, FAULT LOCATING<br>69-540 30554 | EA | 1 | 1 |
| 18 | 27 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-141-1168 | RESISTOR, FIXED,<br>A9R1 THROUGH A9R10<br>RCR20G222JS 81349 | EA | 10 | 10 |
| 18 | 28 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5910-00-254-2789 | CAPACITOR, FIXED,<br>A9C1 THROUGH A9C10<br>M39022/01-1661 81349 | EA | 10 | 10 |
| 18 | 29 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5961-00-079-5958 | RECTIFIER, SILICON,<br>A9SCR1 THROUGH A9SCR10<br>69-542 30554<br>2N1596 81349 | EA | 10 | 10 |
| 18 | 30 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-954-1622 | SLEEVING, INSULATION<br>M23053/5-105-0 81349 | FT | 1 | 6 |
| 18 | 31 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5961-00-237-2384 | RECTIFIER, SILICON,<br>A9CR1 THROUGH A9CR10<br>JAN1N5614 81349 | EA | 10 | 10 |
| 18 | 32 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .008 | 5940-00-767-1596 | TERMINAL, FEED THRU<br>MS17157-10 96906 | EA | 50 | 50 |
| 18 | 33 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-110-0196 | RESISTOR, FIXED,<br>A9R11 THROUGH A9R20<br>RCR20G102JS 81349 | EA | 10 | 10 |
| 18 | 34 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .005 | 5935-00-103-5359 | SOCKET, RELAY<br>69-547 30554<br>VB8-1UA11-8000P300-<br>1147 05574 | EA | 1 | 2 |
| 18 | 35 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 5365-00-216-1229 | SPACER, RELAY SOCKET<br>70-514 30554 | EA | 2 | 2 |
| 18 | 36 | XA-- | XA-- | XA | XA | | | | PRINTED CIRCUIT BOARD<br>69-541 30554 | EA | 1 | 1 |
| 18 | 37 | XB | XB | XB | XB | | | | CHASSIS<br>69-545 30554 | EA | 1 | 1 |

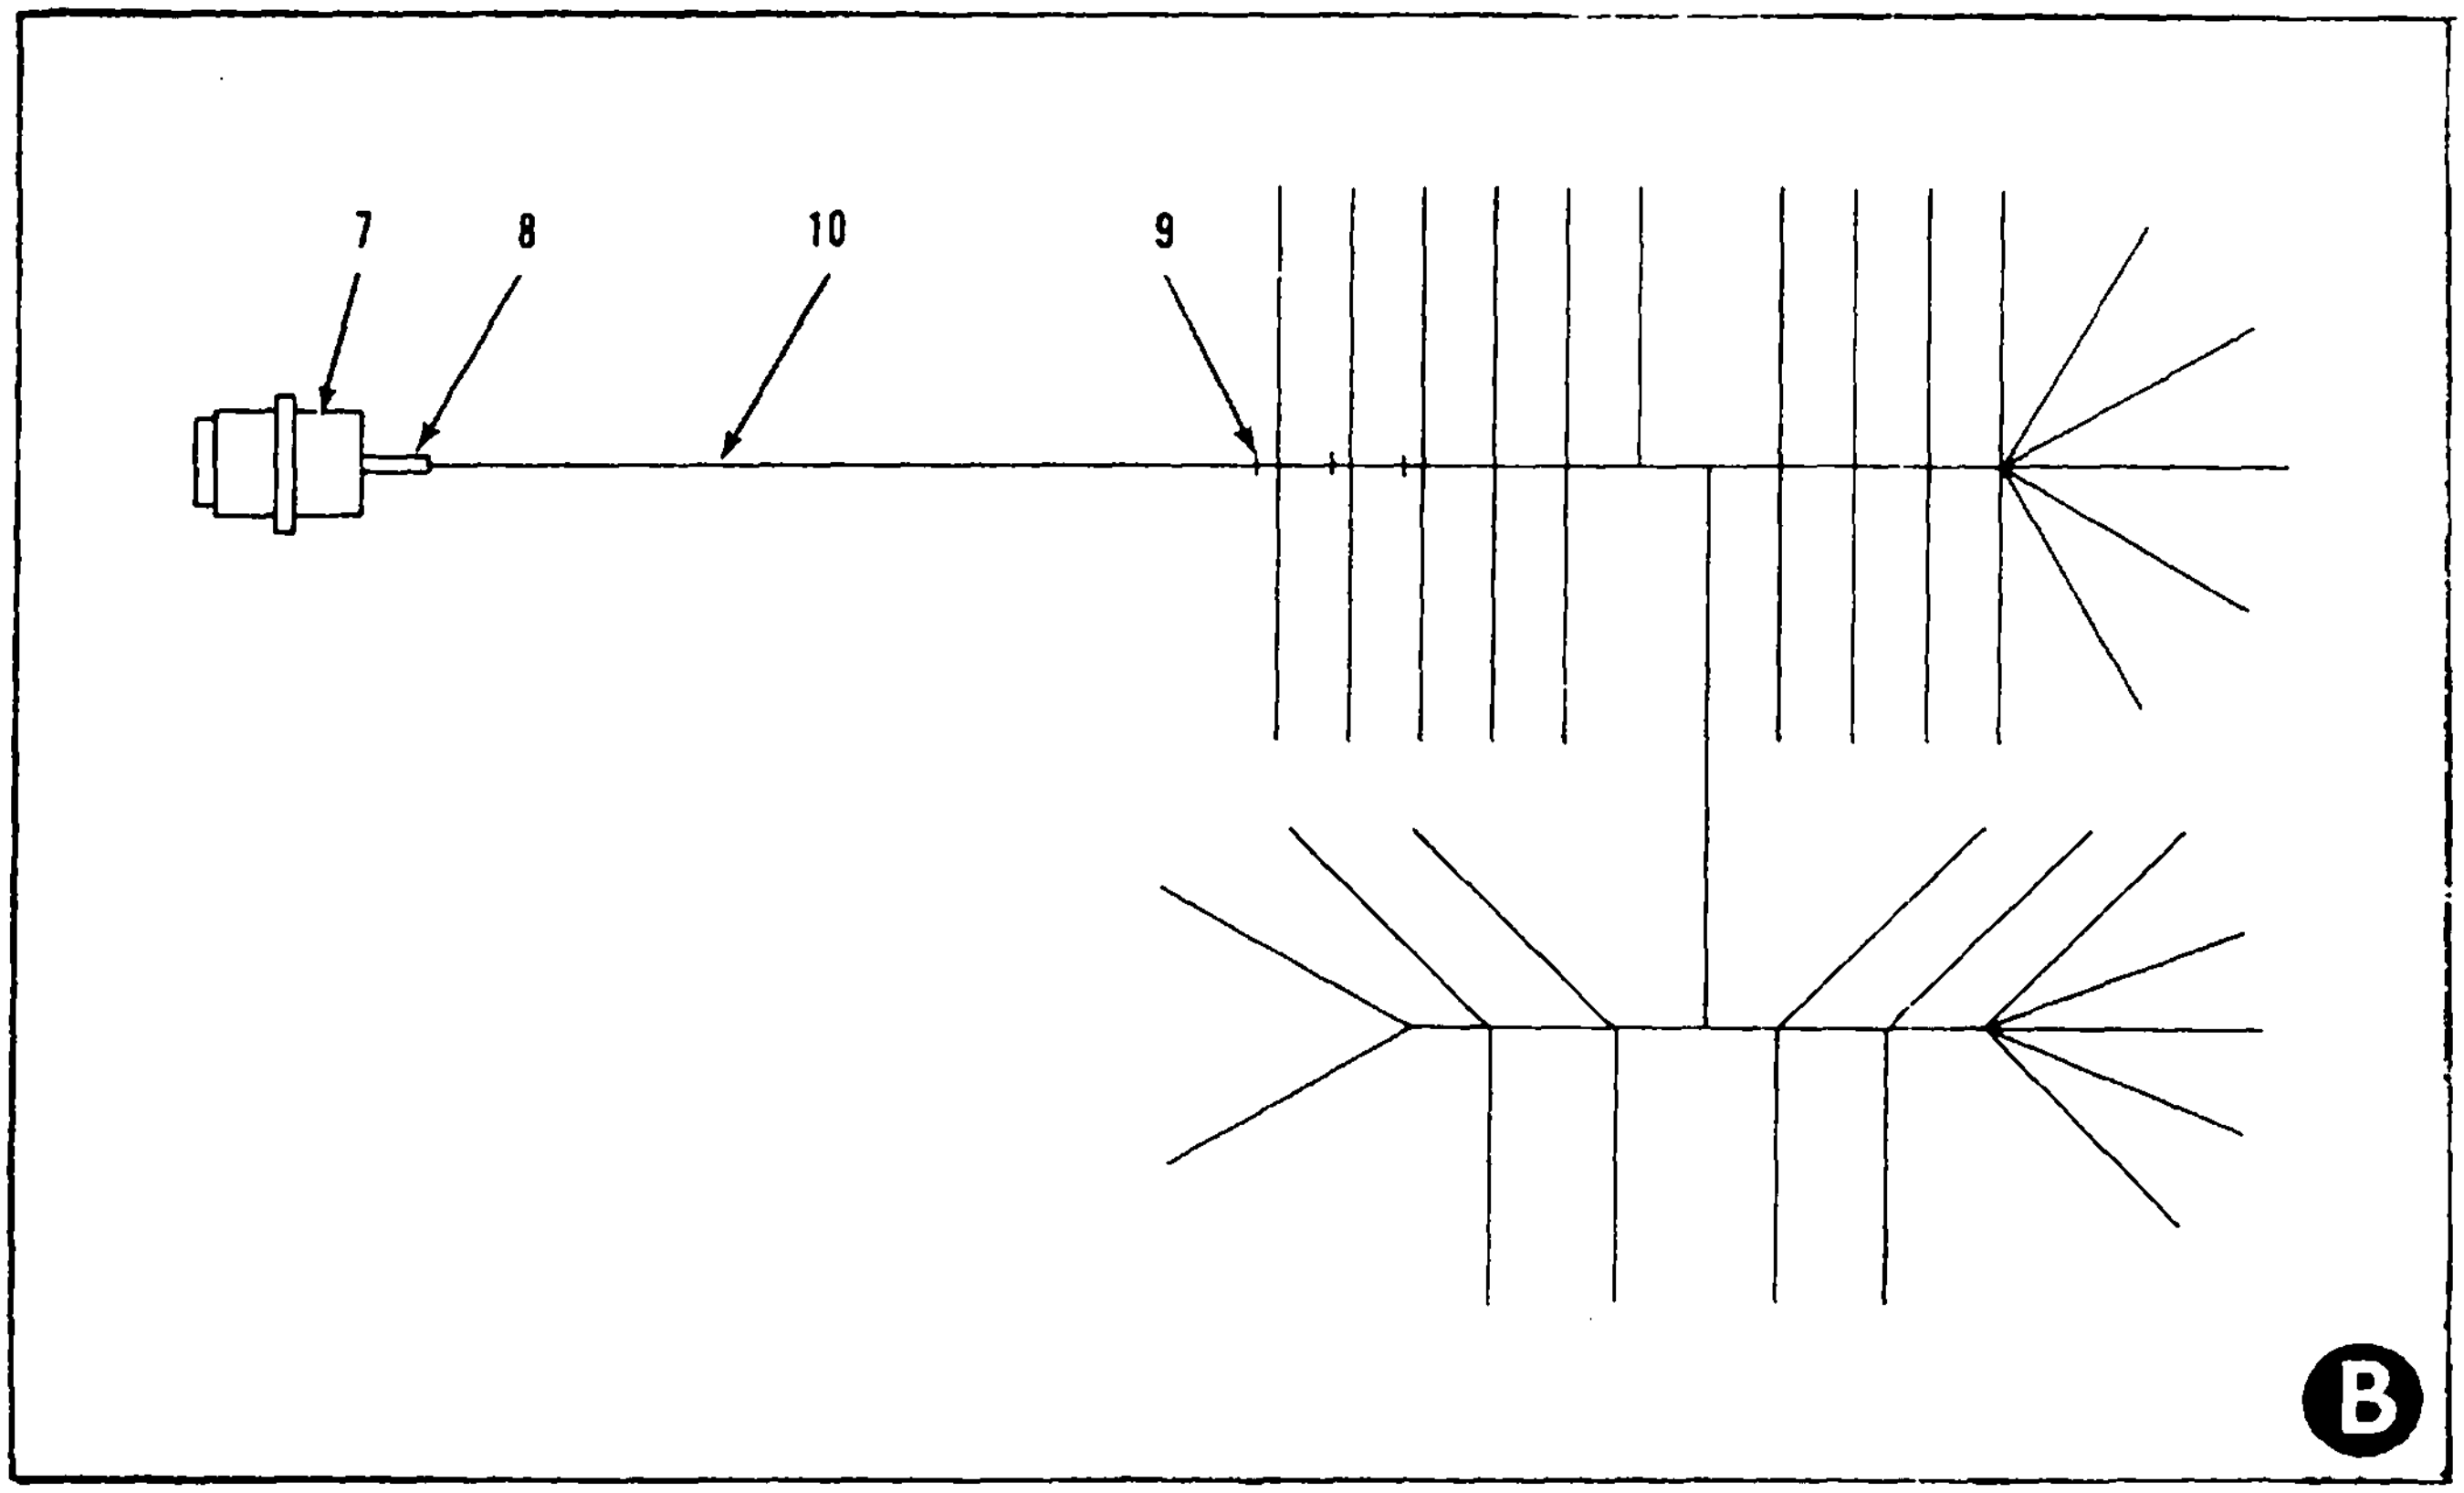

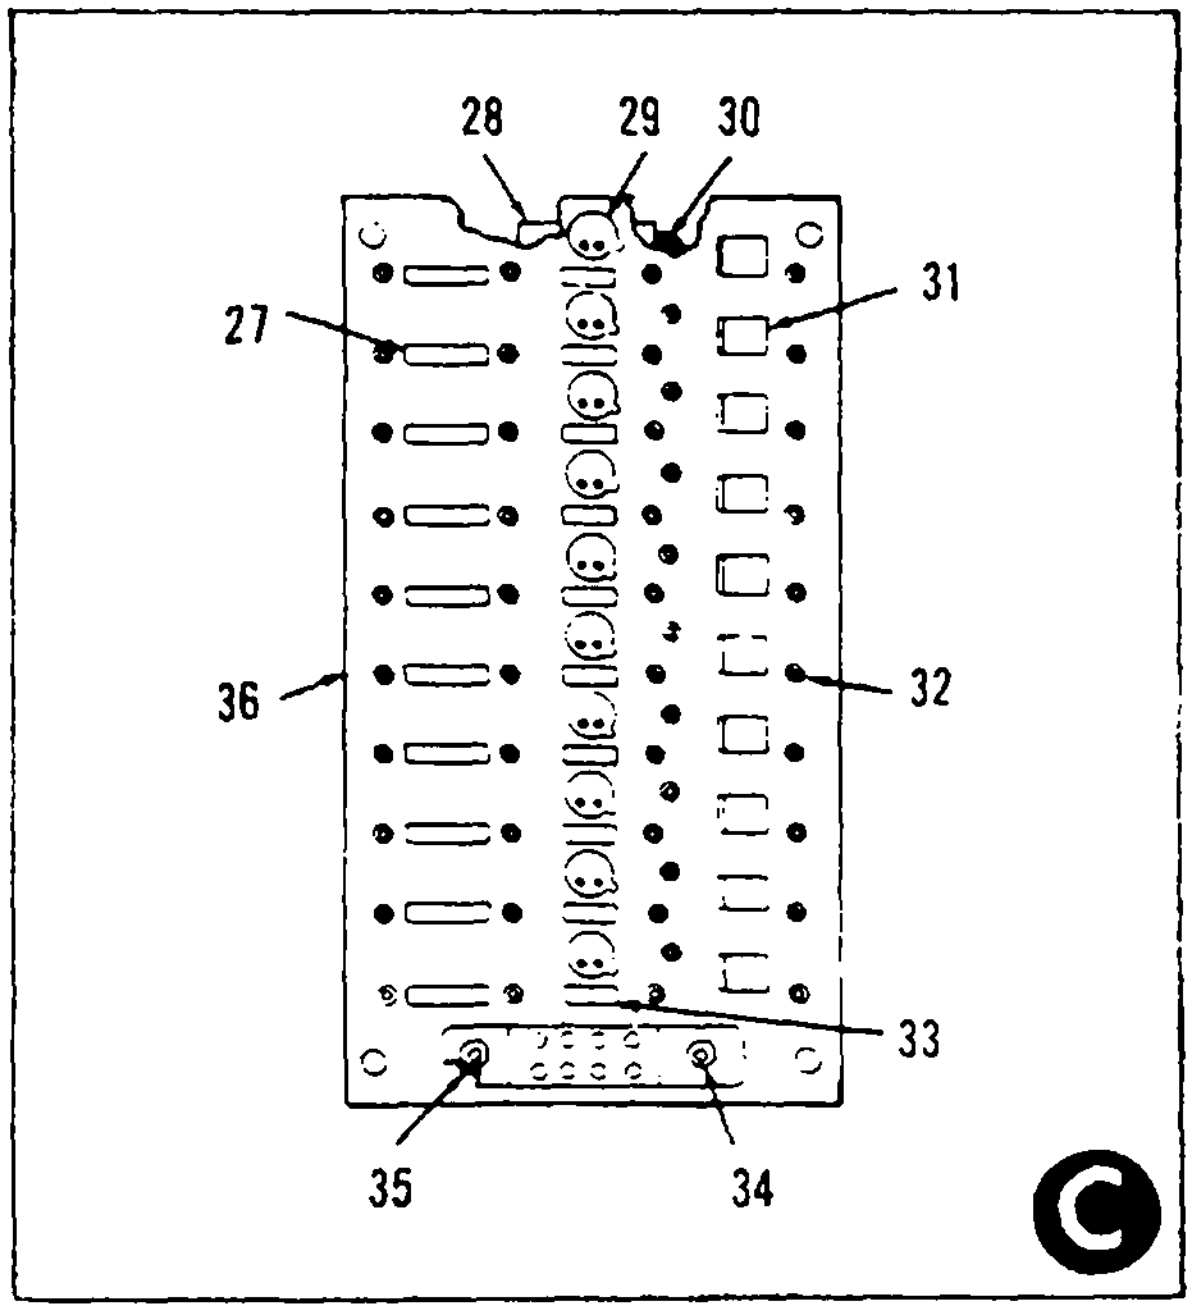
28
29
30
31
27
36
32
33
35
34
C

Figure 18. Fault Indicator Assembly and Related Parts (Sheet 2 of 2)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 03 - SET CONTROLS AND INSTRUMENTATION | | | | |
| 19 | | | | | | | | | CONTROL CUBICLE ASSEMBLY | | | | |
| 19 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0501 | SCREW, HEX HEAD<br>MS90725-5 96906 | | EA | 11 | 114 |
| 19 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK 96906<br>MS35338-44 | | EA | 14 | 154 |
| 19 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-225-3839 | SCREW, HEX HEAD<br>MS90725-8 96906 | | EA | 3 | 35 |
| 19 | 4 | AOO | AOO | AOO | AOO | | | | CONTROL CUBICLE<br>69-590-6 30554 | | EA | 1 | 1 |
| 19 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .050 | 6625-00-004-8066 | METER CURRENT, M8<br>69-597 30554<br>267842 65092 | | EA | 1 | 1 |
| 19 | 6 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .050 | 6625-00-869-3144 | METER, VOLTAGE, M9<br>69-599 30554<br>254013 65092 | | EA | 1 | 1 |
| 19 | 7 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .050 | 6625-00-003-0975 | METER, KILOWATT, M7<br>70-4012 30554<br>260935 65092 | | EA | 1 | 1 |
| 19 | 8 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .05 | 6625-00-003-0971 | METER, FREQUENCY, AND TRANSDUCER, MATCHED SET M6 AND A2<br>69-595 30554<br>268420 65092 | | EA | 1 | 1 |
| 19 | 9 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .060 | 5930-00-214-0431 | SWITCH VOLT - AMP XFR, S8<br>70-4016 30554<br>3194LT 82121 | | EA | 1 | 1 |
| 19 | 10 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .050 | 6685-00-857-0662 | INDICATOR, TEMPERATURE, M2<br>69-577 30554<br>505-BE 57733 | | EA | 1 | 1 |
| 19 | 11 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .050 | 6620-00-005-4879 | INDICATOR, OIL PRESSURE, M1<br>69-576-2 30554<br>505-BD 57733 | | EA | 1 | 1 |
| 19 | 12 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .050 | 6680-00-052-3544 | INDICATOR, LIQUID QUANTITY M3<br>69-575 30554<br>505-BC 57733 | | EA | 1 | 1 |
| 19 | 13 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .050 | 6625-00-869-3141 | AMMETER, DC, M4<br>69-574 30554<br>252633 65092 | | EA | 1 | 1 |
| 19 | 14 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .050 | 6645-00-089-8842 | METER, TIME TOTAL, MS<br>730507 30554<br>15001 74400 | | EA | 1 | 1 |
| 19 | 15 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .040 | 6210-00-935-6919 | LIGHT, PANEL, DS1, DS2, DS3<br>69-593 30554<br>47-0901-2900-201 72619 | | EA | 3 | 3 |
| 19 | 16 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .230 | 6240-00-155-7878 | LAMP, INCANDESCENT<br>69-594 30554<br>656-30V 08805 | | EA | 3 | 3 |
| 19 | 17 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5355-00-916-2060 | KNOB, CONTROL<br>MS91528-2P4B 96906 | | EA | 1 | 1 |
| 19 | 18 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .050 | 5905-00-264-7368 | RHEOSTAT, R2<br>69-548 30554<br>RP101FD251KK 44655 | | EA | 1 | 1 |
| 19 | 19 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .040 | 6210-00-686-4999 | LIGHT ASSY, DS6, DS7<br>MS25331-2 96906 | | EA | 2 | 2 |

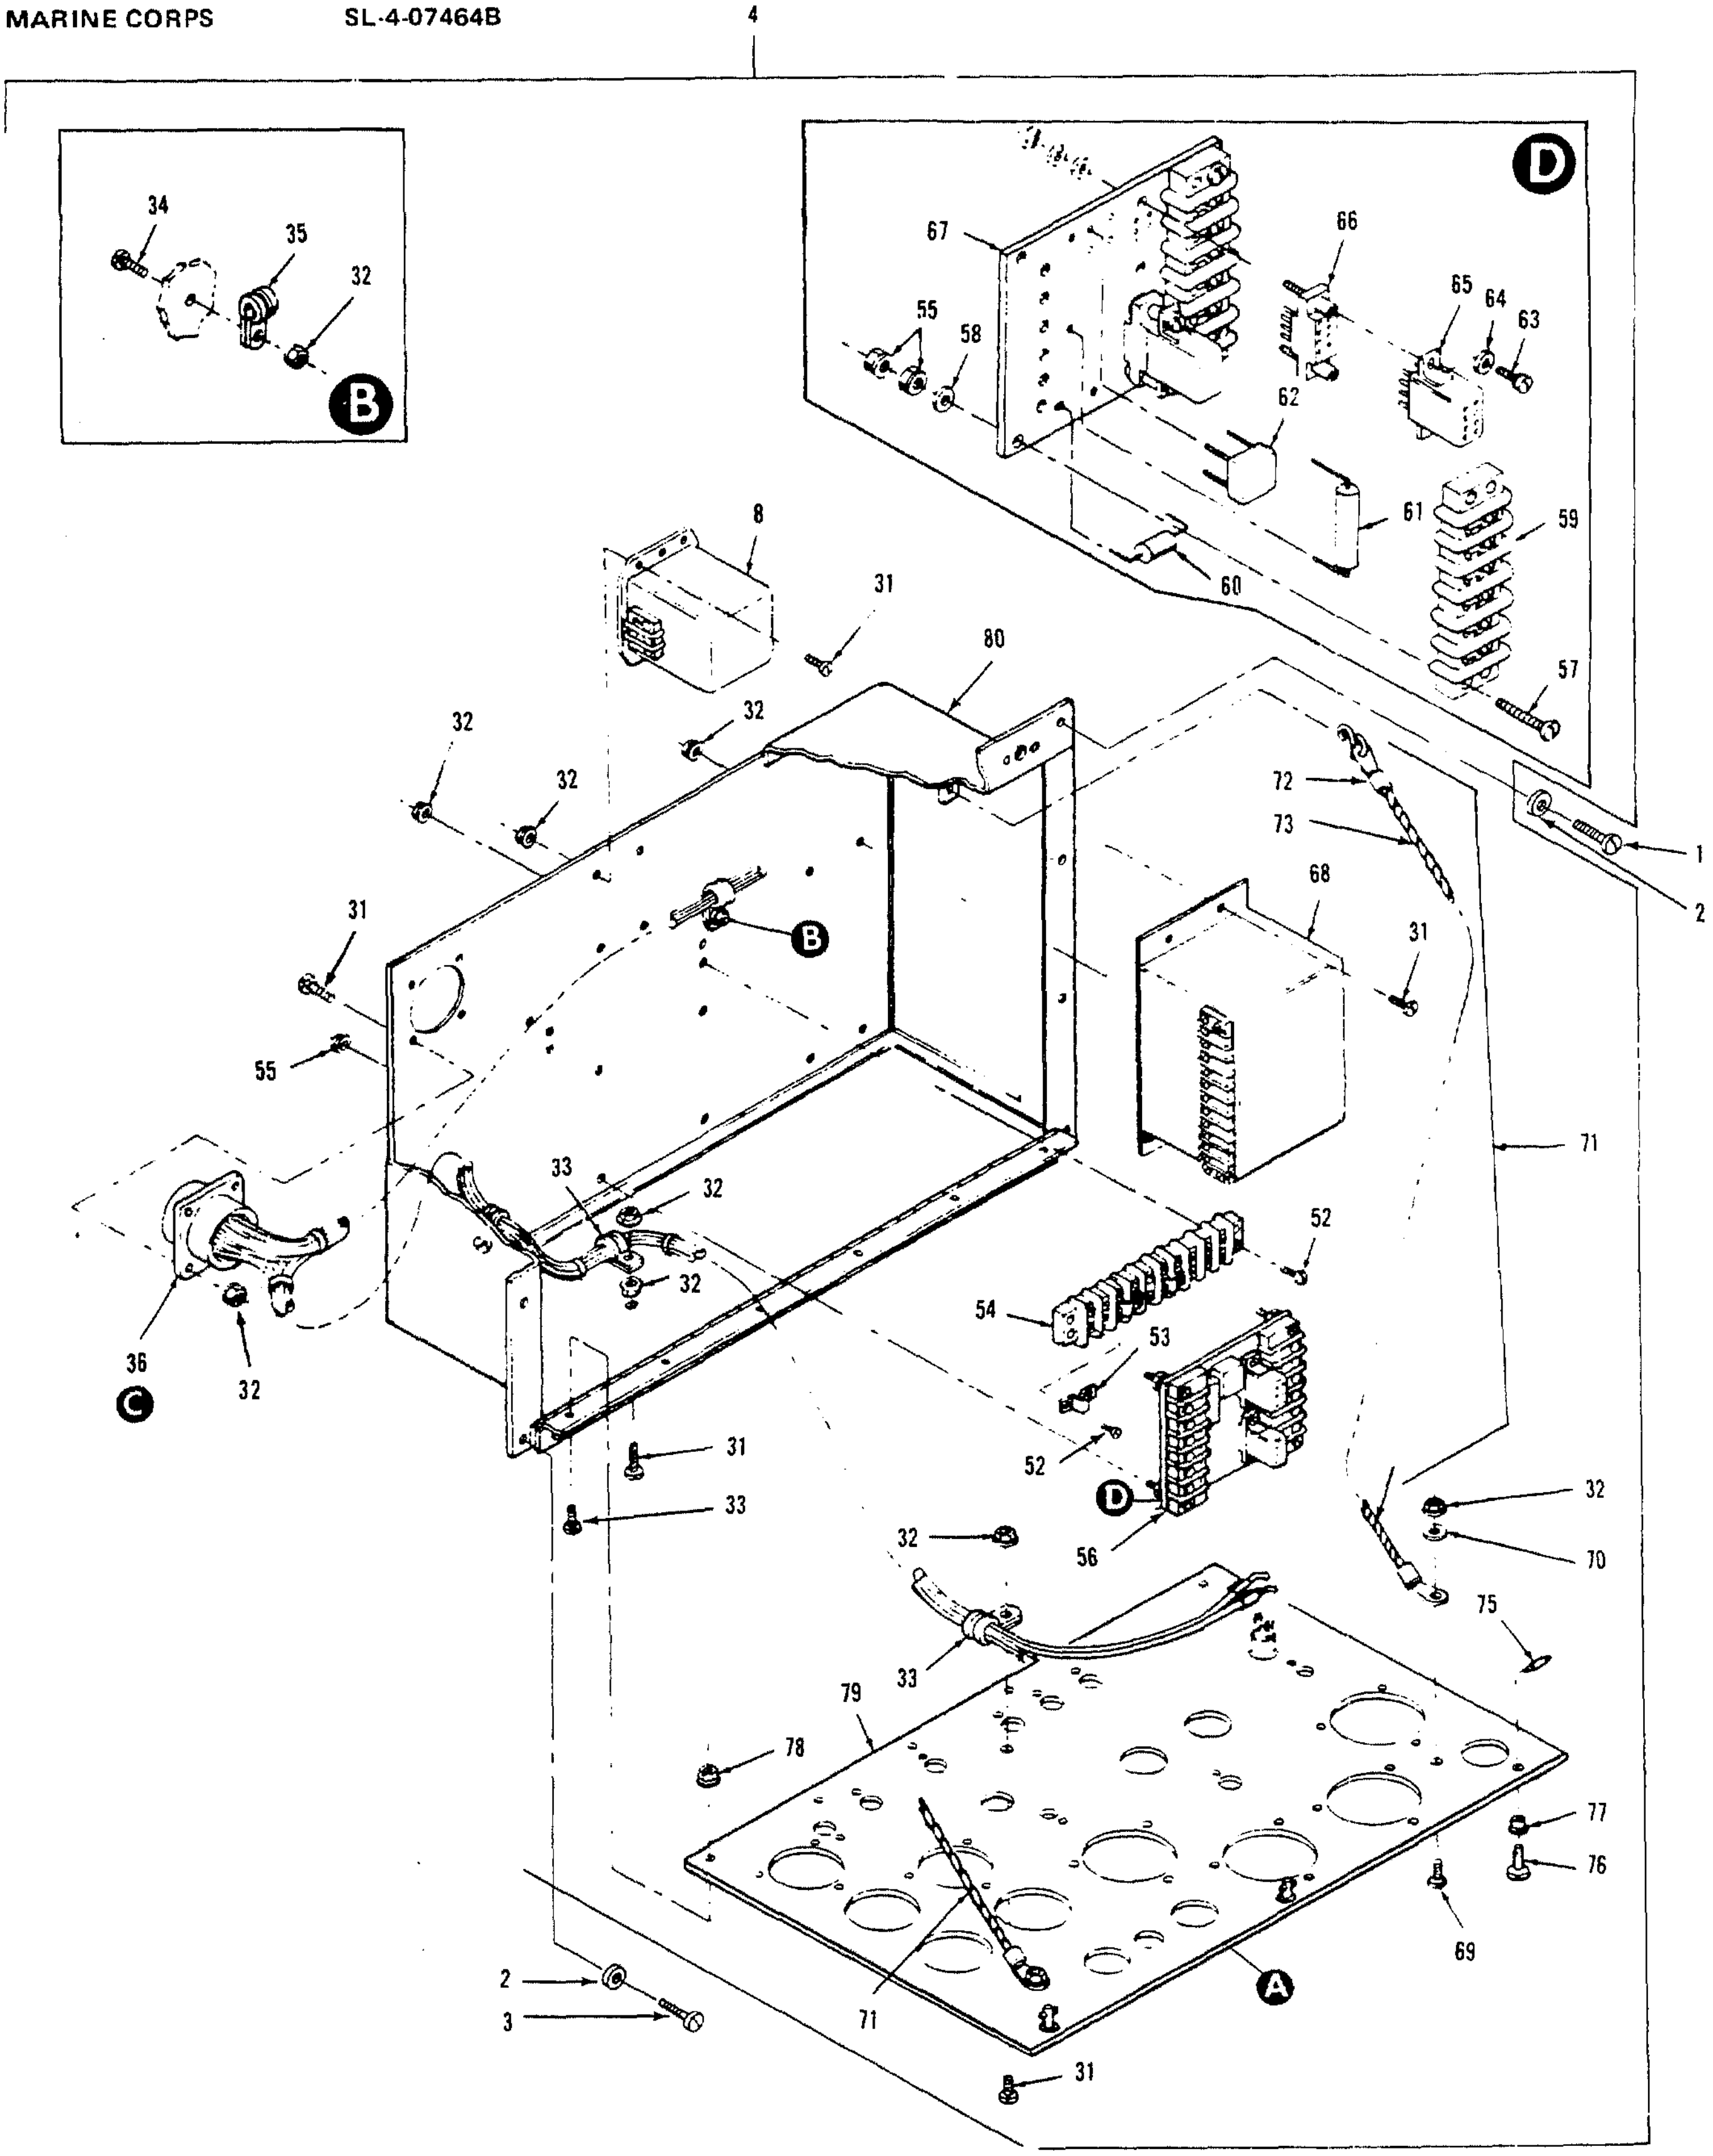
4
D
34
35
32
B
67
66
65
64
63
55
58
62
8
61
59
60
31
80
57
32
32
32
72
1
73
2
68
31
31
B
55
71
33
32
52
32
54
53
36
C
32
31
52
D
32
33
32
56
70
75
33
79
78
77
76
69
2
3
A
71
31

Figure 19. Control Cubicle Assembly (Sheet 1 of 3)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 03 - SET CONTROLS AND INSTRUMENTATION - CONTINUED | | | | |
| 19 | | | | | | | | | CONTROL CUBICLE ASSEMBLY - CONTINUED | | | | |
| 19 | 20 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .230 | 6240-00-155-8714 | LAMP, INCANDESCENT<br>MS25231-313 | 96906 | EA | 3 | 3 |
| 19 | 21 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5930-00-615-6731 | GUARD, SWITCH<br>MS25224-1 | 96906 | EA | 1 | 1 |
| 19 | 22 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .060 | 5930-00-655-1581 | SWITCH, TOGGLE, S6 AND S7<br>MS25068-23 | 96906 | EA | 2 | 2 |
| 19 | 23 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .040 | 6210-00-831-8247 | LIGHT, PANEL, DS4, DS5<br>69-549<br>51-3502-0137-203 | 30554<br>72619 | EA | 2 | 2 |
| 19 | 24 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .023 | 6240-00-143-3060 | LAMP, INDICATING<br>MS15567-1 | 96906 | EA | 2 | 2 |
| 19 | 25 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .060 | 5930-00-655-1582 | SWITCH, TOGGLE, S5<br>MS35059-23 | 96906 | EA | 1 | 1 |
| 19 | 26 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .060 | 5930-00-655-1514 | SWITCH, TOGGLE, S4<br>MS35058-22 | 96906 | EA | 1 | 1 |
| 19 | 27 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .040 | 6625-01-108-2600 | LIGHT ASSY, DS8<br>MS253314 | 96906 | EA | 1 | 1 |
| 19 | 28 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .060 | 5930-00-044-3518 | SWITCH, TOGGLE, S3<br>MS25201-6 | 96906 | EA | 1 | 1 |
| 19 | 29 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .060 | 5930-00-782-8590 | SWITCH, TOGGLE, S2<br>69-572<br>8906K1359 | 30554<br>27192 | EA | 1 | 1 |
| 19 | 30 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .060 | 5930-00-655-1522 | SWITCH, TOGGLE, S1<br>MS35058-30 | 96906 | EA | 1 | 1 |
| 19 | 31 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-984-6193 | SCREW<br>MS35206-245 | 96906 | EA | 9 | 13 |
| 19 | 32 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-052-3632 | NUT AND WASHER<br>69-561-3<br>511-081800-00 | 30554<br>78189 | EA | 14 | 73 |
| 19 | 33 | PAOZZ | PAOZZ | PAOZZ | PAFZZ | D | .008 | 5340-00-050-2740 | CLAMP, CABLE<br>MS21333-75 | 96906 | EA | 3 | 3 |
| 19 | 34 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-984-4988 | SCREW<br>MS35206-25 | 96906 | EA | 7 | 7 |
| 19 | 35 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-057-2904 | CLAMP, CABLE<br>MS21333-71 | 96906 | EA | 1 | 1 |
| 19 | 36 | AOO | AOO | AOO | AOO | | | | WIRING HARNESS, TACTICAL<br>69-677-2 | 30554 | EA | 1 | 1 |
| 19 | 37 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-074-2072 | STRAP, CABLE<br>MS3367-1-9 | 96906 | EA | 90 | 344 |
| 19 | 38 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-204-8966 | LUG, TERMINAL<br>MS25036-102 | 96906 | EA | 62 | 80 |
| 19 | 39 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-557-1629 | LUG, TERMINAL<br>MS25036-149 | 96906 | EA | 18 | 21 |
| 19 | 40 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4774 | LUG, TERMINAL<br>MS25036-153 | 96906 | EA | 19 | 31 |
| 19 | 41 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-283-5280 | LUG, TERMINAL<br>MS25036-106 | 96906 | EA | 40 | 268 |
| 19 | 42 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-113-8184 | LUG, TERMINAL<br>MS25036-150 | 96906 | EA | 9 | 9 |

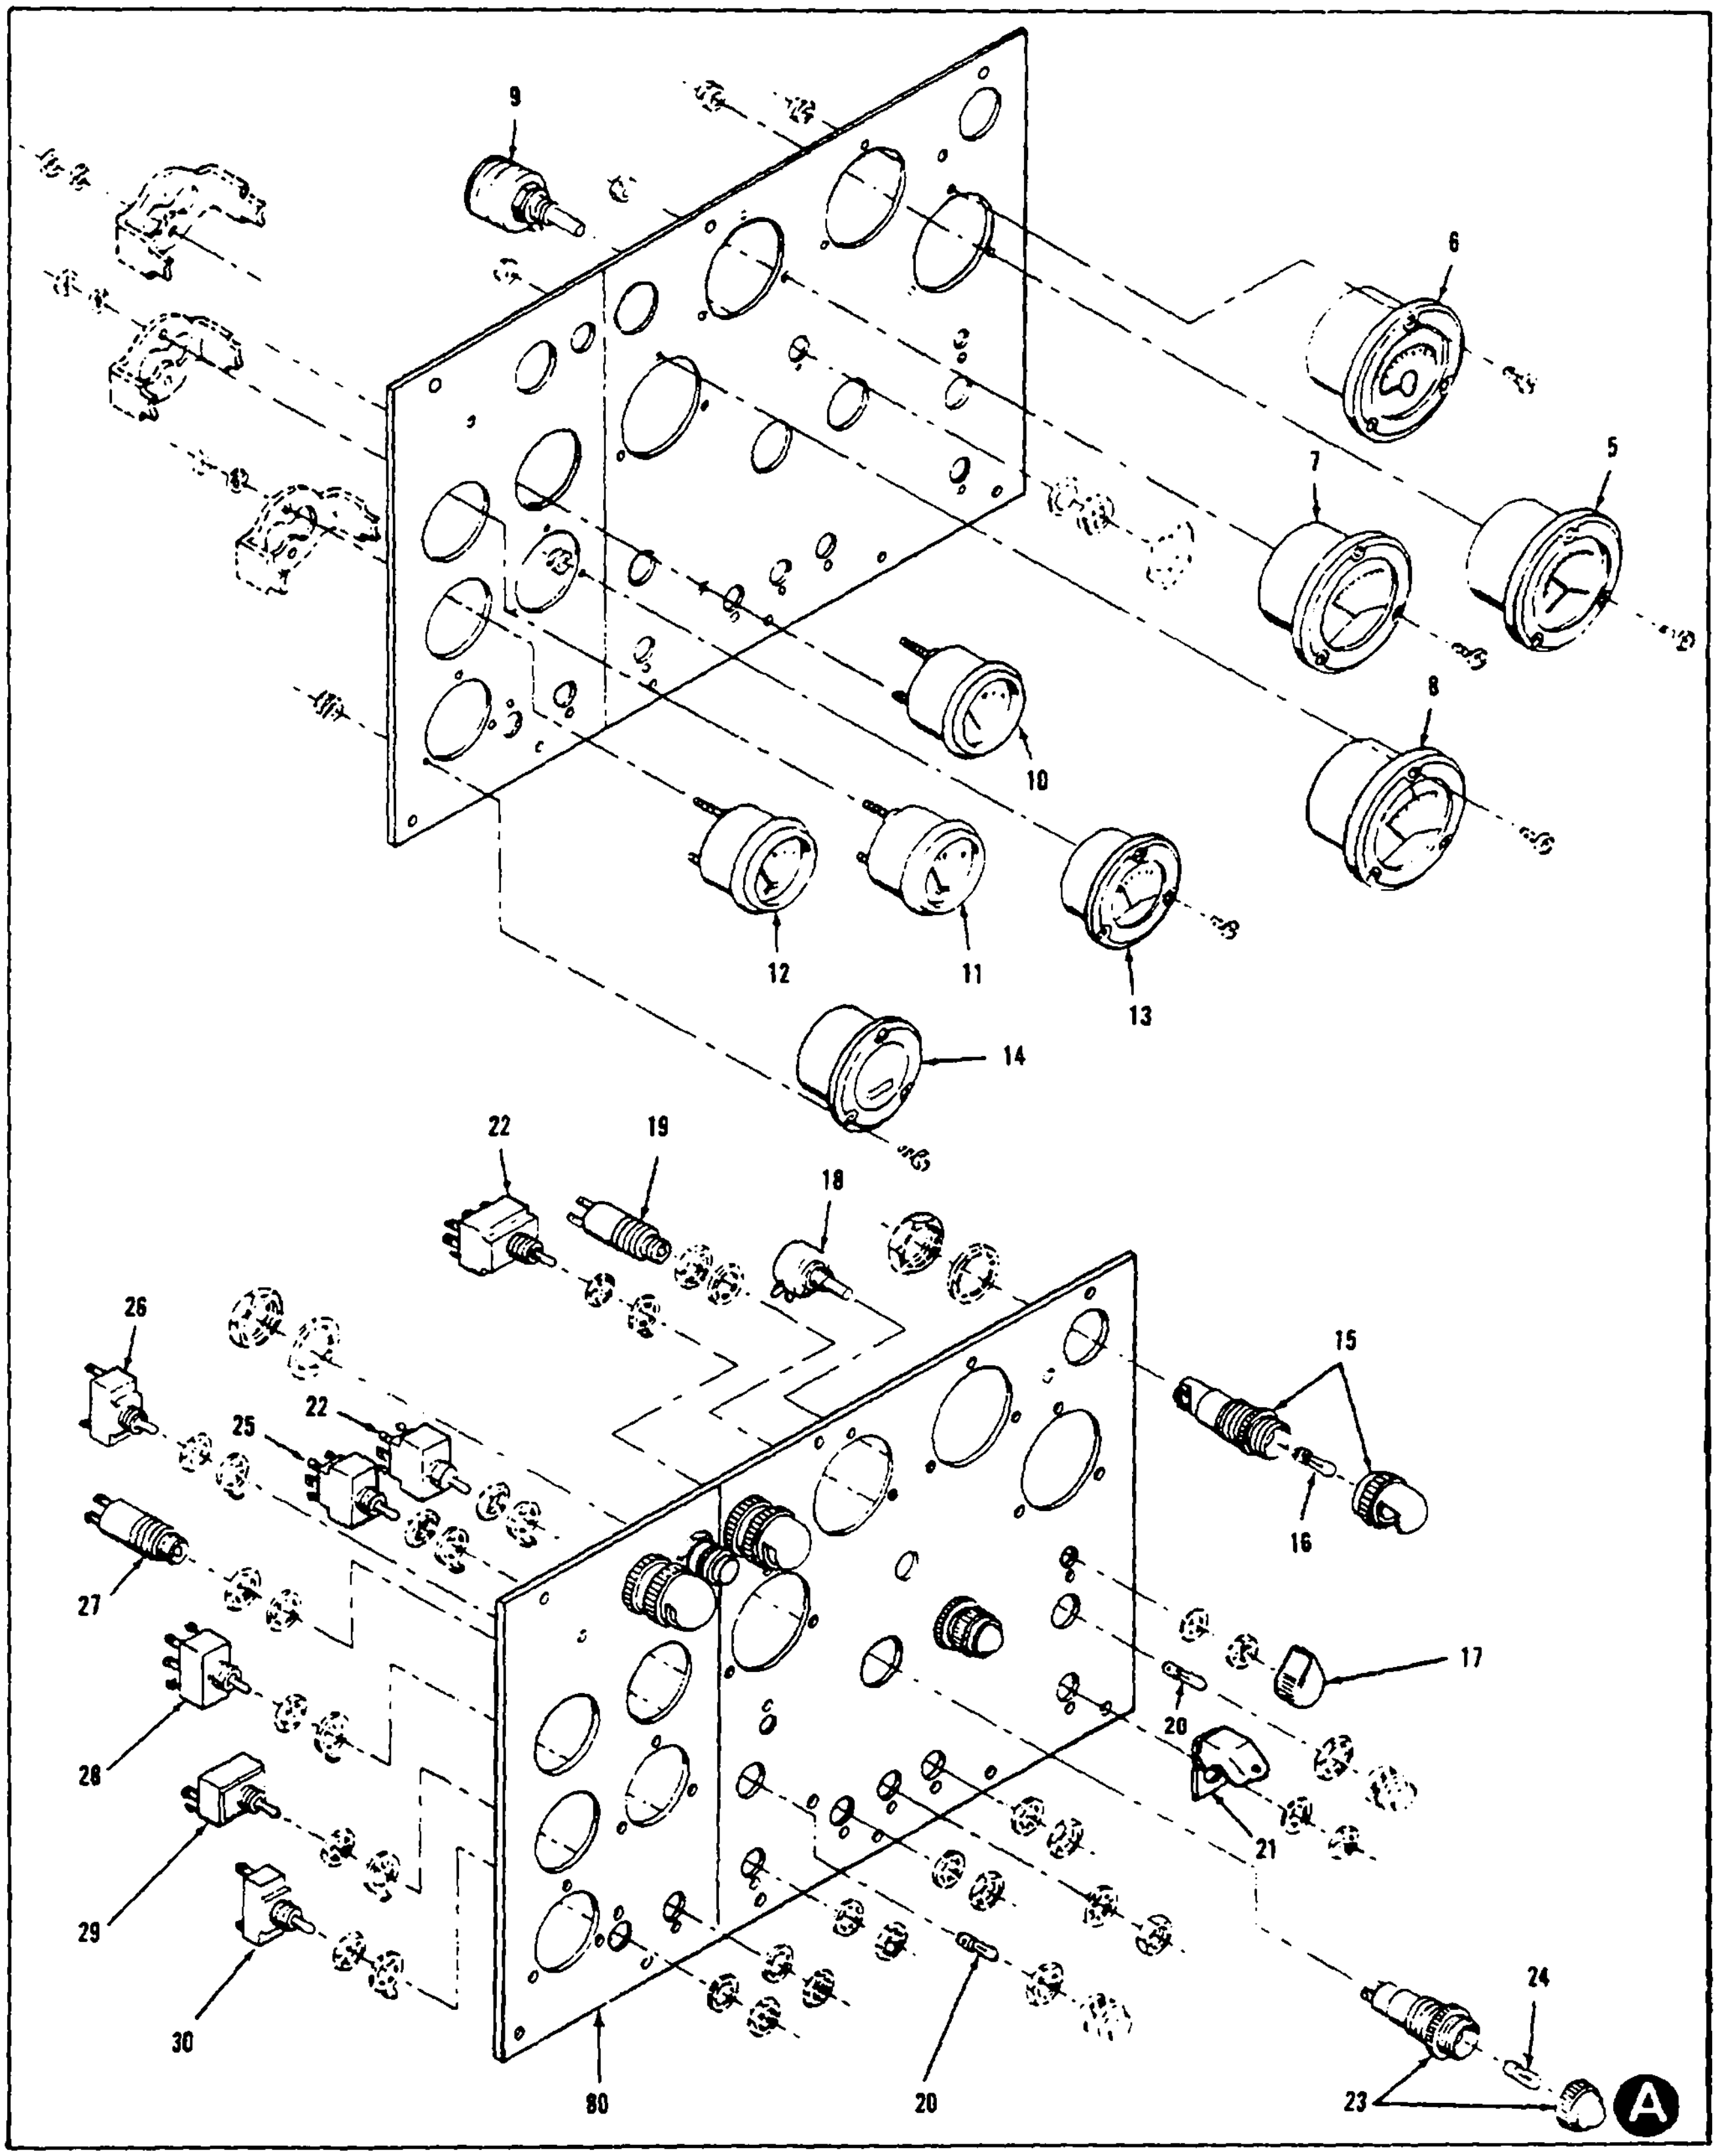
9
6
5
7
8
10
12
11
13
14
22
19
18
26
15
22
25
16
27
17
28
20
21
29
30
24
80
20
23
A

Figure 19. Control Cubicle Assembly (Sheet 2 of 3)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO. | (1) ILLUSTRATION b ITEM NO. | (2) SMR CODE a ARMY | (2) SMR CODE b AIR FORCE | (2) SMR CODE c NAVY | (2) SMR CODE d USMC | (3) USMC a SSI | (3) USMC b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | (5) USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 03 - SET CONTROLS AND INSTRUMENTATION - CONTINUED | | | | |
| 19 | | | | | | | | | CONTROL CUBICLE ASSEMBLY - CONTINUED | | | | |
| 19 | 43 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4780 | LUG, TERMINAL<br>MS25036-108 96906 | | EA | 3 | 35 |
| 19 | 44 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-230-0515 | LUG, TERMINAL 96906<br>MS25036-154 | | EA | 4 | 10 |
| 19 | 45 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4771 | LUG, TERMINAL<br>MS25036-103 96906 | | EA | 8 | 8 |
| 19 | 46 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-844 -4467 | CONNECTOR, RECEPTACLE, J1<br>69-661-14 30554<br>MS3102R36-7P 96906 | | EA | 1 | 2 |
| 19 | 47 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-954-1622 | SLEEVING, INSULATION<br>M23053/5-105-0 81349 | | FT | 80 | 84 |
| 19 | 48 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6602 | WIRE, ELECTRICAL<br>MS086/2-18-9 81349 | | FT | 150 | 150 |
| 19 | 49 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 81349 | | FT | 80 | 1178 |
| 19 | 50 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-815-1295 | SLEEVING, INSULATION<br>M23053/5-106-0 81349 | | FT | 150 | 150 |
| 19 | 51 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-954-1622 | SLEEVING, INSULATION<br>M23053/5-105-0 81349 | | FT | 4 | 84 |
| 19 | 52 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | | SCREW<br>MS35206-247 96906 | | EA | 2 | 2 |
| 19 | 53 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 6150-00-665-7230 | JUMPER, TERMINAL<br>602J 83330 | | EA | 1 | 3 |
| 19 | 54 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | | 5940-00-983-6105 | TERMINAL BOARD<br>MIL-T-55164/3 81349 | | EA | 1 | 1 |
| 19 | 55 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-094-3421 | NUT AND WASHER<br>69-561-4 30554<br>511-101800-00 78189 | | EA | 12 | 95 |
| 19 | 56 | PAFFF | PAOFF | PAFFF | PAFFF | | .125 | 6110-00-202-2888 | RELAY ASSY, CONTROL PANEL<br>69-765 30554 | | EA | 1 | 1 |
| 19 | 57 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-984-6215 | SCREW<br>MS35206-268 96906 | | EA | 4 | 4 |
| 19 | 58 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-8546 | WASHER, FLAT<br>MS27183-8 96906 | | EA | 4 | 26 |
| 19 | 59 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | | 5940-00-088-6357 | TERMINAL BOARD<br>42TB6 81349 | | EA | 2 | 2 |
| 19 | 60 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5910-00-483-4387 | CAPACITOR, C2<br>M39006/02-1268 81349 | | EA | 2 | 2 |
| 19 | 61 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-357-3093 | RESISTOR, FIXED, R10<br>RWR78S1501FM 81349 | | EA | 2 | 2 |
| 19 | 62 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5961-00-135-6168 | RECTIFIER, BRIDGE, CR1<br>69-739 30554<br>B-598-40 06288 | | EA | 2 | 2 |
| 19 | 63 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-984-4982 | SCREW<br>MS35206-225 96906 | | EA | 4 | 12 |
| 19 | 64 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-045-4007 | WASHER, LOCK<br>MS35338-41 96906 | | EA | 4 | 22 |
| 19 | 65 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5945-00-435-1833 | RELAY, K1, K6<br>M5757/23-003 81349 | | EA | 2 | 8 |

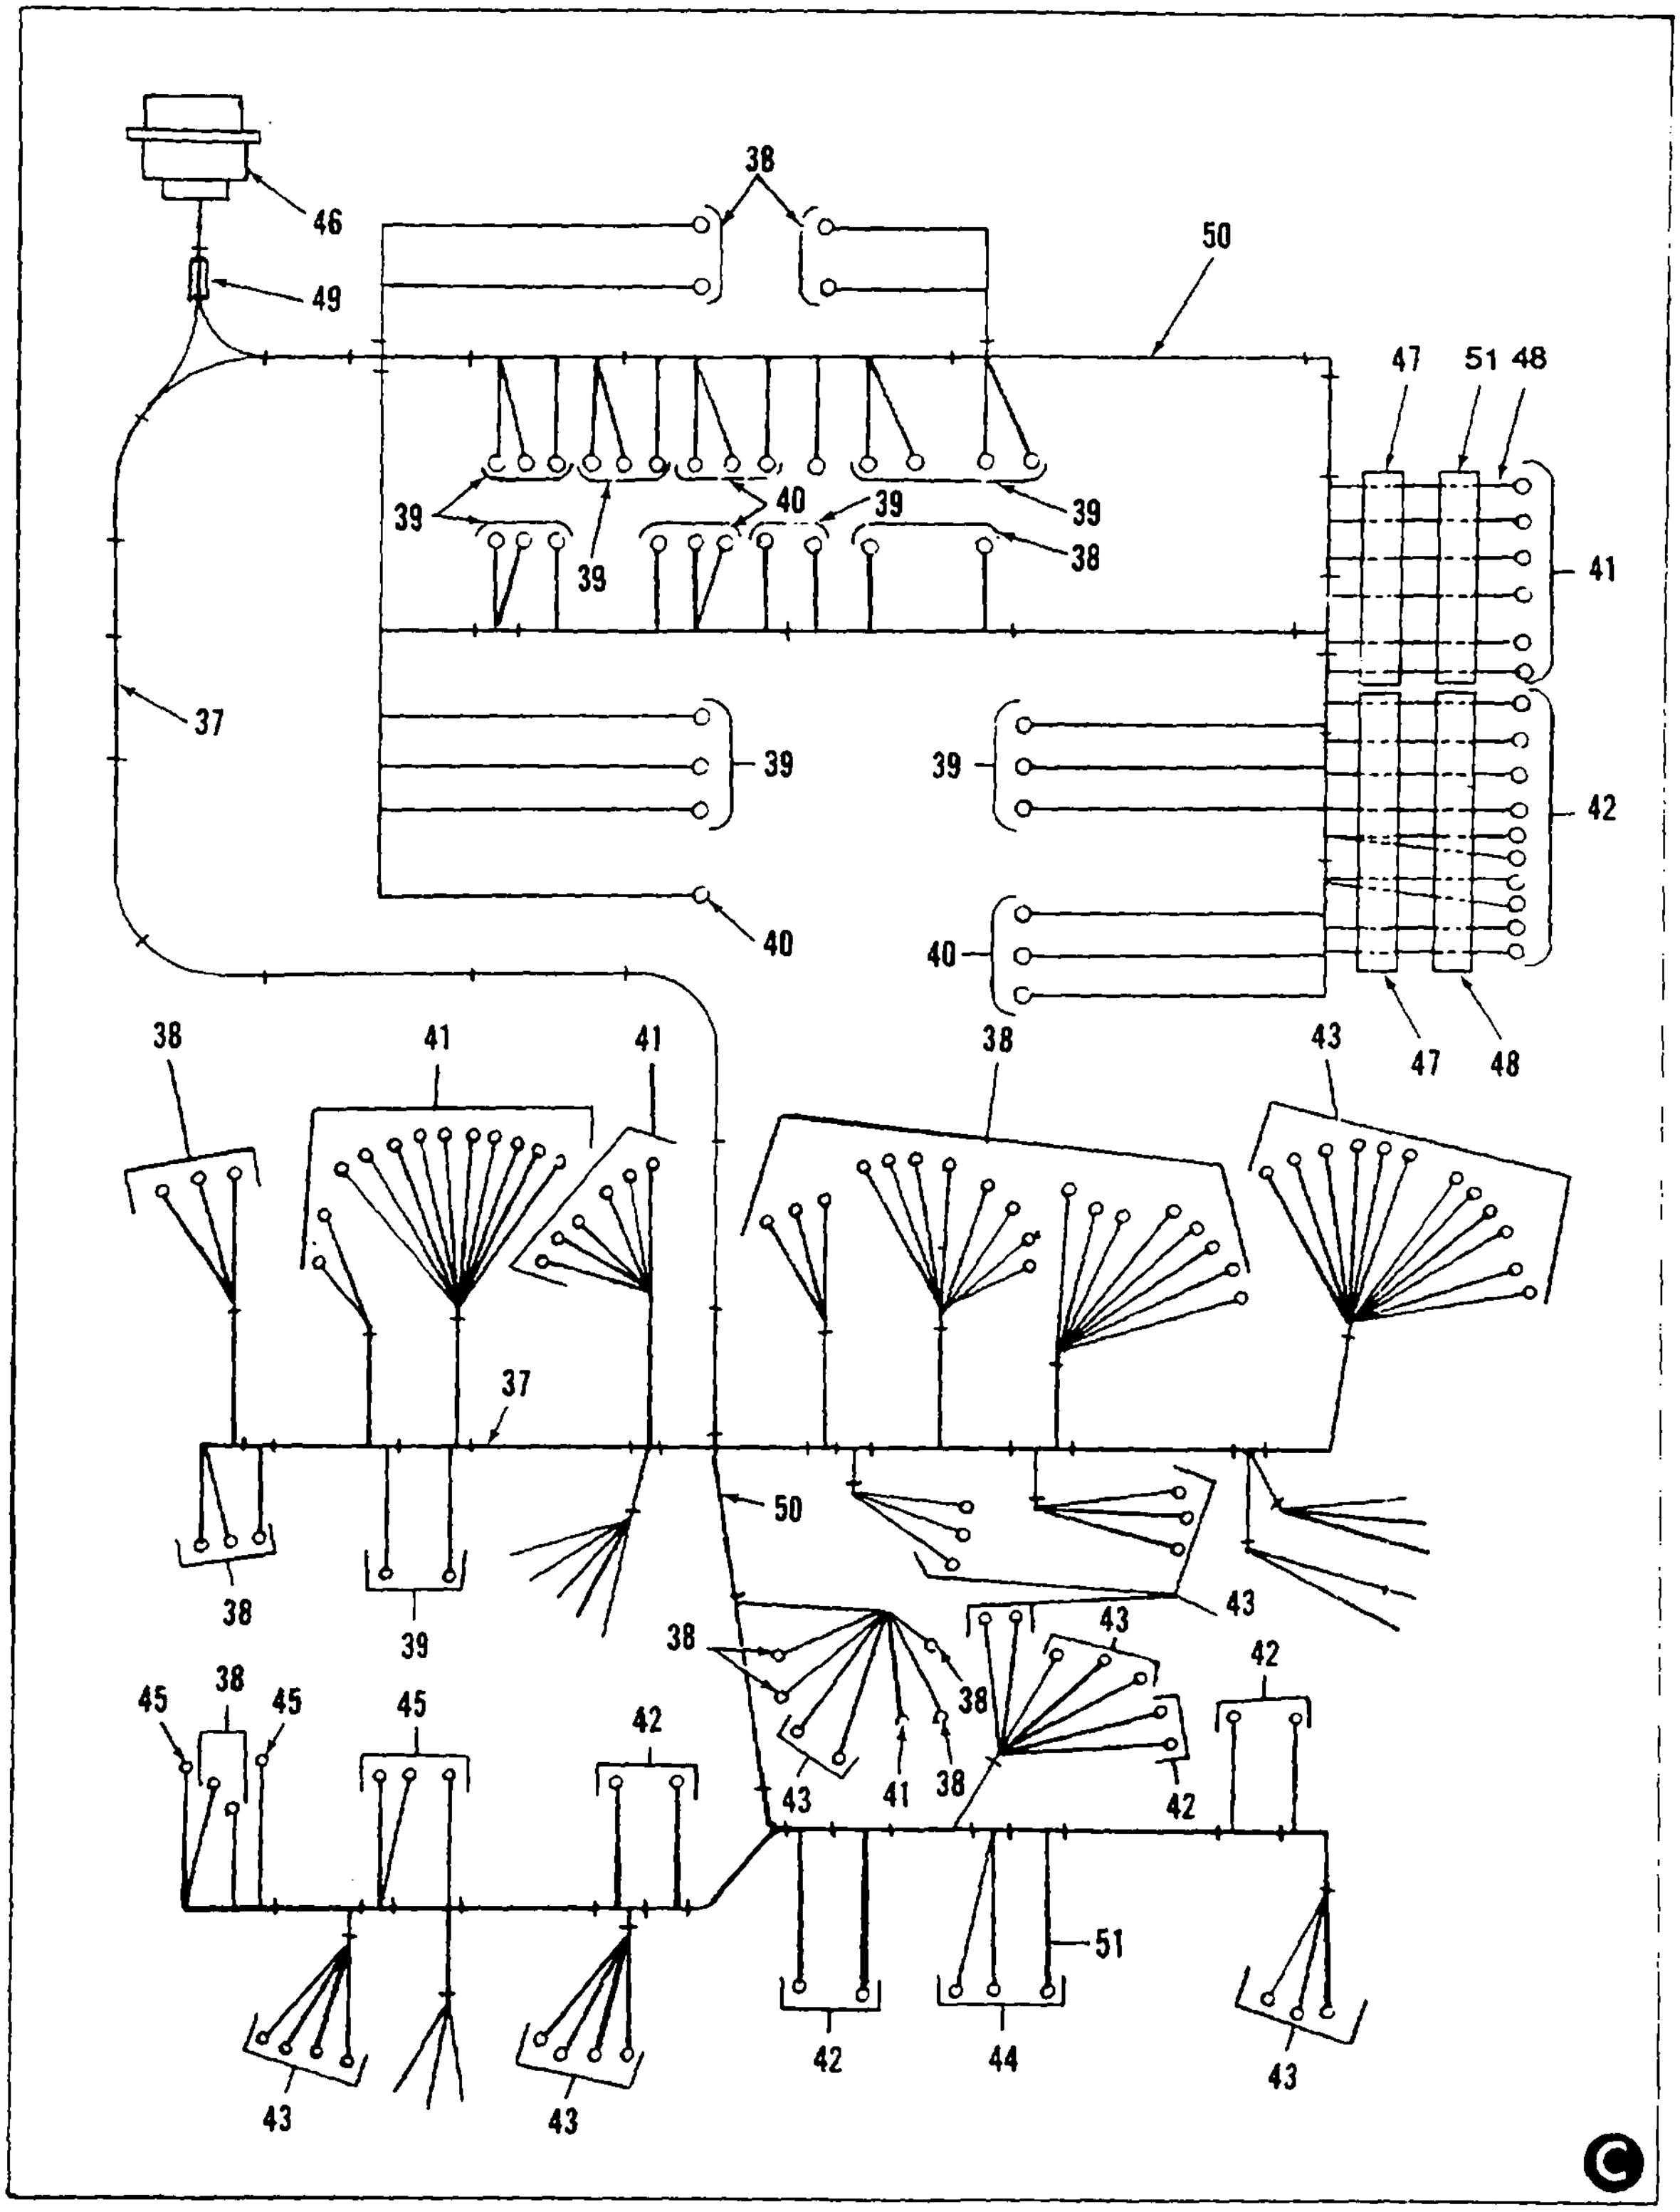
38
46
49
50
47
51
48
39
40
39
38
39
39
41
37
39
39
42
40
40
47
48
38
41
41
38
43
37
50
38
39
43
38
43
42
45
38
45
45
42
38
43
41
38
42
51
43
43
42
44
43
C

Figure 19. Control Cubicle Assembly (Sheet 3 of 3)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE / USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 03 - SET CONTROLS AND INSTRUMENTATION - CONTINUED | | | |
| 19 | | | | | | | | | CONTROL CUBICLE ASSEMBLY - CONTINUED | | | |
| 19 | 66 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5935-00-206-1400 | SOCKET, RELAY<br>69658 30554<br>VB8/FA11-80 05574 | EA | 2 | 5 |
| 19 | 67 | XA | XA | XA | XA | | | | PRINTED CIRCUIT BOARD<br>69-764 30554 | EA | 1 | 1 |
| 19 | 68 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | | .050 | 6625-00-003-0973 | CONVERTER, THERMOWATT<br>69-589-1 30554<br>21820A 12670 | EA | 1 | 1 |
| 19 | 69 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-954-5629 | SCREW<br>MS35198-42 96906 | EA | 2 | 4 |
| 19 | 70 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-809-8544 | WASHERS FLAT<br>MS27183-7 96906 | EA | 2 | 28 |
| 19 | 71 | AOOZZ | AOOZZ | AFOZZ | AFOZZ | | | | HOLDER, DOOR<br>69-763 30554 | EA | 2 | 2 |
| 19 | 72 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 4030-00-780-9350 | HOOK, CHAIN-S<br>MS87006-13 96906 | EA | 2 | 3 |
| 19 | 73 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-115-2677 | LUG, TERMINAL<br>MS20659-144 96906 | EA | 4 | 6 |
| 19 | 74 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .070 | 4020-00-263-3483 | ROPE, NYLON, TWISTED<br>MIL-R-17343 81349 | FT | 4 | 4 |
| 19 | 75 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5315-00-449-2945 | PIN, CROSS<br>69-695 30554<br>99836 76530 | EA | 3 | 8 |
| 19 | 76 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5325-00-432-9902 | STUD<br>69-694-6 30554<br>98292-2-250 76530 | EA | 3 | 3 |
| 19 | 77 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .050 | 5325-00-099-8827 | GROMMET<br>69-766 30554<br>295901-2 76530 | EA | 3 | 3 |
| 19 | 78 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-063-7360 | NUT AND WASHER<br>69-561-2 30554<br>511-061800-00 78189 | EA | 6 | 73 |
| 19 | 79 | XBOZZ | XBOZZ | XBFZZ | XBFZZ | | | | DOOR, CONTROL BOX<br>69-592-2 30554 | EA | 1 | 1 |
| 19 | 80 | XBOZZ | XBOZZ | XBFZZ | XBFZZ | | | | CONTROL BOX<br>69-591 30554 | EA | 1 | 1 |

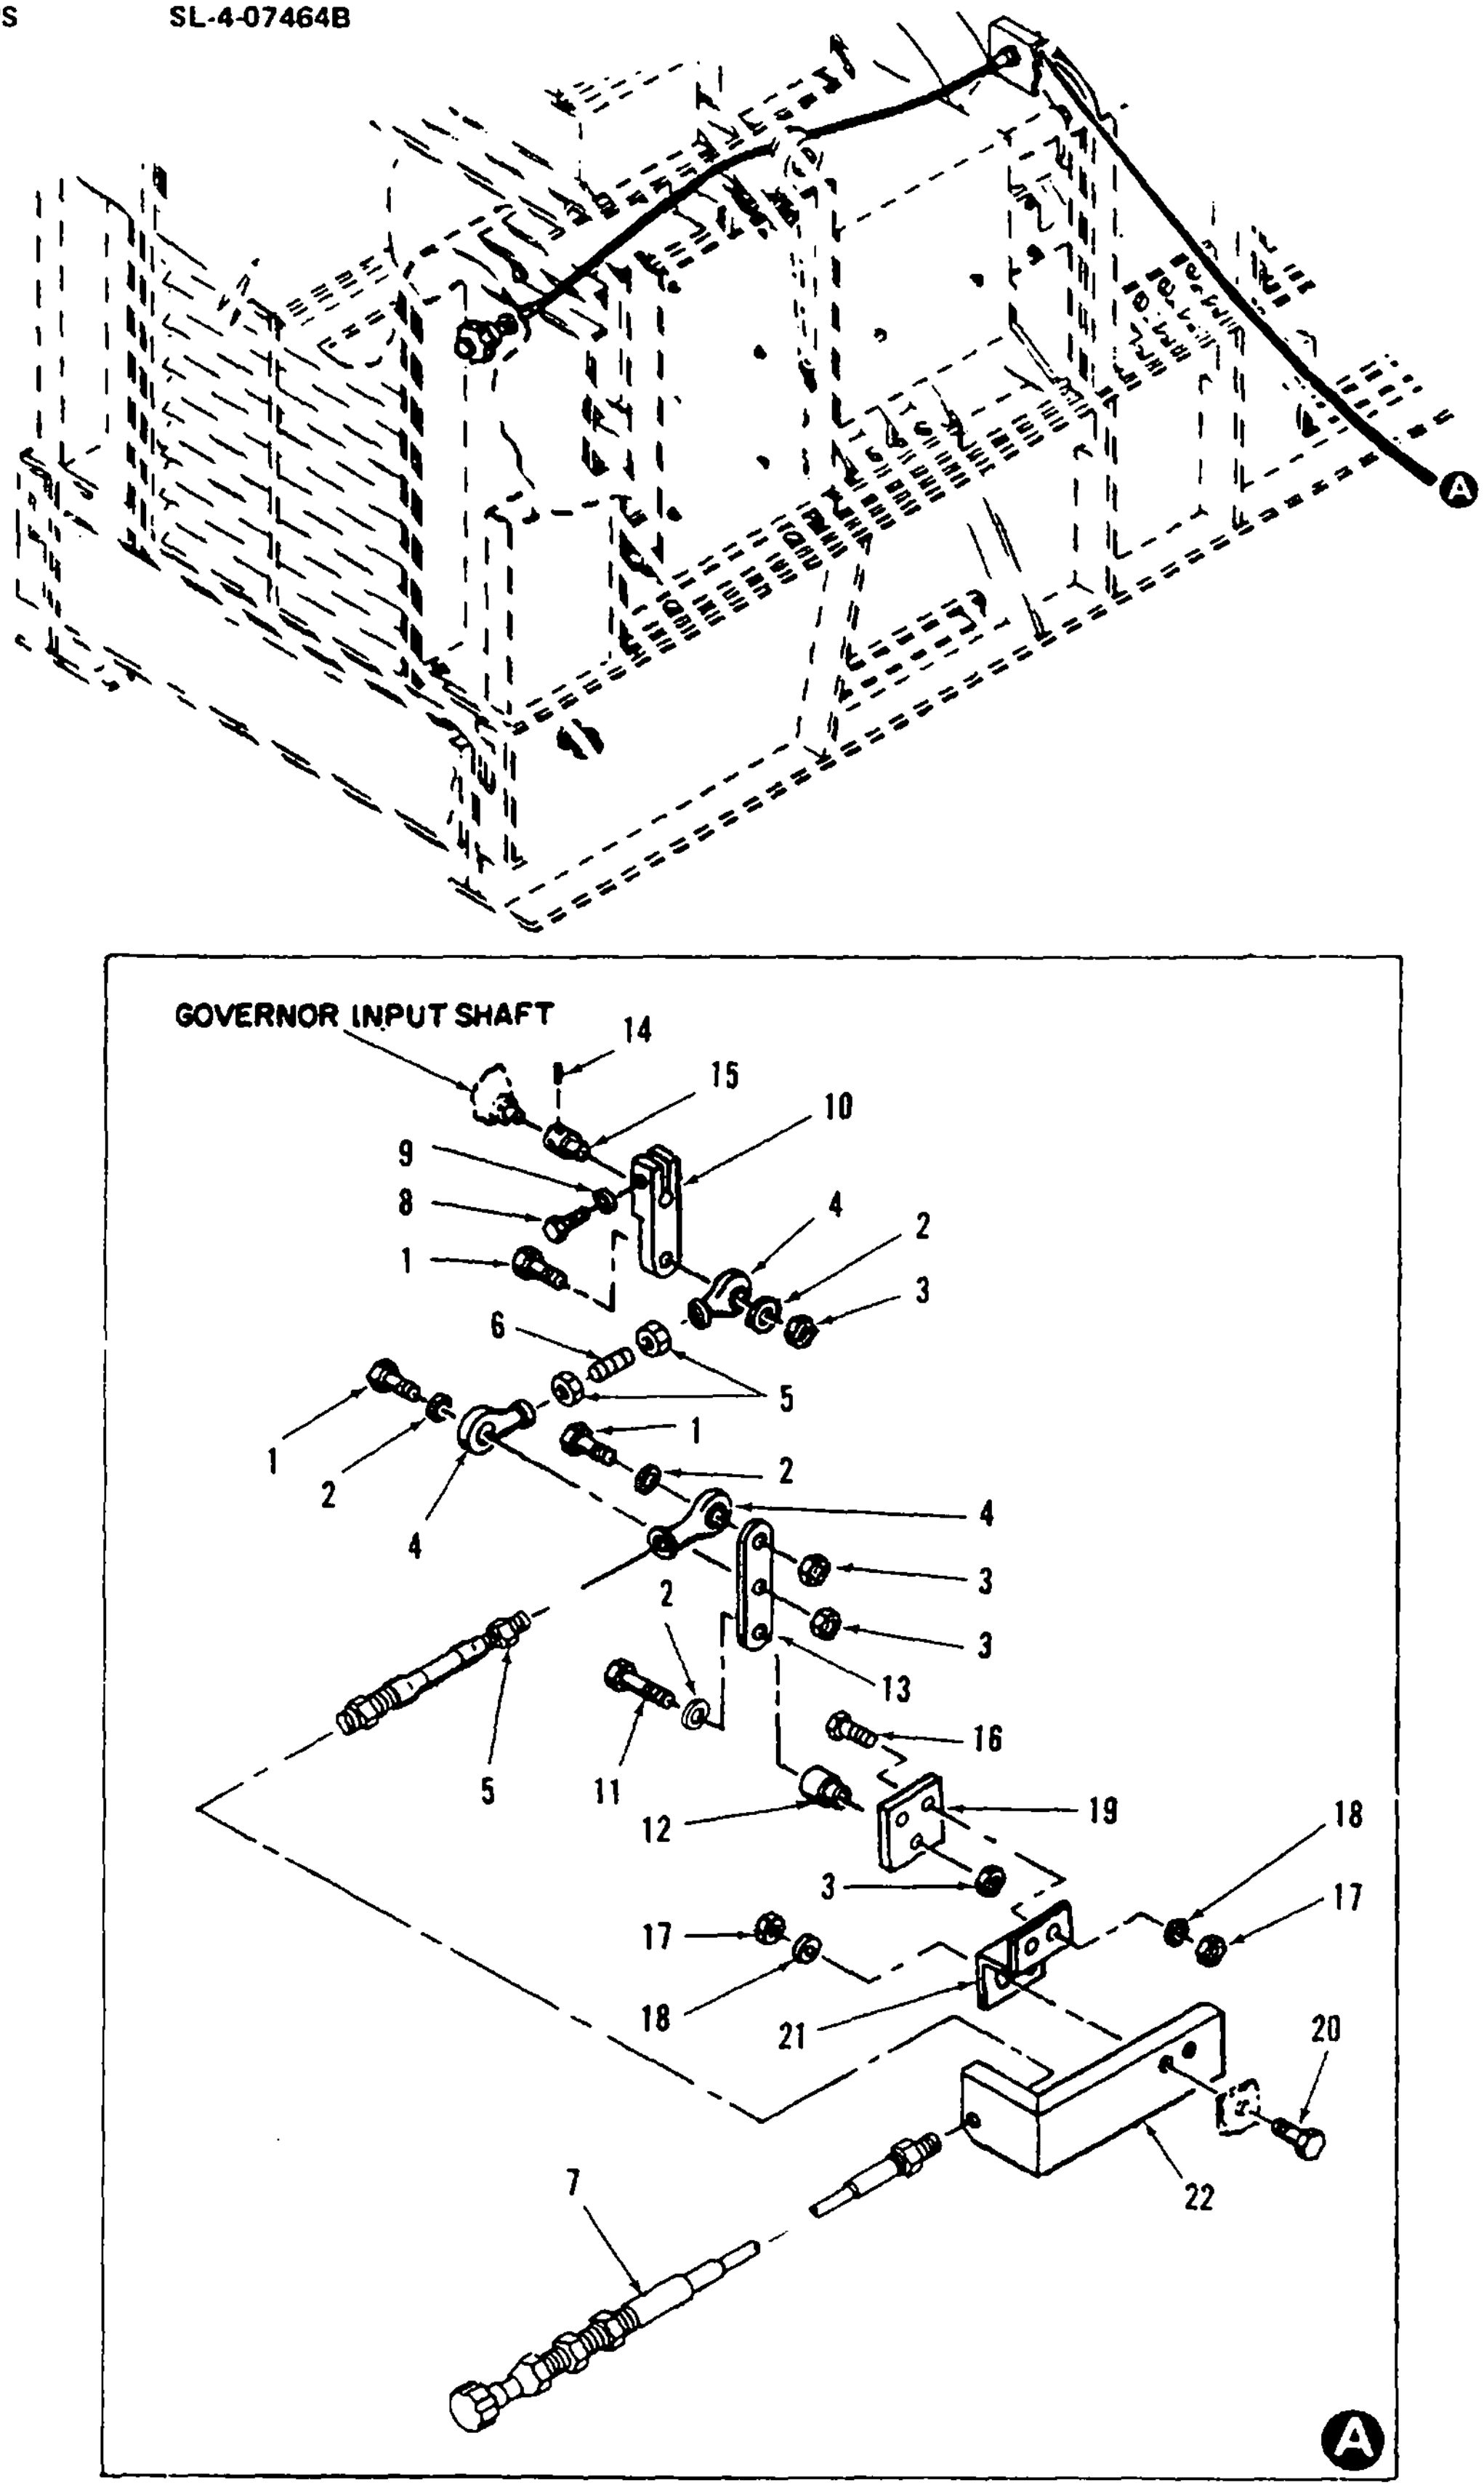
A
GOVERNOR INPUT SHAFT
14
15
10
9
8
1
4
2
3
6
5
1
2
4
1
2
4
3
3
13
2
5
11
16
12
19
3
18
17
17
18
21
20
22
7
A

Figure 20. Throttle Cable Assembly

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION a FIG NO. | b ITEM NO. | (2) SMR CODE a ARMY | b AIR FORCE | c NAVY | d USMC | (3) USMC a SSI | b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
|  |  |  |  |  |  |  |  |  | GROUP 03 - SET CONTROLS AND INSTRUMENTATION |  |  |  |  |
| 20 |  |  |  |  |  |  |  |  | THROTTLE CABLE ASSEMBLY |  |  |  |  |
| 20 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-993-1851 | SCREW, PAN HEAD<br>MS35207-267 96906 |  | EA | 3 | 3 |
| 20 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-823-8804 | WASHER, FLAT<br>MS27183-9 96906 |  | EA | 4 | 4 |
| 20 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-877-5797 | NUT, SELF-LOCKING<br>MS21044-N3 96906 |  | EA | 4 | 4 |
| 20 | 4 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 3120-00-913-7982 | BEARING, ROD END<br>71-4901 30554<br>HF3C64C42617 73134 |  | EA | 3 | 3 |
| 20 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-543-5060 | NUT, PLAIN HEX<br>MS35650-302 96906 |  | EA | 3 | 5 |
| 20 | 6 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5307-01-146-7379 | ROD, THREADED<br>76-4164 30554 |  | EA | 1 | 1 |
| 20 | 7 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 3040-00-264-8664 | PUSH-PULL CONTROL ASSY<br>70-4096-01 30554<br>271-631-51 06870 |  | EA | 1 | 1 |
| 20 | 8 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0502 | SCREW, HEX HEAD<br>MS90725-6 96906 |  | EA | 1 | 118 |
| 20 | 9 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK<br>MS35338-44 96906 |  | EA | 1 | 154 |
| 20 | 10 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .003 | 3040-00-262-8220 | LEVER, SPEED CONTROL<br>71-4620 30554 |  | EA | 1 | 1 |
| 20 | 11 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-211-9343 | SCREW AND WASHER<br>69-662-70 30554<br>61-102441-90-0142B-0542B 78189 |  | EA | 1 | 1 |
| 20 | 12 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-252-9161 | SPACER, STANDOFF<br>71-4766 30554 |  | EA | 1 | 1 |
| 20 | 13 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .003 | 3040-00-261-9594 | LEVER, SPEED CONTROL<br>71-4752 30554 |  | EA | 1 | 1 |
| 20 | 14 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-723-9398 | SETSCREW<br>MS51963-47 96906 |  | EA | 2 | 2 |
| 20 | 15 | PAOZZ | PAOZZ | PAFZZ | PAFZZ |  |  | 3040-01-261-9754 | SHAFT, EXTENDER<br>76-4161 30554 |  | EA | 1 | 1 |
| 20 | 16 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-225-3839 | SCREW, HEX HEAD<br>MS90725-8 96906 |  | EA | 2 | 35 |
| 20 | 17 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C 96906 |  | EA | 4 | 167 |
| 20 | 18 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 96906 |  | EA | 4 | 252 |
| 20 | 19 | MOO | MOO | MOO | MOO |  |  |  | PLATE<br>71-4767 30554 |  | EA | 1 | 1 |
| 20 | 20 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-071-2241 | SCREW, HEX HEAD<br>MS90725-10 96906 |  | EA | 2 | 10 |
| 20 | 21 | MOO | MOO | MOO | MOO |  |  |  | BRACKET<br>71-4709 30554 |  | EA | 1 | 1 |
| 20 | 22 | MOO | MOO | MOO | MOO |  |  |  | BRACKET, CABLE SUPPORT<br>71-4616 30554 |  | EA | 1 | 1 |

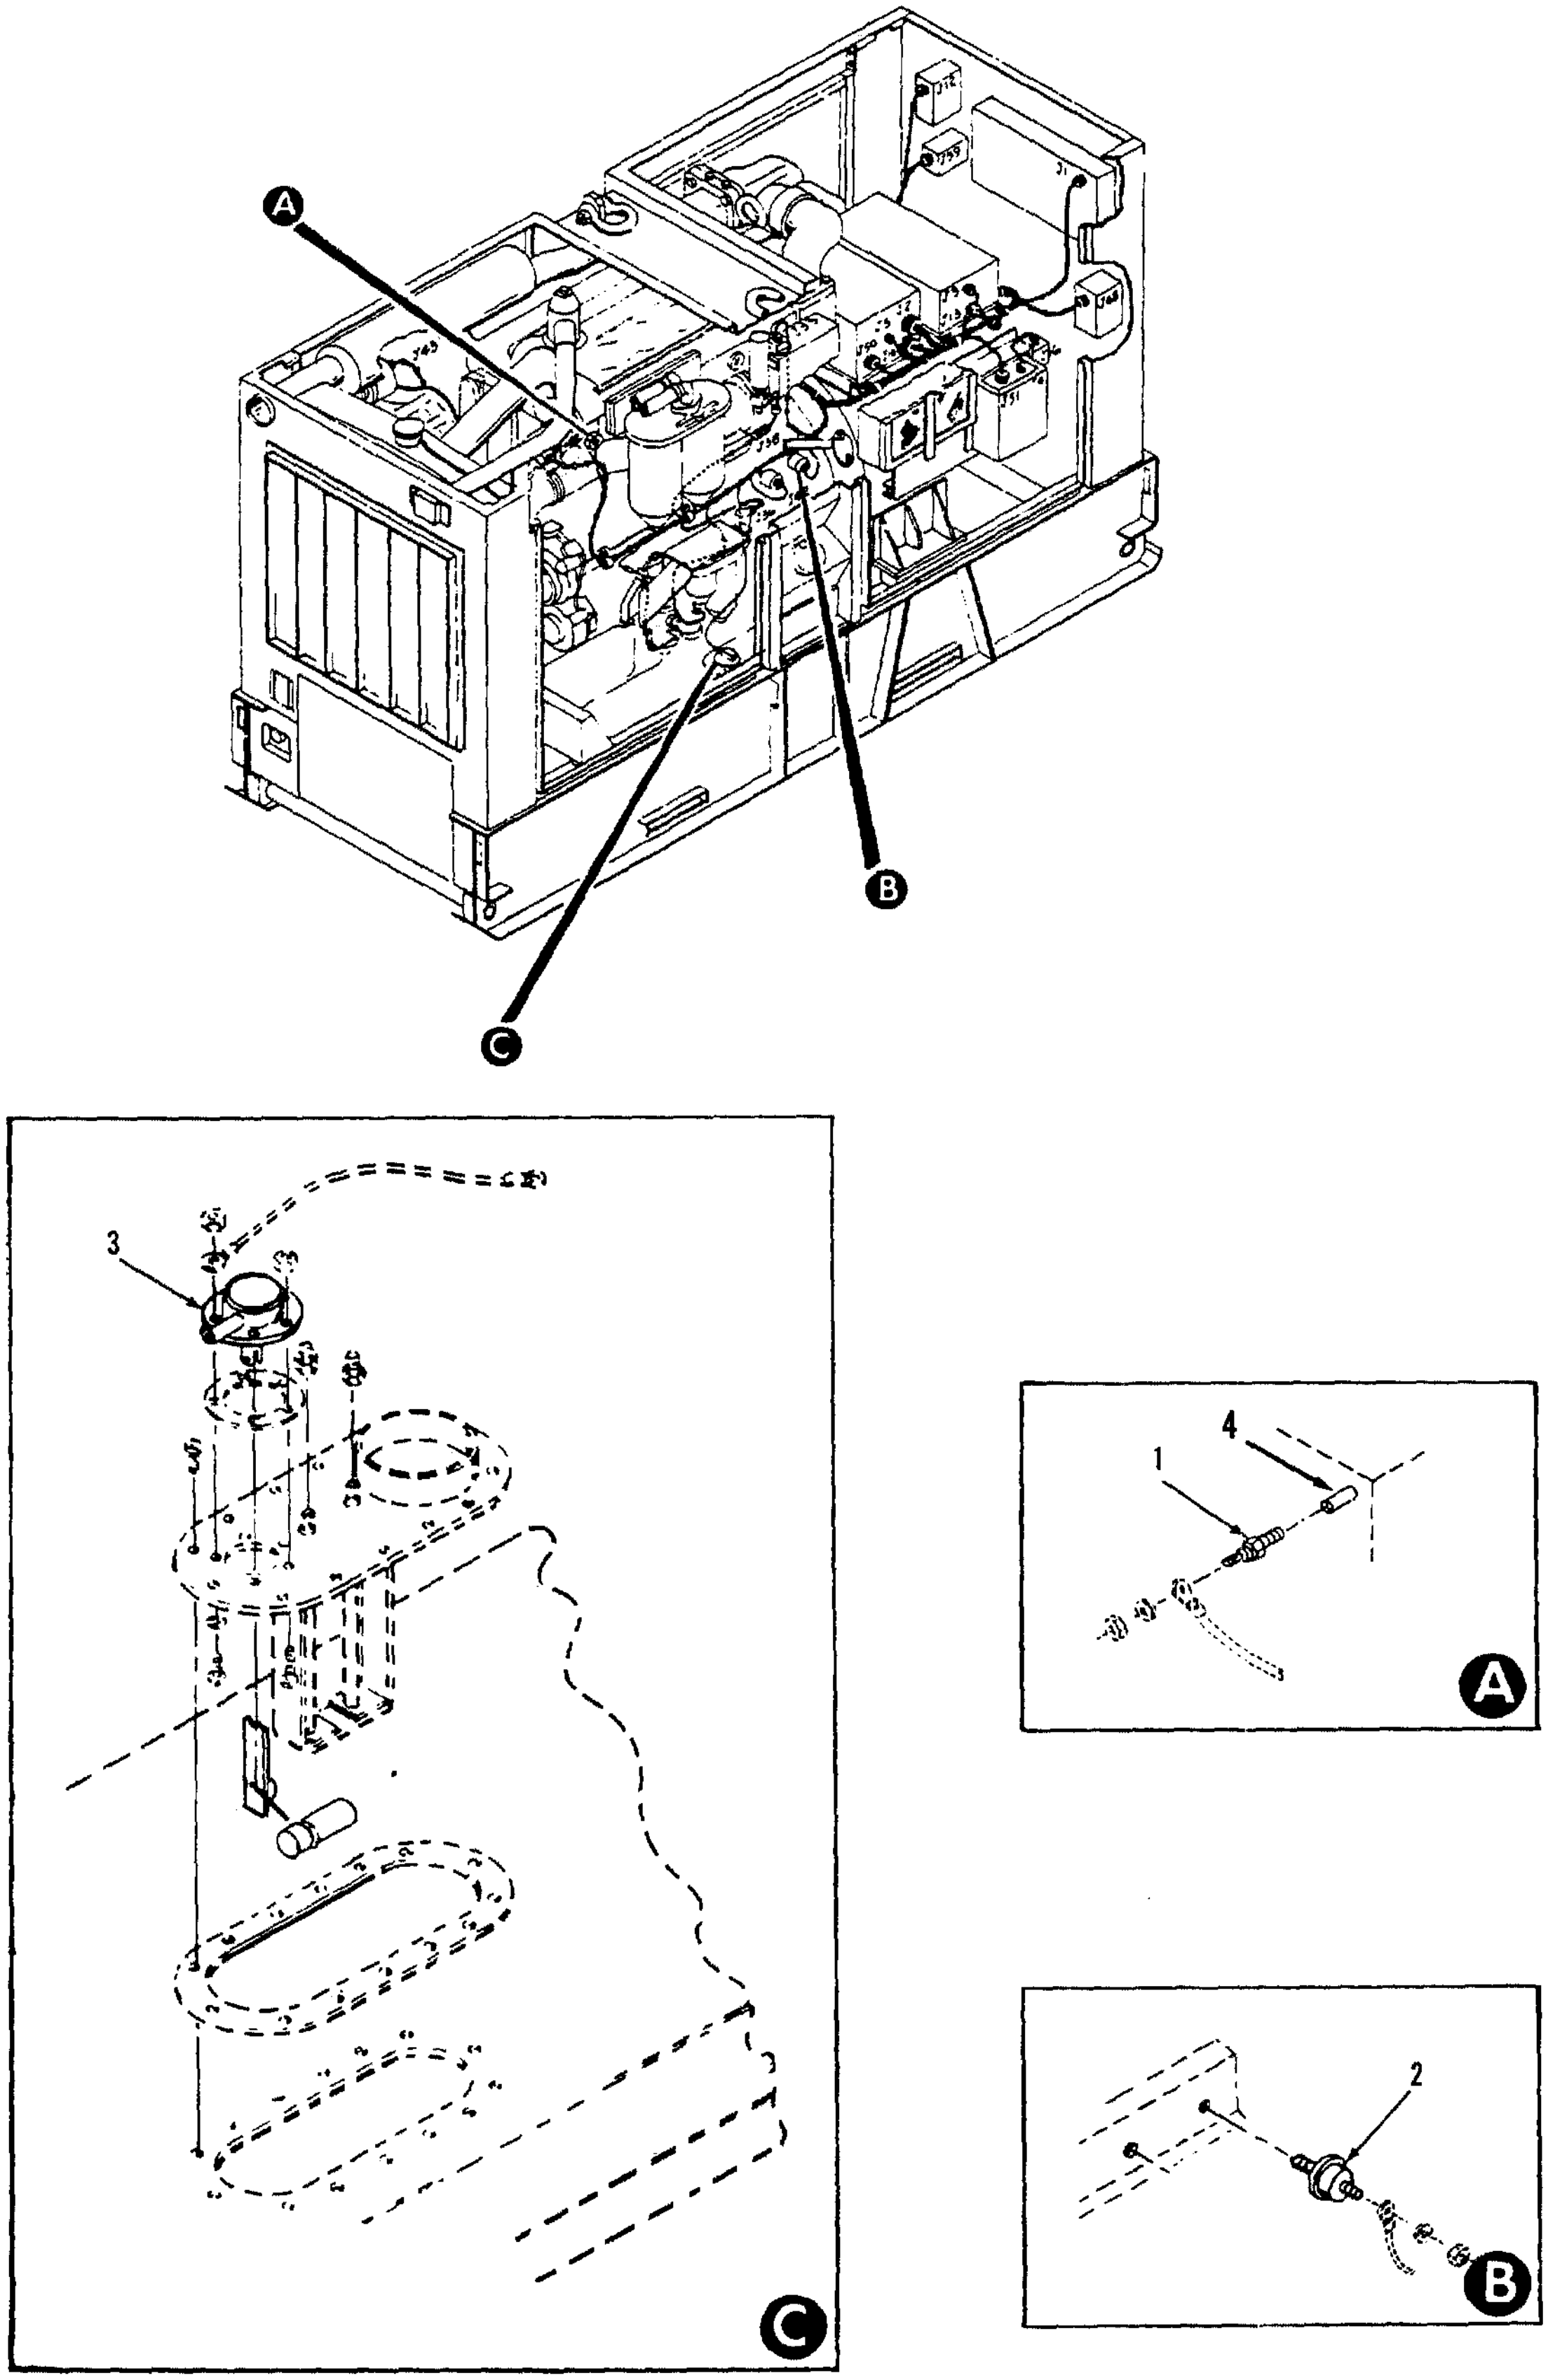

Figure 21. Coolant Temperature, Oil Pressure, and Fuel Level Transmitters

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE / USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 03 - SET CONTROLS AND INSTRUMENTATION | | | |
| 21 | | | | | | | | | COOLANT TEMPERATURE, OIL PRESSURE, AND FUEL LEVEL TRANSMITTERS | | | |
| 21 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .030 | 6685-00-119-9852 | TEMPERATURE TRANSMITTER, MT2<br>69-781 30554<br>506-AE 57733 | EA | 1 | 1 |
| 21 | 2 | PAOZZ | PAOZZ | PAOZZ | PAFZZ | | .050 | 6620-00-134-1593 | OIL PRESSURE TRANSMITTER, MT1<br>69-779-2 30554<br>506-AD 57733 | EA | 1 | 1 |
| 21 | 3 | PAOZZ- | PAOZZ | PAFZZ | PAFZZ | | .008 | 6680-00-676-9242 | FUEL LEVEL TRANSMITTER, MT3<br>MS500040-2 81348 | EA | 1 | 1 |
| 21 | 4 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | | 4730-00-277-5609 | BUSHING, ADAPTER<br>AN912-7 88044 | EA | 1 | 1 |

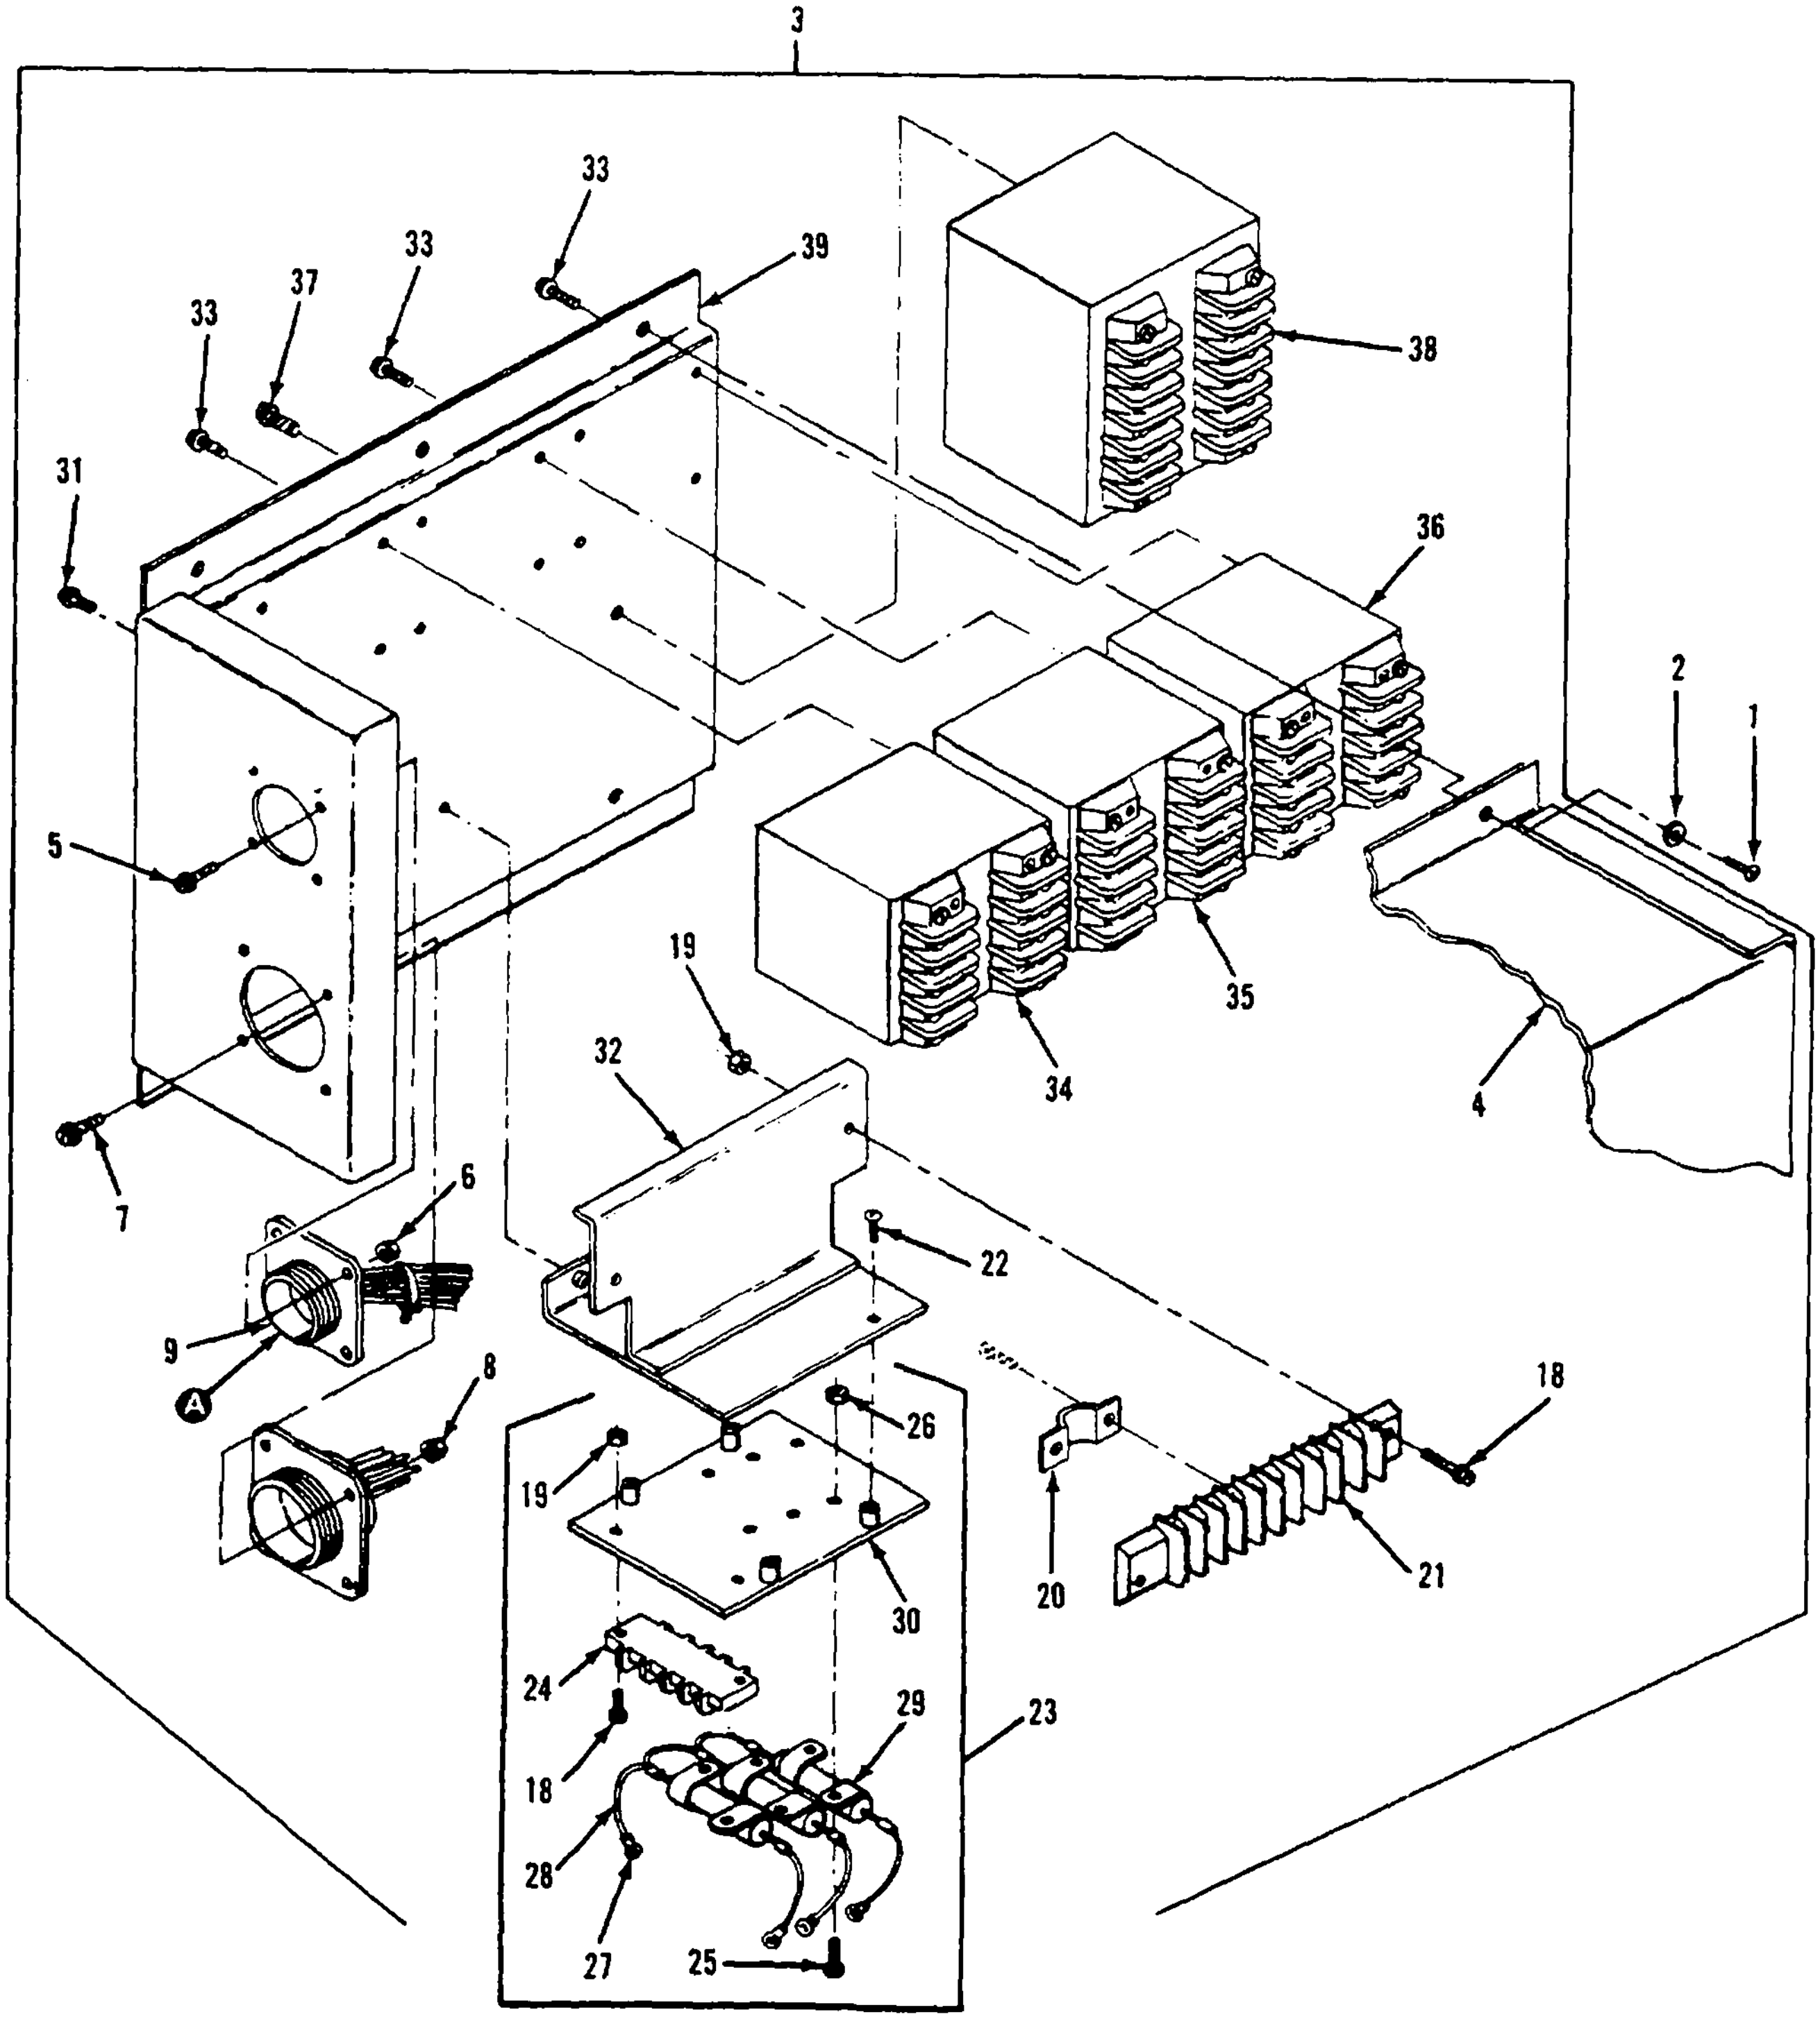
3
33
33
39
33
37
38
31
36
2
1
5
35
19
4
32
34
7
6
22
9
A
8
18
26
19
30
20
21
24
29
23
18
28
27
25

Figure 22. Tactical Relay Box Assembly and Related Parts (Sheet 1 of 2)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM | | | | |
| 22 | | | | | | | | | TACTICAL RELAY BOX ASSEMBLY AND RELATED PARTS | | | | |
| 22 | 1 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068 -0501 | SCREW<br>MS90725-5 96906 | | EA | 6 | 114 |
| 22 | 2 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-582-5965 | WASHER<br>MS35338-44 96906 | | EA | 6 | 154 |
| 22 | 3 | PAFDD | PAFDD | PAFFF | PAFFF | | .125 | 6110-00-199-1377 | TACTICAL RELAY BOX ASSY, A20<br>70-4206 30554 | | EA | 1 | 1 |
| 22 | 4 | XB | XB | XB | XB | | | | COVER<br>70-4190 30554 | | EA | 1 | 1 |
| 22 | 5 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-224-1092 | SCREW AND WASHER<br>69-662-5 30554<br>61-040841-40-0142B-0542B 78189 | | EA | 4 | 4 |
| 22 | 6 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-836-3520 | NUT AND WASHER<br>69-561-1 30554<br>511-041800-00 78189 | | EA | 4 | 66 |
| 22 | 7 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6972 | SCREW AND WASHER<br>69-662-20 30554<br>61-060841-40-0142B-0542B 78189 | | EA | 4 | 12 |
| 22 | 8 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-063-7360 | NUT AND WASHER<br>69-561-2 30554<br>511-081800-00 78189 | | EA | 4 | 73 |
| 22 | 9 | AFF | AFF | AFF | AFF | D | .080 | 5995-00-514-0849 | WIRING HARNESS<br>70-4211 30554 | | EA | 1 | 1 |
| 22 | 10 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-074-2072 | STRAP, TIE DOWN<br>MS3367-1-9 96906 | | EA | 19 | 344 |
| 22 | 11 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-727-5153 | STRAP, TIE DOWN<br>MS33674-9 96906 | | EA | 8 | 239 |
| 22 | 12 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4780 LUG, | TERMINAL<br>MS25036-106 96906 | | EA | 72 | 268 |
| 22 | 13 | PAFZZ | PAFZZ | XBFZZ | XBFZZ | | | 9905-00-893-3570 | BAND, MARKER<br>M43436/1-3 81349 | | EA | 1 | 4 |
| 22 | 14 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-755-2787 | CONNECTOR, PLUG, A20J4<br>MS3102R20-29P 96906 | | EA | 1 | 2 |
| 22 | 15 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-725-0888 | CONNECTOR, PLUG, A20J51<br>MS3102R28-12P 96906 | | EA | 1 | 1 |
| 22 | 16 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-892-3391 | TUBING, INSULATION<br>MIL-1631,.TYPE F,<br>CLASS 1 81349 | | FT | 3 | 3 |
| 22 | 17 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>MS086/2-16-9 81349 | | FT | 65 | 1178 |
| 22 | 18 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-038-3145 | SCREW AND WASHER<br>69-662-37 30554<br>61-081241-40-0142B-0542B 78189 | | EA | 4 | 12 |
| 22 | 19 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-052-3632 | NUT AND WASHER<br>69-561-3 30554<br>511-081800-00 78189 | | EA | 4 | 73 |
| 22 | 20 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 6150-00-519-2714 | JUMPER, TERMINAL BOARD<br>69651-2 30554<br>601J 75382 | | EA | 2 | 17 |
| 22 | 21 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5940-00-983-6087 | BOARD, TERMINAL, A20TB2<br>38TB-10 81349 | | EA | 1 | 1 |
| 22 | 22 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-191-6226 | SCREW AND WASHER<br>69-662-64 30554<br>61-100841-90-0142B-0542B 78189 | | EA | 4 | 4 |

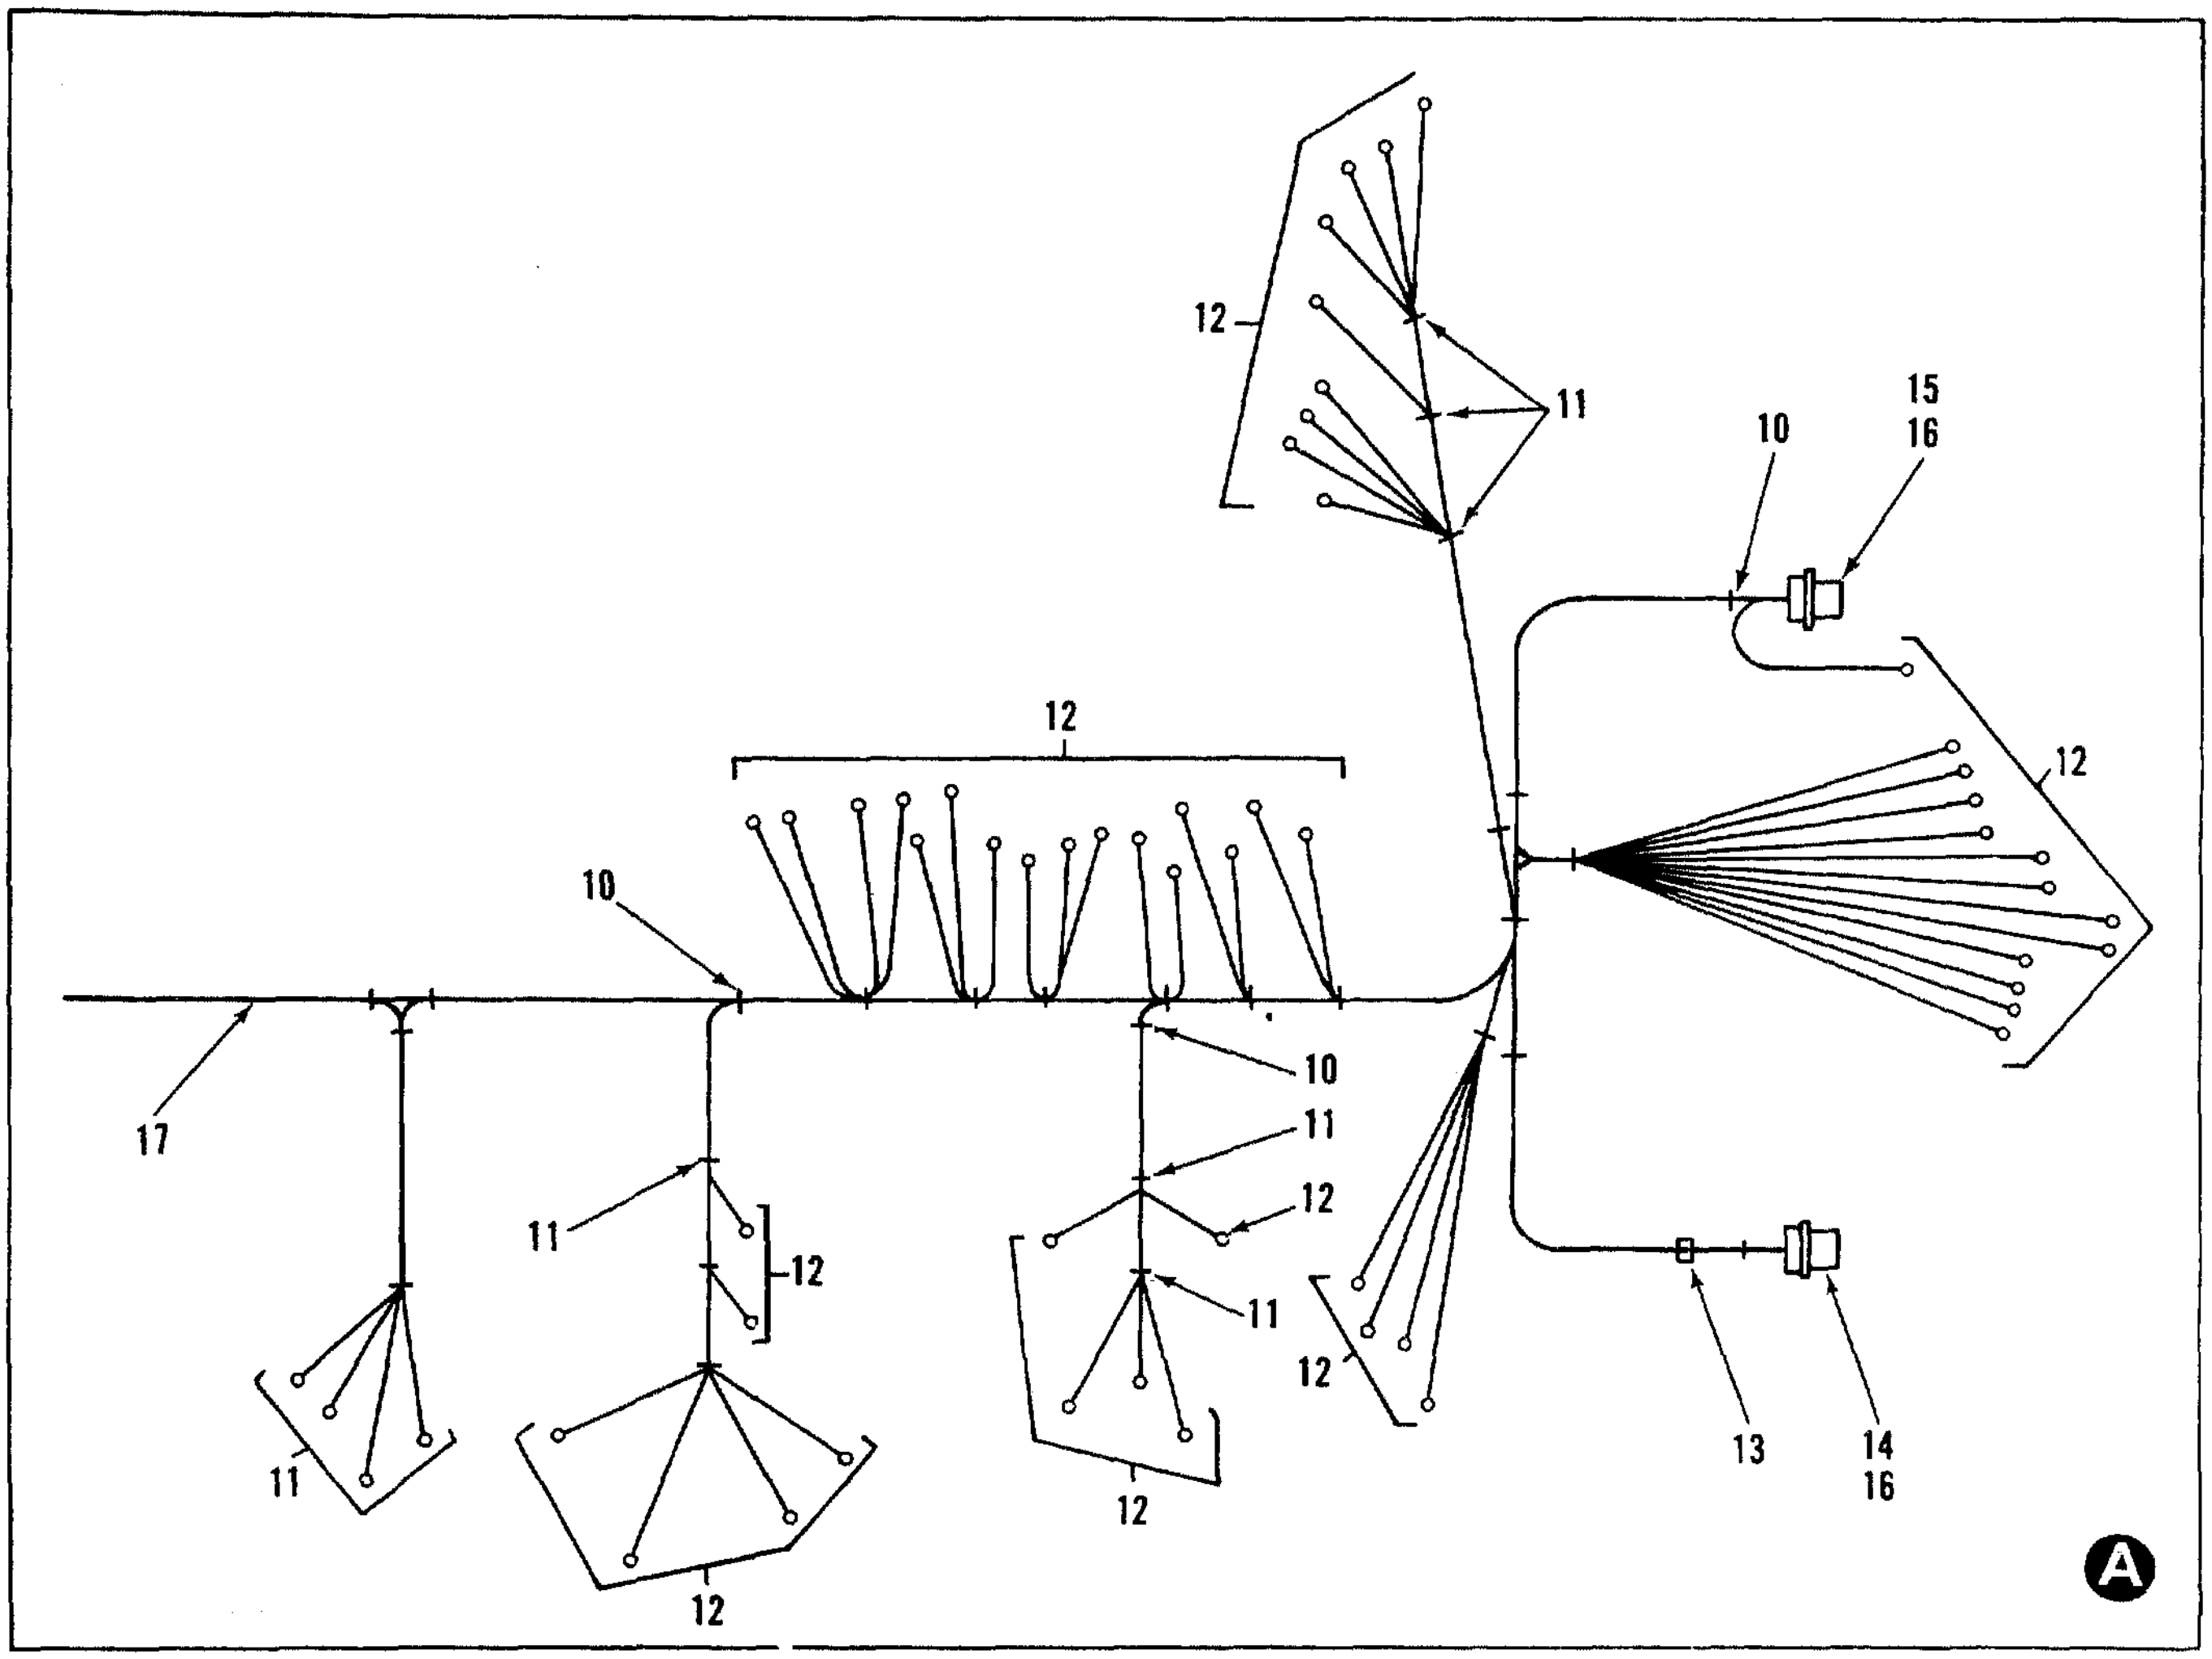
12
11
10
15
16
12
12
10
17
10
11
12
11
12
11
12
12
11
12
12
13
14
16
A

Figure 22. Tactical Relay Box Assembly and Related Parts (Sheet 2 of 2)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION |  | (2) SMR CODE |  |  |  | (3) USMC |  | (4) | (5) DESCRIPTION |  | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M |  |  |
|  |  |  |  |  |  |  |  |  | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM - CONTINUED |  |  |  |  |
| 22 |  |  |  |  |  |  |  |  | TACTICAL RELAY BOX ASSEMBLY AND RELATED PARTS - CONTINUED |  |  |  |  |
| 22 | 23 | AFF | AFF | AFF | AFF |  |  |  | RESISTOR ASSY, A20A7<br>70-4209 30554 |  | EA | 1 | 1 |
| 22 | 24 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5940-00-983-6082 | BOARD, TERMINAL, A20A7TB2<br>38TB-4 81349 |  | EA | 1 | 2 |
| 22 | 25 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-531-0298 | SCREW<br>MS35265-15 96906 |  | EA | 1 | 6 |
| 22 | 26 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-088-0551 | NUT<br>MS21044-N04 96906 |  | EA | 1 | 6 |
| 22 | 27 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-204-8966 | LUG<br>MS25036-102 96906 |  | EA | 4 | 80 |
| 22 | 28 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6602 | WIRE, ELECTRICAL<br>MS086/2-18-9 81349 |  | FT | 2 | 144 |
| 22 | 29 | PAFZZ | PAFZZ | PAFZZ | PAFZZ |  | .050 |  | RESISTOR, FIXED<br>MIL-R-39009/1 81349<br>RER75F7R500R 81349 |  | EA | 3 | 3 |
| 22 | 30 | XB | XB | XB | XB |  |  |  | BRACKET<br>70-4210 30554 |  | EA | 1 | 1 |
| 22 | 31 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6968 | SCREW AND WASHER<br>69-662-18 30554<br>61-060641-40-0142B-0542B 78189 |  | EA | 2 | 103 |
| 22 | 32 | XB | XB | XB | XB |  |  |  | BRACKET<br>70-4214 30554 |  | EA | 1 | 1 |
| 22 | 33 | PAZZ | PAZZ | PAZZ | PAZZ | D | .008 | 5305-00-036-6977 | SCREW AND WASHER<br>69-662-33 30554<br>61-080641-40-0142B-0542B 78189 |  | EA | 12 | 44 |
| 22 | 34 | PAFZZ | PAFZZ | PAFZZ | PAFZZ |  | .050 | 5945-00-057-5655 | RELAY, OVER VOLTAGE, A20K2<br>70-1138 30554<br>11486 12670 |  | EA | 1 | 1 |
| 22 | 35 | PAFZZ | PAFZZ | PAFZZ | PAFZZ |  | .050 | 5945-00-420-4561 | RELAY, SHORT CIRCUIT, A20K3<br>70-1137 30554<br>23380 12670 |  | EA | 1 | 1 |
| 22 | 36 | PAFZZ | PAFZZ | PAFZZ | PAFZZ |  | .050 | 5945-00-919-7749 | RELAY, REVERSE POWER, A20K15<br>70-1136 30554<br>21690-1 12670 |  | EA | 1 | 1 |
| 22 | 37 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-191-6626 | SCREW AND WASHER<br>69-662-64 30554<br>61-100841-90-0142B-0542B 78189 |  | EA | 4 | 4 |
| 22 | 38 | PAFZZ | PAFZZ | PAFZZ | PAFZZ |  | .050 | 5945-00-318-3050 | RELAY, OVERLOAD, A20K14<br>70-1135 30554<br>6105-0001 93742 |  | EA | 1 | 1 |
| 22 | 39 | XA-- | XA-- | XA | XA |  |  |  | CHASSIS, ELECTRICAL EQUIPMENT<br>70-4207 30554 |  | EA | 1 | 1 |

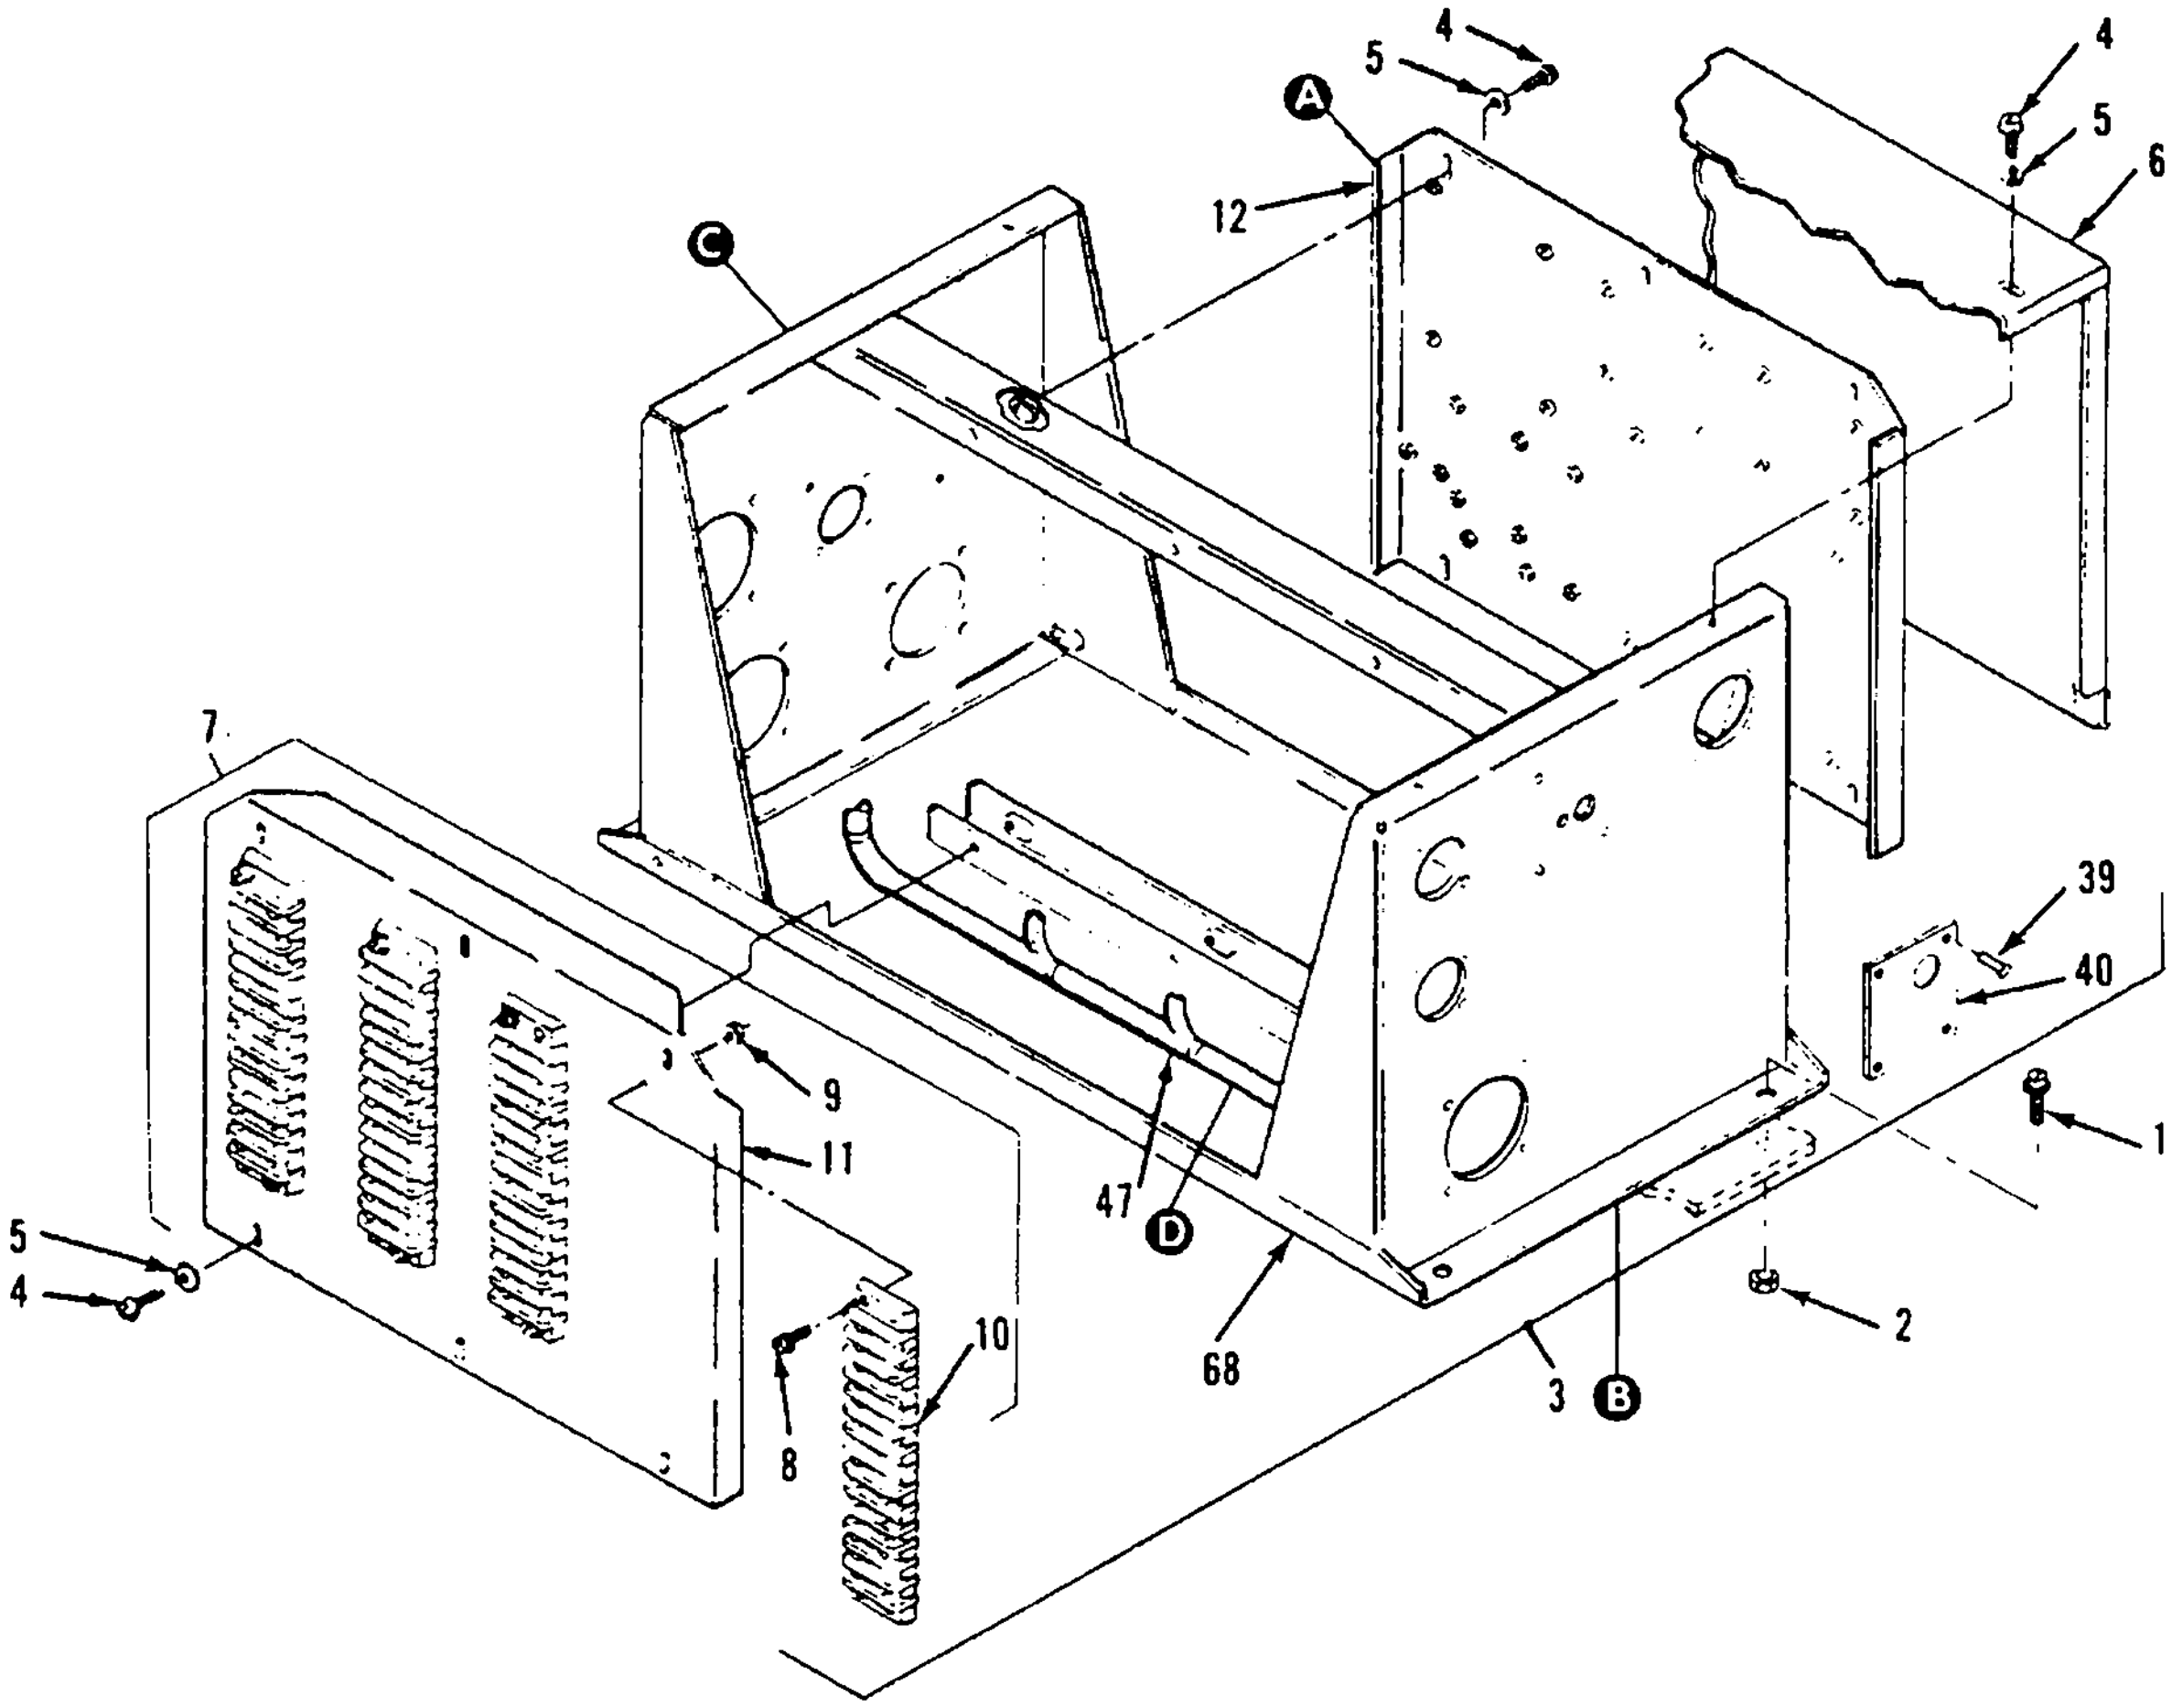
4
5
A
12
C
4
5
6
39
40
1
7
9
11
5
4
10
8
47
D
2
68
3
B

Figure 23. Special Relay Box and Related Parts (Sheet 1 of 3)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM | | | | |
| 23 | | | | | | | | | SPECIAL RELAY BOX AND RELATED PARTS | | | | |
| 23 | 1 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0502 | SCREW, HEX HEAD<br>MS90725-6 96906 | | EA | 4 | 118 |
| 23 | 2 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483 -8792 | NUT, SELF-LOCKING<br>MS17829-4C 96906 | | EA | 4 | 167 |
| 23 | 3 | PAFFF | PAFFF | PAFHH | PAFHH | | .125 | 6115-01-142-3072 | RELAY BOX, SPECIAL<br>79-4512 30554 | | EA | 1 | 1 |
| 23 | 4 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-036-6977 | SCREW AND WASHER<br>69-662-33 30554<br>61-080641-40-0142B-0542B 78189 | | EA | 26 | 44 |
| 23 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-983-8483 | WASHER<br>MS27183-7 96906 | | EA | 22 | 28 |
| 23 | 6 | XB | XB | XB | XB | | | | COVER<br>70-4217 30554 | | EA | 1 | 1 |
| 23 | 7 | AFF | AFF | AFF | AFF | | | | TERMINAL BOARD ASSY<br>70-4158 30554 | | EA | 1 | 1 |
| 23 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-038-3145 | SCREW AND WASHER<br>69-662-37 30554<br>61-081241-40-0142B-0542B 78189 | | EA | 8 | 12 |
| 23 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-052-3632 | NUT AND WASHER<br>69-561-3 30554<br>511-081800-00 78189 | | EA | 26 | 73 |
| 23 | 10 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 5940-00-988-0317 | TERMINAL BOARD, TB1 THROUGH TB4<br>38TB-14 81349 | | EA | 4 | 4 |
| 23 | 11 | XB | XB | XB | XB | | | | BRACKET, MOUNTING<br>70-4159 30554 | | EA | 1 | 1 |
| 23 | 12 | PAFZZ | PAFFF | PAHHH | PAHHH | | .125 | 5990-01-016-3058 | ELECTRONICS COMPONENTS ASSY<br>70-4238 30554 | | EA | 1 | 1 |
| 23 | 13 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-036-6968 | SCREW AND WASHER<br>69-662-18 30554<br>61-060641-40-0142B-0542B 78189 | | EA | 2 | 103 |
| 23 | 14 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-063-7360 | NUT AND WASHER<br>69-561-2 30554<br>511-061800-00 78189 | | EA | 16 | 73 |
| 23 | 15 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .020 | 5950-00-206-1431 | TRANSFORMER, T1<br>70-4064 30554<br>00000-4836 93568 | | EA | 1 | 1 |
| 23 | 16 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5940-00-283 -5280 | LUG, TERMINAL<br>MS25036-106 96906 | | EA | 2 | 268 |
| 23 | 17 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 81349 | | FT | 1 | 1178 |
| 23 | 18 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-036-6902 | SCREW AND WASHER<br>69-662-36 30554<br>61-081041-40-0142B-0542B 78189 | | EA | 10 | 30 |
| 23 | 19 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 6625-00-892-4342 | SHUNT, INSTRUMENT, R13<br>MS91586-10 96906 | | EA | 1 | 1 |
| 23 | 20 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5945-00-686-6877 | RELAY, K3<br>MS24166-D1 96906 | | EA | 1 | 1 |
| 23 | 21 | XB | XB | XB | XB | | | | BRACKET ASSY<br>71-4914 30554 | | EA | 1 | 1 |

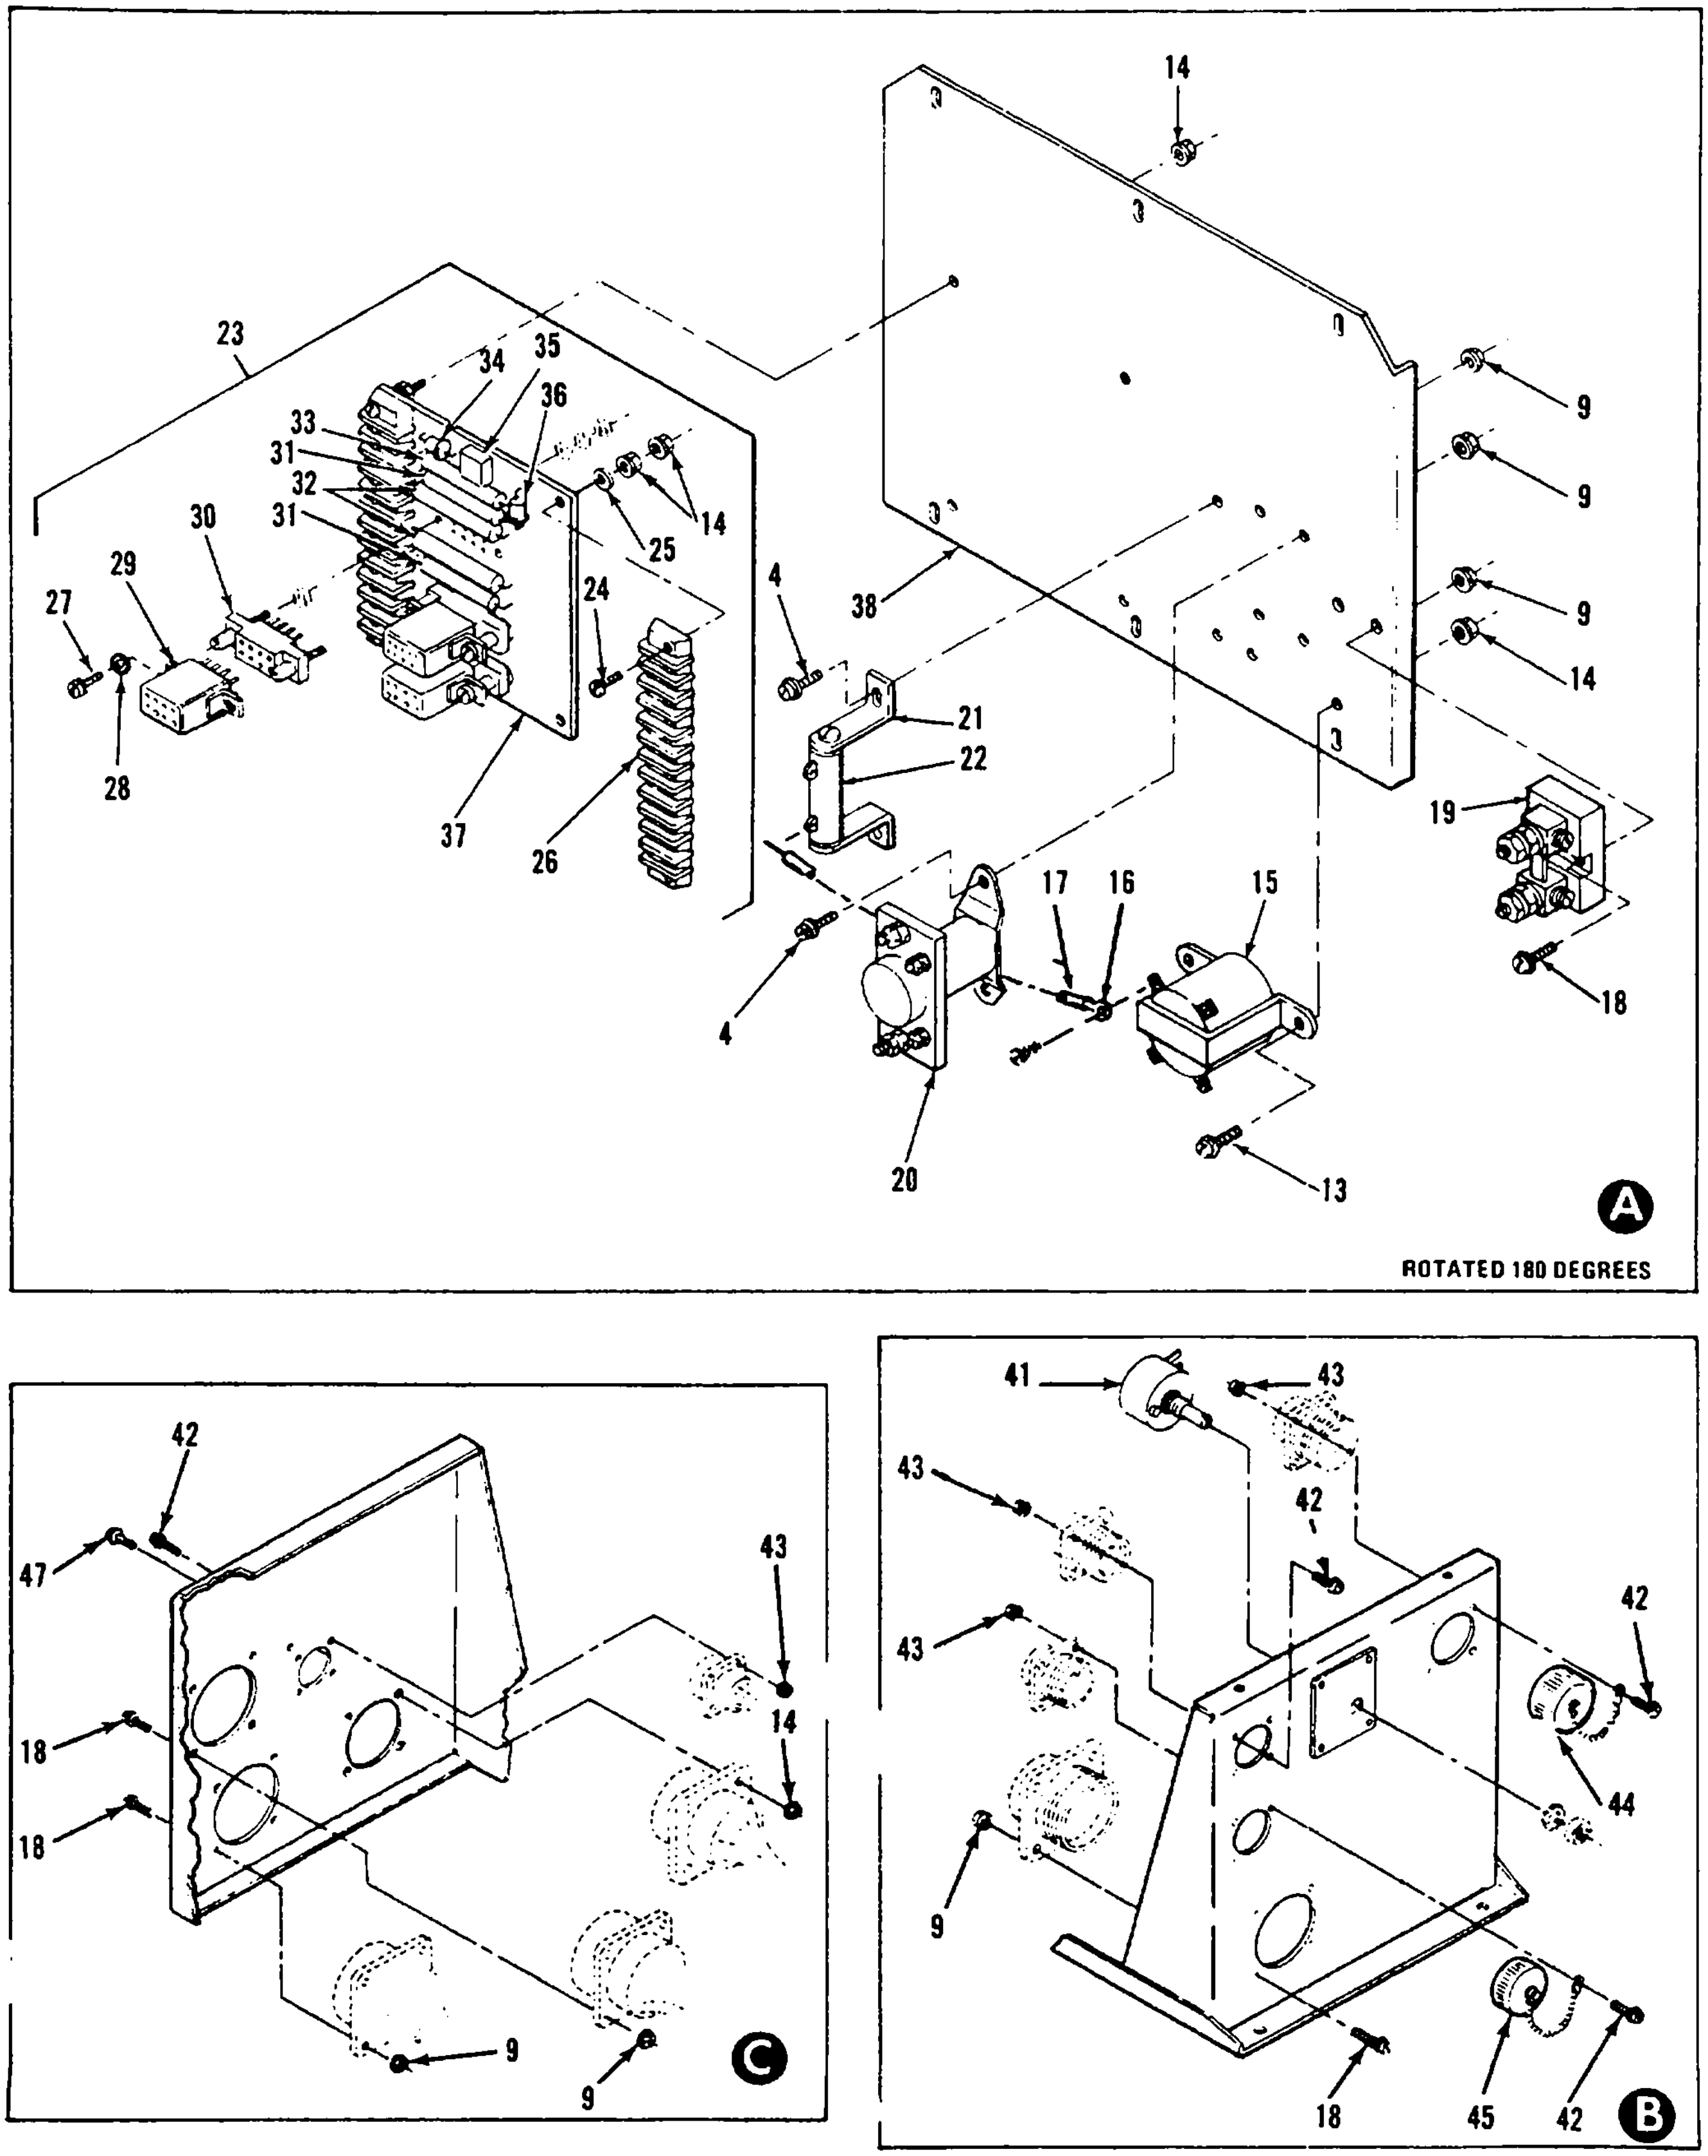
14
23
34
35
36
33
31
32
30
31
14
25
29
27
24
4
38
9
9
9
14
21
22
28
37
26
19
17
16
15
4
18
20
13
A
ROTATED 180 DEGREES
42
47
43
14
18
18
9
9
C
41
43
43
42
43
42
44
9
18
45
42
B

Figure 23. Special Relay Box and Related Parts (Sheet 2 of 3)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 04 - AC ELECTRIC CONTROL SYSTEM - CONTINUED | | | | |
| 23 | | | | | | | | | SPECIAL RELAY BOX AND RELATED PARTS - CONTINUED | | | | |
| 23 | 22 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5905-00-518-5334 | RESISTOR, R1<br>RW29V100 | <br>81349 | EA | 1 | 1 |
| 23 | 23 | PAFZZ | PAFFF | PAHHH | PAHHH | | .050 | 6110-00-201-6015 | DC RELAY ASSY, AS<br>69-768 | <br>30554 | EA | 1 | 1 |
| 23 | 24 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-984-6221 | SCREW<br>MS35206-234 | <br>96906 | EA | 4 | 4 |
| 23 | 25 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-983-8483 | WASHER<br>MS27183-5 | <br>96906 | EA | 4 | 73 |
| 23 | 26 | PAFZZ | PAFZZ | XBHZZ | XBHZZ | | | 5940-00-983-6073 | TERMINAL BOARD<br>401B-12 | <br>81349 | EA | 2 | 2 |
| 23 | 27 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-984-4982 | SCREW<br>MS35206-225 | <br>96906 | EA | 6 | 12 |
| 23 | 28 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-045-4007 | WASHER<br>MS35338-41 | <br>96906 | EA | 6 | 22 |
| 23 | 29 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5945-00-435-1833 | RELAY, A5K5, A5K6, A5K7<br>M5757/23-003 | <br>81349 | EA | 3 | 8 |
| 23 | 30 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 5935-00-206-1400 | SOCKET, RELAY<br>69-658<br>VB8/1FA11-80 | <br>30554<br>05574 | EA | 3 | 5 |
| 23 | 31 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5905-00-448-5539 | RESISTOR, A5R4, A5R7<br>RWR78S2671FR | <br>81349 | EA | 2 | 2 |
| 23 | 32 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5905-00-879-1163 | RESISTOR, A5R5, A5R6<br>RW56V512 | <br>81349 | EA | 2 | 2 |
| 23 | 33 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5905-00-347-3093 | RESISTOR, A5R3<br>RWR78S1501FR | <br>81349 | EA | 1 | 2 |
| 23 | 34 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5961-00-978-7660 | RECTIFIER, A5CR3<br>69-741<br>JAN1N540 | <br>30554<br>81349 | EA | 1 | 1 |
| 23 | 35 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5961-00-135-6168 | RECTIFIER, A5CR4<br>69-739<br>B-598-40 | <br>30554<br>06288 | EA | 1 | 2 |
| 23 | 36 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5961-00-702-5763 | RECTIFIER, A5CR6<br>69-740<br>MR1034A | <br>30554<br>04713 | EA | 1 | 1 |
| 23 | 37 | XA | XA | XA | XA | | | | PRINTED CIRCUIT BOARD<br>69-767 | <br>30554 | EA | 1 | 1 |
| 23 | 38 | XB | XB | XB | XB | | | | BRACKET, MOUNTING<br>70-4239 | <br>30554 | EA | 1 | 1 |
| 23 | 39 | PAFZZ | PAFZZ | PAHZZ | XBOZZ | | | 5320-00-721-5239 | RIVET<br>MS16535-153 | <br>96906 | EA | 4 | 4 |
| 23 | 40 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION<br>70-4156 | <br>30554 | EA | 1 | 1 |
| 23 | 41 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5905-01-021 | RESISTOR, VARIABLE, R29<br>75-0851 | <br>30554 | EA | 1 | 1 |
| 23 | 42 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-036-6903 | SCREW AND WASHER<br>69-662-430554<br>61-040741-40-0142B-0542B | <br><br>78189 | EA | 12 | 60 |
| 23 | 43 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-836-3520 | NUT AND WASHER<br>69-561-130554<br>511-041800-00 | <br><br>78189 | EA | 16 | 66 |

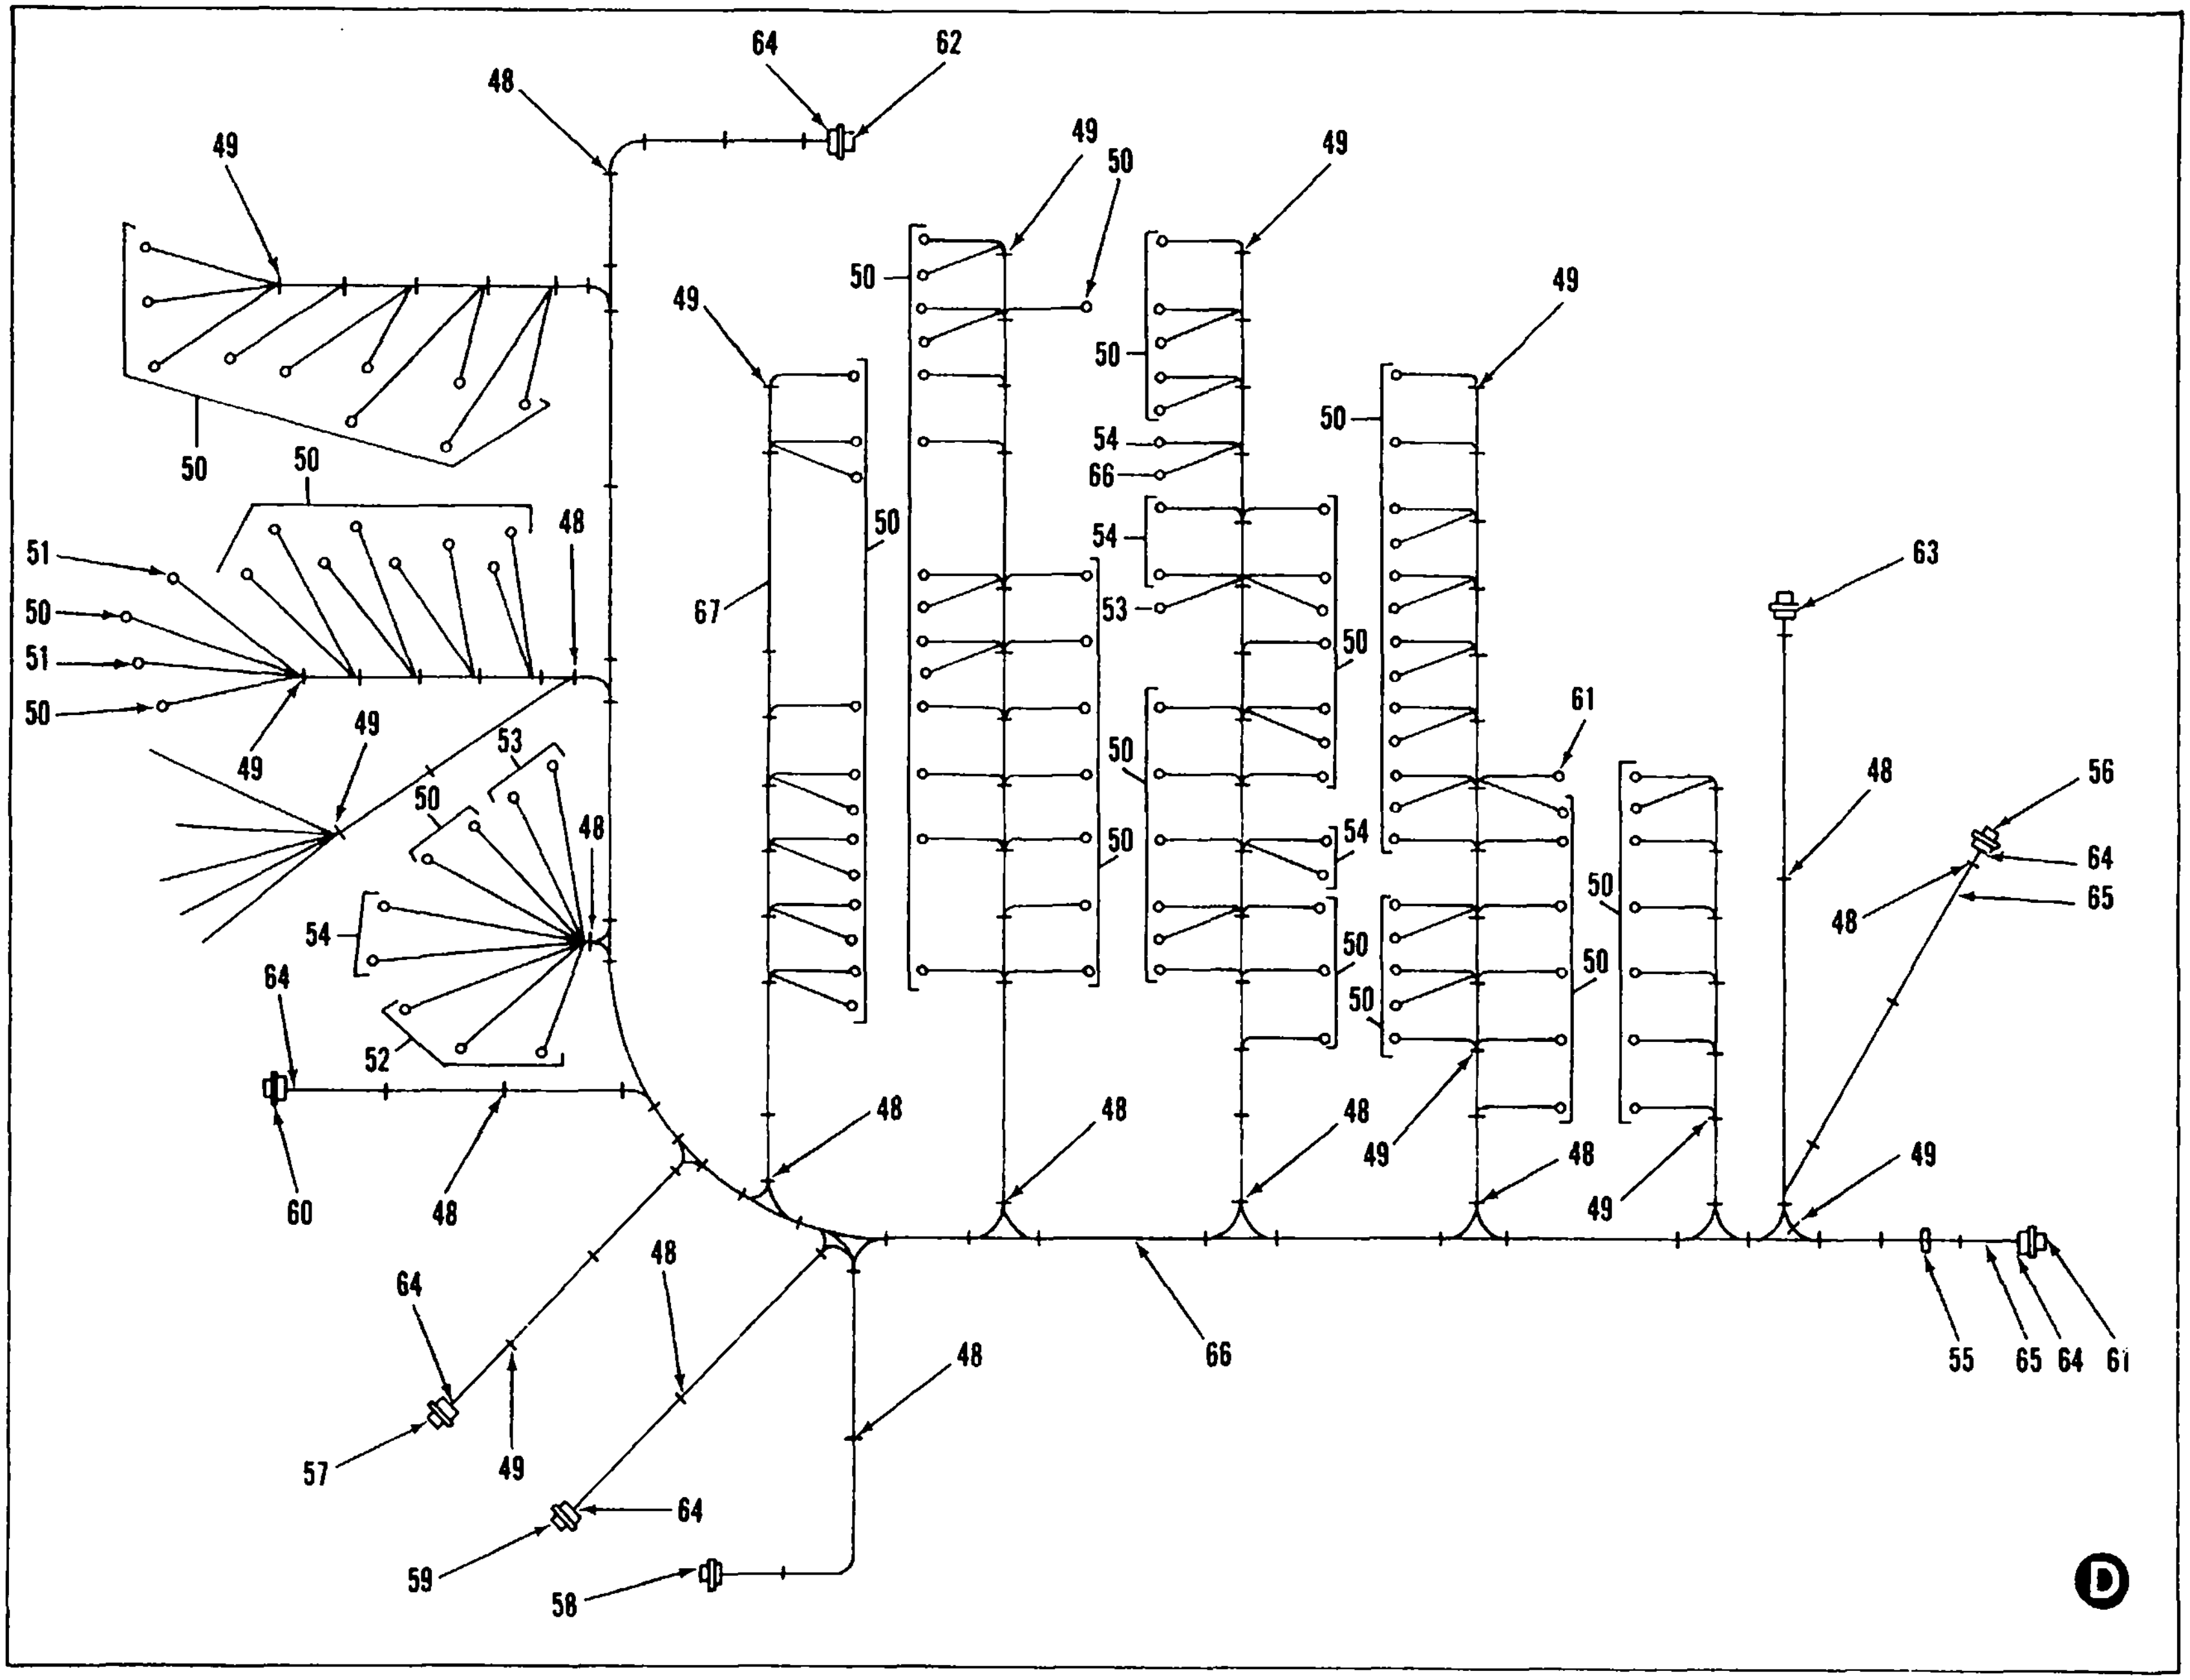
64
62
48
49
49
50
49
50
49
50
50
50
50
50
50
51
50
51
50
48
49
49
53
50
48
54
64
52
60
48
67
50
54
66
54
53
50
50
50
50
50
50
50
50
61
54
63
48
56
64
65
48
48
48
48
49
48
49
49
64
57
49
48
64
59
58
48
66
55
65
64
61
D

Figure 23. Special Relay Box and Related Parts (Sheet 3 of 3)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE / USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 - AC ELECTRIC CONTROL SYSTEMS - CONTINUED | | | |
| 23 | | | | | | | | | SPECIAL RELAY BOX AND RELATED PARTS CONTINUED | | | |
| 23 | 44 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5935-00-137-4670 | COVER, CONNECTOR<br>MS25043-22D 96906 | EA | 1 | 1 |
| 23 | 45 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5935-00-500-5008 | COVER, CONNECTOR<br>MS25043-18D 96906 | EA | 1 | 1 |
| 23 | 46 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-036-6969 | SCREW<br>69-662-19 30554<br>61-060741-40-0142B-0542B 78189 | EA | 4 | 8 |
| 23 | 47 | AFF | AFF | AHH | AHH | | | | WIRING HARNESS<br>79-4510 30554 | EA | 1 | 1 |
| 23 | 48 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5975-00-074-2072 | STRAP, TIE DOWN<br>MS3367-1-9 96906 | EA | 74 | 344 |
| 23 | 49 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5975-00-727-5153 | STRAP, TIE DOWN<br>MS33674-9 96906 | EA | 48 | 239 |
| 23 | 50 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5940-00-283-5280 | LUG, TERMINAL<br>MS25036-106 96906 | EA | 110 | 268 |
| 23 | 51 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5940-00-204-8990 | LUG, TERMINAL<br>MS250-36-111 96906 | EA | 2 | 2 |
| 23 | 52 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5940-00-143-4777 | LUG, TERMINAL<br>MS25036-157 96906 | EA | 3 | 8 |
| 23 | 53 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5940-00-143-4780 | LUG, TERMINAL<br>MS25036-108 96906 | EA | 4 | 35 |
| 23 | 54 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5940-00-204-8990 | LUG, TERMINAL<br>71-4924 30554<br>MS25036-111 96906 | EA | 6 | 6 |
| 23 | 55 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5975-00-944-1499 | BAND, MARKER<br>MS3368-1-9A 96906 | EA | 1 | 3 |
| 23 | 56 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5935-01-073-1240 | CONNECTOR, RECEPTACLE, J7<br>MS3102R18-11S 96906 | EA | 1 | 1 |
| 23 | 57 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5935-00-801-6620 | CONNECTOR, RECEPTACLE, J3<br>MS3102R14S6S 96906 | EA | 1 | 1 |
| 23 | 58 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5935-00-824-7883 | CONNECTOR, RECEPTACLE, J2<br>MS3102R36-7S 96906 | EA | 1 | 1 |
| 23 | 59 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5935-00-726-8317 | CONNECTOR, RECEPTACLE, J10<br>MS2102R32-7P 96906 | EA | 1 | 1 |
| 23 | 60 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5935-00-432-8607 | CONNECTOR, RECEPTACLE, J50<br>MS3102R28-12S 96906 | EA | 1 | 1 |
| 23 | 61 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5935-00-844-4467 | CONNECTOR, RECEPTACLE, J5<br>MS3102R36-7P 96906 | EA | 1 | 2 |
| 23 | 62 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5935-00-682-0567 | CONNECTOR, RECEPTACLE, J29<br>MS3102R22-19S 96906 | EA | 1 | 1 |
| 23 | 63 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5935-00-801-6621 | CONNECTOR, RECEPTACLE, J6<br>MS3102R20-27S 96906 | EA | 1 | 1 |
| 23 | 64 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5970-00-892-3391 | TUBING, INSULATION<br>267-1012P10 49956 | FT | 8 | 8 |
| 23 | 65 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5970-00-248-9191 | TUBING, INSULATION<br>267-1012P6 49956<br>8034668-48 18876 | FT | 8 | 8 |
| 23 | 66 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .080 | 6145-00-578-7514 | WIRE, ELECTRICAL<br>M5086/2-12-9 81349 | FT | 20 | 58 |
| 23 | 67 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 81349 | FT | 265 | 1178 |
| 23 | 68 | XB | XB | XB | XB | D | .080 | | CHASSIS ASSY<br>79-4513 30554 | EA | 1 | 1 |

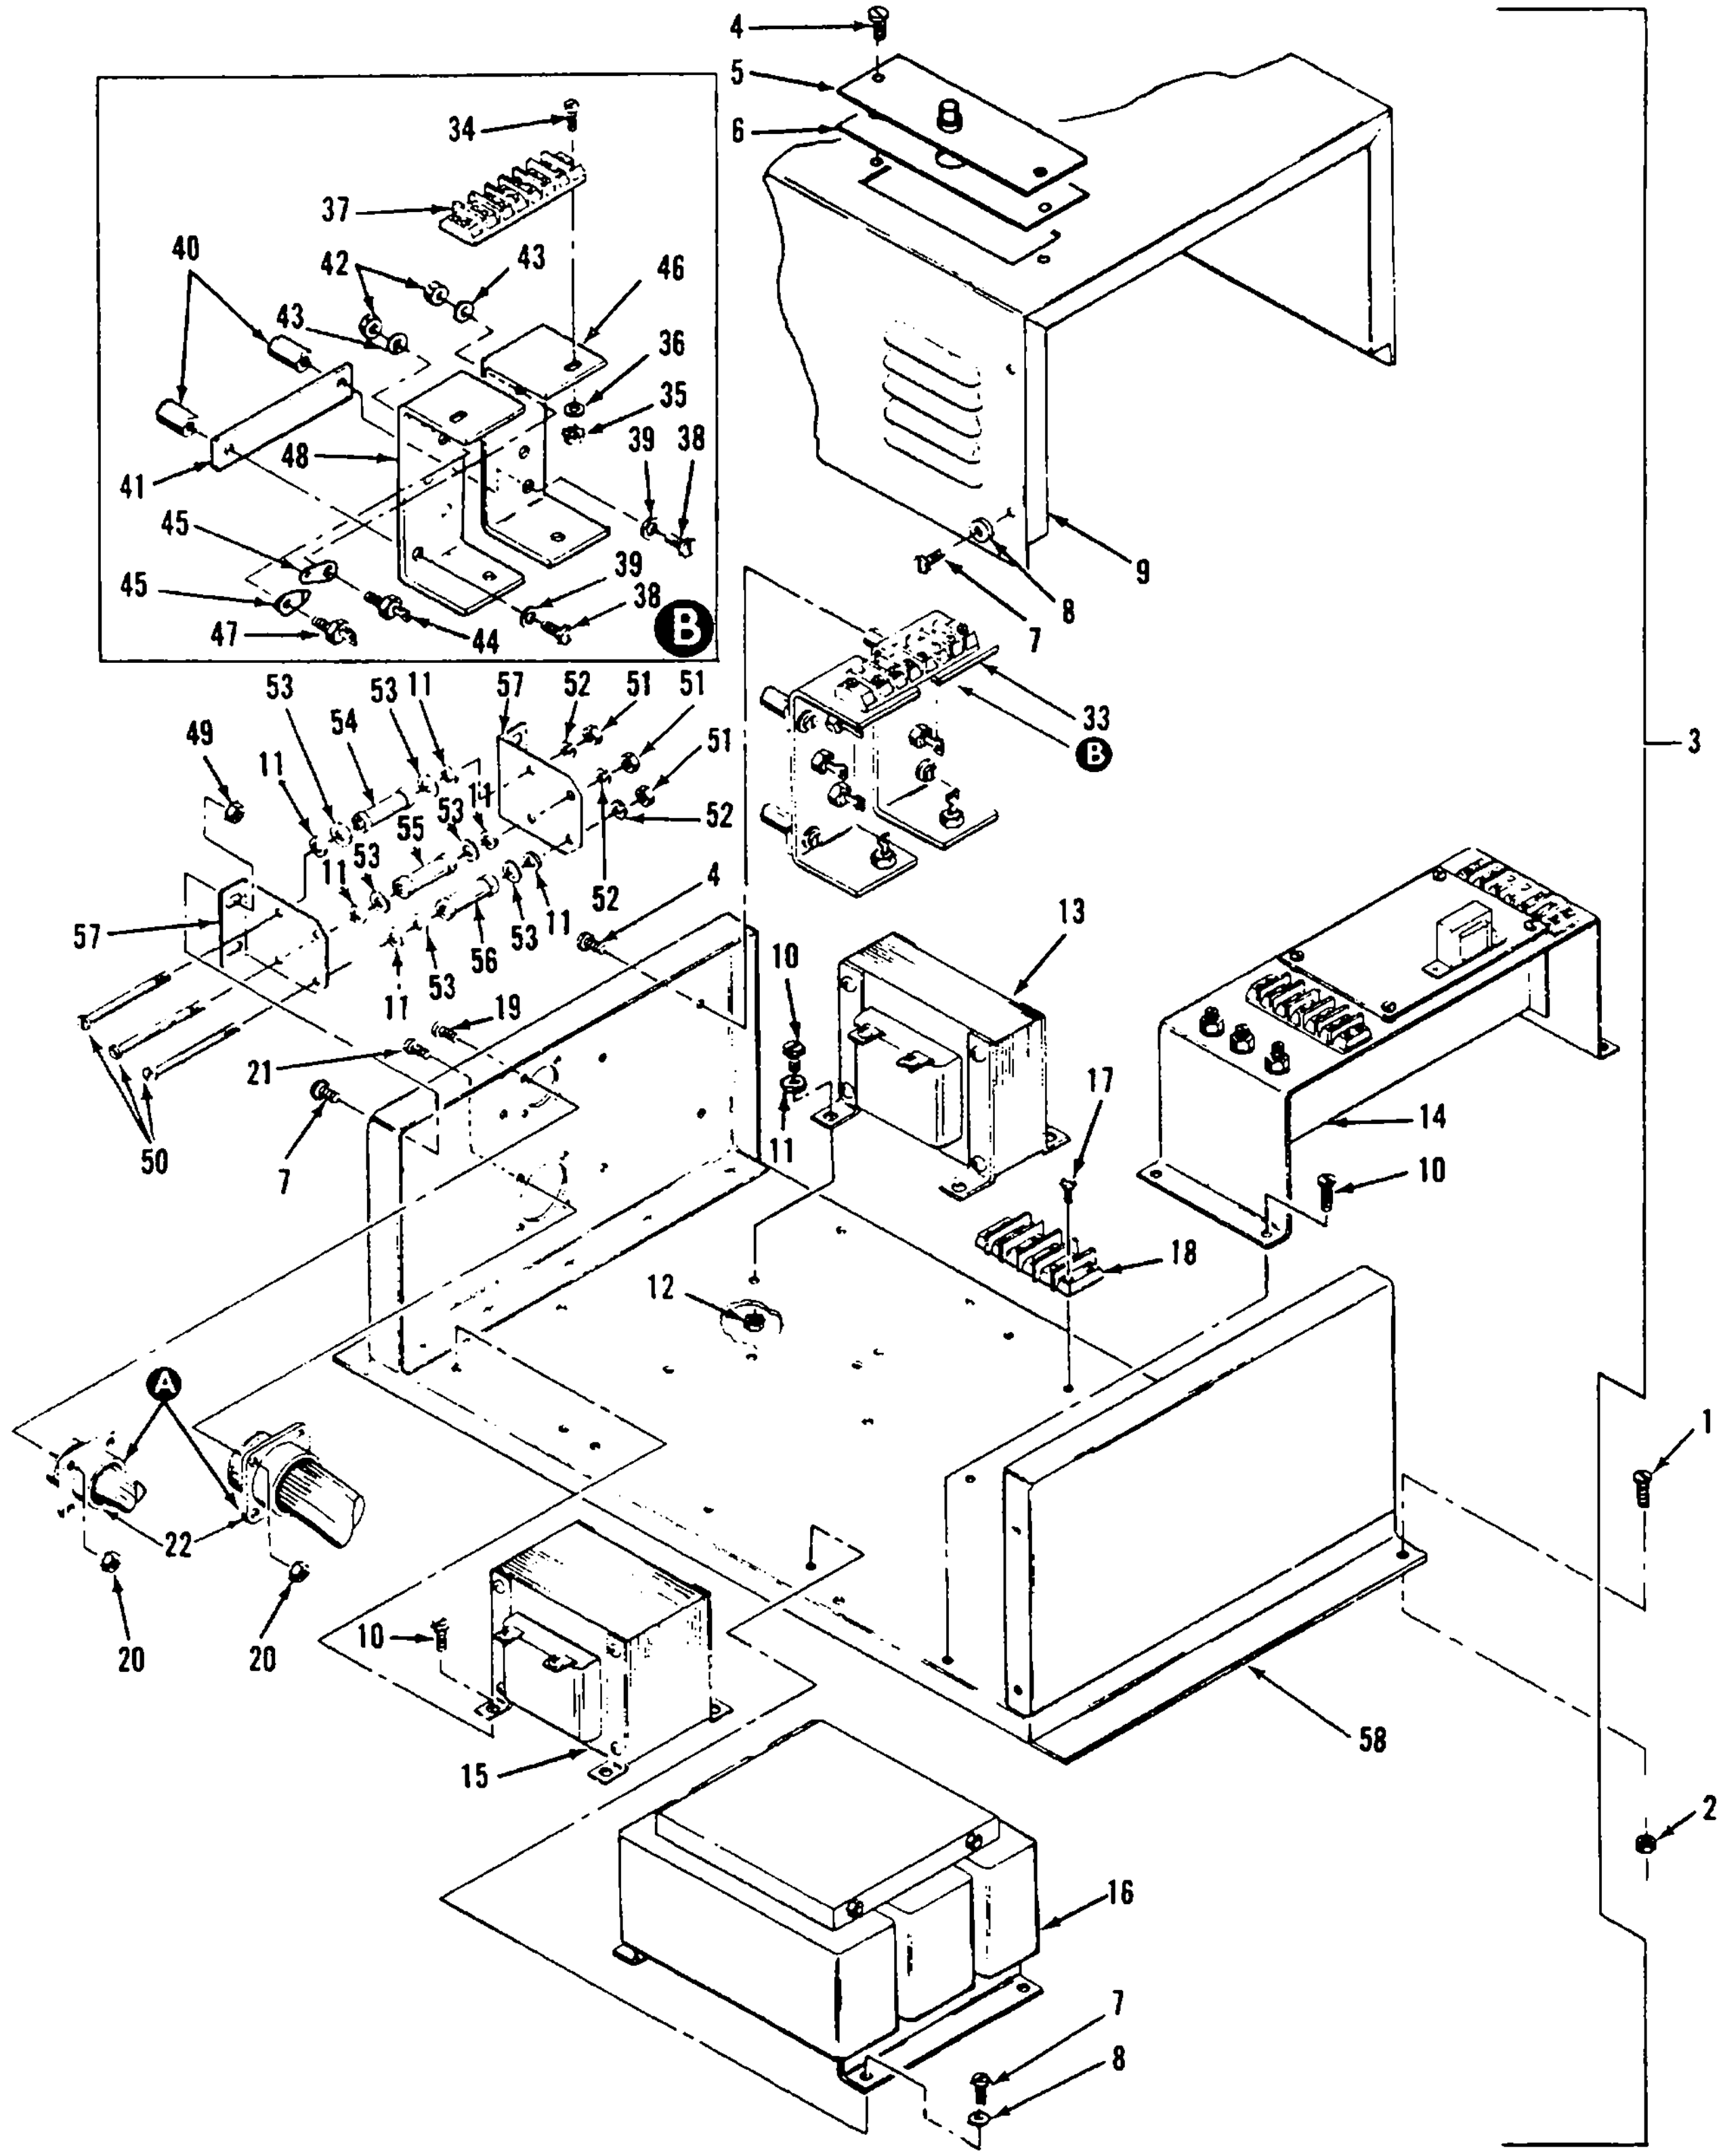
4
5
6
34
37
40
42
43
43
46
36
35
39
38
41
48
45
45
39
38
47
44
B
9
8
7
33
B
3
53
53
11
57
52
51
51
49
54
11
51
53
11
55
11
52
53
57
11
53
52
4
56
53
11
11
53
50
19
21
7
50
7
10
11
13
14
10
17
18
12
A
22
22
20
20
1
10
15
58
2
16
7
8

Figure 24. Exciter-Regulator and Related Parts (Sheet 1 of 2)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO. | b ITEM NO. | (2) SMR CODE a ARMY | b AIR FORCE | c NAVY | d USMC | (3) USMC a SSI | b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM | | | | |
| 24 | | | | | | | | | EXCITER - REGULATOR AND RELATED PARTS | | | | |
| 24 | 1 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0502 | SCREW<br>MS90725-6 | 96906 | EA | 4 | 118 |
| 24 | 2 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT<br>MS17829-4C | 96906 | EA | 4 | 167 |
| 24 | 3 | PAFFF | PAFDD | PAFFF | PAFFF | | .125 | 6115-00-185-8021 | EXCITER - REGULATOR ASSY<br>70-4145 | 30554 | EA | 1 | 1 |
| 24 | 4 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6968 | SCREW AND WASHER<br>69-662-18<br>61-06041-40-142B-542B | 30554<br>78189 | EA | 16 | 103 |
| 24 | 5 | MOO | MOO | MOO | MOO | | | | COVER, ACCESS<br>71-4677 | 30554 | EA | 1 | 1 |
| 24 | 6 | PAFZZ | PAPZZ | PAPZZ | PAPZZ | D | .008 | 5330-01-217-4044 | GASKET<br>71-4678 | 30554 | EA | 1 | 1 |
| 24 | 7 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6906 | SCREW<br>69-662-50<br>69-100841-40-0142B-0542B | 30554<br>78189 | EA | 20 | 98 |
| 24 | 8 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-014-5850 | WASHER<br>MS27183-42 | 96906 | EA | 18 | 20 |
| 24 | 9 | XB | XB | XB | XB | | | | COVER ASSY<br>70-4147 | 30554 | EA | 1 | 1 |
| 24 | 10 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-038-3103 | SCREW AND WASHER<br>69-662-35<br>61-080841-40-0142B-0542B | 30554<br>78189 | EA | 12 | 16 |
| 24 | 11 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-765-3197 | WASHER<br>MS27183-41 | 96906 | EA | 12 | 13 |
| 24 | 12 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-052-3632 | NUT AND WASHER<br>69-561-3<br>511-081800-00 | 30554<br>78189 | EA | 4 | 73 |
| 24 | 13 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5950-00-201-7439 | REACTOR, 60 HZ, L1<br>70-4040<br>00000-4925 | 30554<br>93568 | EA | 1 | 1 |
| 24 | 14 | AFF | AFF | AFF | AFF | | | | VOLTAGE REGULATOR ASSY, A10<br>(SEE FIG. 24 FOR BREAKDOWN)<br>70-4115 | 30554 | EA | 1 | 1 |
| 24 | 15 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .020 | 5950-00-201-7438 | TRANSFORMER, CONTROL, T4<br>70-4031<br>00000-4924 | 30554<br>93568 | EA | 1 | 1 |
| 24 | 16 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .020 | 5950-00-211-1028 | TRANSFORMER, SATURABLE, T1<br>70-4041<br>00000-4923 | 30554<br>93568 | EA | 1 | 1 |
| 24 | 17 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6902 | SCREW AND WASHER ASSY<br>69-662-36<br>61-081041-40-0142B-0542B | 30554<br>78189 | EA | 2 | 30 |
| 24 | 18 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 6940-00-983-6082 | BOARD, TERMINAL<br>38TB-4 | 81349 | EA | 1 | 2 |
| 24 | 19 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-038-3089 | SCREW AND WASHER<br>69-662-3<br>61-040641-40-042B-542B | 30554<br>78189 | EA | 4 | 8 |
| 24 | 20 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-836-3520 | NUT AND WASHER<br>69-561-1<br>511-041800-00 | 30554<br>78189 | EA | 8 | 66 |
| 24 | 21 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6903 | SCREW AND WASHER<br>69-662-4<br>61-040741-40-0142B-0542B | 30554<br>78189 | EA | 4 | 60 |

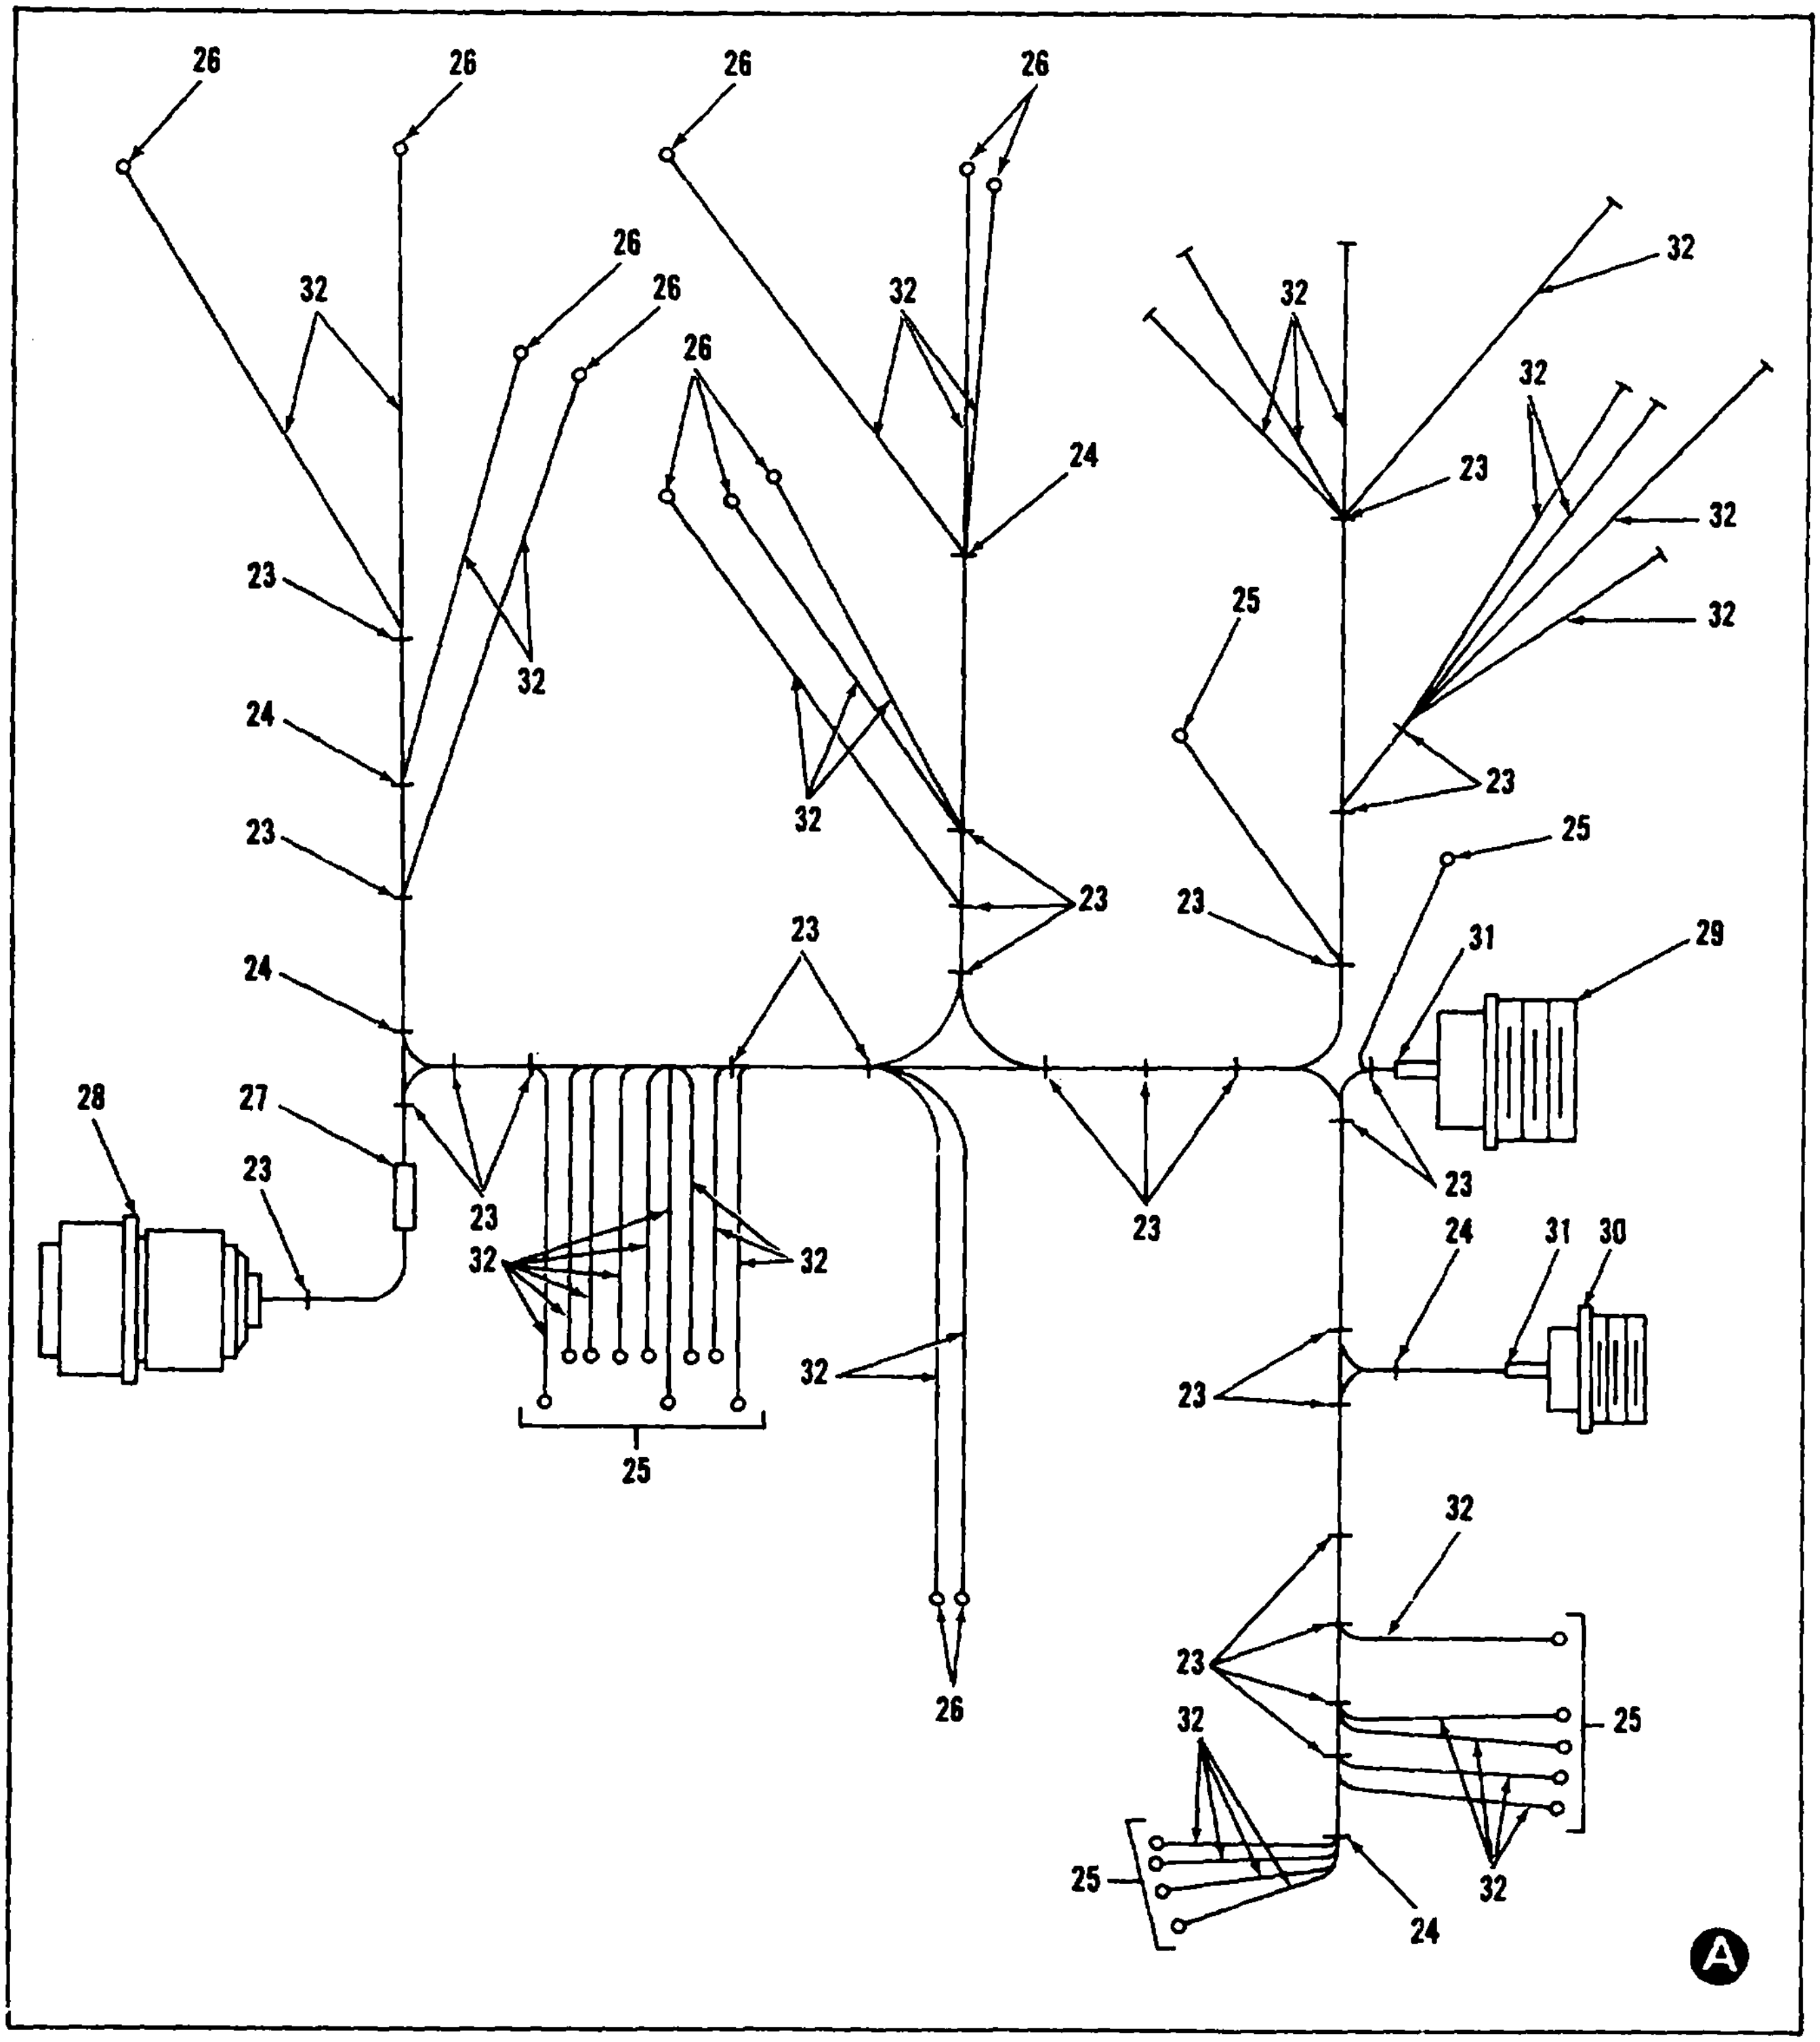
26
26
26
26
26
26
26
32
32
32
32
32
32
32
32
24
23
24
23
24
23
23
25
23
23
23
25
31
29
28
27
23
23
32
32
23
23
24
31
30
32
25
23
32
23
26
25
32
25
32
24
A

Figure 24. Exciter-Regulator and Related Parts (Sheet 2 of 2)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM - CONTINUED | | | | |
| 24 | | | | | | | | | EXCITER - REGULATOR AND RELATED PARTS - CONTINUED | | | | |
| 24 | 22 | AFF | AFF | AFF | AFF | | | 6115-00-248-6180 | WIRING HARNESS<br>70-4152 30554 | | EA | 1 | 1 |
| 24 | 23 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-074-2072 | STRAP, TIE DOWN<br>MS3367-1-9 96906 | | EA | 28 | 344 |
| 24 | 24 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-727-5153 | STRAP, TIE DOWN<br>MS3367-4-9 96906 | | EA | 6 | 239 |
| 24 | 25 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-283-5280 | LUG, TERMINAL<br>MS25036-106 96906 | | EA | 20 | 268 |
| 24 | 26 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4780 | LUG, TERMINAL<br>MS25036-108 96906 | | EA | 12 | 35 |
| 24 | 27 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 9905-80-841-4445 | MARKER, BAND<br>M43436/1-2 81349 | | EA | 1 | 4 |
| 24 | 28 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-834-4904 | CONNECTOR, PLUG, P11<br>MS3106R18-1P 96906 | | EA | 1 | 1 |
| 24 | 29 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-721-0496 | CONNECTOR, RECEPTACLE, J13<br>MS3102R22-14P 96906 | | EA | 1 | 1 |
| 24 | 30 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-834-4904 | CONNECTOR, RECEPTACLE, J19<br>MS3102R14S-6P 96906 | | EA | 1 | 1 |
| 24 | 31 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-227-9278 | TUBING, INSULATING<br>9034661 18876 | | FT | 1 | 2 |
| 24 | 32 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 81349 | | FT | 42 | 1178 |
| 24 | 33 | AFF | AFF | AFF | AFF | | | | BRIDGE RECTIFIER ASSY<br>70-4148 30554 | | EA | 1 | 1 |
| 24 | 34 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-218-4864 | SCREW AND WASHER<br>69-662-22 30554<br>61-061241-40-0142B-0542B 78189 | | EA | 2 | 6 |
| 24 | 35 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-063-7360 | NUT AND WASHER<br>69-561-2 30554<br>511-061800-00 78189 | | EA | 2 | 73 |
| 24 | 36 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-983-8483 | WASHER<br>MS27183-5 96906 | | EA | 2 | 73 |
| 24 | 37 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | | 5940-00-983-4067 | TERMINAL BOARD, TB1<br>40TB-6 81349 | | EA | 1 | 1 |
| 24 | 38 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-889-3000 | SCREW<br>MS35206-230 96906 | | EA | 4 | 4 |
| 24 | 39 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5970-00-223-6843 | WASHER, SHOULDERED<br>70-4042 30554<br>2713-250125-T144 06540 | | EA | 4 | 4 |
| 24 | 40 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-252-9692 | SPACER, THREADED<br>70-4024 30554<br>8396A0632-16 06540 | | EA | 4 | 4 |
| 24 | 41 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-01-219-7662 | PLATE, INSULATING<br>70-4151 30554 | | EA | 2 | 2 |
| 24 | 42 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-934-9751 | NUT<br>MS35650-302 96906 | | EA | 4 | 5 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM - CONTINUED | | | | |
| 24 | | | | | | | | | EXCITER - REGULATOR AND RELATED PARTS - CONTINUED | | | | |
| 24 | 43 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-543-5060 | WASHER, LOCK<br>MS35338-39 | 96906 | EA | 4 | 5 |
| 24 | 44 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5961-00-724-5970 | DIODE, RECTIFIER<br>JAN1N1204A | 81349 | EA | 3 | 3 |
| 24 | 45 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5950-00-201-7439 | LUG, TERMINAL<br>MS35431-8 | 96906 | EA | 2 | 2 |
| 24 | 46 | MFF | MFF | MFF | MFF | | | | HEATSHIELD, DIODE, LEFT<br>70-4150 | 30554 | EA | 1 | 1 |
| 24 | 47 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5961-00-998-9317 | DIODE, RECTIFIER<br>JAN1N1204RA | 81349 | EA | 2 | 2 |
| 24 | 48 | MFF | MFF | MFF | MFF | | | | HEATSHIELD, DIODE, RIGHT<br>70-4149 | 30554 | EA | 1 | 1 |
| 24 | 49 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-094-3421 | NUT AND WASHER<br>69-561-4<br>511-101800-00 | 30554<br>78189 | EA | 4 | 95 |
| 24 | 50 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-054-6681 | SCREW<br>MS51957-54 | 96906 | EA | 4 | 4 |
| 24 | 51 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-934-9757 | NUT<br>MS35649-282 | 96906 | EA | 4 | 5 |
| 24 | 52 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-045-3299 | WASHER<br>MS35338-42 | 96906 | EA | 4 | 9 |
| 24 | 53 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5970-00-814-0393 | WASHER, MICA<br>MS75009-2 | 96906 | EA | 8 | 8 |
| 24 | 54 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5905-00-636-7782 | RESISTOR, R10A, R10B<br>RW31V200 | 81349 | EA | 2 | 2 |
| 24 | 55 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-636-8357 | RESISTOR, R17<br>RW31V100 | 81349 | EA | 1 | 1 |
| 24 | 56 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-883-8044 | RESISTOR, R1<br>RW31V911 | 81349 | EA | 1 | 1 |
| 24 | 57 | MFF | MFF | MFF | MFF | | | | BRACKET, RESISTOR MOUNTING<br>70-4110 | 30554 | EA | 2 | 2 |
| 24 | 58 | XA | XA | XA | XA | | | | CHASSIS<br>70-4146 | 30554 | EA | 1 | 1 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO. | (1) ILLUSTRATION b ITEM NO. | (2) SMR CODE a ARMY | (2) SMR CODE b AIR FORCE | (2) SMR CODE c NAVY | (2) SMR CODE d USMC | (3) USMC a SSI | (3) USMC b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE / USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM | | | |
| 25 | | AFF | AFF | AFF | AFF | | | | VOLTAGE REGULATOR ASSEMBLY, A10 (SEE FIGURE 23, ITEM 14)<br>70-4115 30554 | | | |
| 25 | 1 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5030-00-036-6967 | SCREW<br>69-662-16 30554<br>61-060441-40-0142B-0542B 78189 | EA | 8 | 14 |
| 25 | 2 | MOO | MOO | MOO | MOO | | | | STANDOFF, THREADED<br>70-4111 30554 | EA | 4 | 4 |
| 25 | 3 | PBFFF | PAFFF | PAFFF | PAFFF | | .125 | 6110-00-258-8542 | VOLTAGE REGULATOR SUBASSY<br>70-4119 30554 | EA | 1 | 1 |
| 25 | 4 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-813-0698 | LUG, TERMINAL<br>MS25036-101 96906 | EA | 17 | 17 |
| 25 | 5 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5972-00-074-2072 | STRAP, CABLE<br>MS3367-1-9 96906 | EA | 16 | 344 |
| 25 | 6 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-643-0648 | WIRE, ELECTRICAL<br>MIL-W-16887/2 81349 | FT | 2 | 2 |
| 25 | 7 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6968 | SCREW AND WASHER<br>69-662-18 30554<br>61-060741-40-0142B-0542B 78189 | EA | 2 | 103 |
| 25 | 8 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-063-7360 | NUT AND WASHER<br>69-561-2 30554<br>511-061800-00 78189 | EA | 10 | 73 |
| 25 | 9 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-983-8483 | WASHER<br>MS27183-5 96906 | EA | 2 | 73 |
| 25 | 10 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .020 | 5950-00-201-2437 | TRANSFORMER, A10T5<br>70-4032 30554<br>00000-4831 93568 | EA | 1 | 1 |
| 25 | 11 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 5325-00-685-0615 | EYELET<br>70-4034 30554<br>SE-45 07707 | EA | 11 | 11 |
| 25 | 12 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-116-8570 | RESISTOR, A10R21<br>RCR20G912JS 81349 | EA | 1 | 1 |
| 25 | 13 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5961-00-958-5391 | DIODE, A10CR7 THROUGH A10CR17<br>JAN1N4247 81349 | EA | 10 | 10 |
| 25 | 14 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-173-4276 | RESISTOR, A10R16<br>RNR70C4990FS 81349 | EA | 1 | 1 |
| 25 | 15 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 5325-00-891-1826 | EYELET<br>S-6045 07707 | EA | 2 | 24 |
| 25 | 16 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-417-7441 | RESISTOR, A10R2<br>RNR70C6810FS 81349 | EA | 1 | 1 |
| 25 | 17 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-468-4240 | RESISTOR, A10R3, A10R5, A10R6,A10R7<br>RNR65C5620FS 81349 | EA | 4 | 4 |
| 25 | 18 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5910-01-063-4059 | CAPACITOR, A10C3<br>M39006/09-8731 81349 | EA | 1 | 1 |
| 25 | 19 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5961-00-941-2056 | TRANSISTOR, A10QQ, A10Q2<br>JAN2N2904A 81349 | EA | 2 | 2 |
| 25 | 20 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5999-00-420-7393 | PAD, TRANSISTOR<br>70-4035 30554<br>7717-5NRED 13103 | EA | 2 | 2 |

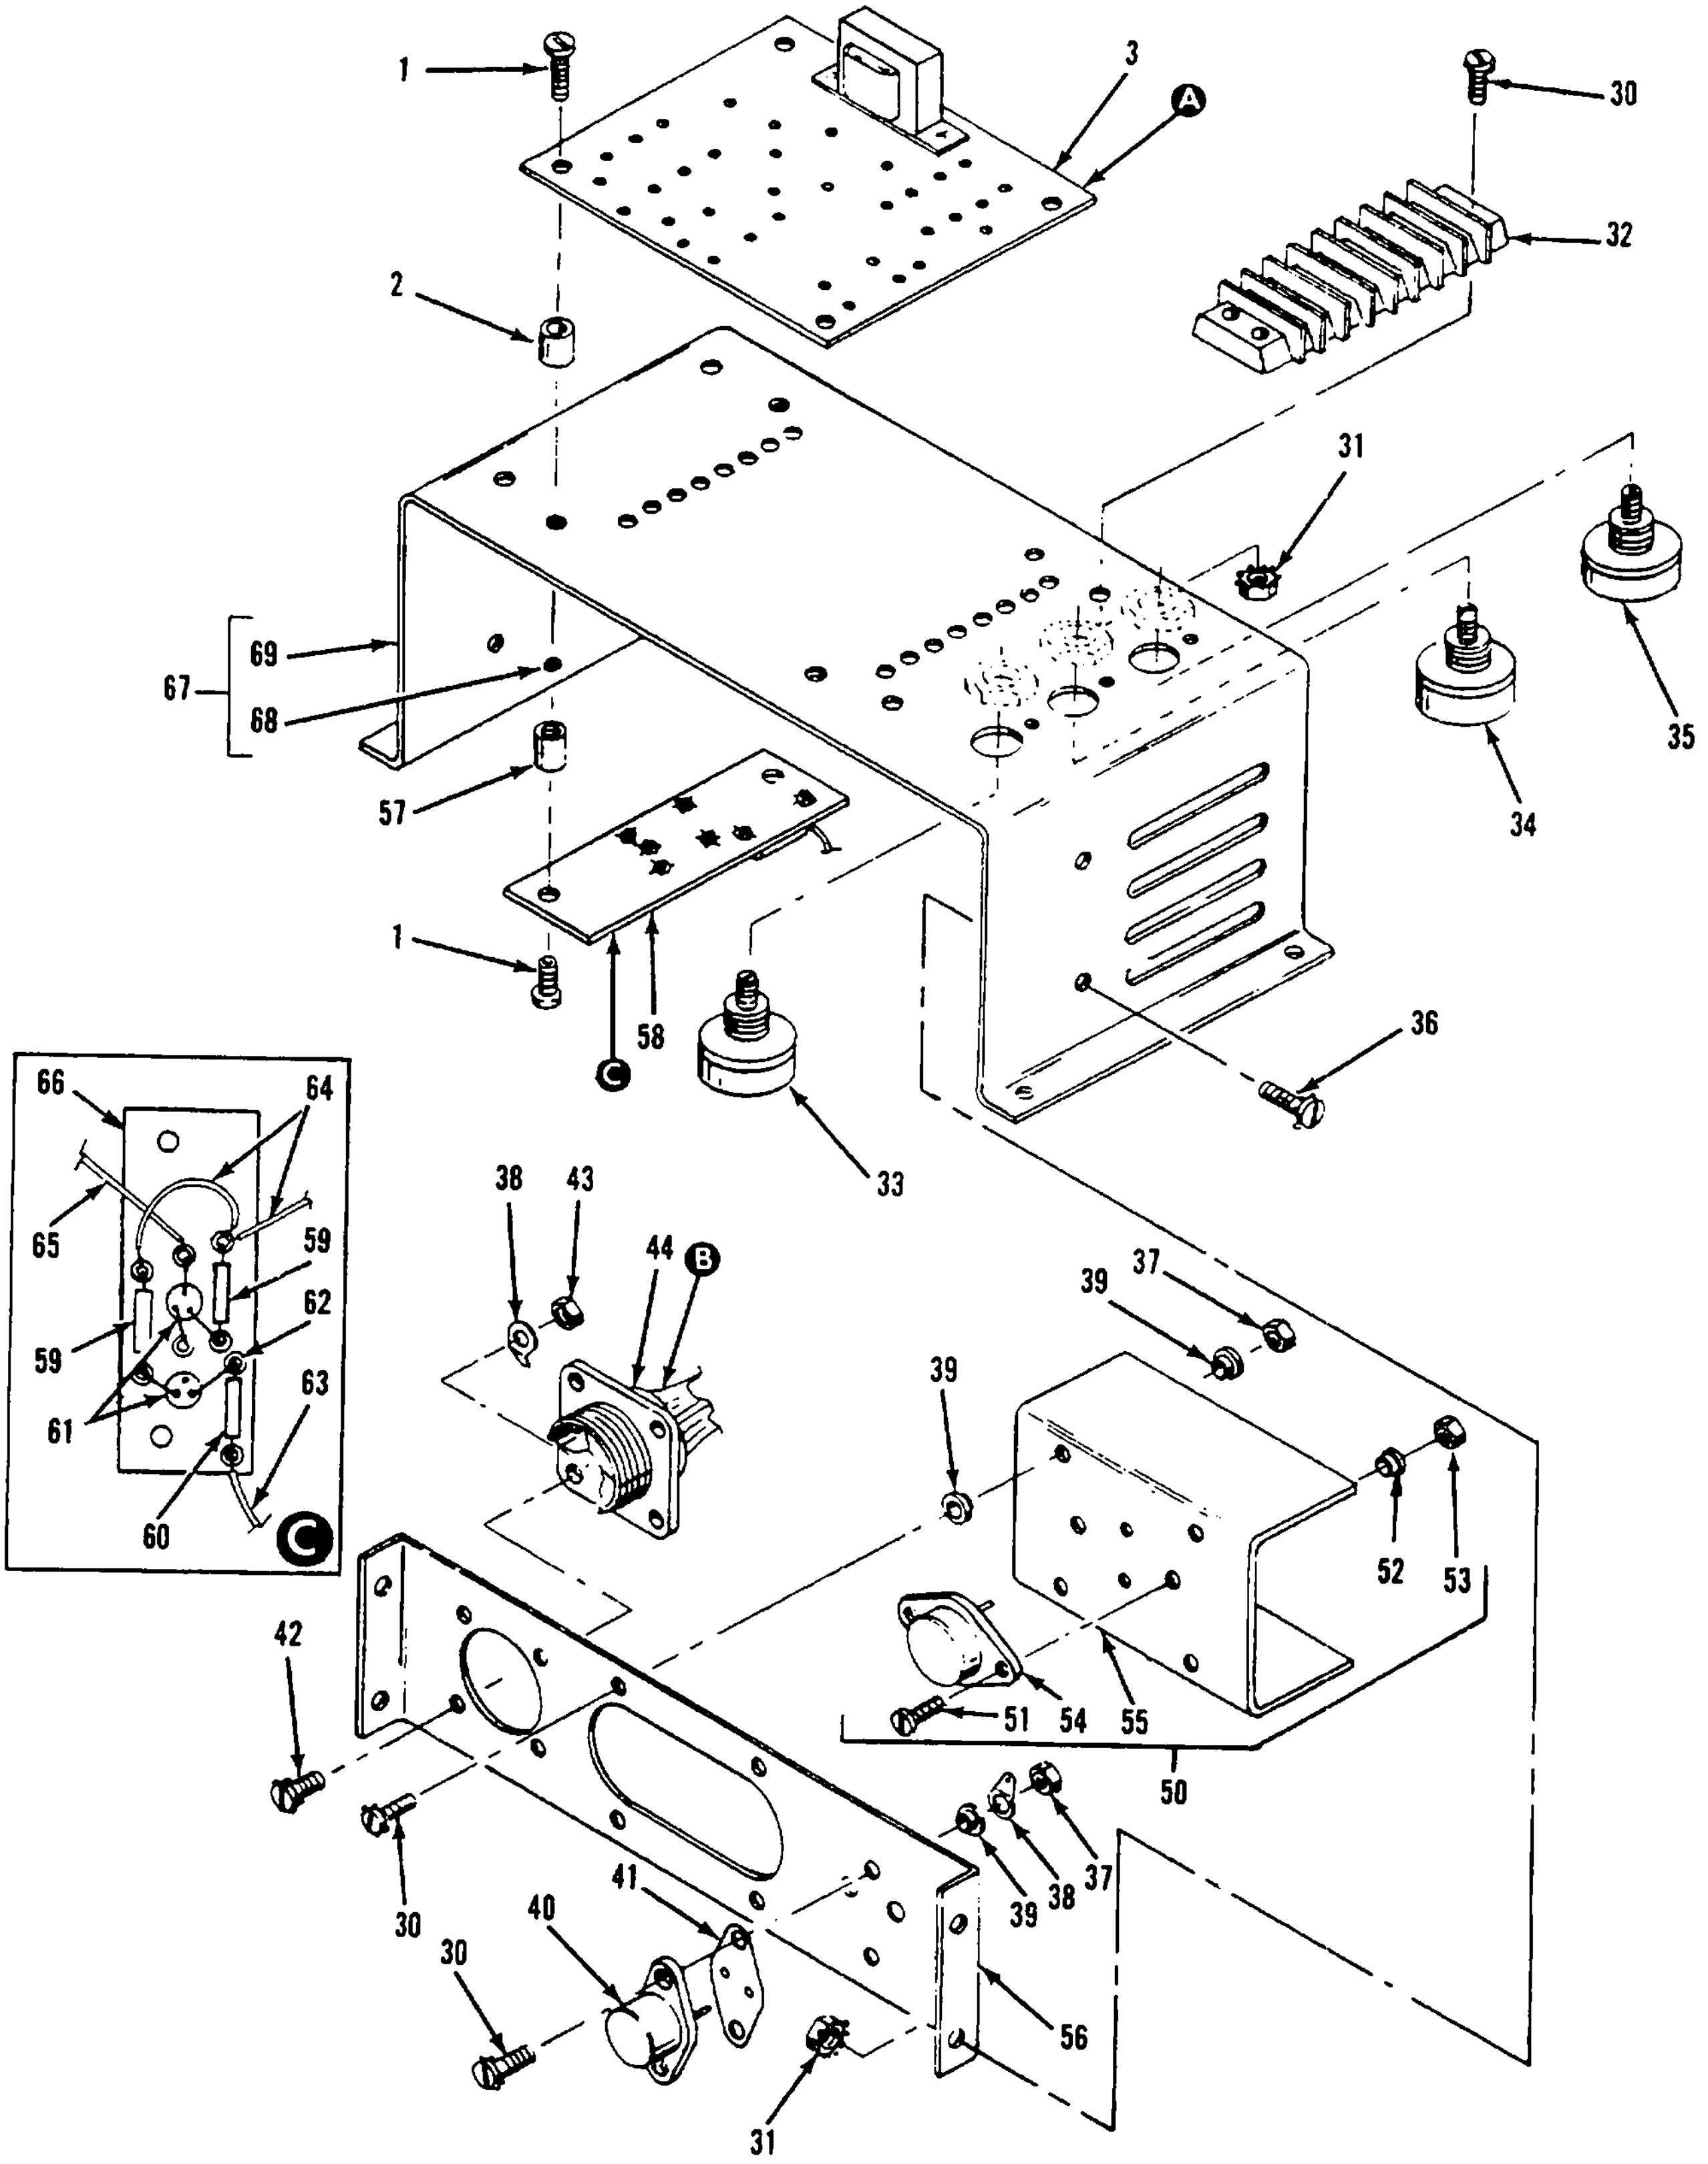
1
3
A
30
32
2
31
69
67
68
35
34
57
1
58
C
36
66
64
65
59
62
59
61
63
60
C
33
38
43
44
B
37
39
39
52
53
42
51
54
55
50
30
30
40
41
39
38
37
56
31

Figure 25. Voltage Regulator Assembly (Sheet 1 of 3)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 -AC ELECTRICAL CONTROL SYSTEM - CONTINUED | | | | |
| 25 | | | | | | | | | VOLTAGE REGULATOR ASSEMBLY - CONTINUED | | | | |
| 25 | 21 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5910-01-061-1268 | CAPACITOR, A10C4<br>M39006/09-8674 81349 | | EA | 1 | 1 |
| 25 | 22 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5961-00-621-2309 | DIODE, A10VR1<br>JAN1N751A 81349 | | EA | 1 | 1 |
| 25 | 23 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5910-00-061-1263 | CAPACITOR, A10C2, A10C5<br>M39006/09-8734 81349 | | EA | 2 | 2 |
| 25 | 24 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-410-3964 | RESISTOR, A10R4<br>RNR65C6810FS 81349 | | EA | 1 | 1 |
| 25 | 25 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-403-2455 | RESISTOR, A10R8<br>RNR65C2211FS 81349 | | EA | 1 | 1 |
| 25 | 26 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-104-8347 | RESISTOR, A10R9<br>RCR32G101JS 81349 | | EA | 1 | 1 |
| 25 | 27 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-405-8260 | RESISTOR, A10R14<br>RCR42G471JS 81349 | | EA | 1 | 1 |
| 25 | 28 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5910-01-036-3581 | CAPACITOR, A1C1<br>M39006/09-8728 81349 | | EA | 1 | 1 |
| 25 | 29 | PAFFF | PAFFF | PAFFF | PAFFF | D | .008 | 5999-01-016-3198 | PRINTED WIRING BOARD<br>70-4120 30554 | | EA | 1 | 1 |
| 25 | 30 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6976 | SCREW AND WASHER<br>69-662-21 30554<br>61-061041-40-0142B-0542B 78189 | | EA | 10 | 12 |
| 25 | 31 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-063-7360 | NUT AND WASHER<br>69-561-2 30554<br>511-061800-00 78189 | | EA | 8 | 73 |
| 25 | 32 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5940-00-983-6069 | BOARD, TERMINAL<br>40TB-8 81349 | | EA | 2 | 2 |
| 25 | 33 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-430-2679 | RESISTOR, VARIABLE<br>RA20TASB751A 81349 | | EA | 1 | 1 |
| 25 | 34 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-759-8879 | RESISTOR, VARIABLE<br>RA20TASB502A 81349 | | EA | 1 | 1 |
| 25 | 35 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-378-0250 | RESISTOR, VARIABLE<br>RA20TASB103A 81349 | | EA | 1 | 1 |
| 25 | 36 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6968 | SCREW AND WASHER<br>69-661-18 30554<br>61-060641-40-0142B-0542B 78189 | | EA | 1 | 103 |
| 25 | 37 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-081-8087 | NUT<br>MS21044-N06 96906 | | EA | 10 | 68 |
| 25 | 38 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-816-6103 | LUG, TERMINAL<br>MS77066-2 96906 | | EA | 2 | 2 |
| 25 | 39 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5330-00-227-1538 | WASHER, SHOULDERED<br>70-4112 30554<br>2701-18540-T140 06540 | | EA | 10 | 14 |
| 25 | 40 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5961-00-222-1754 | TRANSISTOR, A10Q3<br>71-4936 30554<br>SDT1061 21845 | | EA | 1 | 2 |

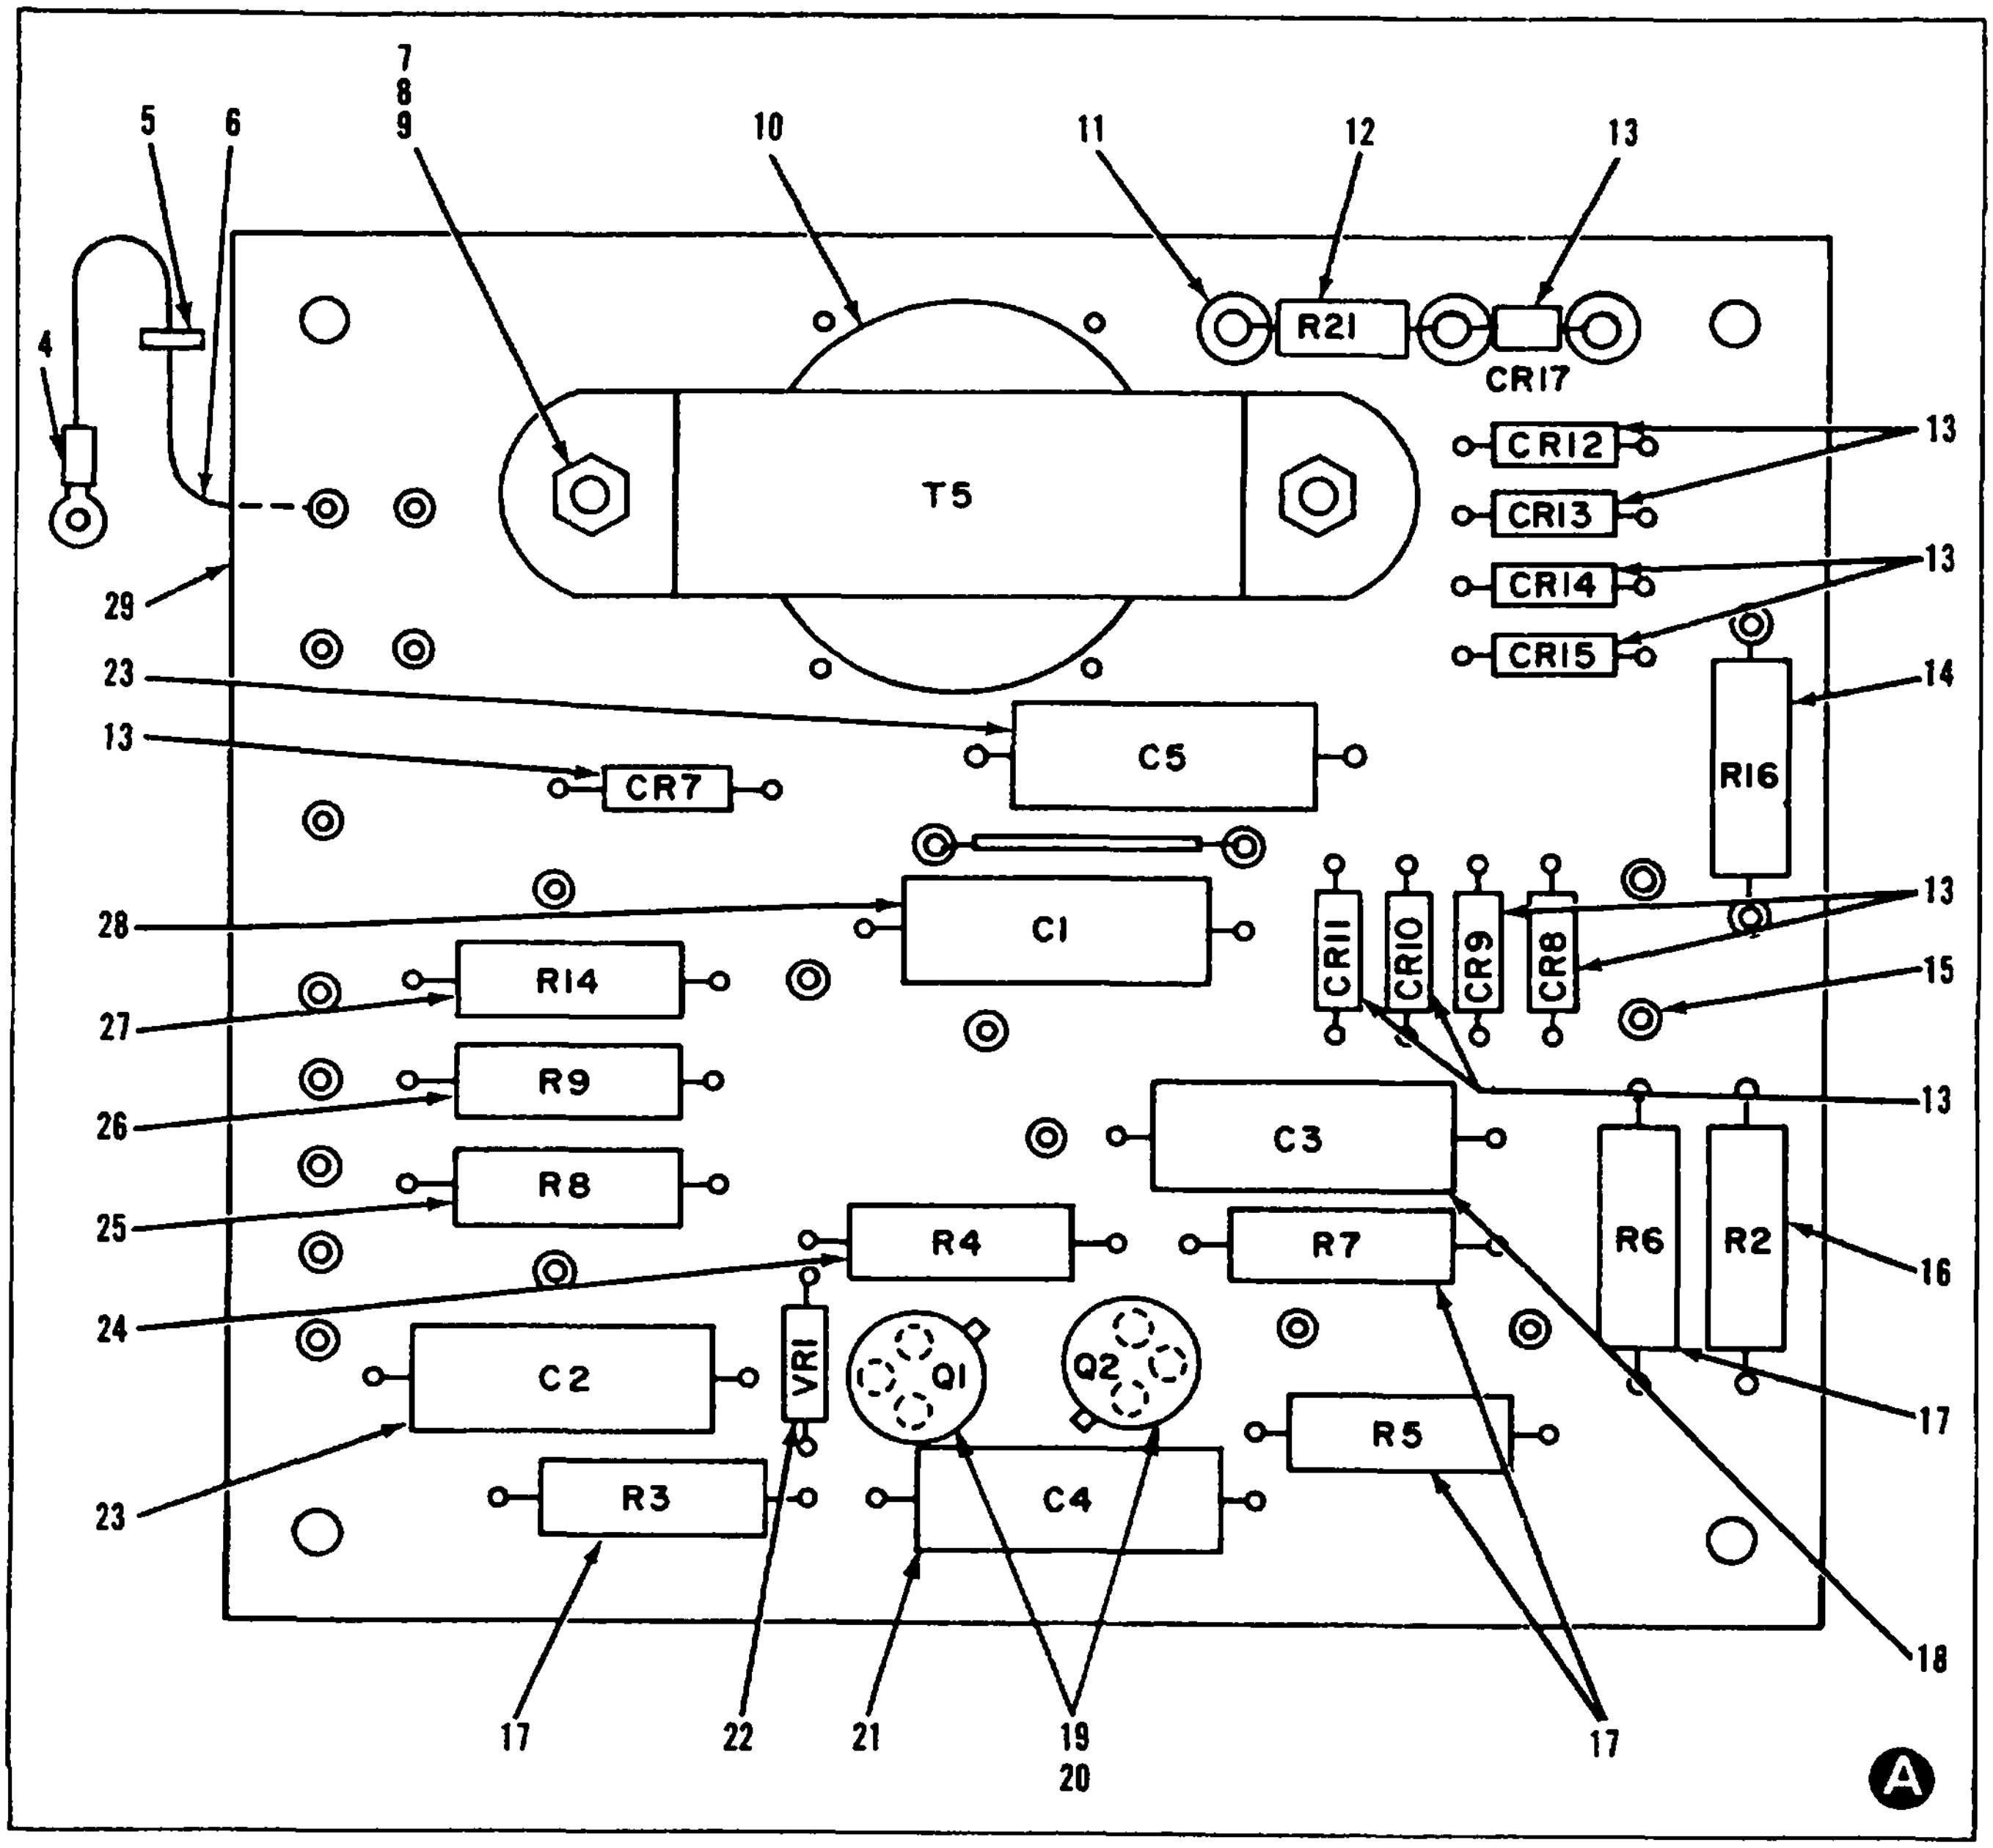
7
8
9
5
6
10
11
12
13
4
R21
CR17
T5
CR12
CR13
CR14
CR15
29
23
13
C5
CR7
R16
14
28
C1
CR11
CR10
CR9
CR8
15
27
R14
R9
26
C3
25
R8
24
R4
R7
R6
R2
16
VR1
Q1
Q2
C2
17
23
R5
R3
C4
18
17
22
21
19
20
17
A

Figure 25. Voltage Regulator Assembly (Sheet 2 of 3)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM - CONTINUED | | | | |
| 25 | | | | | | | | | VOLTAGE REGULATOR ASSEMBLY - CONTINUED | | | | |
| 25 | 41 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5970-00-223-6842 | WASHER, MICA<br>70-4033 30554<br>A732 30161 | | EA | 1 | 1 |
| 25 | 42 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6903 | SCREW AND WASHER<br>69-662-4 30554<br>61-040741-40-0142B-0542B 78189 | | EA | 8 | 60 |
| 25 | 43 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-836-3520 | NUT AND WASHER<br>69-561-1 30554<br>511-041800-00 78189 | | EA | 12 | 66 |
| 25 | 44 | AFF | AFF | AFF | AFF | | | 6115-00-248-6185 | WIRING HARNESS<br>70-4121 30554 | | EA | 1 | 1 |
| 25 | 45 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-727-5753 | STRAP, TIE DOWN<br>MS3367-4-9 96906 | | EA | 32 | 239 |
| 25 | 46 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 9905-00-752-4649 | BAND MARKER<br>M43436/1-1 81349 | | EA | 1 | 1 |
| 25 | 47 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-813-4364 | CONNECTOR, RECEPTACLE, A10J11<br>MS3102R18-1S 96906 | | EA | 1 | 1 |
| 25 | 48 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-915-6133 | INSULATION, ELECTRICAL MIL-I-631, TYPE F, FORM UA. GRADE A, CLASS 1, CATEGORY 1 81349<br>187C704P433 89954 | | FT | 2 | 2 |
| 25 | 49 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-643-0648 | WIRE, ELECTRICAL<br>M16878/2-22-9 81349<br>89 54-9 70903 | | FT | 34 | 38 |
| 25 | 50 | AFF | AFF | AFF | AFF | | | | HEAT SINK ASSEMBLY<br>70-4117 30554 | | EA | 1 | 1 |
| 25 | 51 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6972 | SCREW AND WASHER<br>69-662-20 30554<br>61-0841-40-0142B-0524B 78189 | | EA | 2 | 12 |
| 25 | 52 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5330-00-227-1538 | WASHER, SHOULDERED, INSULATED<br>70-4112 30554 | | EA | 2 | 4 |
| 25 | 53 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-061-8087 | NUT, SELF-LOCKING<br>MS21044-N06 96906 | | EA | 2 | 4 |
| 25 | 54 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5961-00-222-1754 | TRANSISTOR, A10Q4<br>71-4936 30554<br>SDT1061 21845 | | EA | 1 | 2 |
| 25 | 55 | XB | XB | XB | XB | | | | HEAT SINK, XSTR<br>70-4106 30554 | | EA | 1 | 1 |
| 25 | 56 | MFF | MFF | MFF | MFF | | | | BRACKET, COMPONENT MOUNTING<br>70-4118 30554 | | EA | 1 | 1 |
| 25 | 57 | MFF | MFF | MFF | MFF | | | | STANDOFF, THREADED<br>70-4113 30554 | | EA | 2 | 2 |
| 25 | 58 | PAFZZ | PAFZZ | PAFZZ | | | | 6115-00-248-6187 | COMPONENT BOARD ASSY<br>70-4123 30554 | | EA | 1 | 1 |
| 25 | 59 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-110-0196 | RESISTOR, A10R18, A10R19<br>RCR20G102JS 81349 | | EA | 2 | 2 |

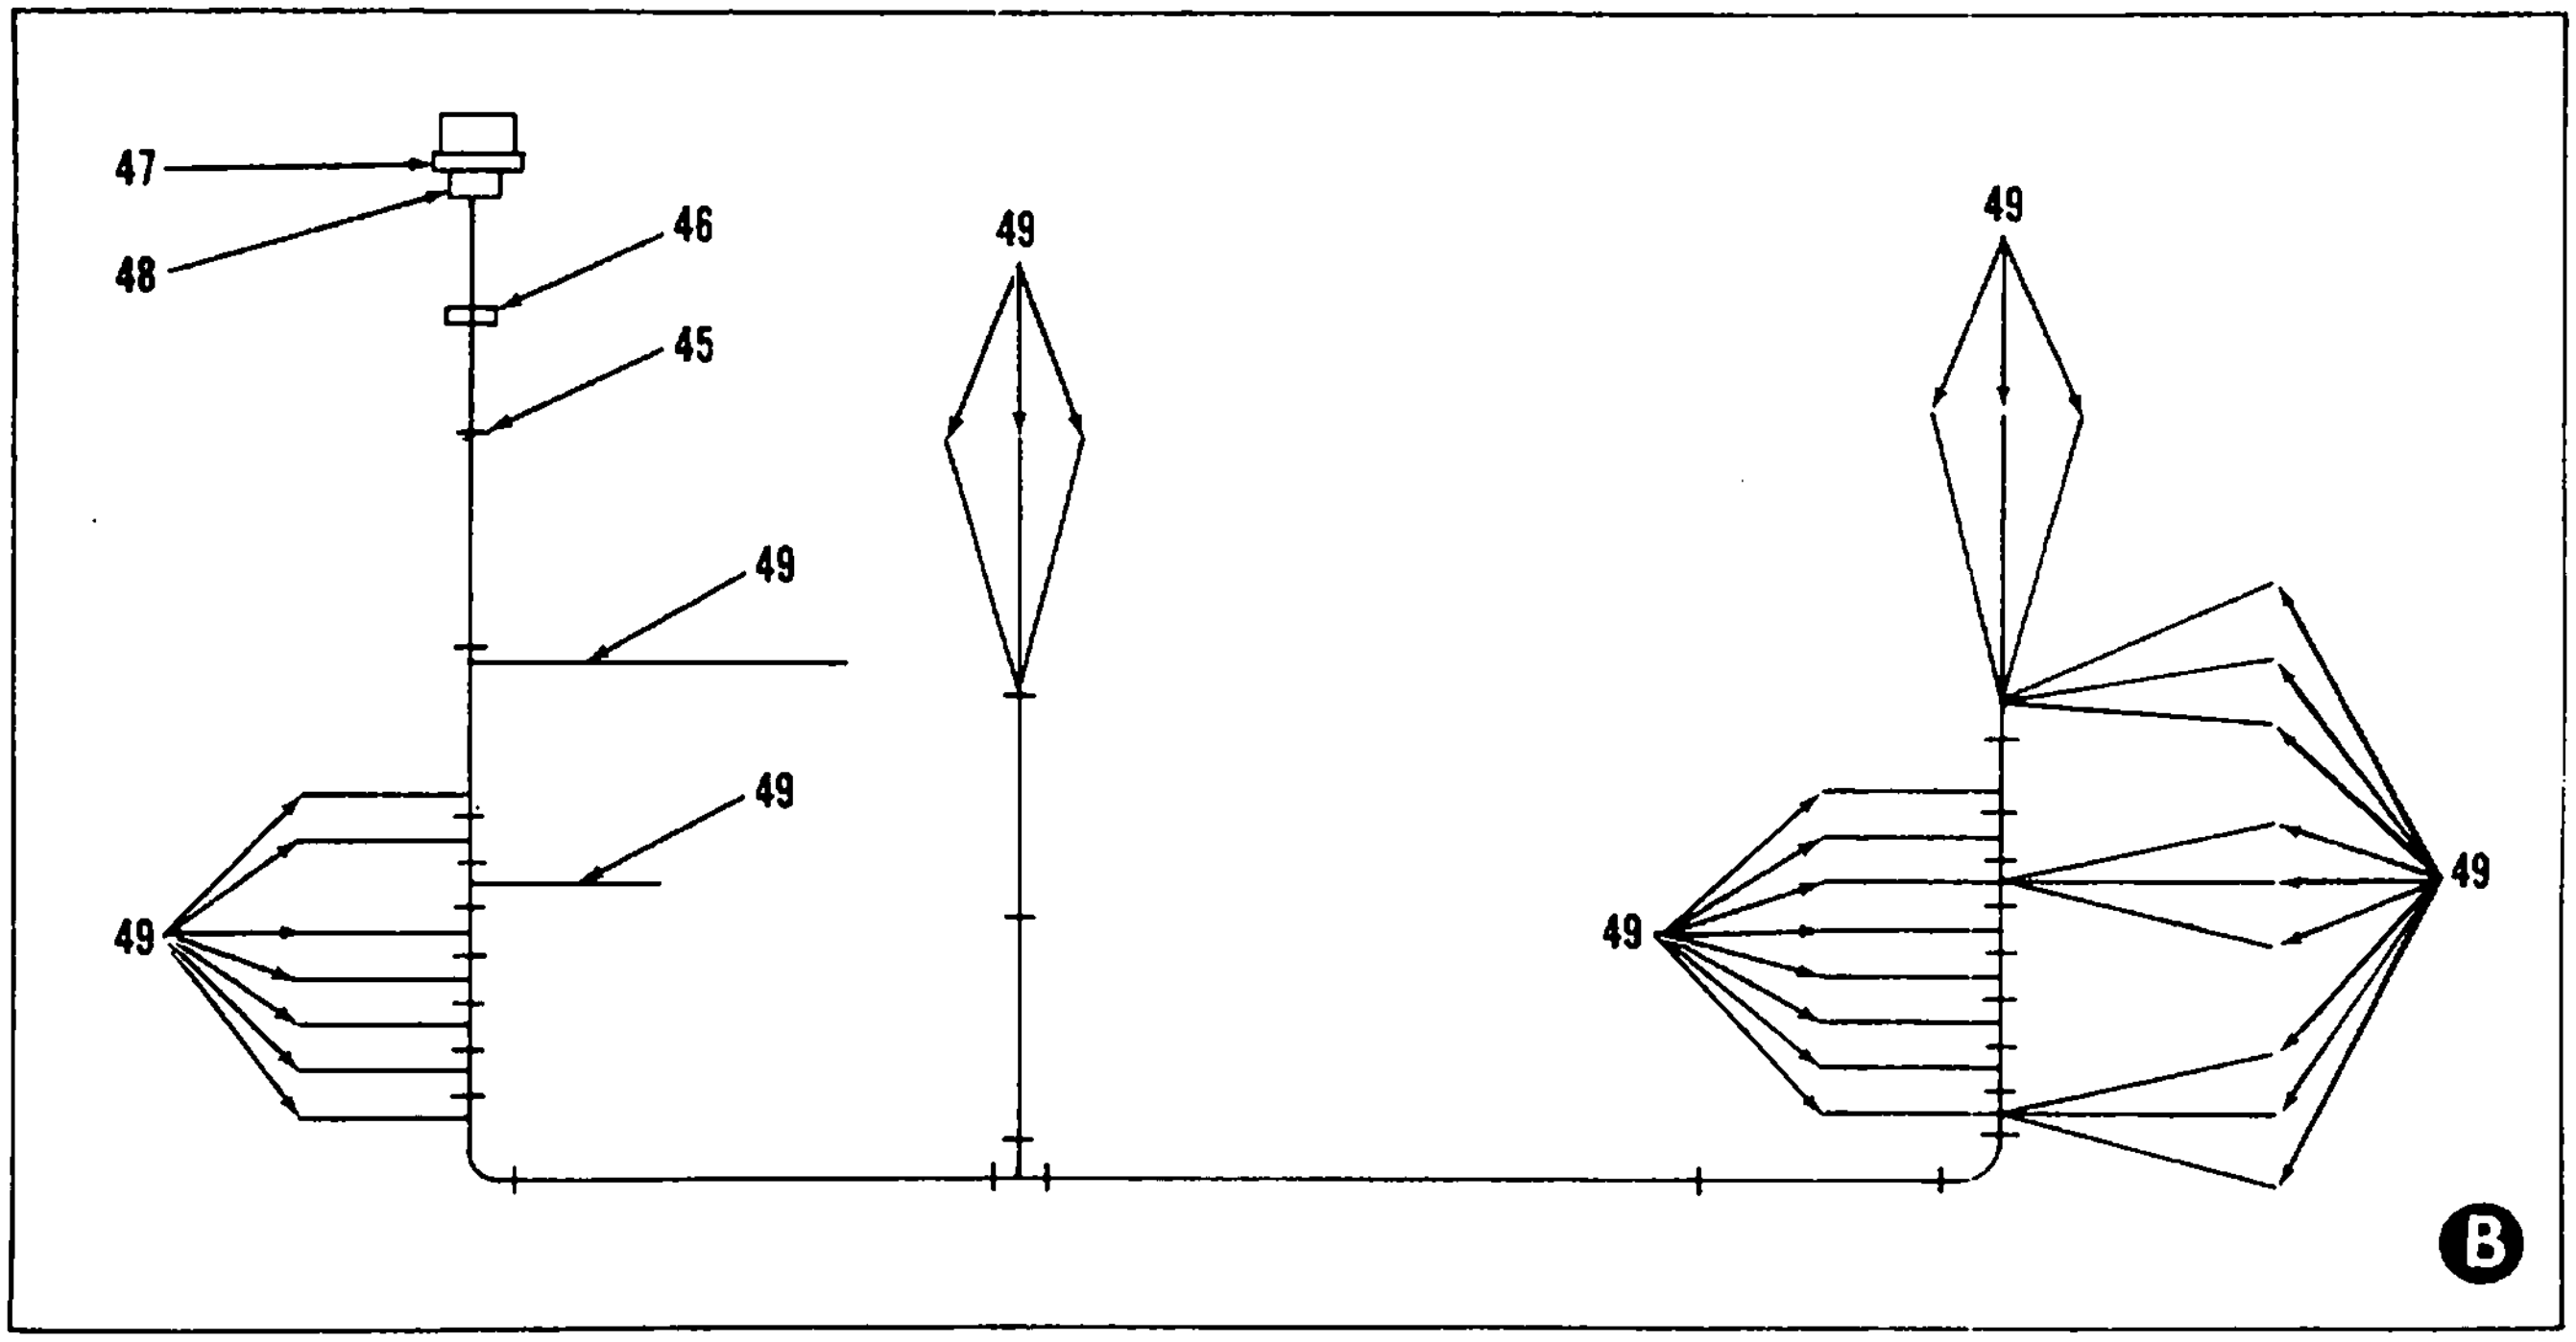
47
48
46
45
49
49
49
49
49
49
49
B

Figure 25. Voltage Regulator Assembly (Sheet 3 of 3)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL<br>CONTROL SYSTEM - CONTINUED | | | | |
| 25 | | | | | | | | | VOLTAGE REGULATOR<br>ASSEMBLY - CONTINUED | | | | |
| 25 | 60 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-60-435-1723 | RESISTOR, A10R20 | | EA | 1 | 1 |
| 25 | 61 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5961-00-837-7262 | TRANSISTOR, A10Q3, A10Q6<br>JAN2N697 81349 | | EA | 2 | 2 |
| 25 | 62 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | | 5325-00-685-0615 | EYELET<br>70-4034 30554 | | EA | 2 | 11 |
| 25 | 63 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-726-0285 | WIRE, ELECTRICAL<br>M16878/2-22-2 81349 | | FT | 1 | 1 |
| 25 | 64 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-726-0637 | WIRE, ELECTRICAL<br>M16878/2-22-4 81349 | | FT | 1 | 1 |
| 25 | 65 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-581-1627 | WIRE, ELECTRICAL<br>M16878/2-22-5 81349 | | FT | 1 | 1 |
| 25 | 66 | XA--- | XA--- | XA | XA | | | | COMPONENT BOARD<br>70-4105 30554 | | EA | 1 | 1 |
| 25 | 67 | XA | XA | XA | XA | | | | CHASSIS, ASSY<br>VOLTAGE REGULATOR<br>70-4116 30554 | | EA | 1 | 1 |
| 25 | 68 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-01-013-0208 | NUT<br>70-4037 30554 | | EA | 2 | 4 |
| 25 | 69 | XA | XA | XA | XA | | | | CHASSIS<br>70-4116-01 30554 | | EA | 1 | 1 |

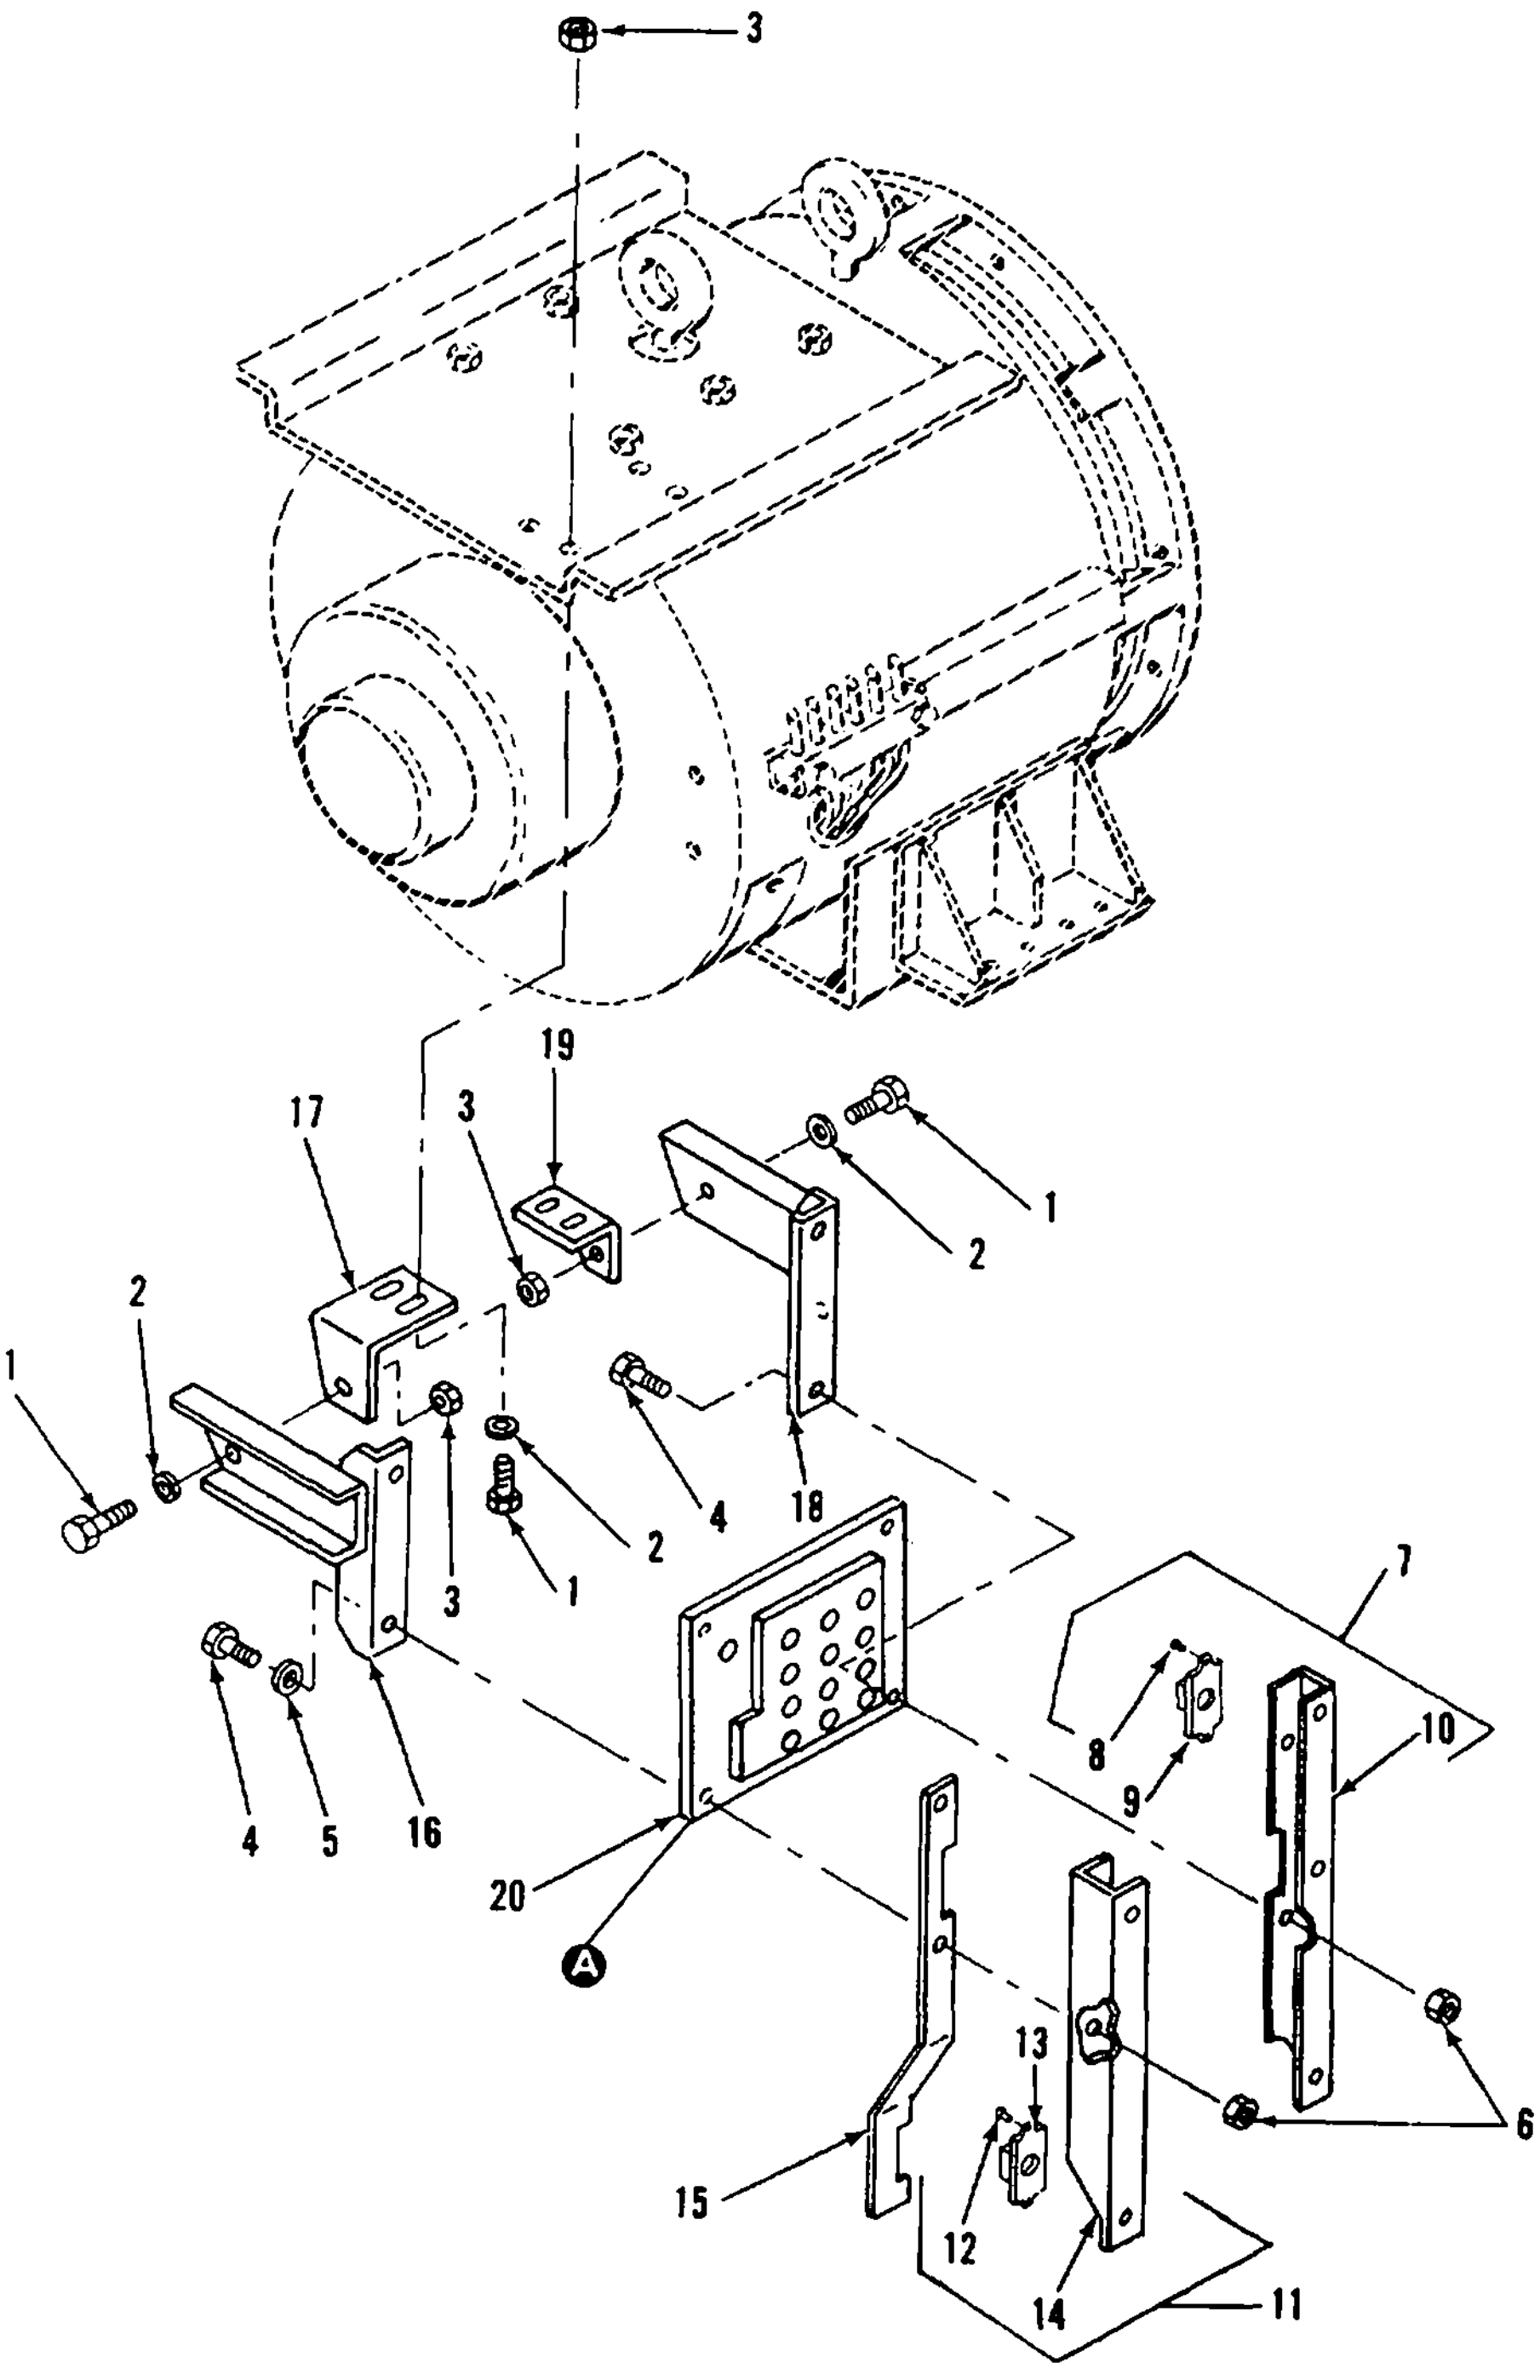
3
19
17
3
1
2
2
1
3
2
4
18
1
7
3
8
10
9
4
5
16
20
A
6
13
15
12
14
11

Figure 26. Reconnection Terminal Board Assembly and Related Parts (Sheet 1 of 2)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM | | | | |
| 26 | | | | | | | | | RECONNECTION TERMINAL BOARD ASSEMBLY AND RELATED PARTS | | | | |
| 26 | 1 | PAFZZ | PAFZZ | PAHZZ | PAFZZ | D | .008 | 5305-00-942-2196 | SCREW, HEX HEAD<br>MS18154-60 | 96906 | EA | 6 | 10 |
| 26 | 2 | PAFZZ | PAFZZ | PAHZZ | PAFZZ | D | .010 | 5310-00-080-6004 | WASHER, FLAT<br>MS27183-14 | 96906 | EA | 6 | 43 |
| 26 | 3 | PAFZZ | PAFZZ | PAHZZ | PAFZZ | D | .008 | 5310-00-483-8790 | NUT, SELF-LOCKING<br>MS17829-6C | 96906 | EA | 6 | 25 |
| 26 | 4 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-225-3839 | SCREW, HEX HEAD<br>MS90725-8 | 96906 | EA | 4 | 35 |
| 26 | 5 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | 96906 | EA | 4 | 252 |
| 26 | 6 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C | 96906 | EA | 4 | 167 |
| 26 | 7 | XB | XB | XB | XB | | | | BRACKET, DOUBLE ANGLE, RH<br>71-4633 | 30554 | EA | 1 | 1 |
| 26 | 8 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | | 5320-00-582-3561 | RIVET<br>MS20601AD4W2 | 96906 | EA | 6 | 14 |
| 26 | 9 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5325-00-449-2967 | RECEPTACLE<br>69-693-2<br>99947P130 | 30554<br>76530 | EA | 6 | 7 |
| 26 | 10 | XA— | XA | XA | XA | | | | BRACKET<br>71-4633-01 | 30554 | EA | 1 | 1 |
| 26 | 11 | XB | XB | XB | XB | | | | BRACKET, DBL, ANG., BD COVER, LH<br>70-4351 | 30554 | EA | 1 | 1 |
| 26 | 12 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | | 5320-00-582-3561 | RIVET<br>MS20601AD4W2 | 96906 | EA | 3 | 34 |
| 26 | 13 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 5325-00-449-2967 | RECEPTACLE<br>69-693-2<br>99947P130 | 30554<br>76530 | EA | 3 | 7 |
| 26 | 14 | XB | XB | XB | XB | | | | BRACKET<br>70-4351-01 | 30554 | EA | 1 | 1 |
| 26 | 15 | XB | XB | XB | XB | | | | BRACKET, SUPPORT, RH<br>71-4560 | 30554 | EA | 1 | 1 |
| 26 | 16 | XB | XB | XB | XB | | | | SUPPORT, RECONN BOARD, LH<br>70-4374 | 30554 | EA | 1 | 1 |
| 26 | 17 | MOO | MOO | MOO | MOO | | | | BRACKET, ANGLE<br>71-4386 | 30554 | EA | 1 | 1 |
| 26 | 18 | XB | XB | XB | XB | | | | SUPPORT, RECONN BOARD, RH<br>70-4375 | 30554 | EA | 1 | 1 |
| 26 | 19 | XB | XB | XB | XB | | | | BRACKET, ANGLE<br>71-4387 | 30554 | EA | 1 | 1 |
| 26 | 20 | AFF | AFF | AHH | AHH | | | | RECONNECTION BOARD ASSY<br>70-4289 | 30554 | EA | 1 | 1 |
| 26 | 21 | PAOZZ | PAOZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-595-7421 | NUT, SELF-LOCKING<br>MS17829-8C | 96906 | EA | 13 | 29 |
| 26 | 22 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-584-8000 | NUT, PLAIN HEX<br>MS16203-29 | 96906 | EA | 13 | 13 |
| 26 | 23 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-577-5354 | WASHER, LOCK<br>MS35338-105 | 96906 | EA | 13 | 13 |

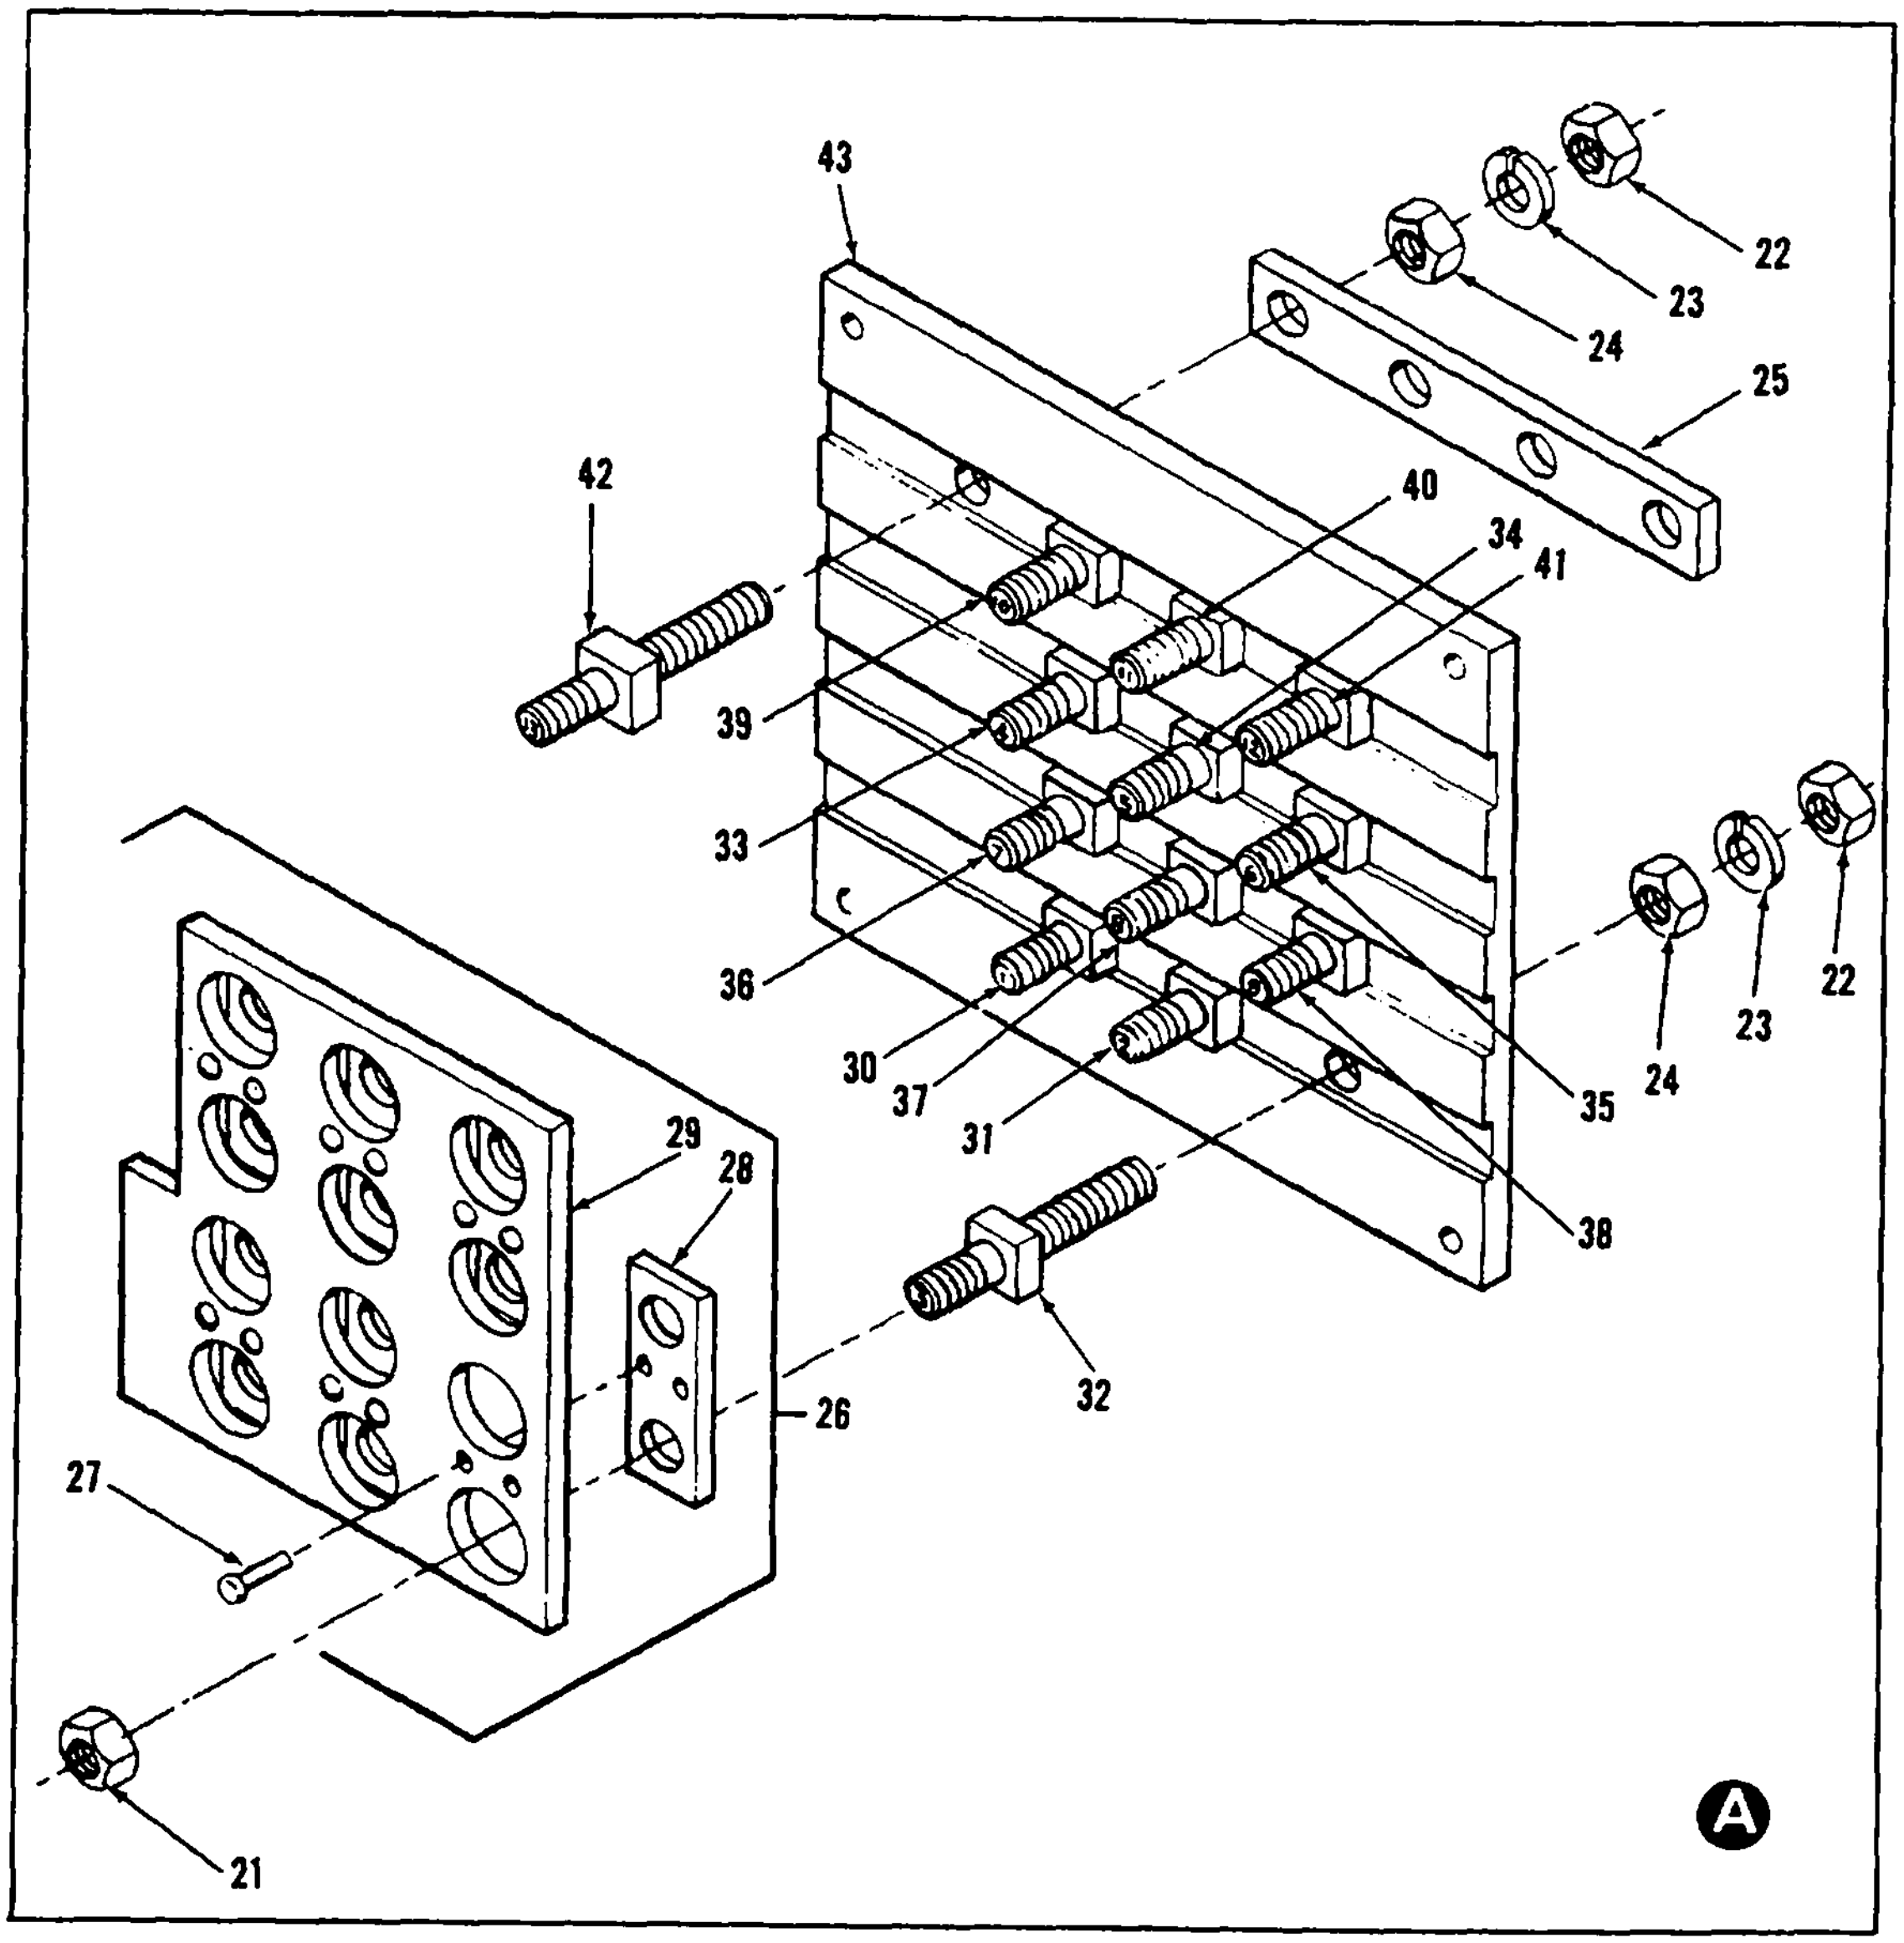
43
22
23
24
25
42
40
34
41
39
33
36
30
37
31
35
24
23
22
38
29
28
26
32
27
21
A

Figure 26. Reconnection Terminal Board Assembly and Related Parts (Sheet 2 of 2)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM - CONTINUED | | | | |
| 26 | | | | | | | | | RECONNECTION TERMINAL BOARD ASSEMBLY AND RELATED PARTS - CONTINUED | | | | |
| 26 | 24 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-006-8286 | NUT, PLAIN HEX<br>MS16203-41 | 96906 | EA | 13 | 13 |
| 26 | 25 | MOO | MOO | MOO | MOO | | | | BAR, BUS<br>70-4292 | 30554 | EA | 1 | 1 |
| 26 | 26 | PAOZZ | PAOZZ | PAHZZ | PAHZZ | D | .003 | 5940-00-221-8176 | TERMINAL BOARD ASSY<br>70-4294 | 30554 | EA | 1 | 1 |
| 26 | 27 | PAOZZ | PAOZZ | PAHZZ | PAHZZ | | | 5320-00-771-7530 | RIVET<br>MS206154CU10 | 96906 | EA | 12 | 12 |
| 26 | 28 | PAOZZ | PAOZZ | PAHZZ | PAHZZ | | | 6150-01-020-1980 | BAR, BUS<br>70-4291 | 30554 | EA | 6 | 6 |
| 26 | 29 | XB | XB | XB | XB | | | | TERMINAL BOARD<br>70-4295 | 30554 | EA | 1 | 1 |
| 26 | 30 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5940-00-226-9666 | STUD, TERMINAL<br>70-4293-01 | 30554 | EA | 1 | 1 |
| 26 | 31 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5940-00-226-9697 | STUD, TERMINAL<br>70-4293-02 | 30554 | EA | 1 | 1 |
| 26 | 32 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5940-00-226-9796 | STUD, TERMINAL<br>70-4293-03 | 30554 | EA | 1 | 1 |
| 26 | 33 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5940-00-226-9630 | STUD, TERMINAL<br>70-4293-04 | 30554 | EA | 1 | 1 |
| 26 | 34 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5940-00-226-9631 | STUD, TERMINAL<br>70-4293-05 | 30554 | EA | 1 | 1 |
| 26 | 35 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5940-00-226-9633 | STUD, TERMINAL<br>70-4293-06 | 30554 | EA | 1 | 1 |
| 26 | 36 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5940-00-226-9636 | STUD, TERMINAL<br>70-4293-07 | 30554 | EA | 1 | 1 |
| 26 | 37 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5940-00-226-9637 | STUD, TERMINAL<br>70-4293-08 | 30554 | EA | 1 | 1 |
| 26 | 38 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5940-00-226-9639 | STUD, TERMINAL<br>70-4293-09 | 30554 | EA | 1 | 1 |
| 26 | 39 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5940-00-226-9641 | STUD, TERMINAL<br>70-4293-10 | 30554 | EA | 1 | 1 |
| 26 | 40 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5940-00-226-9643 | STUD, TERMINAL<br>70-4293-11 | 30554 | EA | 1 | 1 |
| 26 | 41 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5940-00-226-9644 | STUD, TERMINAL<br>70-4293-12 | 30554 | EA | 1 | 1 |
| 26 | 42 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5940-00-226-9645 | STUD, TERMINAL<br>70-4293-13 | 30554 | EA | 1 | 1 |
| 26 | 43 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 5940-00-223-7055 | TERMINAL BOARD<br>70-4290 | 30554 | EA | 1 | 1 |

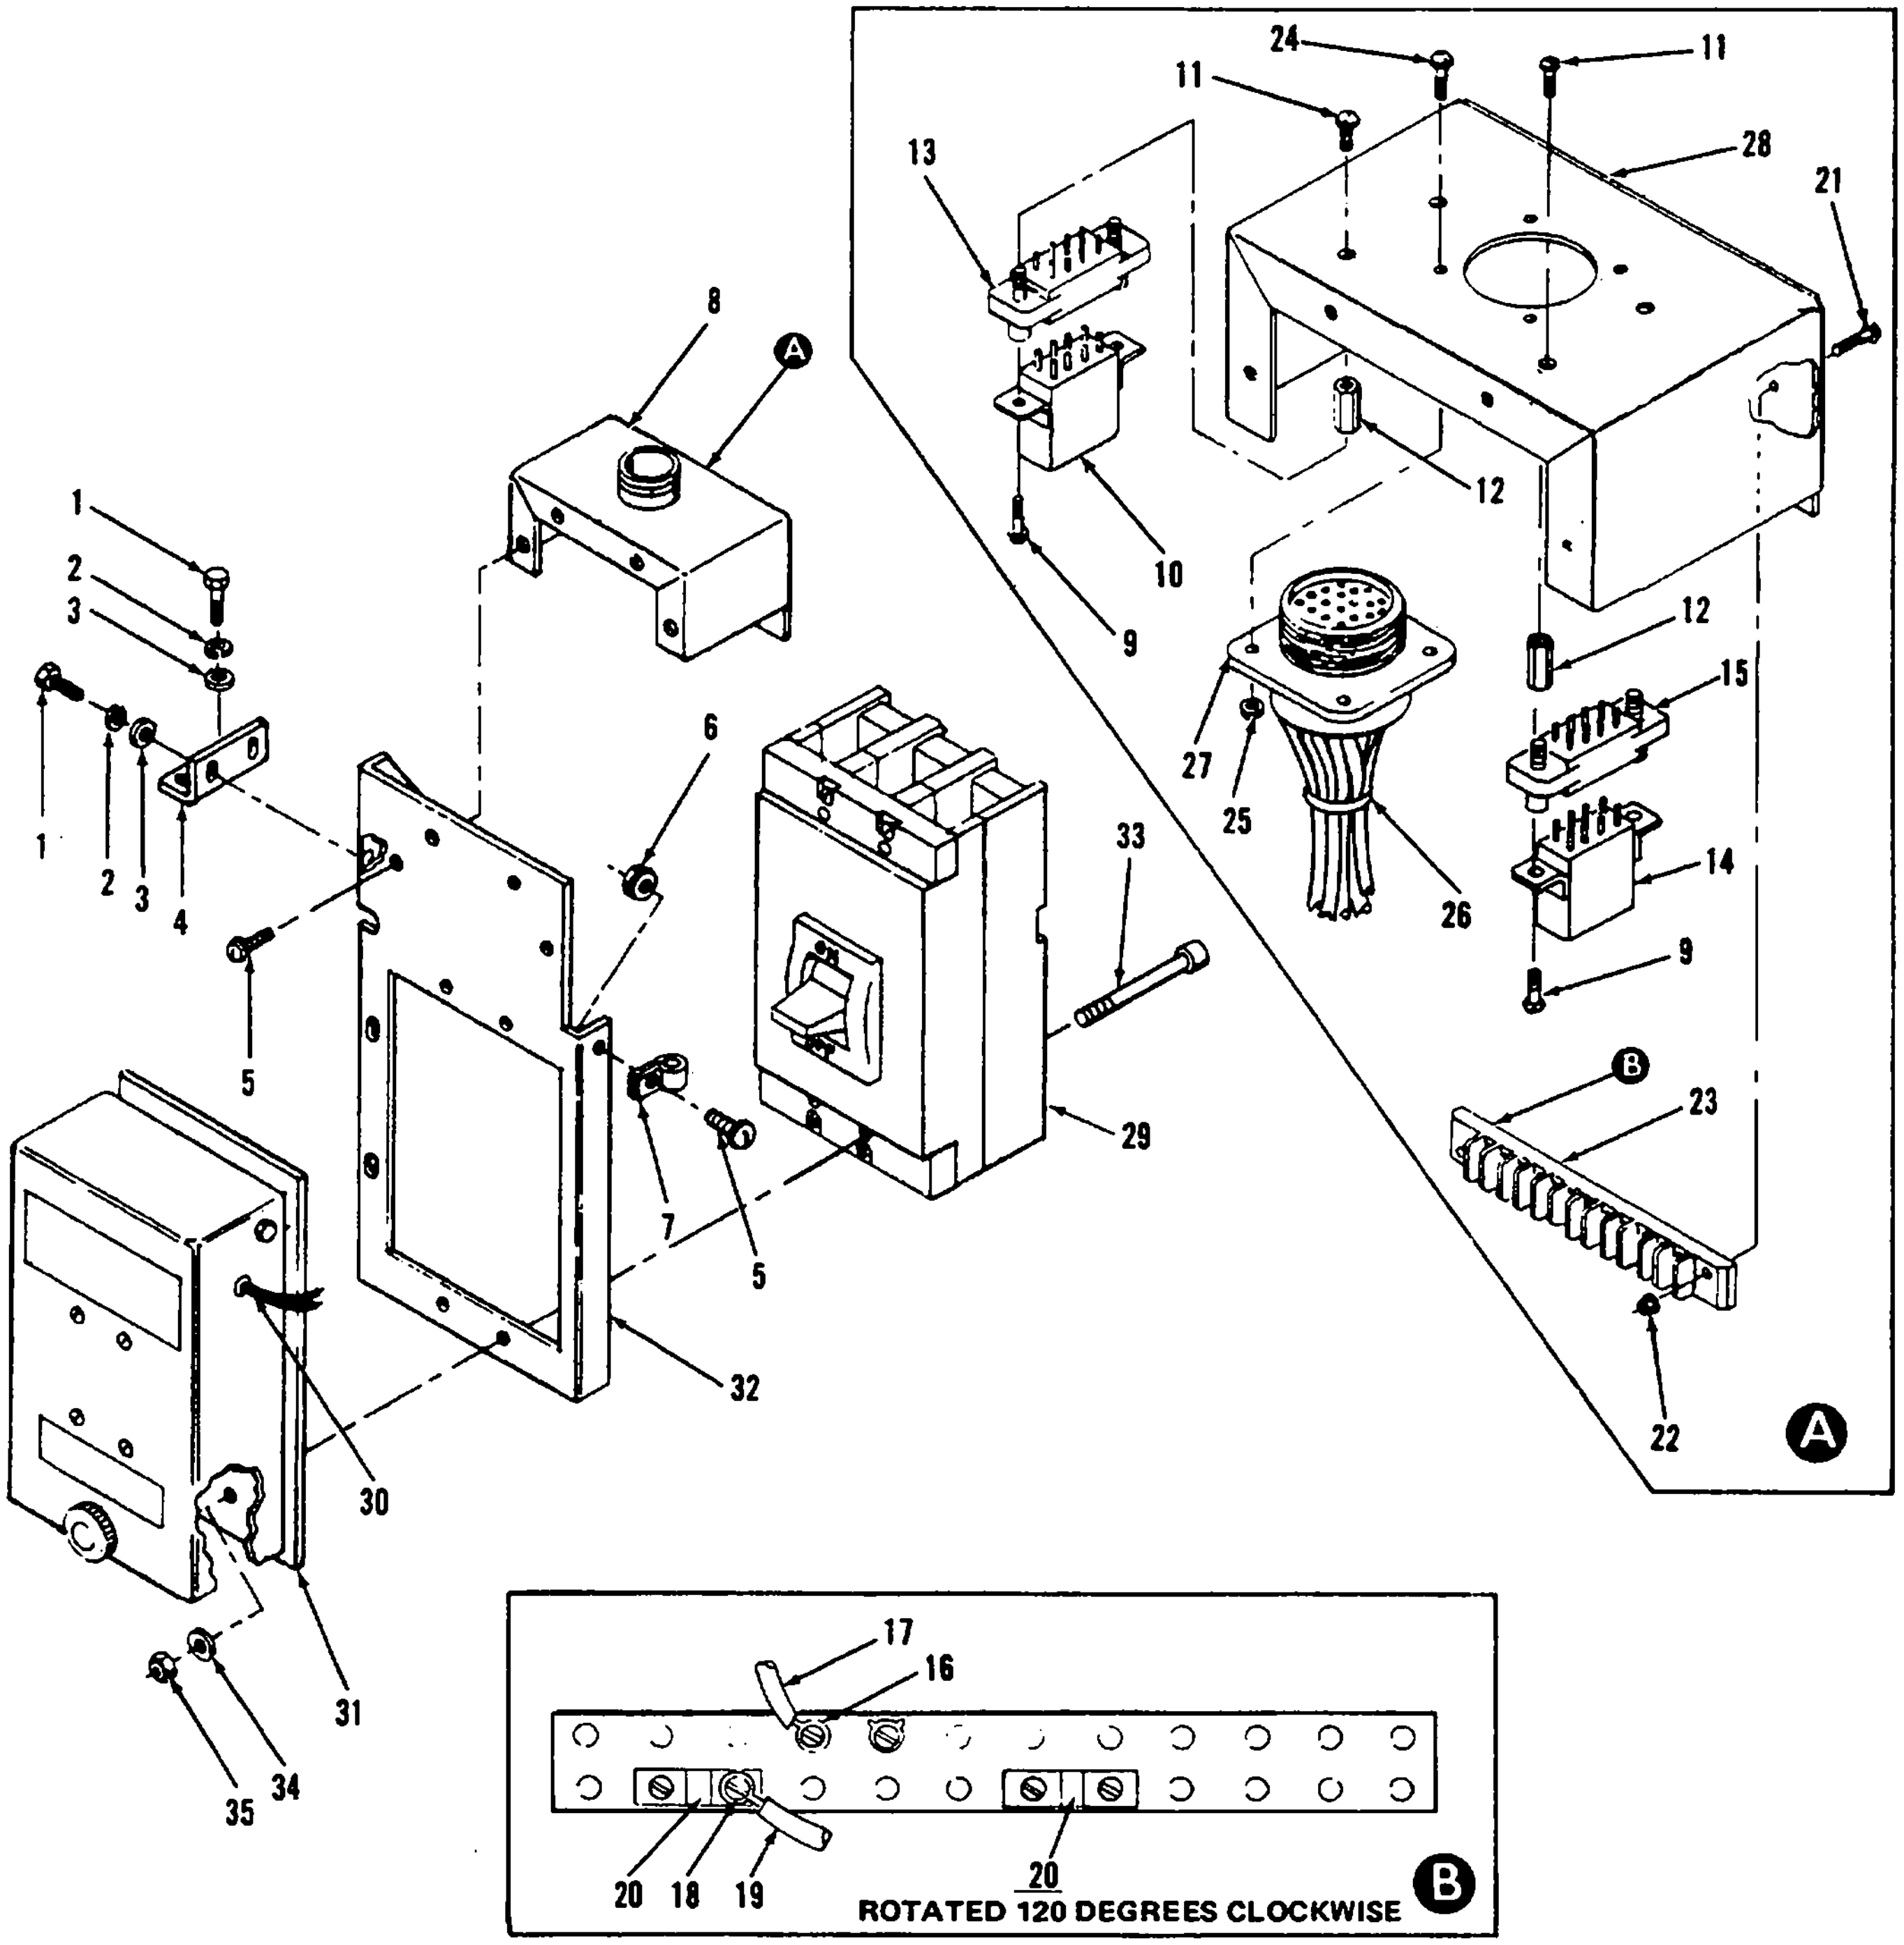
24
11
11
28
13
21
8
A
12
10
1
2
3
9
12
1
15
2
3
4
6
27
25
33
14
26
9
5
B
23
29
7
5
32
30
22
A
31
17
16
34
35
20
18
19
20
ROTATED 120 DEGREES CLOCKWISE
B

Figure 27. Circuit Breaker Assembly

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM | | | | |
| 27 | | PAOFF | PAOFF | PAFFF | PAFFF | | .050 | 5925-01-048-7656 | CIRCUIT BREAKER ASSEMBLY<br>76-4191 30554 | | EA | 1 | 1 |
| 27 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-225-8497 | SCREW, HEX HEAD<br>MS90725-32 96906 | | EA | 6 | 28 |
| 27 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-081-4219 | WASHER, FLAT<br>MS27183-12 96906 | | EA | 6 | 62 |
| 27 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-407-9566 | WASHER, LOCK<br>MS35338-45 96906 | | EA | 6 | 67 |
| 27 | 4 | MOO | MOO | MOO | MOO | | | | BRACKET<br>76-4192 30554 | | EA | 1 | 1 |
| 27 | 5 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-177-5778 | SCREW AND WASHER<br>69-662-49 30554<br>303737 32195 | | EA | 5 | 5 |
| 27 | 6 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-094-3421 | NUT AND WASHER<br>69-561-4 30554<br>511-101800-00 78189 | | EA | 5 | 95 |
| 27 | 7 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-079-7837 | CLAMP<br>MS21333-67 96906 | | EA | 1 | 1 |
| 27 | 8 | AFF | AFF | AFF | AFF | | | | RELAY BOX ASSY<br>76-4172 30554 | | EA | 1 | 1 |
| 27 | 9 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6967 | SCREW AND WASHER<br>69-662-16 30554<br>61-060441-10-0142B-0542B 78189 | | EA | 4 | 14 |
| 27 | 10 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5945-00-435-1833 | RELAY, K26<br>M5757/23-003 81349 | | EA | 1 | 8 |
| 27 | 11 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6969 | SCREW AND WASHER<br>69-662-19 30554<br>61-060741-40-0142B-0542B 78189 | | EA | 4 | 8 |
| 27 | 12 | XB | XB | XB | XB | | | | STANDOFF<br>76-4199 30554<br>8397-A-0632 06540 | | EA | 2 | 4 |
| 27 | 13 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5935-00-210-8648 | SOCKET, RELAY<br>69-547 30554<br>VB8/1UA11-80 05574 | | EA | 1 | 2 |
| 27 | 14 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5945-01-015-0354 | RELAY, K27<br>MS27401-14 96906 | | EA | 1 | 1 |
| 27 | 15 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5935-01-130-3899 | SOCKET, RELAY<br>M12883/41-01 81349 | | EA | 1 | 1 |
| 27 | 16 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-204-8966 | LUG, TERMINAL<br>MS25036-102 96906 | | EA | 14 | 80 |
| 27 | 17 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 81349 | | FT | 2 | 1178 |
| 27 | 18 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-283-5280 | LUG, TERMINAL<br>MS25036-106 96906 | | EA | 8 | 268 |
| 27 | 19 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6602 | WIRE, ELECTRICAL<br>M5086/2-18-9 81349 | | FT | 2 | 144 |
| 27 | 20 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 6150-00-632-7234 | JUMPER<br>69-651-1 30554<br>600J 75382 | | EA | 2 | 2 |
| 27 | 21 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6976 | SCREW AND WASHER<br>69-662-21 30554<br>61-061041-0142B-0542B 78189 | | EA | 2 | 12 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM - CONTINUED | | | | |
| 27 | | | | | | | | | CIRCUIT BREAKER ASSEMBLY - CONTINUED | | | | |
| 27 | 22 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-063-7360 | NUT AND WASHER<br>69-561-2 30554 | | EA | 2 | 73 |
| 27 | 23 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5940-00-983-6053 | TERMINAL BOARD, TB1<br>37TB-12 81349 | | EA | 1 | 1 |
| 27 | 24 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6903 | SCREW AND WASHER<br>69-662-4 30554<br>61-040741-40-0142B-0542B 78189 | | EA | 4 | 60 |
| 27 | 25 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-836-3520 | NUT AND WASHER<br>69-561-1 30554<br>511-041800-00 78189 | | EA | 4 | 66 |
| 27 | 26 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-727-5153 | STRAP, TIE DOWN<br>MS3367-4-9 96906 | | EA | 24 | 239 |
| 27 | 27 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-755-2787 | CONNECTOR, J41<br>MS3102R20-29P 96906 | | EA | 1 | 2 |
| 27 | 28 | XB | XB | XB | XB | | | | RELAY BOX, WELDED<br>76-4173 30554 | | EA | 1 | 1 |
| 27 | 29 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5925-01-050-9661 | CIRCUIT BREAKER, CB2<br>76-4182-01 30554 | | EA | 1 | 1 |
| 27 | 30 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 81349 | | FT | 6 | 1178 |
| 27 | 31 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 6110-01-052-8081 | MOTOR CONTROL<br>76-4193 30554<br>63030-211-50 12670 | | EA | 1 | 1 |
| 27 | 32 | XB | XB | XB | XB | | | | BRACKET<br>76-4170 30554 | | EA | 1 | 1 |
| 27 | 33 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-207-2715 | SCREW, CAP, SOCKETHEAD<br>1/4 X 20 X 3.5 LONG 93742<br>5174C 15434 | | EA | 4 | 4 |
| 27 | 34 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-1058 | WASHER, FLAT<br>MS27183-10 96906 | | EA | 4 | 252 |
| 27 | 35 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-088-1251 | NUT, SELF-LOCKING<br>MS51922-1 96906 | | EA | 4 | 4 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO. | b ITEM NO. | (2) SMR CODE a ARMY | b AIR FORCE | c NAVY | d USMC | (3) USMC a SSI | b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM | | | | |
| 28 | | AFF | AFF | AFF | AFF | | | | CIRCUIT BREAKER ASSEMBLY<br>90-4001 | | EA | 1 | |
| 28 | 1 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | | BRACKET, LOAD CONTRACTOR<br>90-4003 | 30554 | EA | 1 | |
| 28 | 2 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | | ANGLE, GLASTIC<br>90-4004-01 | 30554 | EA | 1 | |
| 28 | 3 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | | ANGLE, GLASTIC<br>90-4004-02 | 30554 | EA | 1 | |
| 28 | 4 | MOO | MOO | MOO | MOO | | | | BRACKET, BOLT LOCKING<br>90-4005 | 30554 | EA | 6 | |
| 28 | 5 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | | WIRE, LOAD CONTACTOR<br>90-4006 | 81349 | EA | 12 | |
| 28 | 6 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | | LOAD CONTACTOR<br>90-4007 | | EA | 1 | |
| 28 | 7 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | | SPACER, LOAD CONTACTOR<br>90-4008 | 30554 | EA | | |
| 28 | 8 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | | CABLE PROTECTOR<br>71-4711-1 | | EA | 2 | |
| 28 | 9 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5305-00-269-3217 | SCREW, HEX HEAD<br>MS90725-67 | 96906 | EA | 3 | |
| 28 | 10 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5305-01-325-8387 | SCREW, HEX HEAD<br>MS90725-64 | 96906 | EA | 3 | |
| 28 | 11 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5310-00-080-6004 | WASHER, FLAT<br>MS27183-14 | 96906 | EA | 18 | |
| 28 | 12 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5310-00-004-5033 | WASHER, SPLIT-LOCK<br>MS35338-46 | 96906 | | EA | 6 |
| 28 | 13 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5310-00-732-0558 | NUT, HEX HEAD<br>MS51967-8 | 96906 | EA | 6 | |
| 28 | 14 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5305-00-225-8389 | SCREW, HEX HEAD<br>MS90725-8 | 96906 | EA | 6 | |
| 28 | 15 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | 96906 | EA | 6 | |
| 28 | 16 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C | 96906 | EA | 6 | |
| 28 | 17 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5305-00-038-3148 | SCREW, PAN HEAD<br>69-662-51 | 30554 | EA | 4 | |
| 28 | 18 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5310-00-765-3197 | FLAT WASHER<br>MS27183-41 | 30554 | EA | 4 | |
| 28 | 19 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5310-00-094-3421 | NUT, KEP<br>69-561- 4 | 30554 | EA | 4 | |
| 28 | 20 | MOO | MOO | MOO | MOO | | | | BRACKET<br>76-4192 | 30554 | EA | 1 | |
| 28 | 21 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5306-00-961-3444 | SCREW, HEX HEAD<br>ANSI 818.2.1 | 80204 | EA | 4 | |
| 28 | 22 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5310-00-081-4219 | WASHER, FLAT<br>MS27183-12 | 96906 | EA | 4 | |
| 28 | 23 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5310-01-338-7338 | WASHER, SPLIT-LOCK<br>MS35338-45 | 96906 | EA | 1 | |

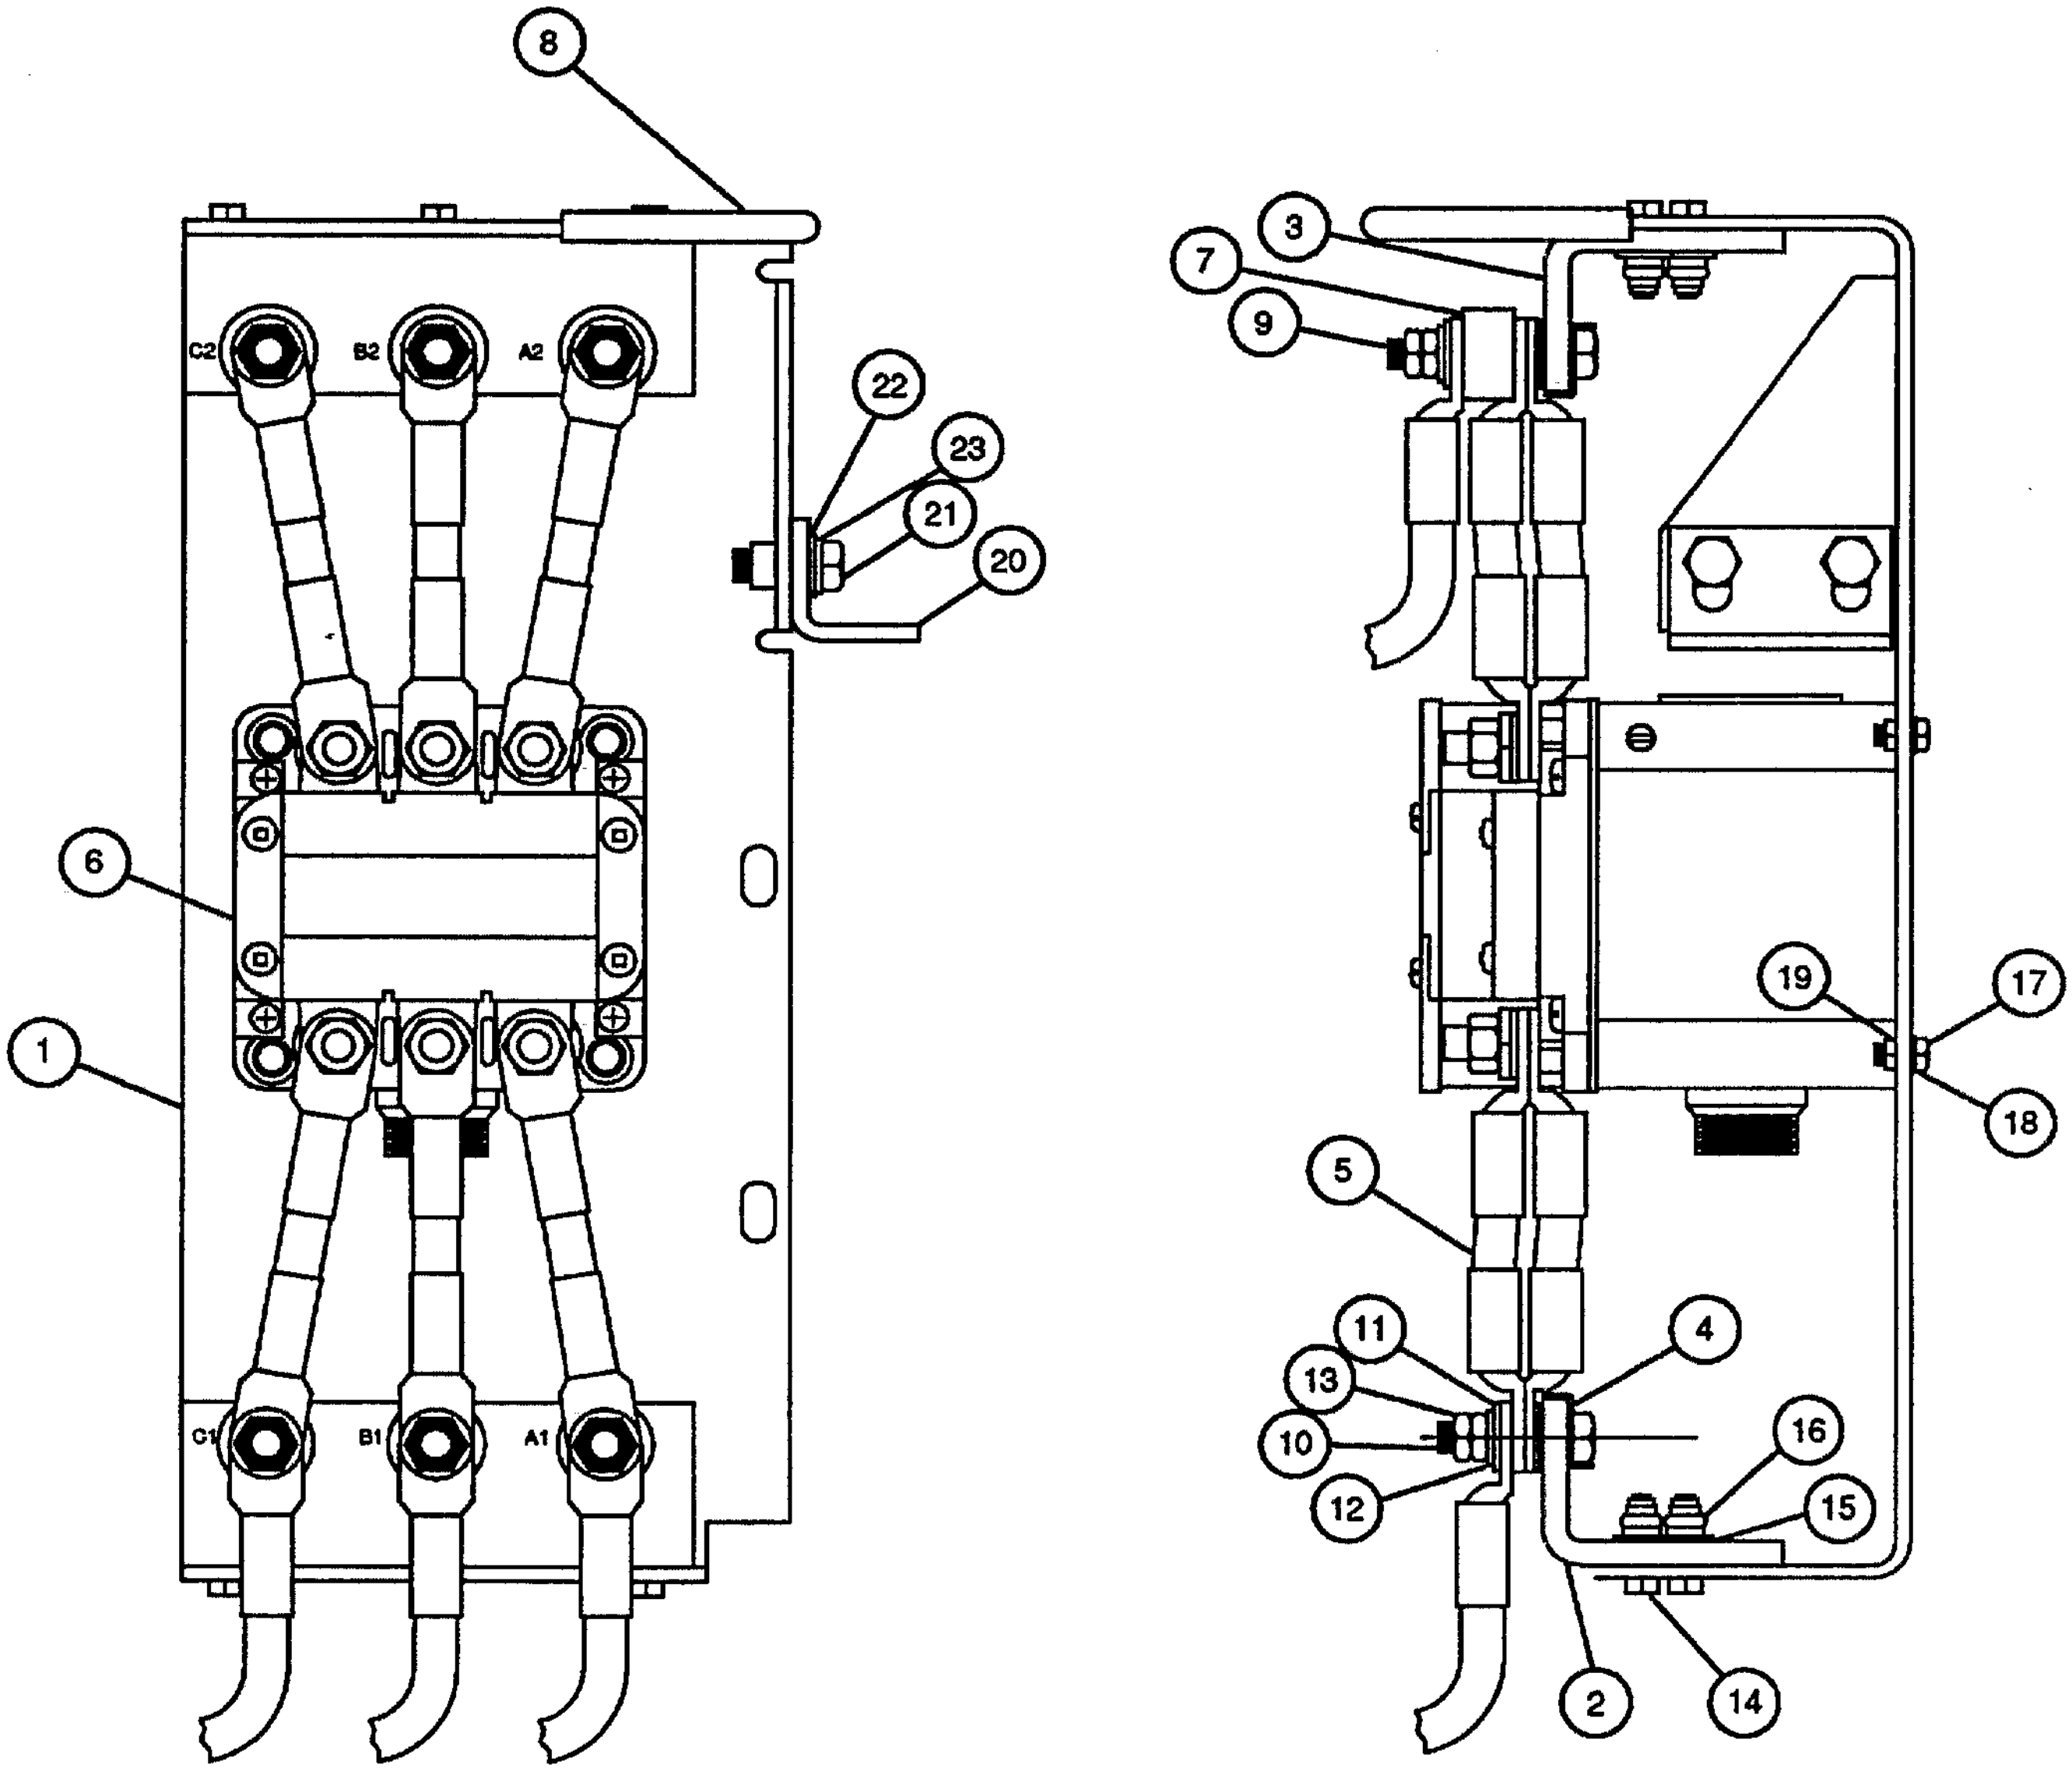
8
C2
B2
A2
22
23
21
20
6
1
C1
B1
A1
3
7
9
19
17
18
5
11
4
13
10
16
12
15
2
14

Figure 28. Alternate Circuit Breaker (Load Contactor Assembly)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM | | | | |
| 29 | | | | | | | | | LOAD TERMINAL BOARD AND RELATED PARTS | | | | |
| 29 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-269-3213 | SCREW, HEX HEAD<br>MS90725-62 | 96906 | EA | 4 | 17 |
| 29 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-637-9541 | WASHER, LOCK<br>MS35338-46 | 96906 | EA | 4 | 40 |
| 29 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-080-6004 | WASHER, FLAT<br>MS27183-14 | 96906 | EA | 4 | 43 |
| 29 | 4 | AOO | AOO | AFF | AFF | | | 5940-00-237-2779 | TERMINAL BOARD ASSY<br>70-4296 | 30554 | EA | 1 | 1 |
| 29 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-269-3209 | SCREW, HEX HEAD<br>MS90725-58 | 96906 | EA | 1 | 9 |
| 29 | 6 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-732-0558 | NUT, PLAIN HEX<br>MS51967-8 | 96906 | EA | 1 | 1 |
| 29 | 7 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-637-9541 | WASHER, LOCK<br>MS35338-46 | 96906 | EA | 2 | 40 |
| 29 | 8 | AFF | AFF | AFF | AFF | | | | LEAD, ELECTRICAL<br>71-4714 | 30554 | EA | 1 | 1 |
| 29 | 9 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-115-5006 | LUG, TERMINAL<br>MS25036-133 | 96906 | EA | 2 | 2 |
| 29 | 10 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6601 | WIRE, ELECTRICAL<br>M5086/2-01-9 | 81349 | FT | 4 | 4 |
| 29 | 11 | PAOZZ | PAOZZ | PAOZZ | PAFZZ | D | .008 | 5310-00-322-0135 | NUT, HEX<br>MS16203-43 | 96906 | EA | 8 | 8 |
| 29 | 12 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-680-6823 | WASHER, LOCK<br>MS35338-108 | 96906 | EA | 4 | 4 |
| 29 | 13 | MFF | MFF | MFF | MFF | | | | BUS BAR, NEUTRAL<br>71-4703 | 30554 | EA | 1 | 1 |
| 29 | 14 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-237-2704 | LOAD TERMINAL<br>L0 THROUGH L3<br>MS30347-6 | 30554 | EA | 4 | 4 |
| 29 | 15 | MFF | MFF | MFF | MFF | | | | BOARD, TERMINAL LOAD<br>70-4297 | 30554 | EA | 1 | 1 |

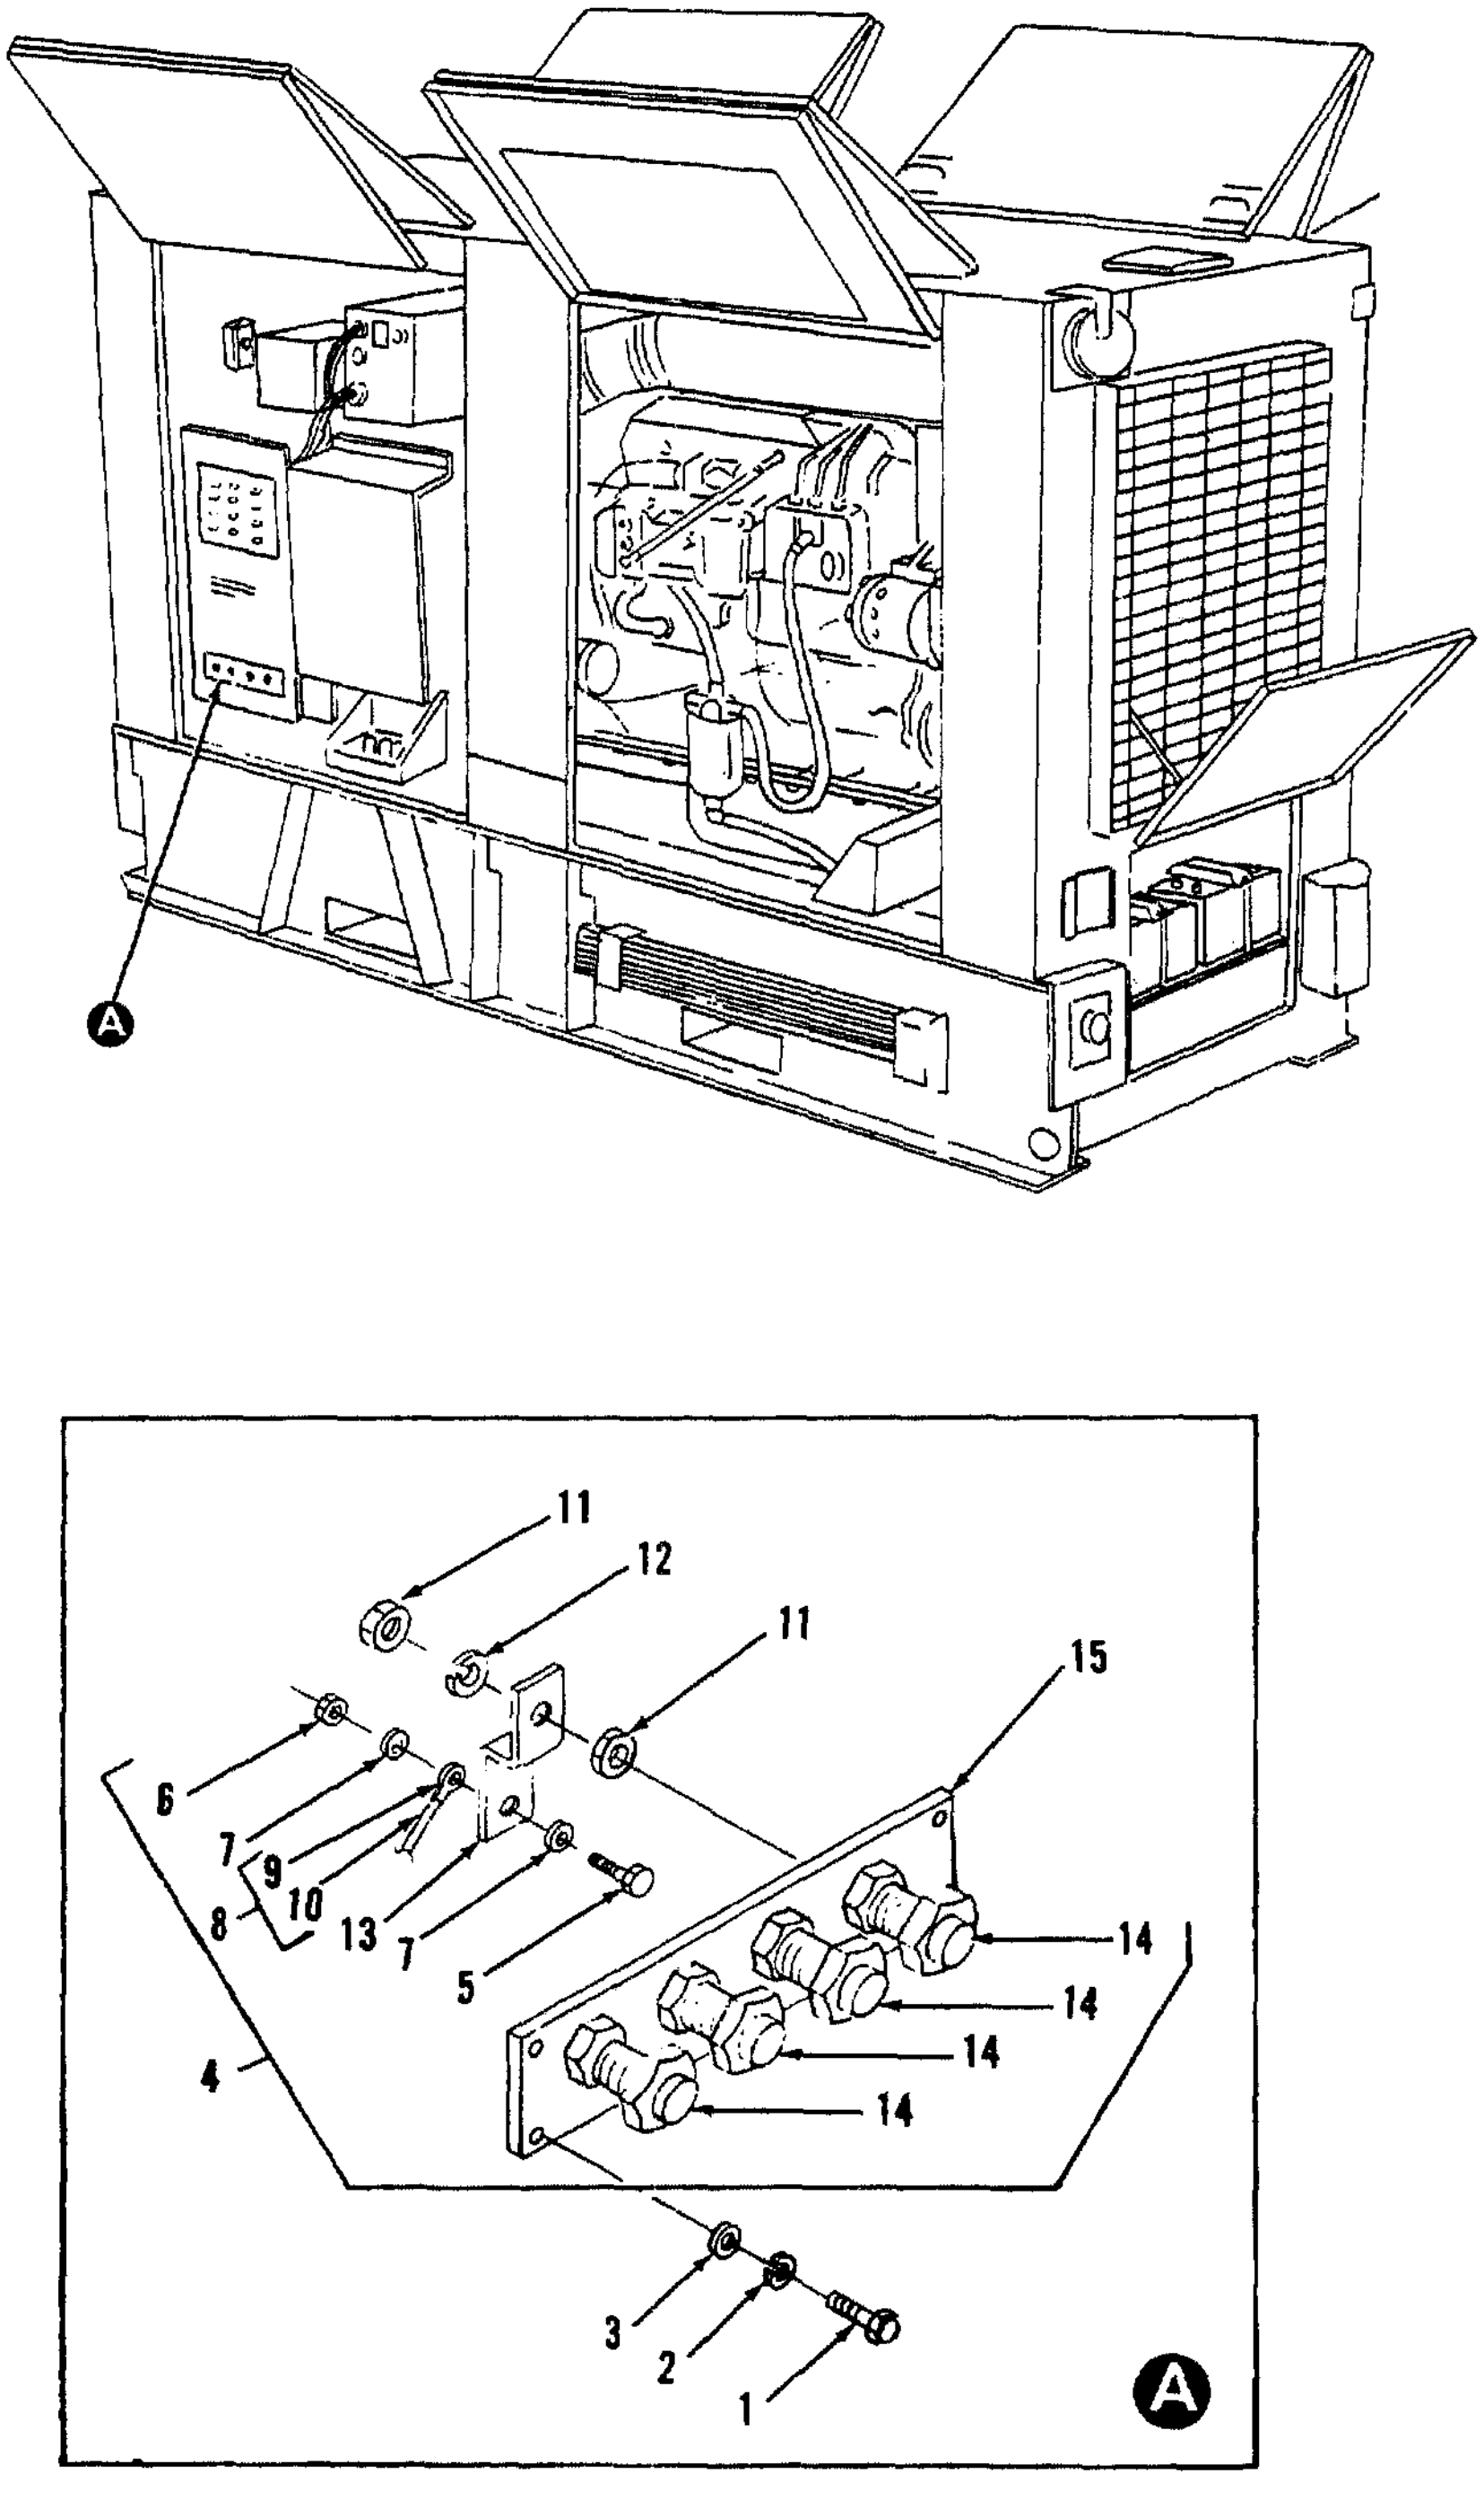
A
11
12
11
15
6
7
9
10
8
13
7
5
4
14
14
14
14
3
2
1
A

Figure 29. Load Terminal Board and Related Parts

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE / USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM | | | |
| 30 | | | | | | | | | CONVENIENCE RECEPTACLE AND RELATED PARTS | | | |
| 30 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0501 | SCREW, HEX HEAD<br>MS90725-5 96906 | EA | 6 | 114 |
| 30 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK<br>MS35338-44 96906 | EA | 6 | 26 |
| 30 | 3 | AFF | AFF | AFF | AFF | | | 5999-01-031-5291 | RECEPTACLE BOX ASSY<br>70-4101 30554 | EA | 1 | 1 |
| 30 | 4 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6968 | SCREW AND WASHER<br>69-662-18 30554<br>61-060641-40-0142B-0542B 78189 | EA | 10 | 103 |
| 30 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6903 | SCREW AND WASHER<br>69-662-4 30554<br>61-040741-40-0142B-0542B 78189 | EA | 4 | 60 |
| 30 | 6 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-836-3520 | NUT AND WASHER<br>69-561-1 30554<br>511-041800-00 78189 | EA | 4 | 66 |
| 30 | 7 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-727-5153 | STRAP, CABLE<br>MS3367-4-9 96906 | EA | 2 | 239 |
| 30 | 8 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4775 | LUG, TERMINAL<br>MS25036-156 96906 | EA | 6 | 9 |
| 30 | 9 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-543-1098 | INSULATION<br>9034663 18876 | FT | 1 | 2 |
| 30 | 10 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-7514 | WIRE, ELECTRICAL<br>M5086/2-12-9 81349 | FT | 3 | 58 |
| | 11 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-853-3749 | CONNECTOR, PLUG, J48<br>MS3102R18-5P 96906 | EA | 1 | 1 |
| 30 | 12 | XB | XB | XB | XB | | | | COVER<br>70-4103 30554 | EA | 1 | 1 |
| 30 | 13 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6972 | SCREW AND WASHER<br>69-662-20 30554<br>61-060841-10-0142B-0542B 78189 | EA | 4 | 12 |
| 30 | 14 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-063-7360 | NUT AND WASHER<br>69-561-2 30554<br>511-061800-00 78189 | EA | 8 | 73 |
| 30 | 15 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-417-0543 | COVER<br>A9000 08556 | EA | 1 | 1 |
| 30 | 16 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-958-5453 | SCREW, PAN HEAD<br>MS35190-236 96906 | EA | 1 | 1 |
| 30 | 17 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .040 | 5330-00-240-0834 | GASKET, RECEPTACLE COVER<br>69-669 30554 | EA | 1 | 1 |
| 30 | 18 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5935-01-012-3080 | RECEPTACLE, DUPLEX, J55<br>69-691 30554<br>WC596/12-4 81348 | EA | 1 | 1 |
| 30 | 19 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .050 | 5925-00-686-3301 | CIRCUIT BREAKER, CB3<br>MS25244-15 96906 | EA | 1 | 1 |
| 30 | 20 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION<br>70-4104 30554 | EA | 1 | 1 |
| 30 | 21 | XB | XB | XB | XB | | | | CHASSIS<br>70-4102 30554 | EA | 1 | 1 |

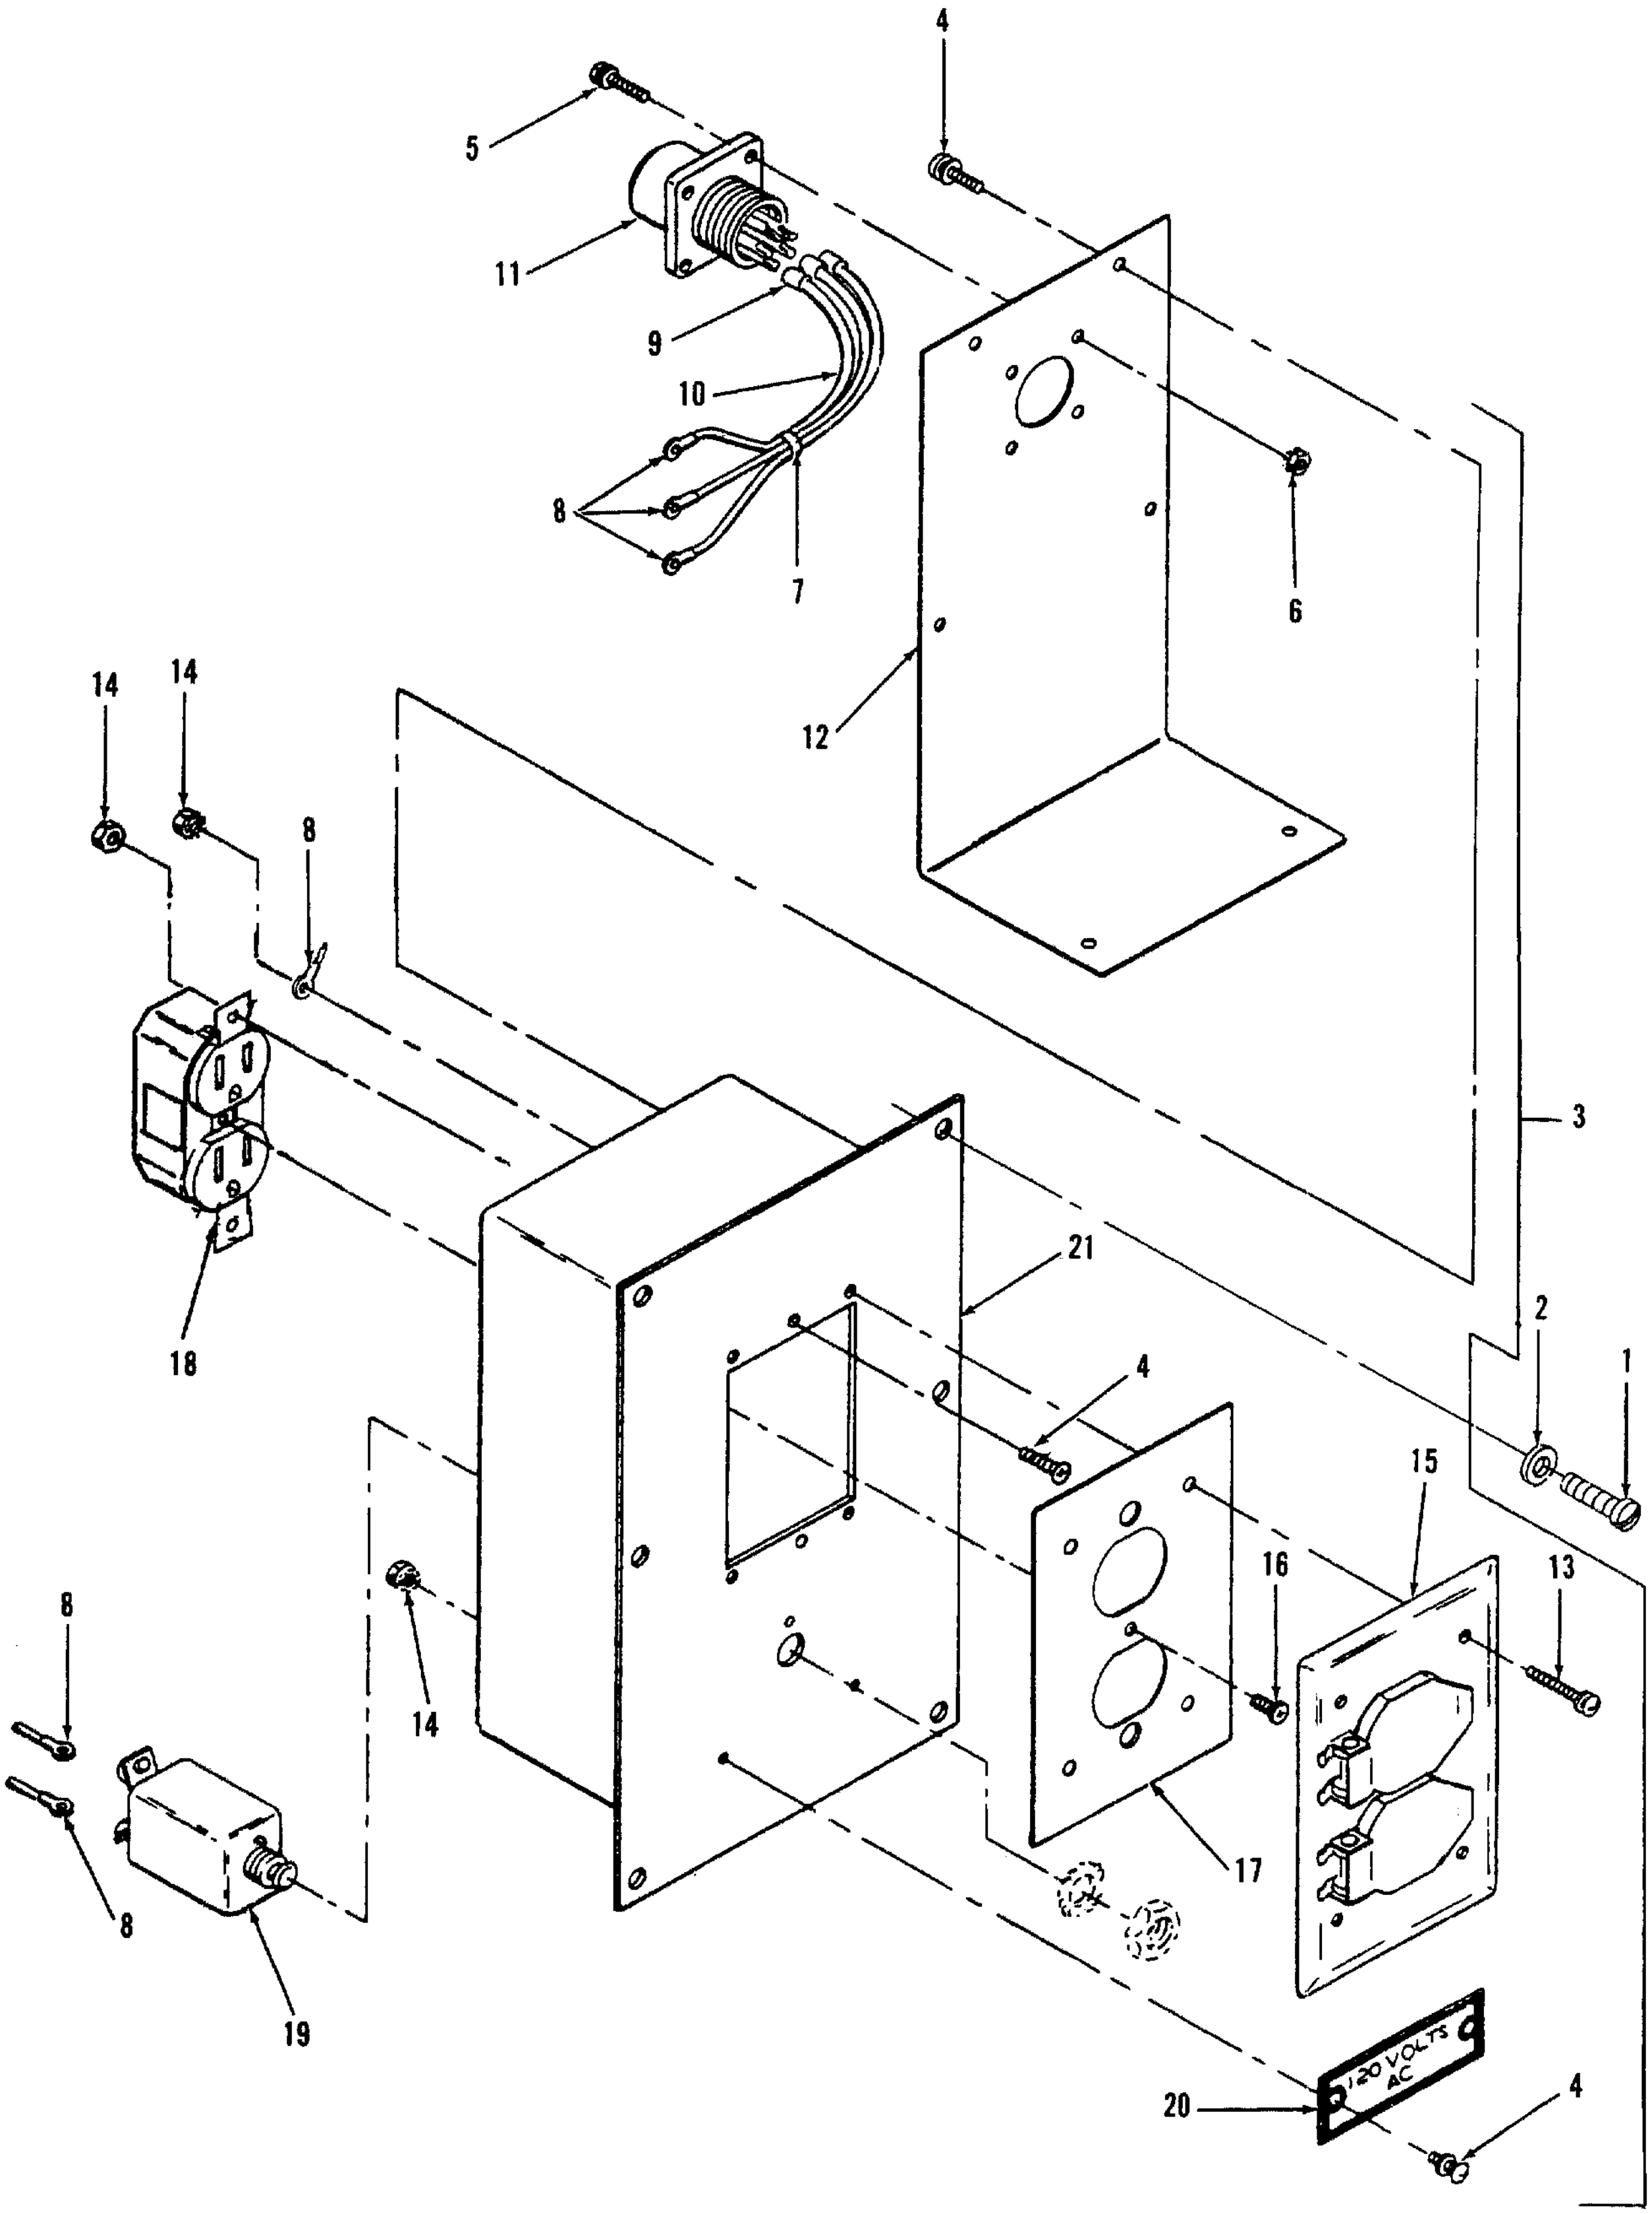
4
5
11
9
10
8
7
6
12
14
14
8
3
21
18
2
1
4
15
16
13
8
14
17
8
19
20
120 VOLTS AC
4

Figure 30. Convenience Receptacle and Related Parts

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM | | | | |
| 31 | | AHF | AFF | AHF | AHF | | | | CURRENT TRANSFORMER ASSEMBLY<br>71-4472 30554 | | EA | 1 | 1 |
| 31 | 1 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-038-3148 | SCREW AND WASHER<br>69-662-51 30554<br>61-101041-40-0142B-0542B 78189 | | EA | 12 | 24 |
| 31 | 2 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-809-8546 | WASHER, FLAT<br>MS27183-8 96906 | | EA | 28 | .26 |
| 31 | 3 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-052-3632 | NUT AND WASHER<br>69-561-3 30554<br>511-081800-00 78189 | | EA | 8 | 73 |
| 31 | 4 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .009 | 5950-00-206-1466 | TRANSFORMER, INSTRUMENT, CT1, CT2, CT3<br>70-4084 30554<br>51-464-1 12670 | | EA | 3 | 3 |
| 31 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-036-6906 | SCREW AND WASHER<br>69-662-50 30554<br>61-100841-40-0142B-0542B 78189 | | EA | 16 | 98 |
| 31 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .009 | 5950-00-206-1516 | TRANSFORMER, CURRENT, CT5, CT6<br>70-4086 30554<br>00000-4922 93568 | | EA | 2 | 2 |
| 31 | 7 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .009 | 5950-00-208-1819 | TRANSFORMER, CURRENT, CT4<br>70-4067 30554<br>00000-4921 93568 | | EA | 1 | 1 |
| 31 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-984-6200 | SCREW, PAN HEAD<br>MS35206-252 96906 | | EA | 2 | 2 |
| 31 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .009 | 5950-00-206-1496 | TRANSFORMER, CROSS CURRENT, CT7<br>70-4085 30554<br>6-400/1 12670 | | EA | 1 | 1 |
| 31 | 10 | XB | XB | XB | XB | | | | BRACKET, TRANSFORMER MOUNTING<br>71-4775 30554 | | EA | 2 | 2 |
| 31 | 11 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5940-00-283-5280 | LUG, TERMINAL<br>MS25036-106 96906 | | EA | 2 | 268 |
| 31 | 12 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 6150-00-519-2714 | JUMPER, TERMINAL BOARD<br>69-651-2 30554<br>601J 75382 | | EA | 2 | 17 |
| 31 | 13 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-038-3145 | SCREW AND WASHER<br>69-662-37 30554<br>61-081241-40-0142B-0542B 78189 | | EA | 2 | 12 |
| 31 | 14 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .023 | 5940-00-983-6084 | BLOCK, TERMINAL, TB2<br>38TB-6 81349 | | EA | 1 | 1 |
| 31 | 15 | XB | XB | XB | XB | | | | BRACKET, CURRENT TRANSFORMER<br>71-4404 30554 | | EA | 1 | 1 |

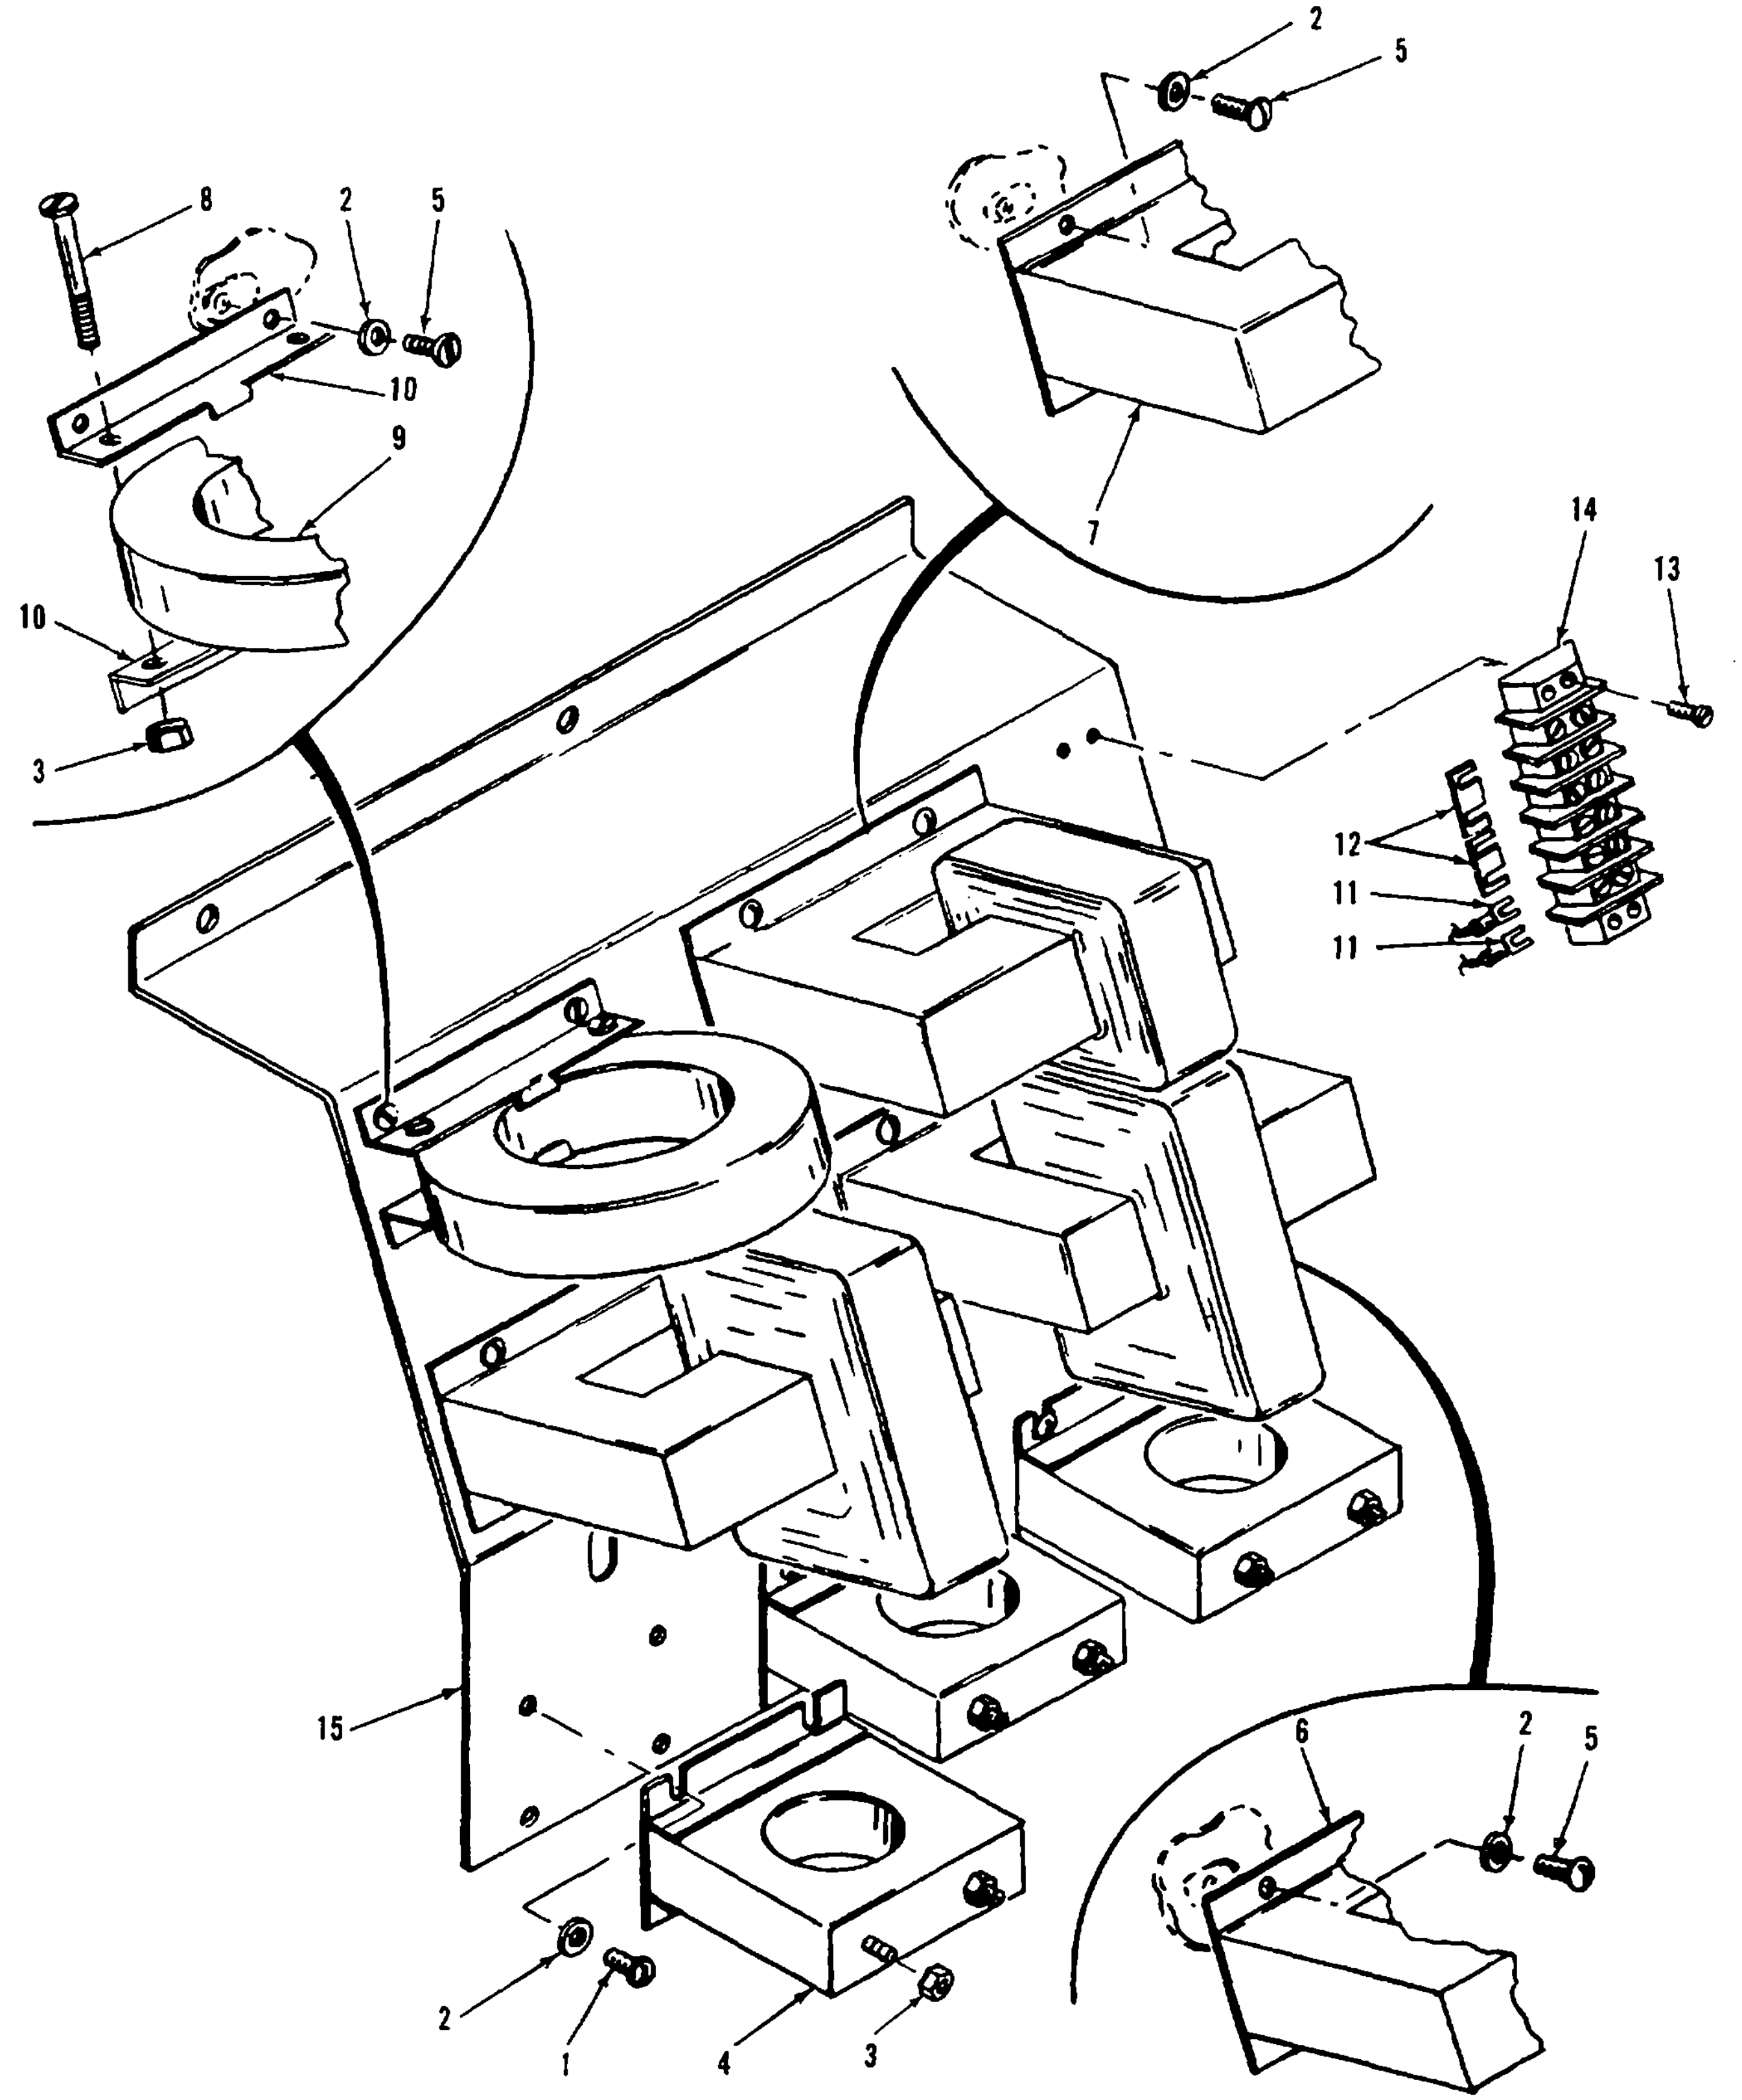
2
5
8
2
5
10
9
10
3
7
14
13
12
11
11
15
6
2
5
2
1
4
3

Figure 31. Current Transformer Assembly

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM | | | | |
| 32 | | | | | | | | | LOAD MEASURING UNIT AND RELATED PARTS | | | | |
| 32 | 1 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-038-3148 | SCREW AND WASHER<br>69-662-51<br>61-101041-40-0142B-0542B | <br>30554<br>78189 | EA | 4 | 24 |
| 32 | 2 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-094-3421 | NUT AND WASHER<br>69-561-4<br>511-101800-00 | <br>30554<br>78189 | EA | 4 | 95 |
| 32 | 3 | PAFFF | PAFFF | PAFFF | PAFFF | | .250 | 6115-00-188-5333 | LOAD MEASURING UNIT, A8<br>69-785<br>69-500 REV C | <br>30554<br>12670 | EA | 1 | 1 |
| 32 | 4 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION<br>69-506 | <br>30554 | EA | 1 | 1 |
| 32 | 5 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-934-9747 | NUT, HEX<br>MS35649-262 | <br>96906 | EA | 10 | 10 |
| 32 | 6 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-045-4007 | WASHER, LOCK<br>MS35338-41 | <br>96906 | EA | 10 | 22 |
| 32 | 7 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-082-1404 | WASHER, FLAT<br>MS27183-6 | <br>96906 | EA | 14 | 14 |
| 32 | 8 | XB | XB | XB | XB | | | | COVER<br>69-503 | <br>30554 | EA | 1 | 1 |
| 32 | 9 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-622-9475 | SCREW, PAN HEAD<br>MS35265-41 | <br>96906 | EA | 4 | 4 |
| 32 | 10 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-045-3299 | WASHER, LOCK<br>MS35338-42 | <br>96906 | EA | 5 | 9 |
| 32 | 11 | AFF | AFF | AFF | AFF | | | | WIRING HARNESS, A8A6<br>69-511<br>04306-8074 | <br>30554<br>93568 | EA | 1 | 1 |
| 32 | 12 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-367-7625 | CONNECTOR, RECEPTACLE, A8A6J7<br>69-502-2 | <br>30554 | EA | 1 | 1 |
| 32 | 13 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-156-3253 | STRAP, CABLE<br>MS3367-2-9 | <br>96906 | EA | 1 | 1 |
| 32 | 14 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-903-8733 | SLEEVING, INSULATION<br>M23053/5-203C | <br>81349 | FT | 1 | 1 |
| 32 | 15 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-643-0647 | WIRE, ELECTRICAL<br>M16878/2-20-9 | <br>81349 | FT | 8 | 8 |
| 32 | 16 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-582-5807 | SCREW, PAN HEAD<br>MS35265-28 | <br>96906 | EA | 2 | 2 |
| 32 | 17 | MOO | MOO | MOO | MOO | | | | BRACKET<br>69-504 | <br>30554 | EA | 1 | 1 |
| 32 | 18 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-069-5122 | SCREW, PAN HEAD<br>MS35265-55 | <br>96906 | EA | 1 | 1 |
| 32 | 19 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-934-9757 | NUT, HEX<br>MS35649-282 | <br>96906 | EA | 1 | 5 |
| 32 | 20 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-765-3197 | WASHER, FLAT<br>MS27183-41 | <br>96906 | EA | 1 | 13 |
| 32 | 21 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-991-2949 | WASHER, FLAT<br>NAS549P8 | <br>80205 | EA | 3 | 3 |
| 32 | 22 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5905-00-642-5025 | RESISTOR, ADJUSTABLE<br>10A500<br>69-505 | <br>63743<br>30554 | EA | 1 | 1 |
| 32 | 23 | MOO | MOO | MOO | MOO | | | | TUBE<br>MIL-P-79 FORM TM TYPE B | <br>81349 | EA | 4 | 4 |
| 32 | 24 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5961-00-998-6947 | RECTIFIER, SILICON<br>69-512<br>JAN1N4385 | <br>30554<br>81349 | EA | 6 | 6 |
| 32 | 25 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .020 | 5950-00-327-9625 | TRANSFORMER ASSY, A8T1<br>69-508<br>04306-8072 | <br>30554<br>93568 | EA | 1 | 1 |
| 32 | 26 | XB | XB | XB | XBFZZ | | | | PLATE, MOUNTING<br>69-507 | <br>30554 | EA | 1 | 1 |

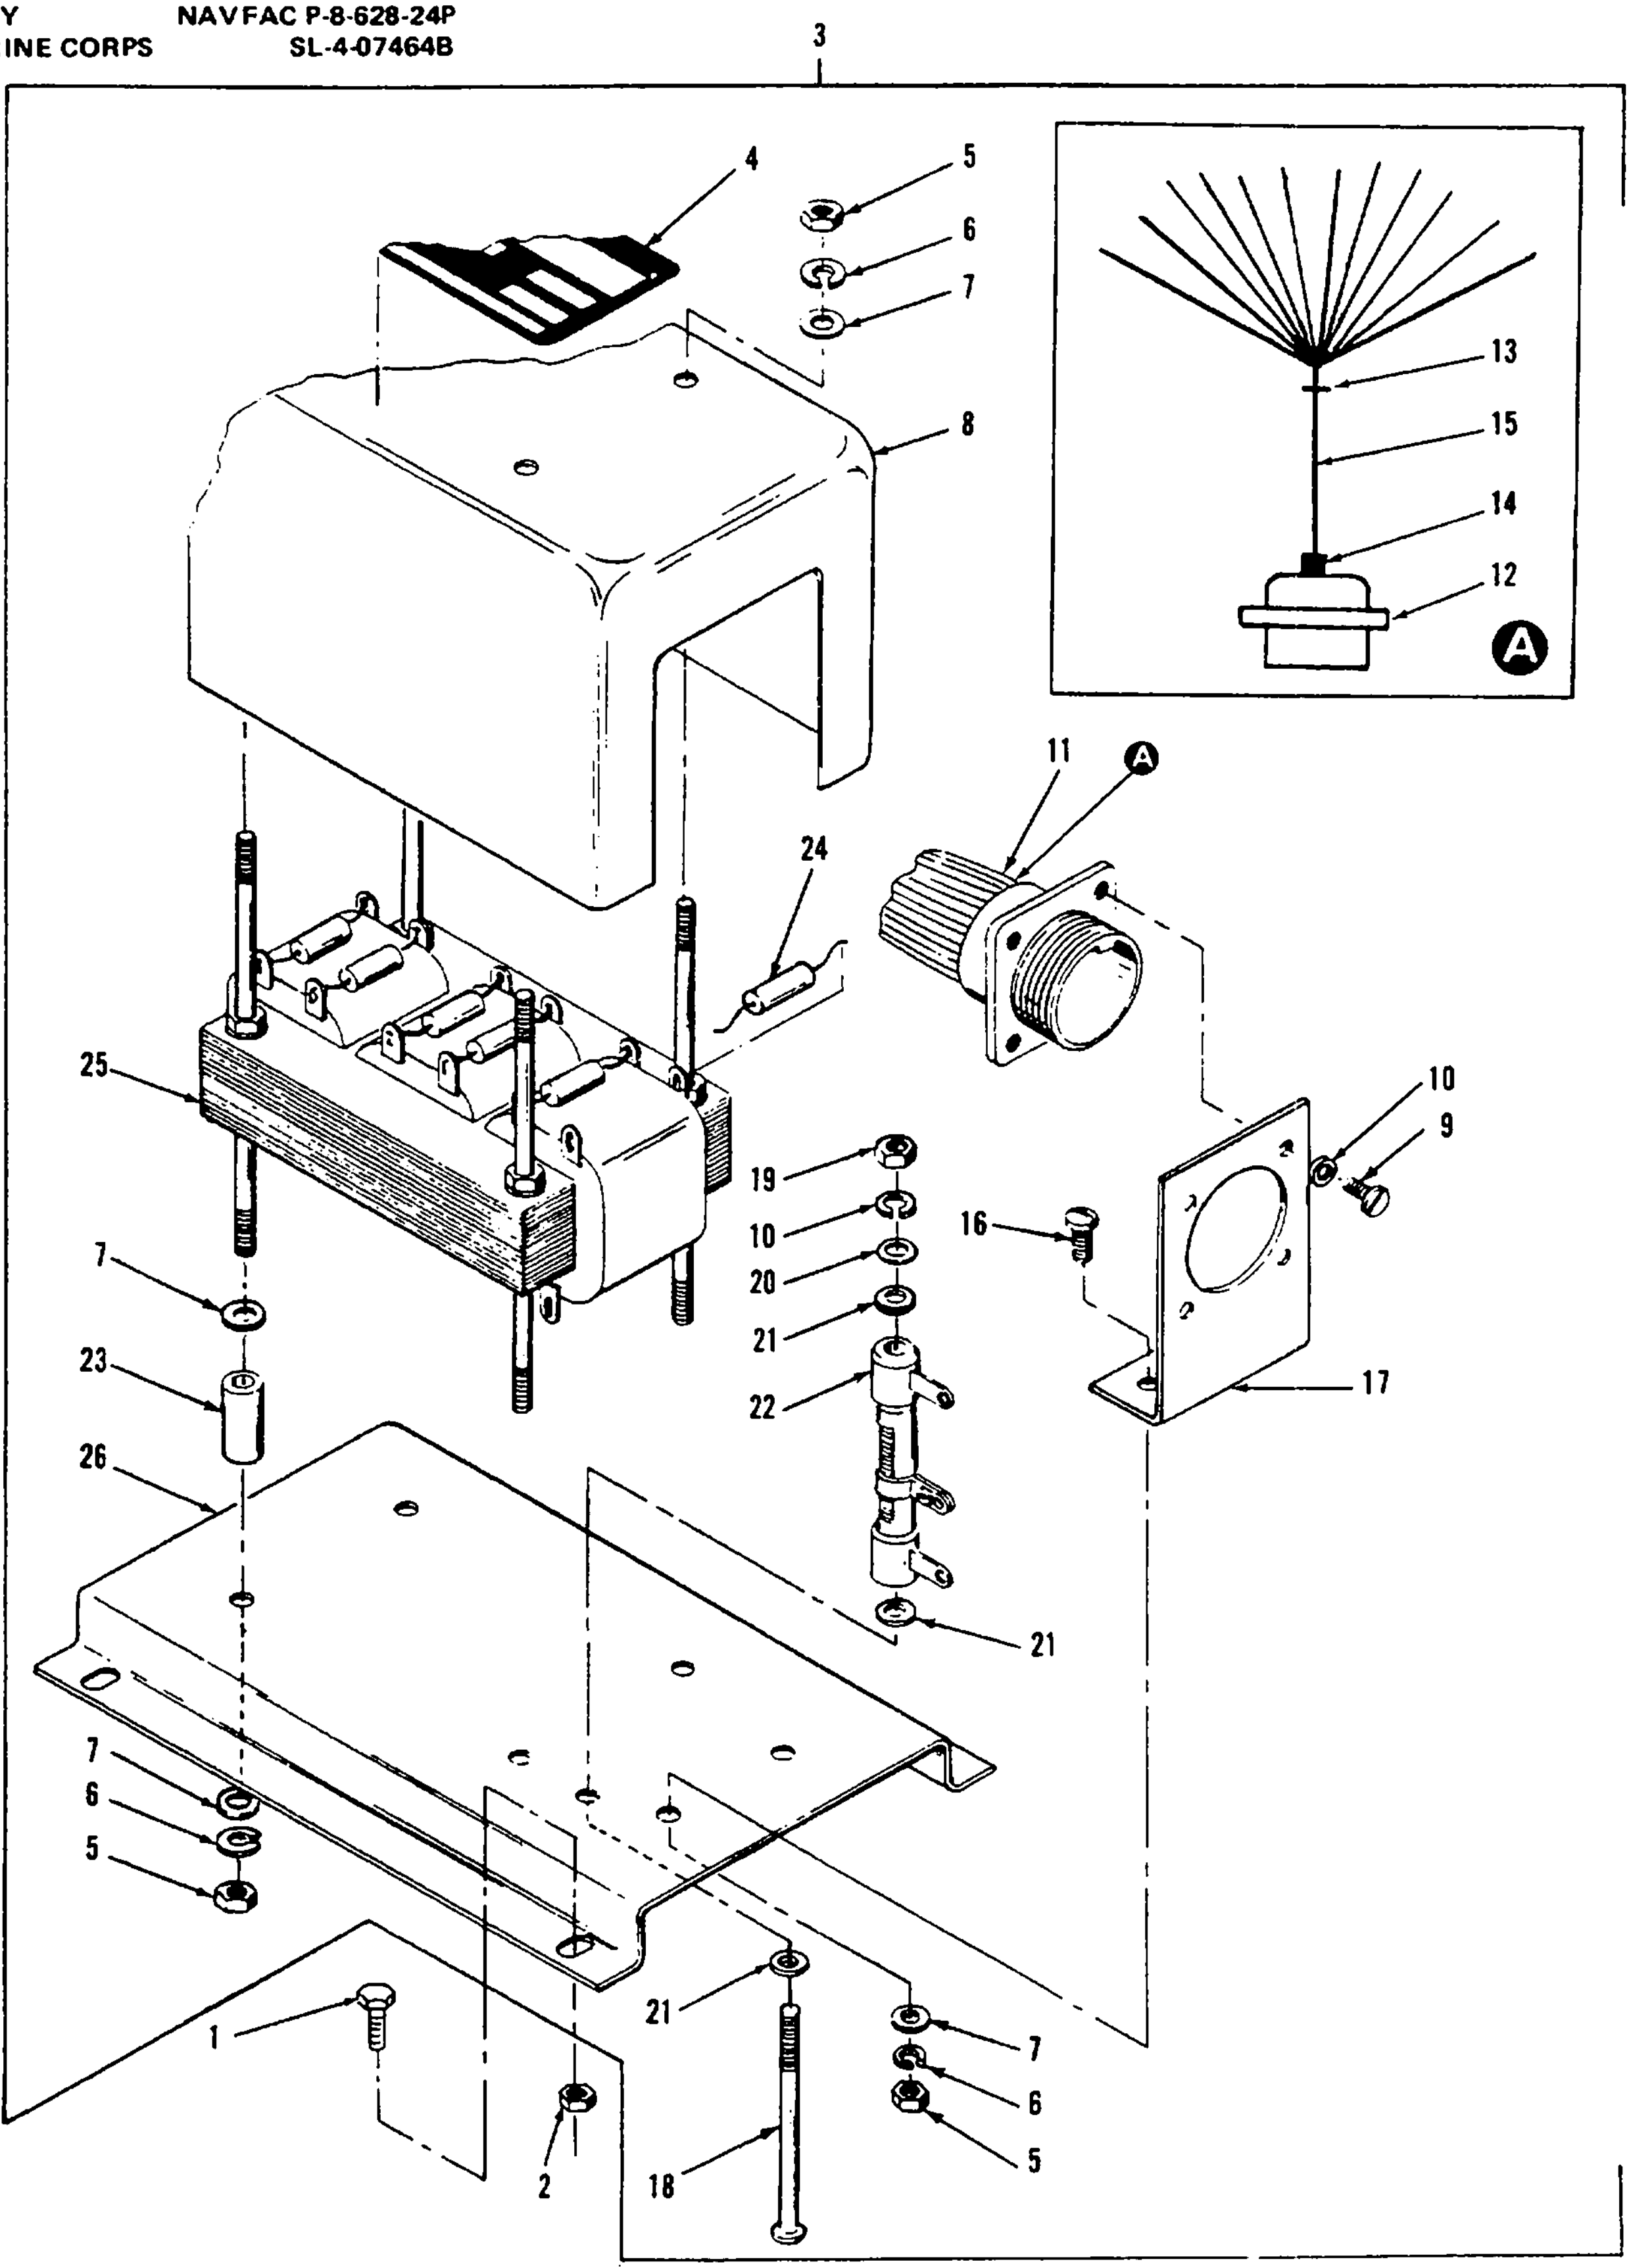
3
4
5
6
7
8
13
15
14
12
A
11
A
24
25
10
9
19
10
16
20
21
22
17
7
23
26
21
7
6
5
21
7
6
5
1
2
18

Figure 32. Load Measuring Unit and Related Parts

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM | | | | |
| 33 | | | | | | | | | AC ELECTRICAL WIRING HARNESS | | | | |
| 33 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-269-3213 | SCREW, HEX HEAD<br>MS90725-62 96906 | | EA | 1 | 17 |
| 33 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-080-6004 | WASHER, FLAT<br>MS27183-14 96906 | | EA | 3 | 43 |
| 33 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8790 | NUT<br>MS17829-6C 96906 | | EA | 3 | 25 |
| 33 | 4 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-269-3214 | SCREW<br>MS90725-64 96906 | | EA | 3 | 4 |
| 33 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-637-9541 | WASHER<br>MS35338-46 96906 | | EA | 3 | 40 |
| 33 | 6 | XB | XB | XB | XB | | | | EXTENDER, CIRCUIT BREAKER TERMINAL<br>76-4171 30554 | | EA | 3 | 3 |
| 33 | 7 | AFF | AFF | AFF | AFF | | | | WIRING HARNESS, RELAY BOX TO CONTROL PANEL<br>79-4504 30554 | | EA | 1 | 1 |
| 33 | 8 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-723-5281 | CONNECTOR, PLUG, P1<br>MS3106R36-7S 96906<br>3450W36-75 | | EA | 1 | 2 |
| 33 | 9 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5340-00-823-5322 | PLUG, END SEAL<br>MS25251-16 96906 | | EA | 14 | 82 |
| 33 | 10 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-846-5602 | CONNECTOR, PLUG, P2<br>MS3106R36-7P 96906 | | EA | 1 | 1 |
| 33 | 11 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-074-2072 | STRAP, TIE DOWN<br>MS3367-1-9 96906 | | EA | 14 | 344 |
| 33 | 12 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 81349 | | FT | 4 | 1178 |
| 33 | 13 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | | 5975-00-944-1499 | STRAP, TIE DOWN<br>MS3368-1-9A 96906 | | EA | 1 | 1 |
| 33 | 14 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-809-1494 | CLAMP<br>MS21333-105 96906 | | EA | 1 | 1 |
| 33 | 15 | AFF | AFF | AFF | AFF | | | | WIRING HARNESS, RELAY BOX TO RECONNECTION PANEL<br>76-4216 30554 | | EA | 1 | 1 |
| 33 | 16 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-851-9080 | CONNECTOR, PLUG, P10<br>MS3106R32-7S 96906 | | EA | 1 | 1 |
| 33 | 17 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5340-00-823-5322 | PLUG, END SEAL<br>MS25251-16 96906 | | EA | 28 | 82 |
| 33 | 18 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5935-00-565-9503 | PLUG, END SEAL<br>MS25251-12 96906 | | EA | 4 | 7 |
| 33 | 19 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-805-4992 | CONNECTOR, PLUG, P48, P61<br>MS3106R18-5S 96906 | | PEA | 2 | 2 |
| 33 | 20 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .060 | 5935-00-725-8233 | CONNECTOR, PLUG, P41<br>MS3106R20-29S 96906 | | EA | 1 | 2 |
| 33 | 21 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-814-9781 | CONNECTOR, PLUG, P13<br>MS3106R22-14S 96906 | | EA | 1 | 1 |
| 33 | 22 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4793 | LUG, TERMINAL<br>MS25036-110 96906 | | EA | 12 | 12 |

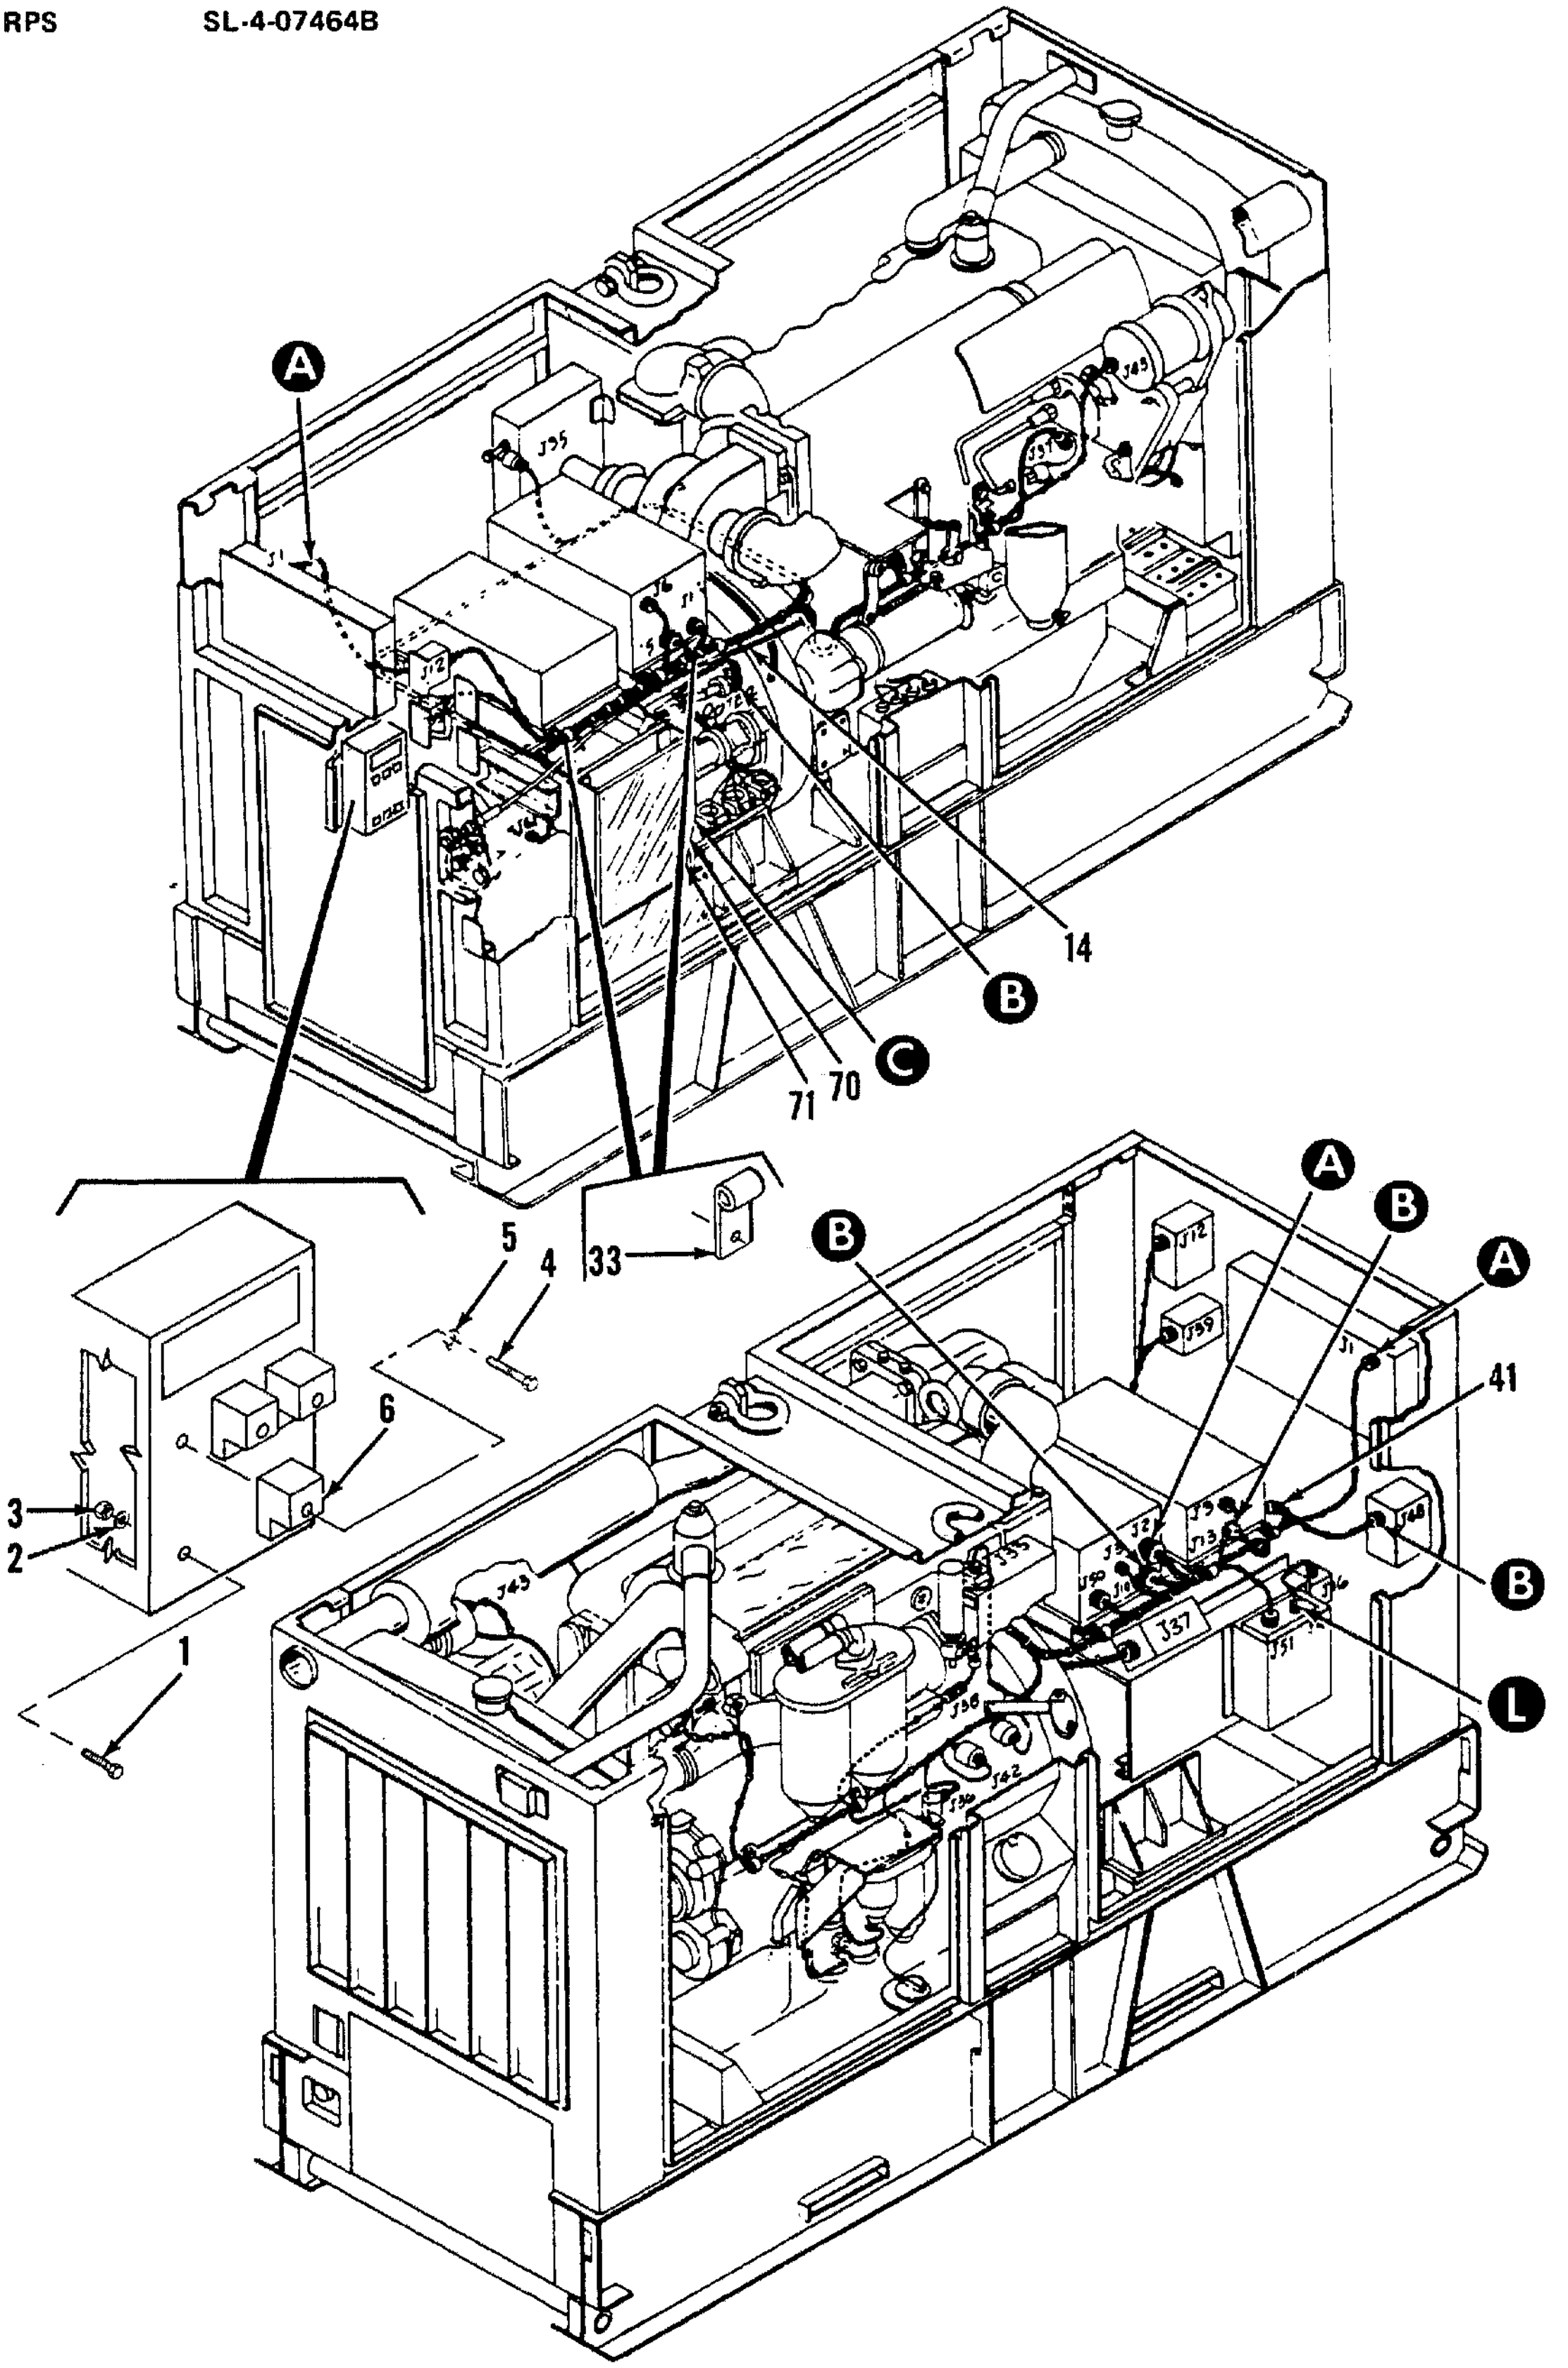
A
J35
J1
J12
J6
J45
J51
14
B
C
70
71
33
5
4
6
3
2
1
B
A
B
A
41
J12
J39
J1
J2
J9
J13
J37
J51
J68
J43
J58
J42
B
L

Figure 33. AC Electrical Wiring Harness (Sheet 1 of 4)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM - CONTINUED | | | | |
| 33 | | | | | | | | | AC ELECTRICAL WIRING HARNESSES - CONTINUED | | | | |
| 33 | 23 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4780 | LUG, TERMINAL<br>MS25036-108 | 96906 | EA | 2 | 35 |
| 33 | 24 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-660-3633 | LUG, TERMINAL<br>MS25036-155 | 96906 | EA | 10 | 10 |
| 33 | 25 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-283-5280 | LUG, TERMINAL<br>MS25036-106 | 96906 | EA | 10 | 268 |
| 33 | 26 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-682-2445 | LUG, TERMINAL<br>MS25036-158 | 96906 | EA | 1 | 4 |
| 33 | 27 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4774 | LUG, TERMINAL<br>MS25036-153 | 96906 | EA | 1 | 31 |
| 33 | 28 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>MS086/2-16-9 | 81349 | FT | 200 | 1178 |
| 33 | 29 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-7514 | WIRE, ELECTRICAL<br>M5086/2-12-9 | 81349 | FT | 200 | 200 |
| 33 | 30 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-094-2072 | STRAP, TIE DOWN<br>MS3367-1-9 | 96906 | EA | 14 | 344 |
| 33 | 31 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-727-5153 | STRAP, TIE DOWN<br>MS3367-4-9 | 96906 | EA | 38 | 239 |
| 33 | 32 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | | 5975-00-944-1499 | BAND, MARKER<br>MS3368-1-9A | 96906 | EA | 1 | 1 |
| 33 | 33 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-809-1500 | CLAMP<br>MS21333-107 | 96906 | EA | 2 | 2 |
| 33 | 34 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6906 | SCREW<br>69-662-50<br>61-100841-40-0142B-0542B | 30554<br>78189 | EA | 3 | 98 |
| 33 | 35 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .013 | 5340-00-922-6300 | CLAMP<br>MS21333-77 | 96906 | EA | 1 | 1 |
| 33 | 36 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-094-3421 | NUT<br>69-561-4<br>511-101800-00 | 30554<br>78189 | EA | 3 | 95 |
| 33 | 37 | XB | XB | XB | XB | | | | INSULATION<br>71-4786-02 | 30554 | EA | 2 | 2 |
| 33 | 38 | XB | XB | XB | XB | | | | INSULATION<br>71-4786-03 | 30554 | EA | 1 | 2 |
| 33 | 39 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .013 | 5340-01-062-6748 | CLAMP<br>76-4133 | 30554 | EA | 1 | 1 |
| 33 | 40 | MOO | MOO | MOO | MOO | | | | BRACKET<br>76-4134 | 30554 | EA | 1 | 1 |
| 33 | 41 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-074-2072 | STRAP, TIE DOWN<br>MS3367-1-9 | 96906 | EA | 1 | 344 |
| 33 | 42 | AFF | AFF | AFF | AFF | | | | CABLE ASSY<br>71-4745-01 | 30554 | EA | 1 | 1 |
| 33 | 43 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-237-2693 | LUG, TERMINAL<br>71-4878-01 | 30554 | EA | 1 | 2 |
| 33 | 44 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-114-1321 | LUG, TERMINAL<br>MS25036-141 | 96906 | EA | 1 | 10 |
| 33 | 45 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-195-5602 | WIRE, ELECTRICAL<br>M5086/2-04-9 | 81349 | FT | 4 | 22 |

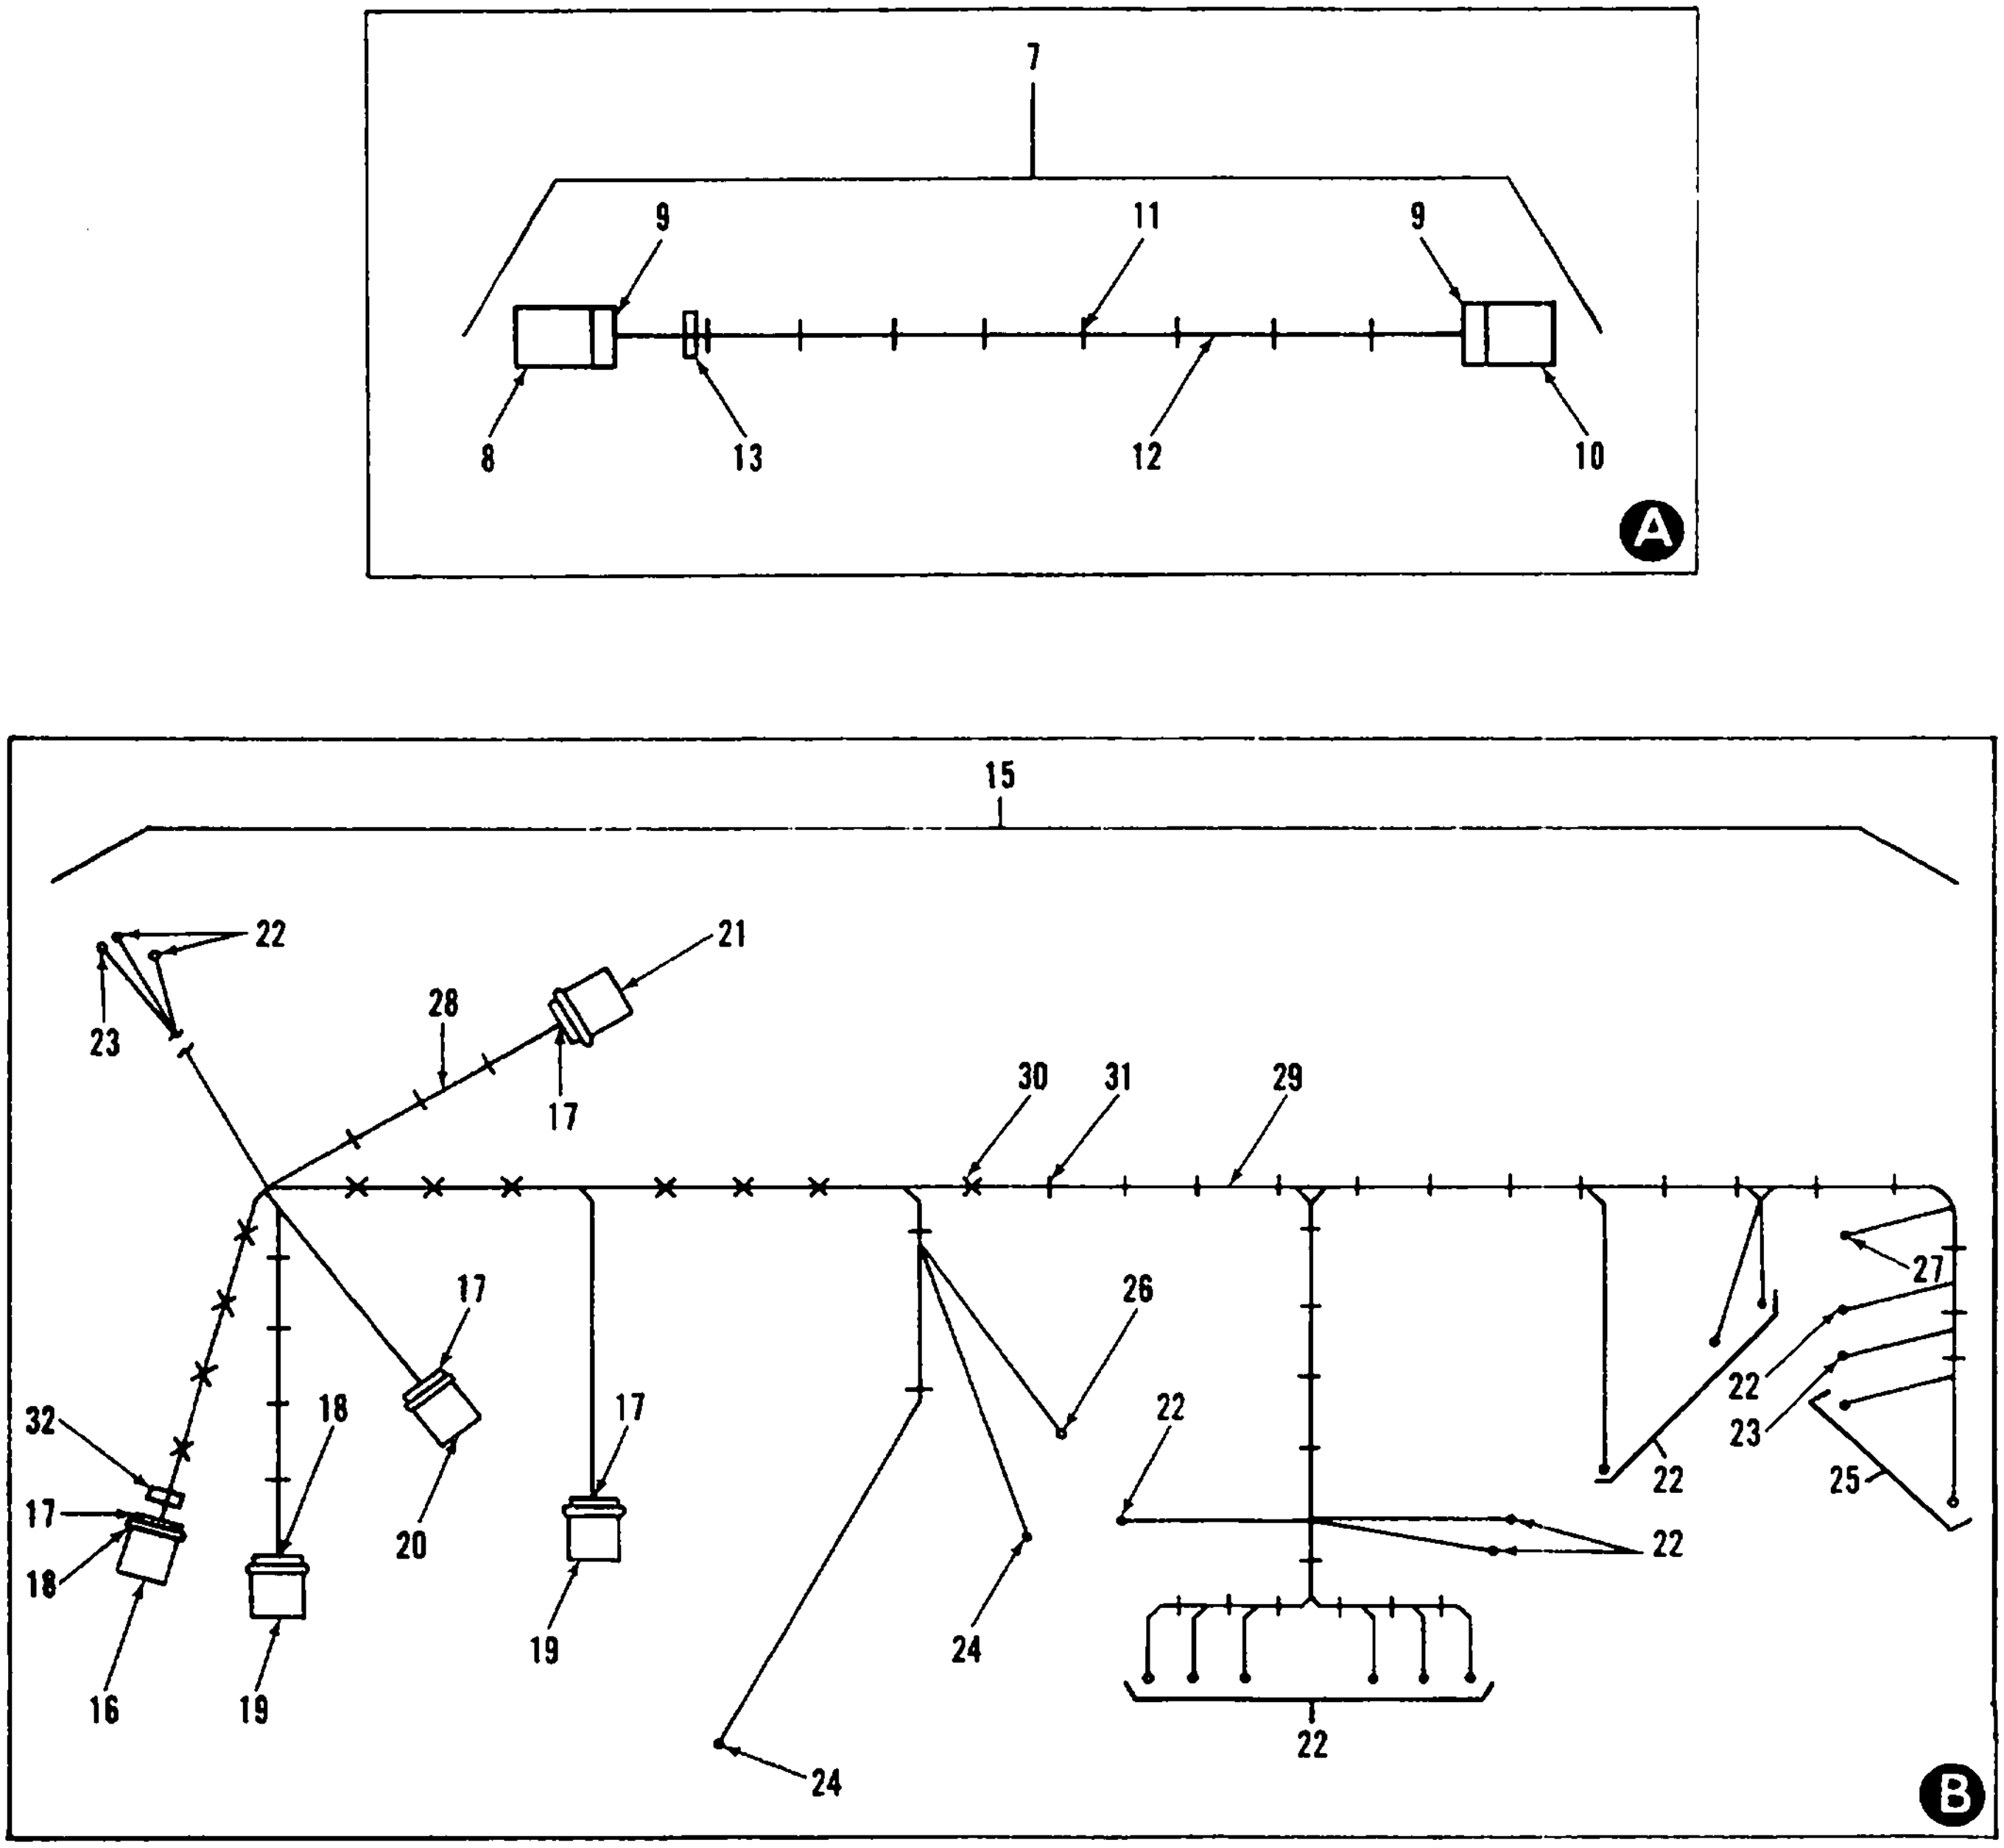
7
9
11
9
8
13
12
10
A
15
22
21
28
23
17
30
31
29
17
26
27
32
18
17
22
22
23
17
22
25
22
18
20
19
24
16
19
22
24
B

Figure 33. AC Electrical Wiring Harness (Sheet 2 of 4)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM - CONTINUED | | | |
| 33 | | | | | | | | | AC ELECTRICAL WIRING HARNESSES - CONTINUED | | | |
| 33 | 46 | AFF | AFF | AFF | AFF | | | | CABLE ASSY<br>76-4132-01 30554 | EA | 1 | 1 |
| 33 | 47 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-114-1320 | LUG, TERMINAL<br>MS25036-140 96906 | EA | 1 | 5 |
| 33 | 48 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-237-2693 | LUG, TERMINAL<br>71-4878-01 30554 | EA | 1 | 3 |
| 33 | 49 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-195-5602 | WIRE, ELECTRICAL<br>M5086/2-04-9 81349 | FT | 4 | 22 |
| 33 | 50 | AFF | AFF | AFF | AFF | | | | CABLE ASSY<br>76-4132-02 30554 | EA | 1 | 2 |
| 33 | 51 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-114-1320 | LUG, TERMINAL<br>MS25036-140 96906 | EA | 1 | 5 |
| 33 | 52 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-237-2693 | LUG, TERMINAL<br>71-4878-01 30554 | EA | 1 | 3 |
| 33 | 53 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-195-5602 | WIRE, ELECTRICAL<br>M5086/2-04-9 81349 | FT | 4 | 22 |
| 33 | 54 | AFF | AFF | AFF | AFF | | | | CABLE ASSY<br>76-4132-03 30554 | EA | 1 | 1 |
| 33 | 55 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-114-1320 | LUG, TERMINAL<br>MS25036-140 96906 | EA | 1 | 5 |
| 33 | 56 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-237-2693 | LUG, TERMINAL<br>71-4878-01 30554 | EA | 1 | 3 |
| 33 | 57 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-195-5602 | WIRE, ELECTRICAL<br>M5086/2-04-9 81349 | FT | 4 | 22 |
| 33 | 58 | AFF | AFF | AFF | AFF | | | | CABLE ASSY<br>76-4132-04 30554 | EA | 1 | 1 |
| 33 | 59 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-114-1320 | LUG, TERMINAL<br>MS25036-140 96906 | EA | 1 | 5 |
| 33 | 60 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-114-1321 | LUG, TERMINAL<br>MS25036-141 96906 | EA | 1 | 10 |
| 33 | 61 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-195-5602 | WIRE, ELECTRICAL<br>M5086/2-04-9 81349 | FT | 1 | 22 |
| 33 | 62 | AFF | AFF | AFF | AFF | | | | CABLE ASSY<br>76-4132-05 30554 | EA | 1 | 1 |
| 33 | 63 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-114-1320 | LUG, TERMINAL<br>MS25036-140 96906 | EA | 1 | 5 |
| 33 | 64 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-114-1321 | LUG, TERMINAL<br>MS25036-141 96906 | EA | 1 | 10 |
| 33 | 65 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-195-5602 | WIRE, ELECTRICAL<br>M5086/204-9 81349 | FT | 3 | 22 |
| 33 | 66 | AFF | AFF | AFF | AFF | | | | CABLE ASSY<br>76-4132-06 30554 | EA | 1 | 1 |
| 33 | 67 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-114-1320 | LUG, TERMINAL<br>MS25036-140 96906 | EA | 1 | 5 |
| 33 | 68 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-114-1321 | LUG, TERMINAL<br>MS25036-141 96906 | EA | 1 | 10 |
| 33 | 69 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-195-5602 | WIRE, ELECTRICAL<br>M5086/2-04-09 81349 | FT | 3 | 22 |

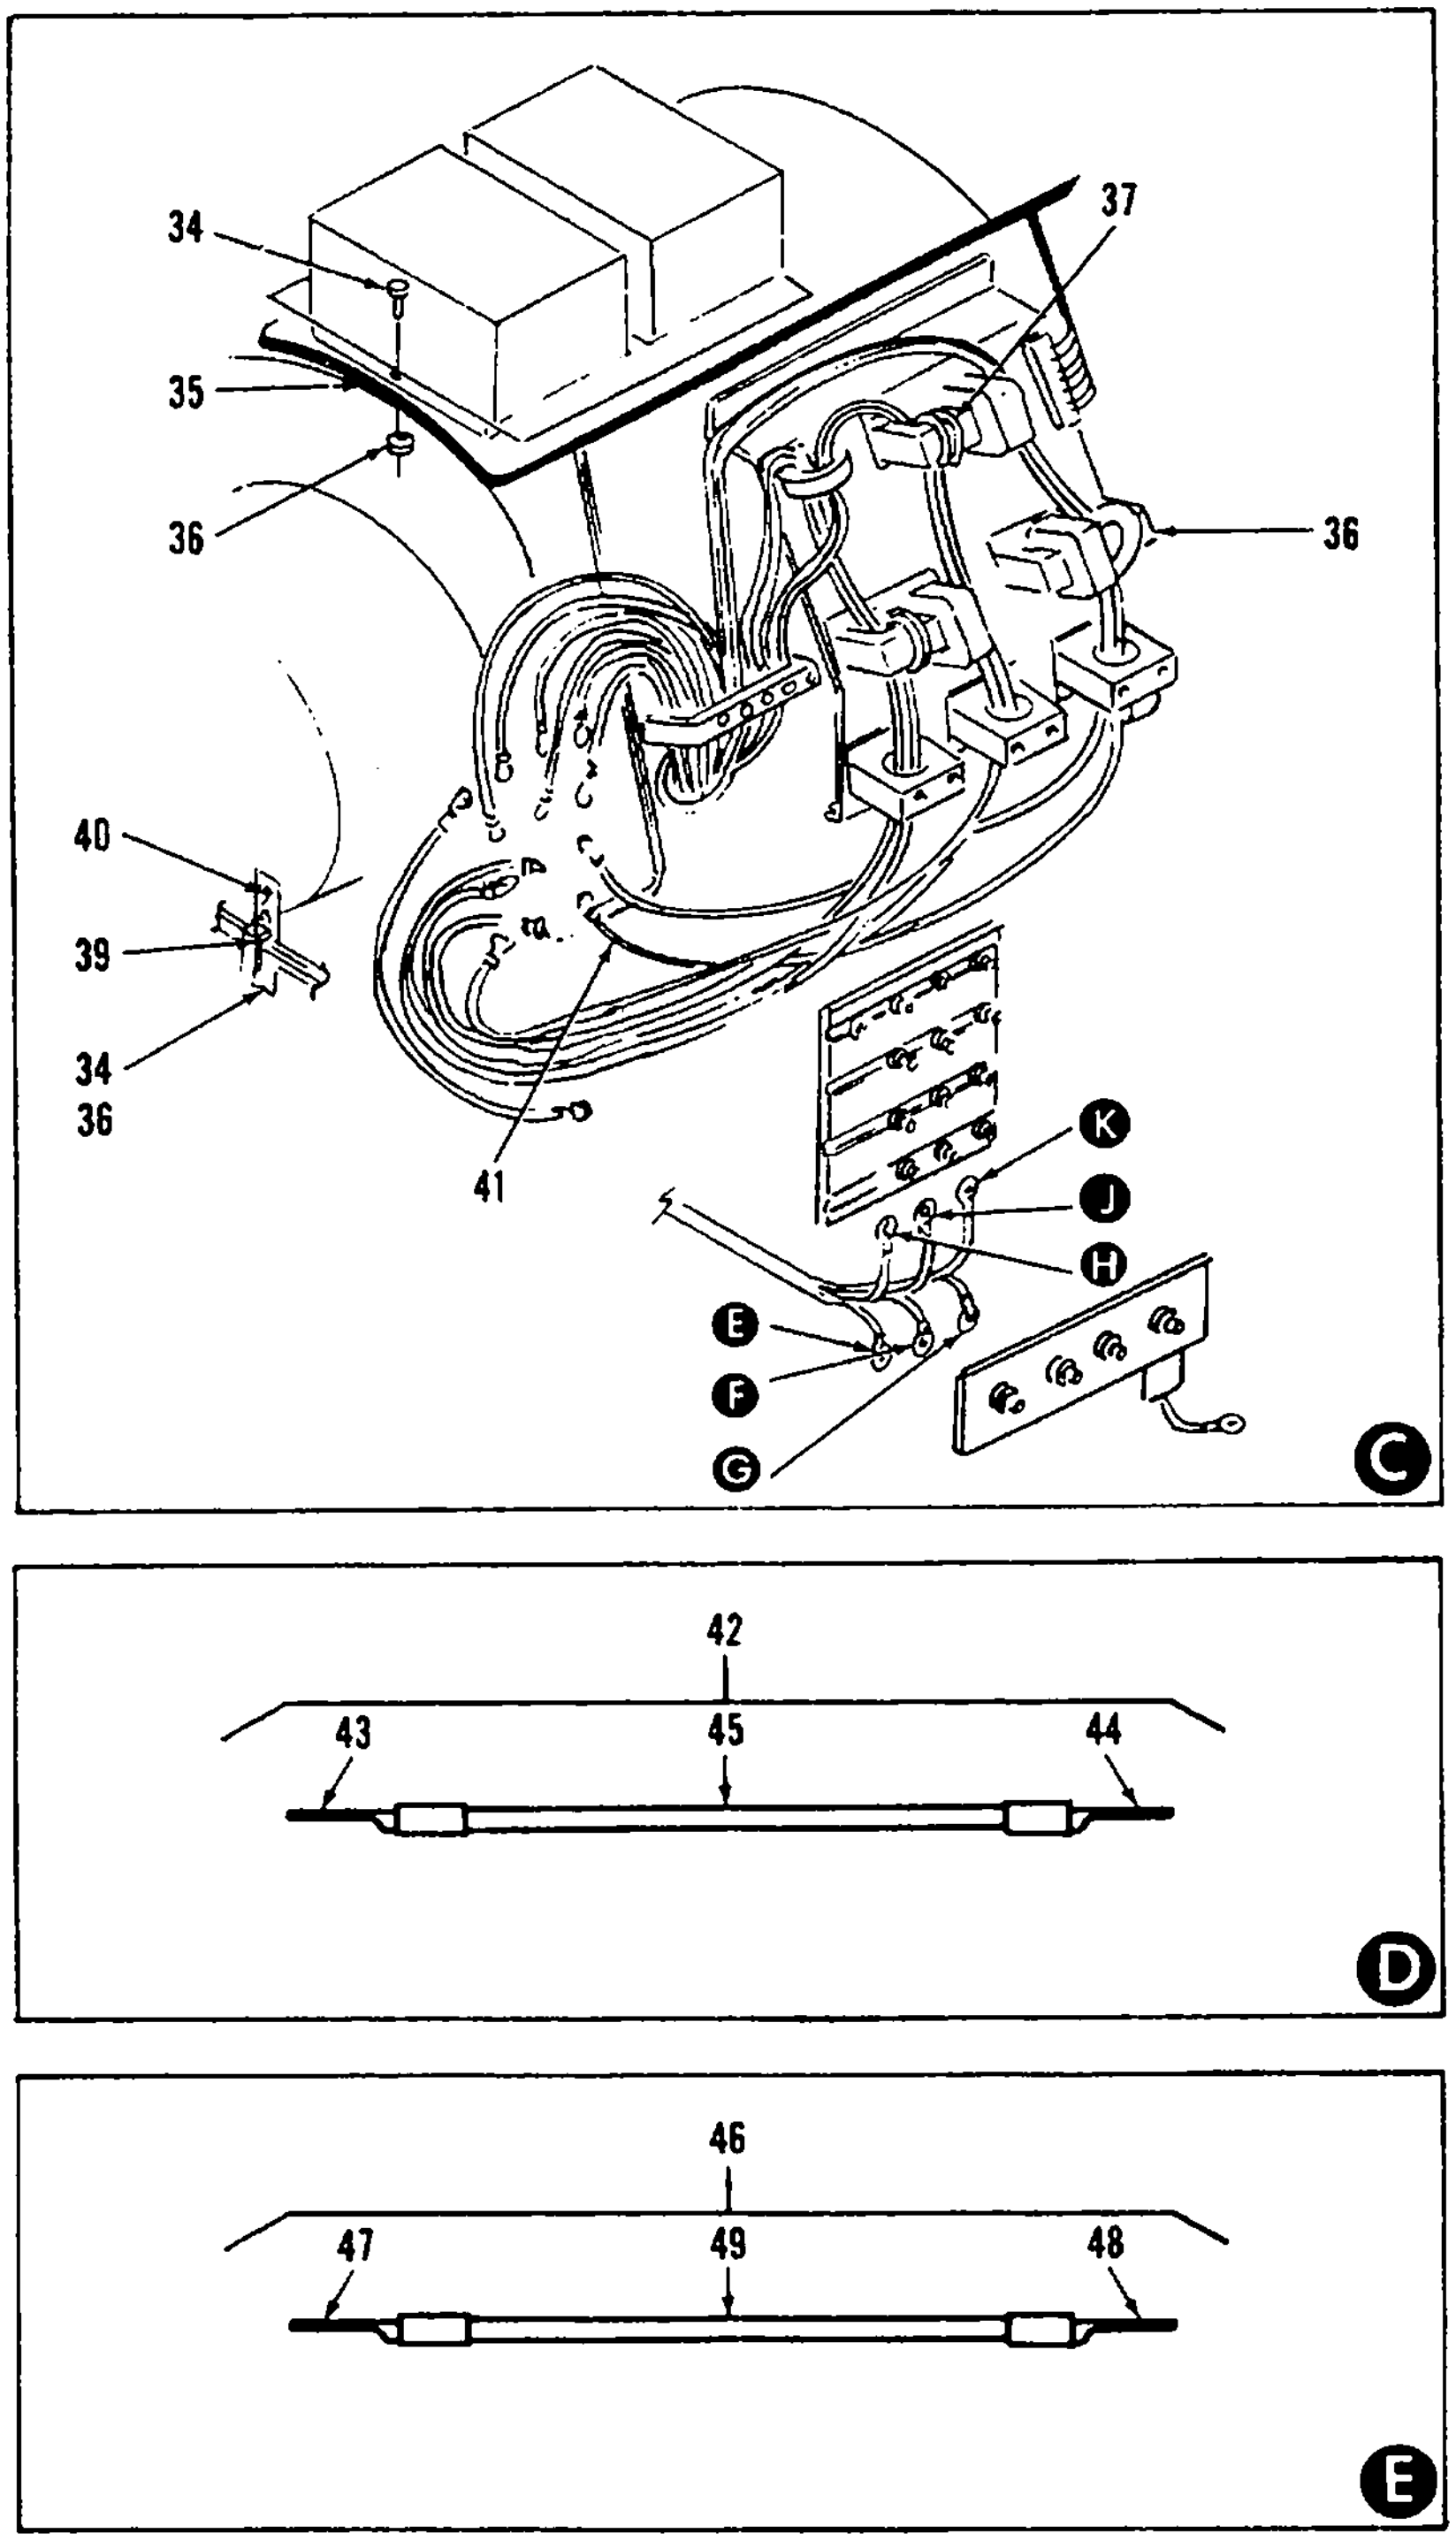
34
37
35
36
36
40
39
34
36
41
K
J
H
E
F
G
C
42
43
45
44
D
46
47
49
48
E

Figure 33. AC Electrical Wiring Harness (Sheet 3 of 4)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 04 - AC ELECTRICAL CONTROL SYSTEM - CONTINUED | | | | |
| 33 | | | | | | | | | AC ELECTRICAL WIRING HARNESSES - CONTINUED | | | | |
| 33 | 70 | XB | XB | XB | XB | | | | INSULATION<br>71-4786-01 30554 | | EA | 1 | 1 |
| 33 | 71 | XB | XB | XB | XB | | | | INSULATION<br>71-4786-04 30554 | | EA | 1 | 1 |
| 33 | 72 | AFO | AFO | AFF | AFF | | | 6115-00-148-5724 | WIRING HARNESS<br>70-4308 30554 | | EA | 1 | 1 |
| 33 | 73 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-725-8233 | CONNECTOR, PLUG, P4<br>MS3106R20-29S 96906 | | EA | 10 | 12 |
| 33 | 74 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5340-00-823-5322 | PLUG, END SEAL<br>MS25251-16 96906 | | EA | 10 | 82 |
| 33 | 75 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-752-2770 | CONNECTOR, PLUG, ANGLE, P16<br>MS3108R20-29S 96906 | | EA | 1 | 12 |
| 33 | 76 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5935-00-223-0572 | CLAMP<br>MS3057-12A 96906 | | EA | 1 | 1 |
| 33 | 77 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 5935-00-598-5416 | BUSHING<br>MS3420-12 96906 | | EA | 1 | 1 |
| 33 | 78 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 81349 | | FT | 2 | 1178 |
| 33 | 79 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-074-2072 | STRAP, TIE DOWN<br>MS3367-1-9 96906 | | EA | 3 | 344 |
| 33 | 80 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | | 9905-00-893-3570 | BAND, MARKER<br>MIL-B-43436/1-3 81349 | | EA | 1 | 1 |

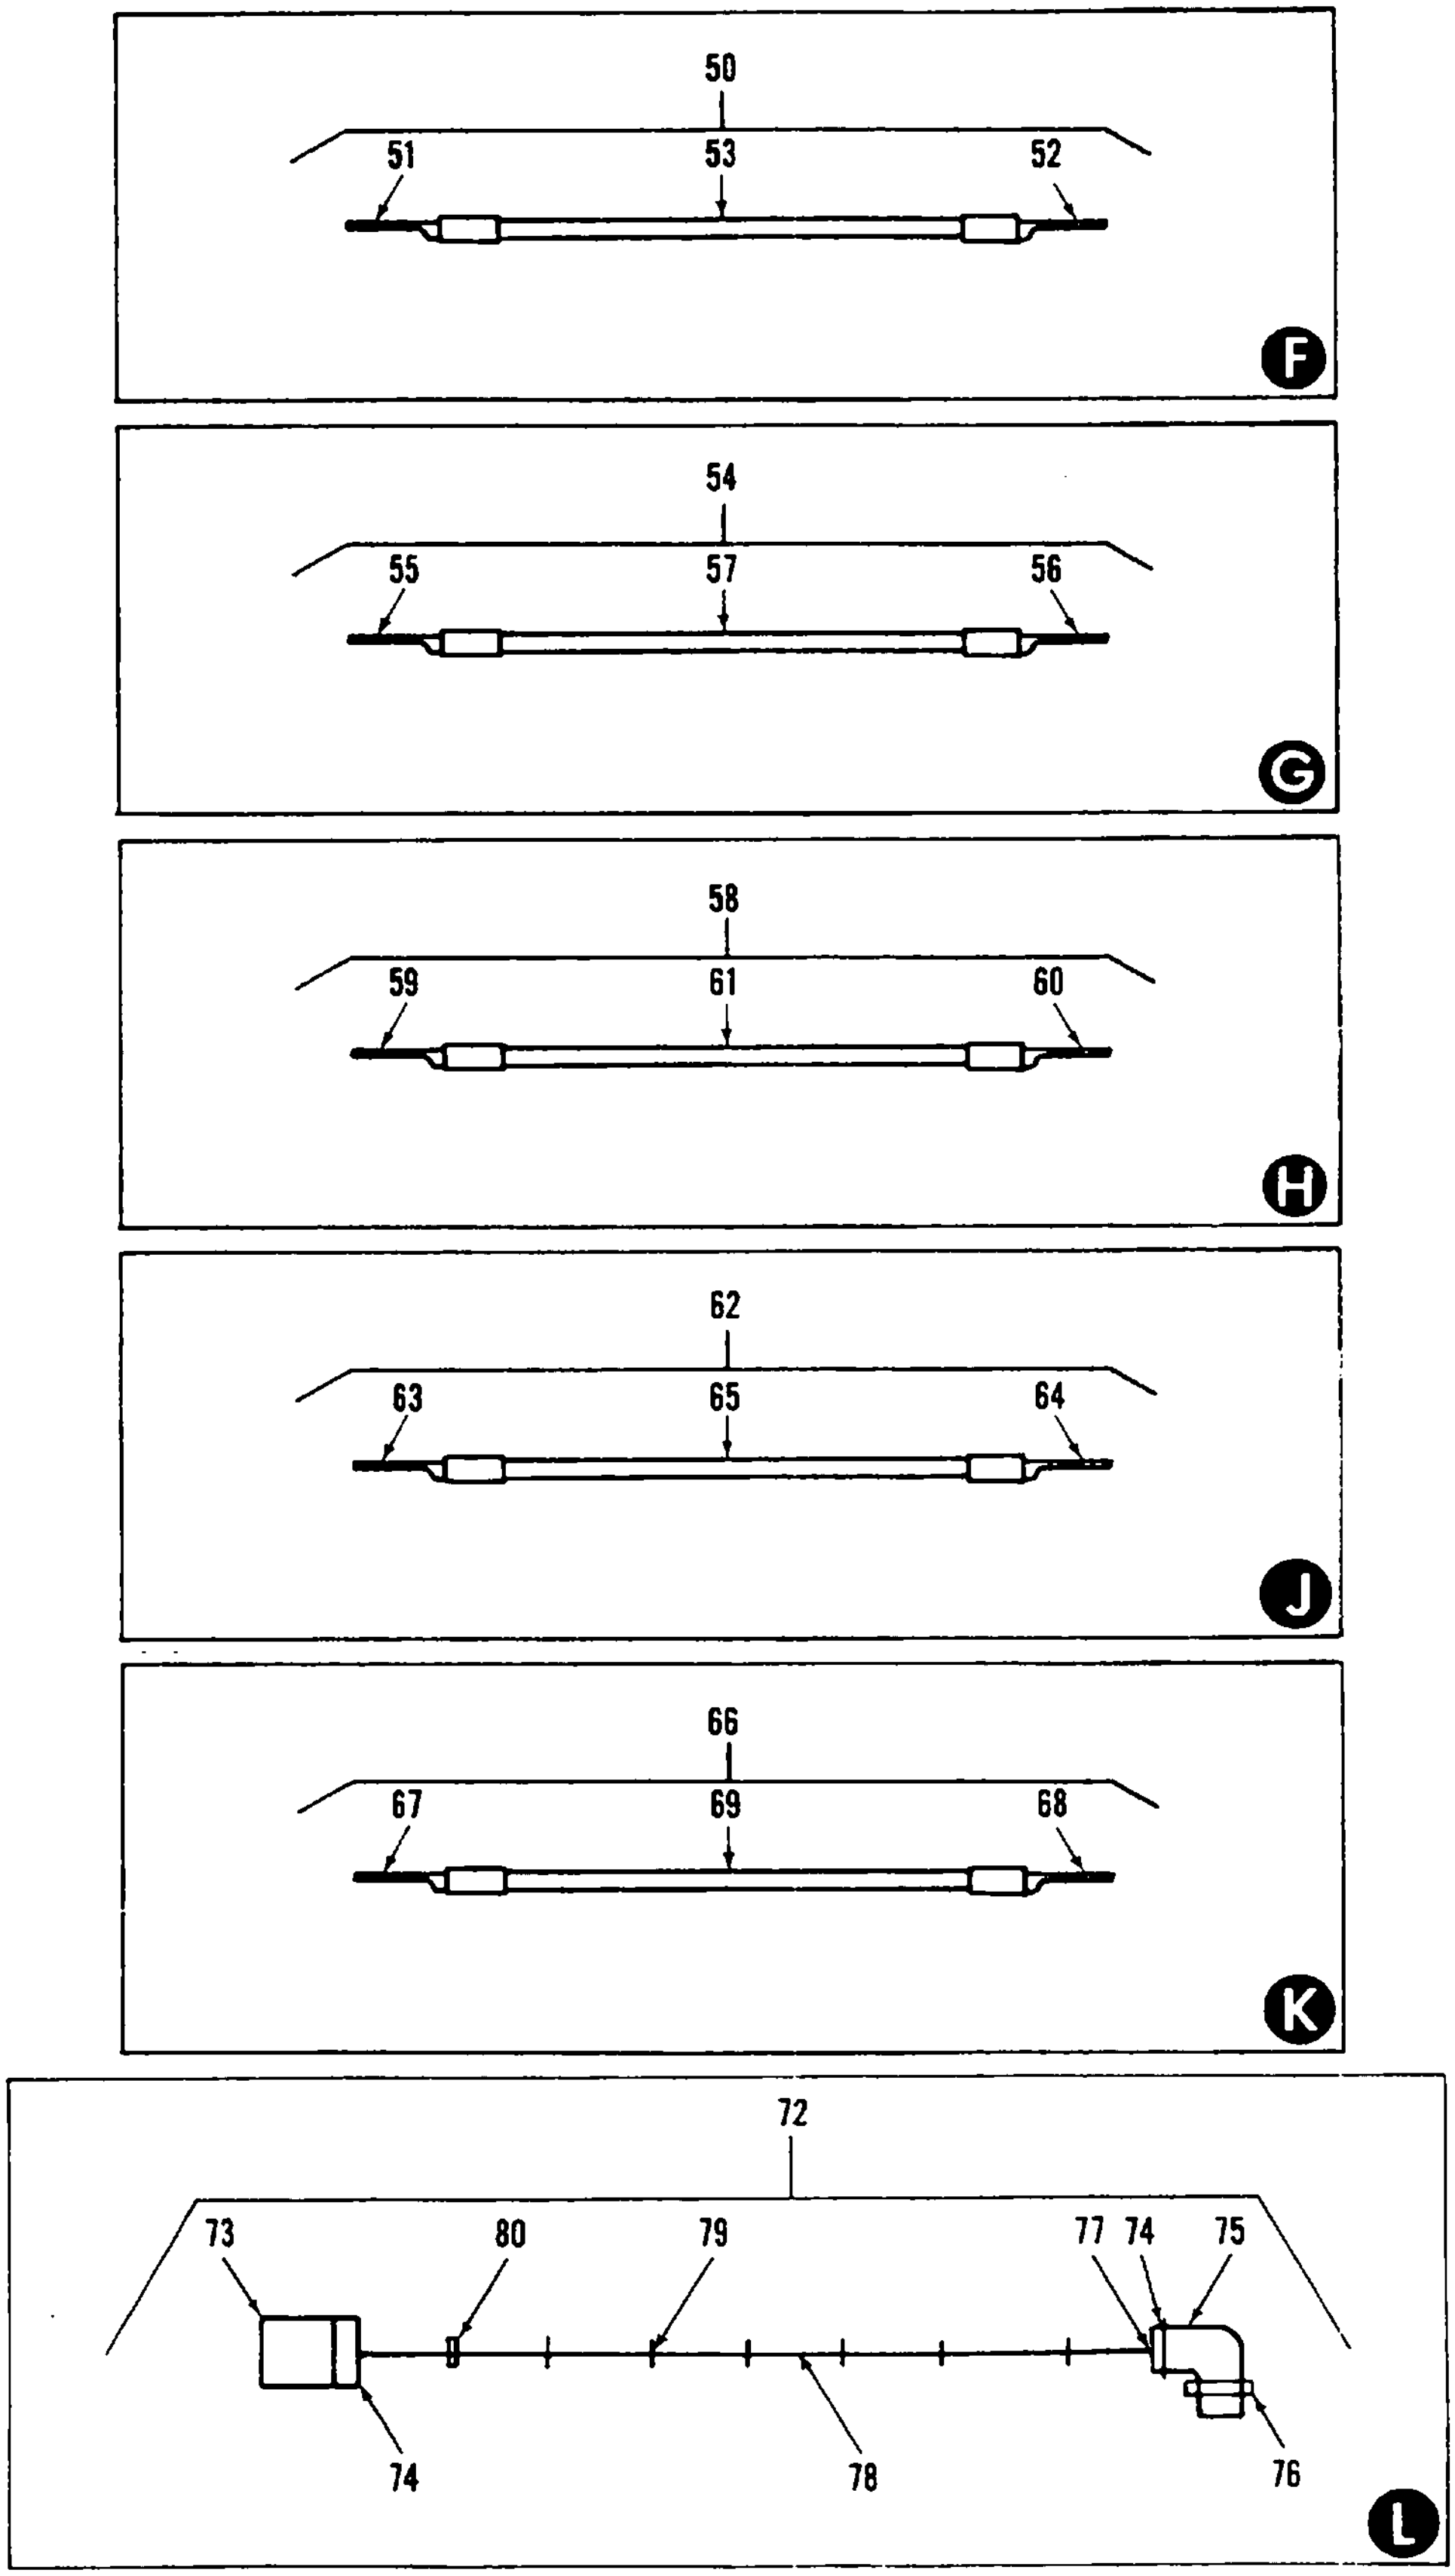
50
51
53
52
F
54
55
57
56
G
58
59
61
60
H
62
63
65
64
J
66
67
69
68
K
72
73
80
79
77
74
75
74
78
76
L

Figure 33. AC Electrical Wiring Harness (Sheet 4 of 4)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 05 - FUEL SYSTEM | | | | |
| 34 | | | | | | | | | FUEL FILTER AND PUMP ASSEMBLY AND RELATED PARTS | | | | |
| 34 | 1 | AOO | AOO | AFF | AFF | | | | FUEL FILTER AND PUMP ASSY<br>71-4471 | <br>30554 | EA | 1 | 1 |
| 34 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 5310-00-245-3419 | ELBOW<br>MS20822-6 | <br>96906 | EA | 1 | 3 |
| 34 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .030 | 4810-00-216-1849 | VALVE, SOLENOID<br>69-787-2<br>V5L8720<br>6x322 | <br>30554<br>81978<br>73212 | EA | 1 | 1 |
| 34 | 4 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-188-3513 | PLUG, SQUARE HEAD<br>MS20913-2 | <br>96906 | EA | 1 | 3 |
| 34 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-177-6166 | TEE, STREET<br>71-4853<br>1-4MROS | <br>30554<br>30780 | EA | 1 | 2 |
| 34 | 6 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-186-7798 | NIPPLE<br>AN911-2 | <br>88044 | EA | 1 | 1 |
| 34 | 7 | AFO | AFO | AFO | AFO | | | 4720-00-802-8008 | HOSE ASSY<br>MS28741-6-0140 | <br>96906 | EA | 2 | 2 |
| 34 | 8 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-843-0269 | FITTING<br>MS24587-6 | <br>96906 | EA | 2 | 12 |
| 34 | 9 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-278-1323 | HOSE<br>MIL-H-8794-6 | <br>81349 | FT | 2 | 2 |
| 34 | 10 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .006 | 4730-00-209-5015 | ELBOW<br>71-4842-05<br>6CCCTX-S | <br>30554<br>08752 | EA | 1 | 1 |
| 34 | 11 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .006 | 4730-00-289-2378 | ELBOW<br>71-4855<br>6DXS | <br>30554<br>08752 | EA | 1 | 1 |
| 34 | 12 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .006 | 4730-00-202-9997 | CONNECTOR<br>71-4840<br>6GTXS<br>MS51503A6 | <br>30554<br>08752<br>30327 | EA | 2 | 3 |
| 34 | 13 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .006 | 4730-00-995-1559 | CONNECTOR<br>MS51500A6 | <br>96096 | EA | 1 | 2 |
| 34 | 14 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .006 | 4730-00-231-5622 | ELBOW<br>AN916-2 | <br>88044 | EA | 1 | 1 |
| 34 | 15 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-068-0502 | SCREW, HEX HEAD<br>MS90725-6 | <br>96906 | EA | 4 | 118 |
| 34 | 16 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | <br>96906 | EA | 4 | 252 |
| 34 | 17 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5310-00-483-8792 | NUT<br>MS17829-4C | <br>96906 | EA | 4 | 167 |
| 34 | 18 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-869-2528 | WASHER, LOCK<br>MS45904-68 | <br>96906 | EA | 2 | 6 |
| 34 | 19 | PAOOO | PAOOO | PAOOO | PAOOO | | .013 | 2910-01-095-7595 | PUMP, ELECTRIC, FUEL<br>72-5313<br>480517 | <br>30554<br>72850 | EA | 2 | 2 |
| 34 | 20 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | | 2910-01-063-3144 | COVER<br>479130 | <br>72850 | EA | 1 | 2 |
| 34 | 21 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .030 | 5330-00-763 -9322 | GASKET, COVER<br>479136 | <br>72850 | EA | 1 | 2 |
| 34 | 22 | PAOBZ | PAOBZ | PAOZZ | PAOZZ | | | 2910-00-893 -6402 | STRAINER<br>479729 | <br>72850 | EA | 1 | 2 |

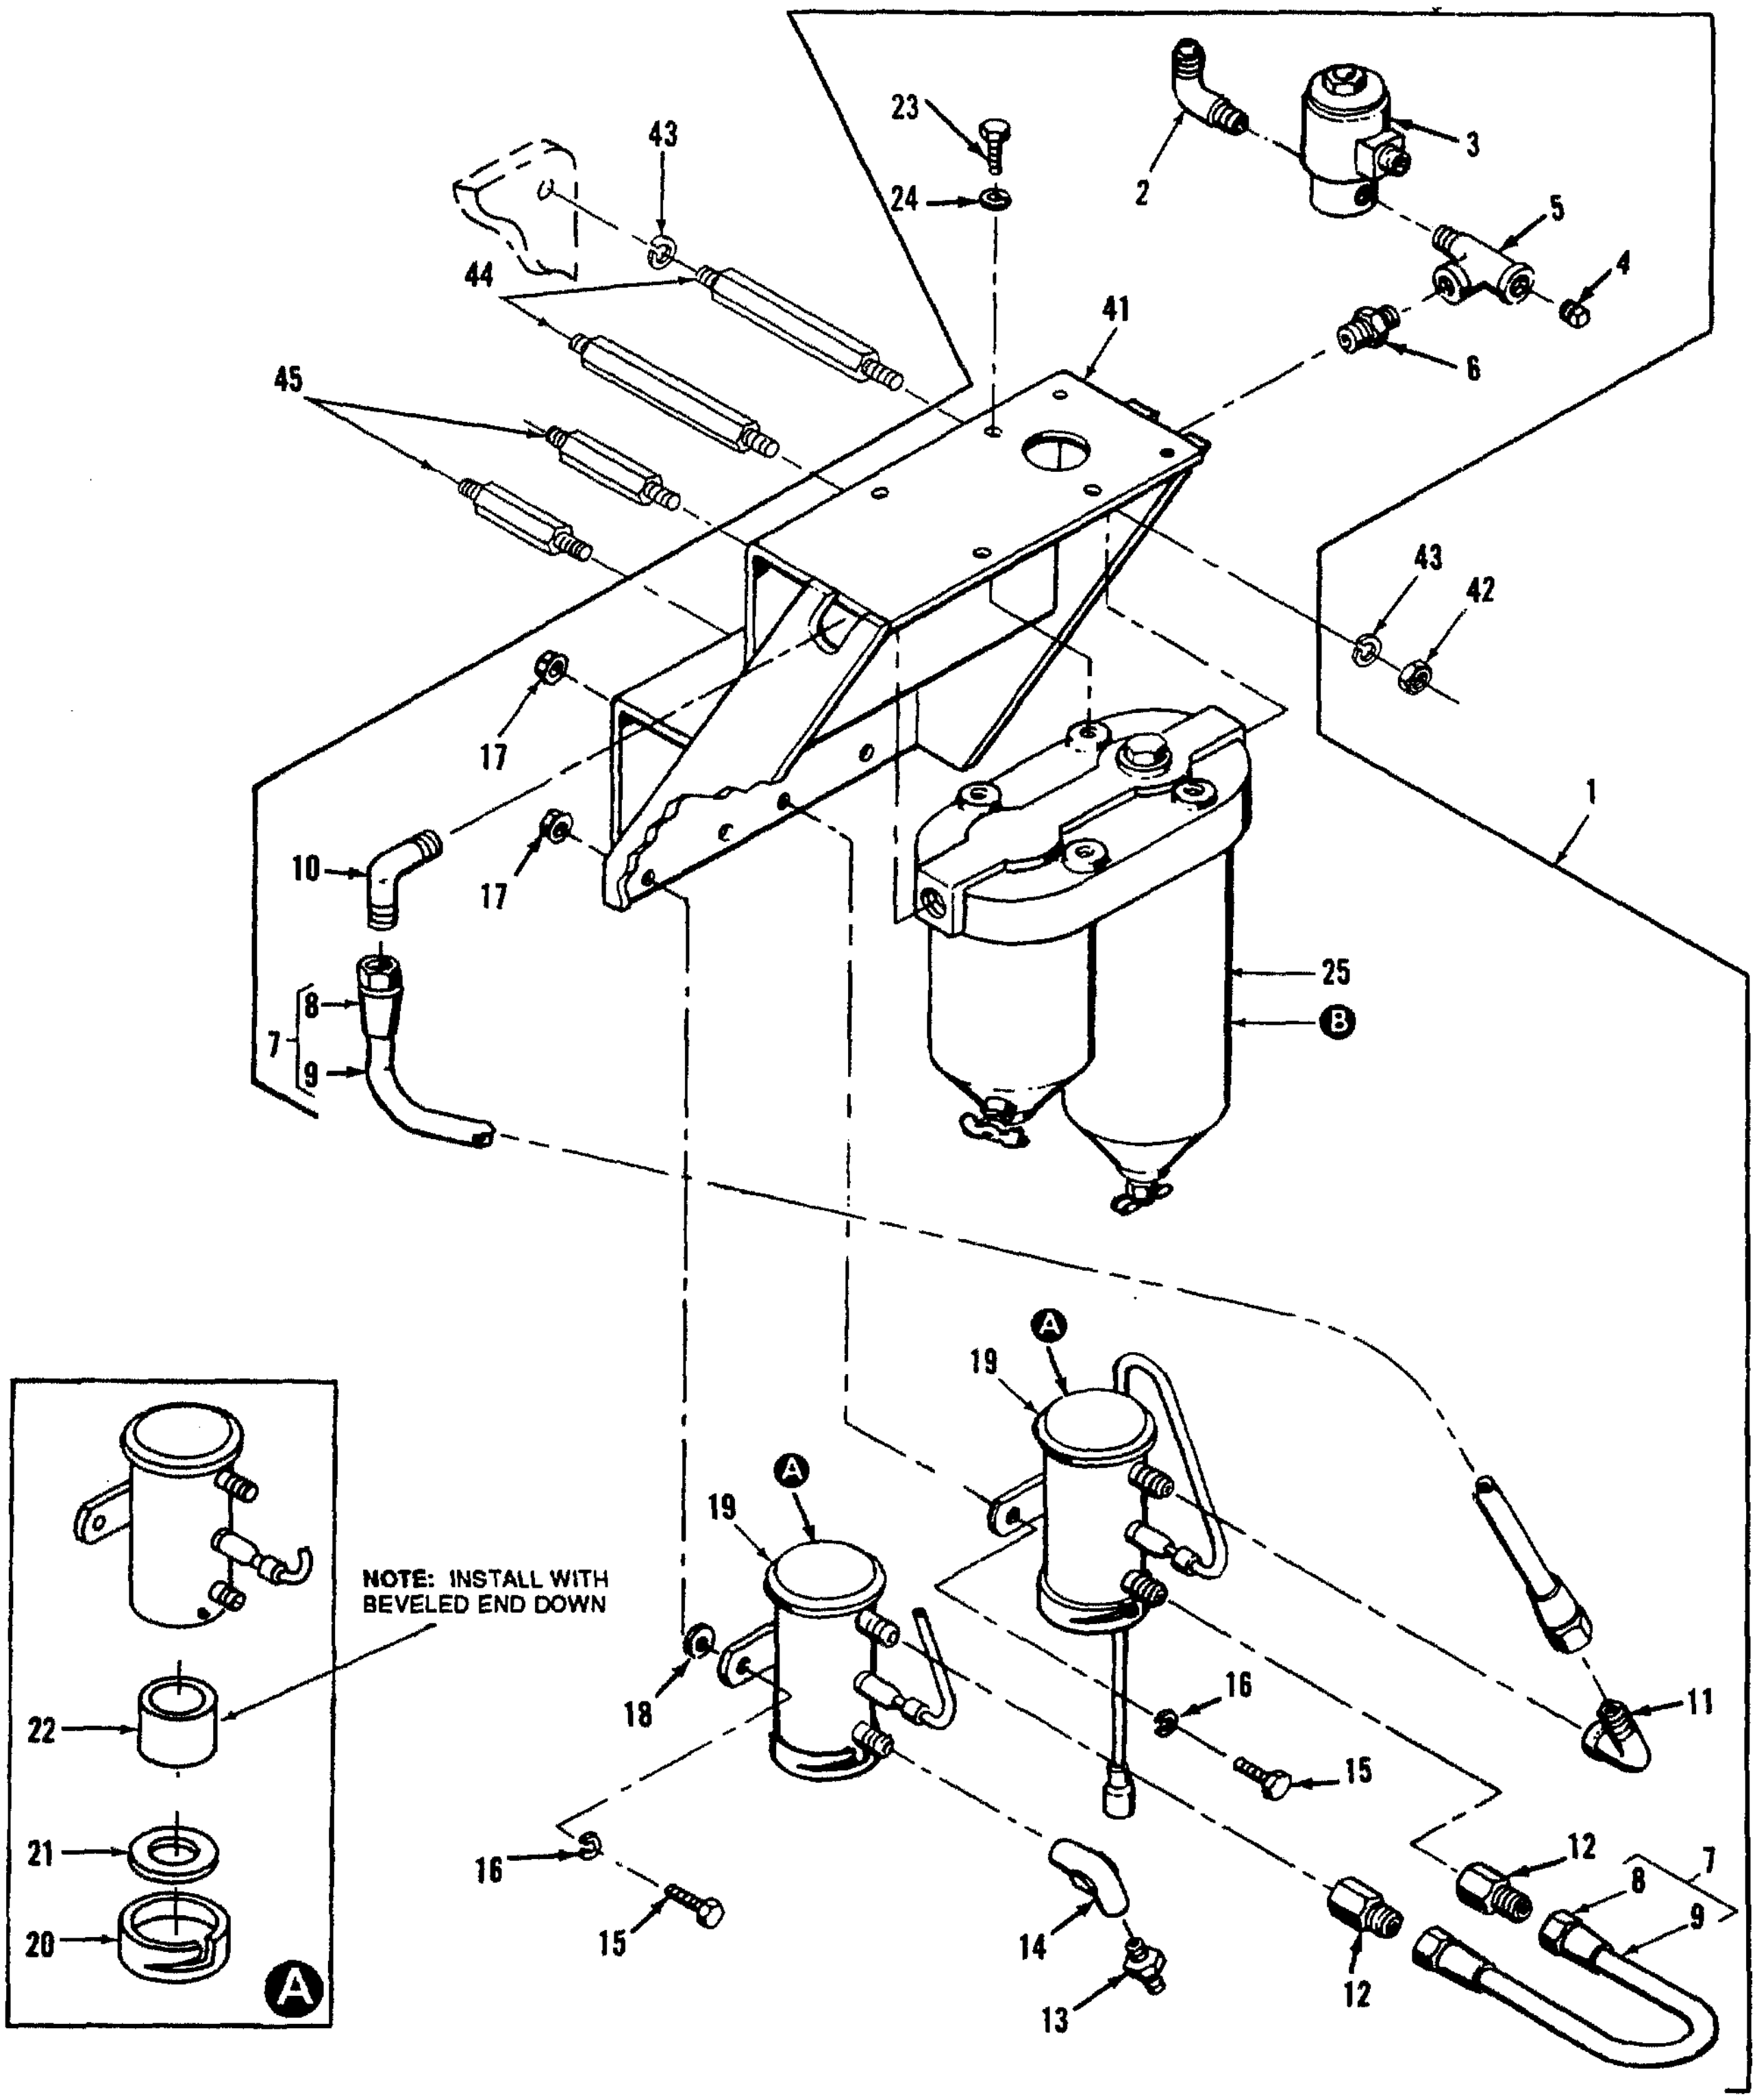
23
43
2
3
24
5
4
44
41
6
45
43
42
17
1
10
17
25
8
7
9
B
A
19
A
19
NOTE: INSTALL WITH BEVELED END DOWN
18
16
11
15
22
21
16
12
7
8
15
9
20
14
12
13
A

Figure 34. Fuel Filter and Pump Assembly and Related Parts (Sheet 1 of 2)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO. | (1) ILLUSTRATION b ITEM NO. | (2) SMR CODE a ARMY | (2) SMR CODE b AIR FORCE | (2) SMR CODE c NAVY | (2) SMR CODE d USMC | (3) USMC a SSI | (3) USMC b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | (5) DESCRIPTION USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 05 - FUEL SYSTEM - CONTINUED | | | | |
| 34 | | | | | | | | | FUEL FILTER AND PUMP ASSEMBLY<br>*AND RELATED PARTS - CONTINUED* | | | | |
| 34 | 23 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-01-010-2362 | SCREW, HEX HEAD<br>MS18154-S9 | 96906 | EA | 4 | 4 |
| 34 | 24 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-637-9541 | WASHER, LOCK<br>MS35338-46 | 96906 | EA | 4 | 40 |
| 34 | 25 | PBOZZ | PAOZZ | PAOOO | PAOOO | | .040 | 2910-00-085-5598 | FILTER AND STRAINER<br>ASSY, FUEL<br>70-507<br>240903 | 30554<br>73370 | EA | 1 | 1 |
| 34 | 26 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .005 | 4820-00-752-9040 | COCK, DRAIN<br>06498 | 73370 | EA | 2 | 21 |
| 34 | 27 | PAOZZ | PAOZZ | PAFZZ | PAOZZ | D | .008 | 5305-00-709-8540 | SCREW, HEX CAP<br>MS90727-90 | 96906 | EA | 1 | 1 |
| 34 | 28 | PAOZZ | PAOZZ | PAFZZ | PAOZZ | D | .010 | 5310-00-595 -6398 | WASHER<br>101487 | 96906 | EA | 1 | 35 |
| 34 | 29 | XA | XA | XA | XA | | | | BODY AND CENTRALIZER<br>244611 | 73370 | EA | 1 | 1 |
| 34 | 30 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .050 | 2910-00-287-1912 | FILTER, ELEMENT<br>C1126PL<br>8085-1 | 73370<br>13520 | EA | 1 | 1 |
| 34 | 31 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .050 | 5330-00-663-4773 | GASKET<br>101489 | 73370 | EA | 1 | 1 |
| 34 | 32 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5310-00-059-9268 | NUT, CROWN<br>MS24680-6 | 96906 | EA | 1 | 2 |
| 34 | 33 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .050 | 5310-00-639-6385 | GASKET<br>151328 | 73370 | EA | 1 | 1 |
| 34 | 34 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 2910-00-787-6552 | BODY ASSY<br>149557 | 73370 | EA | 1 | 1 |
| 34 | 35 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .013 | 5340-00-036-3612 | RETAINER ASSY<br>35066 | 73370 | EA | 1 | 1 |
| 34 | 36 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .050 | 2910-00-374-6020 | CARTRIDGE, STRAINER<br>35070 | 73370 | EA | 1 | 1 |
| 34 | 37 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5307-00-287-6471 | STUD<br>227032 | 73370 | EA | 1 | 1 |
| 34 | 38 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5310-00-880-7744 | NUT, HEX<br>MS51967-5 | 96906 | EA | 1 | 1 |
| 34 | 39 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .050 | 5330-00-663-4773 | GASKET<br>101489 | 73370 | EA | 1 | 2 |
| 34 | 40 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 2910-00-225-5103 | HEAD<br>242672 | 73370 | EA | 1 | 1 |
| 34 | 41 | MOO | MOO | MOO | MOO | | | | BRACKET, MOUNTING<br>71-4395 | 30554 | EA | 1 | 1 |
| 34 | 42 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483 -8790 | NUT, SELF-LOCKING<br>MS17829-6C | 96906 | EA | 1 | 25 |
| 34 | 43 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .013 | 5310-00-061-1258 | WASHER LOCK<br>MS45904-76 | 96906 | EA | 8 | 8 |
| 34 | 44 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5307-00-259-1623 | SPACER, THREADED<br>71-4380-01 | 30554 | EA | 2 | 2 |
| 34 | 45 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5307-00-245-6648 | SPACER, THREADED<br>71-4380-02 | 30554 | EA | 2 | 2 |

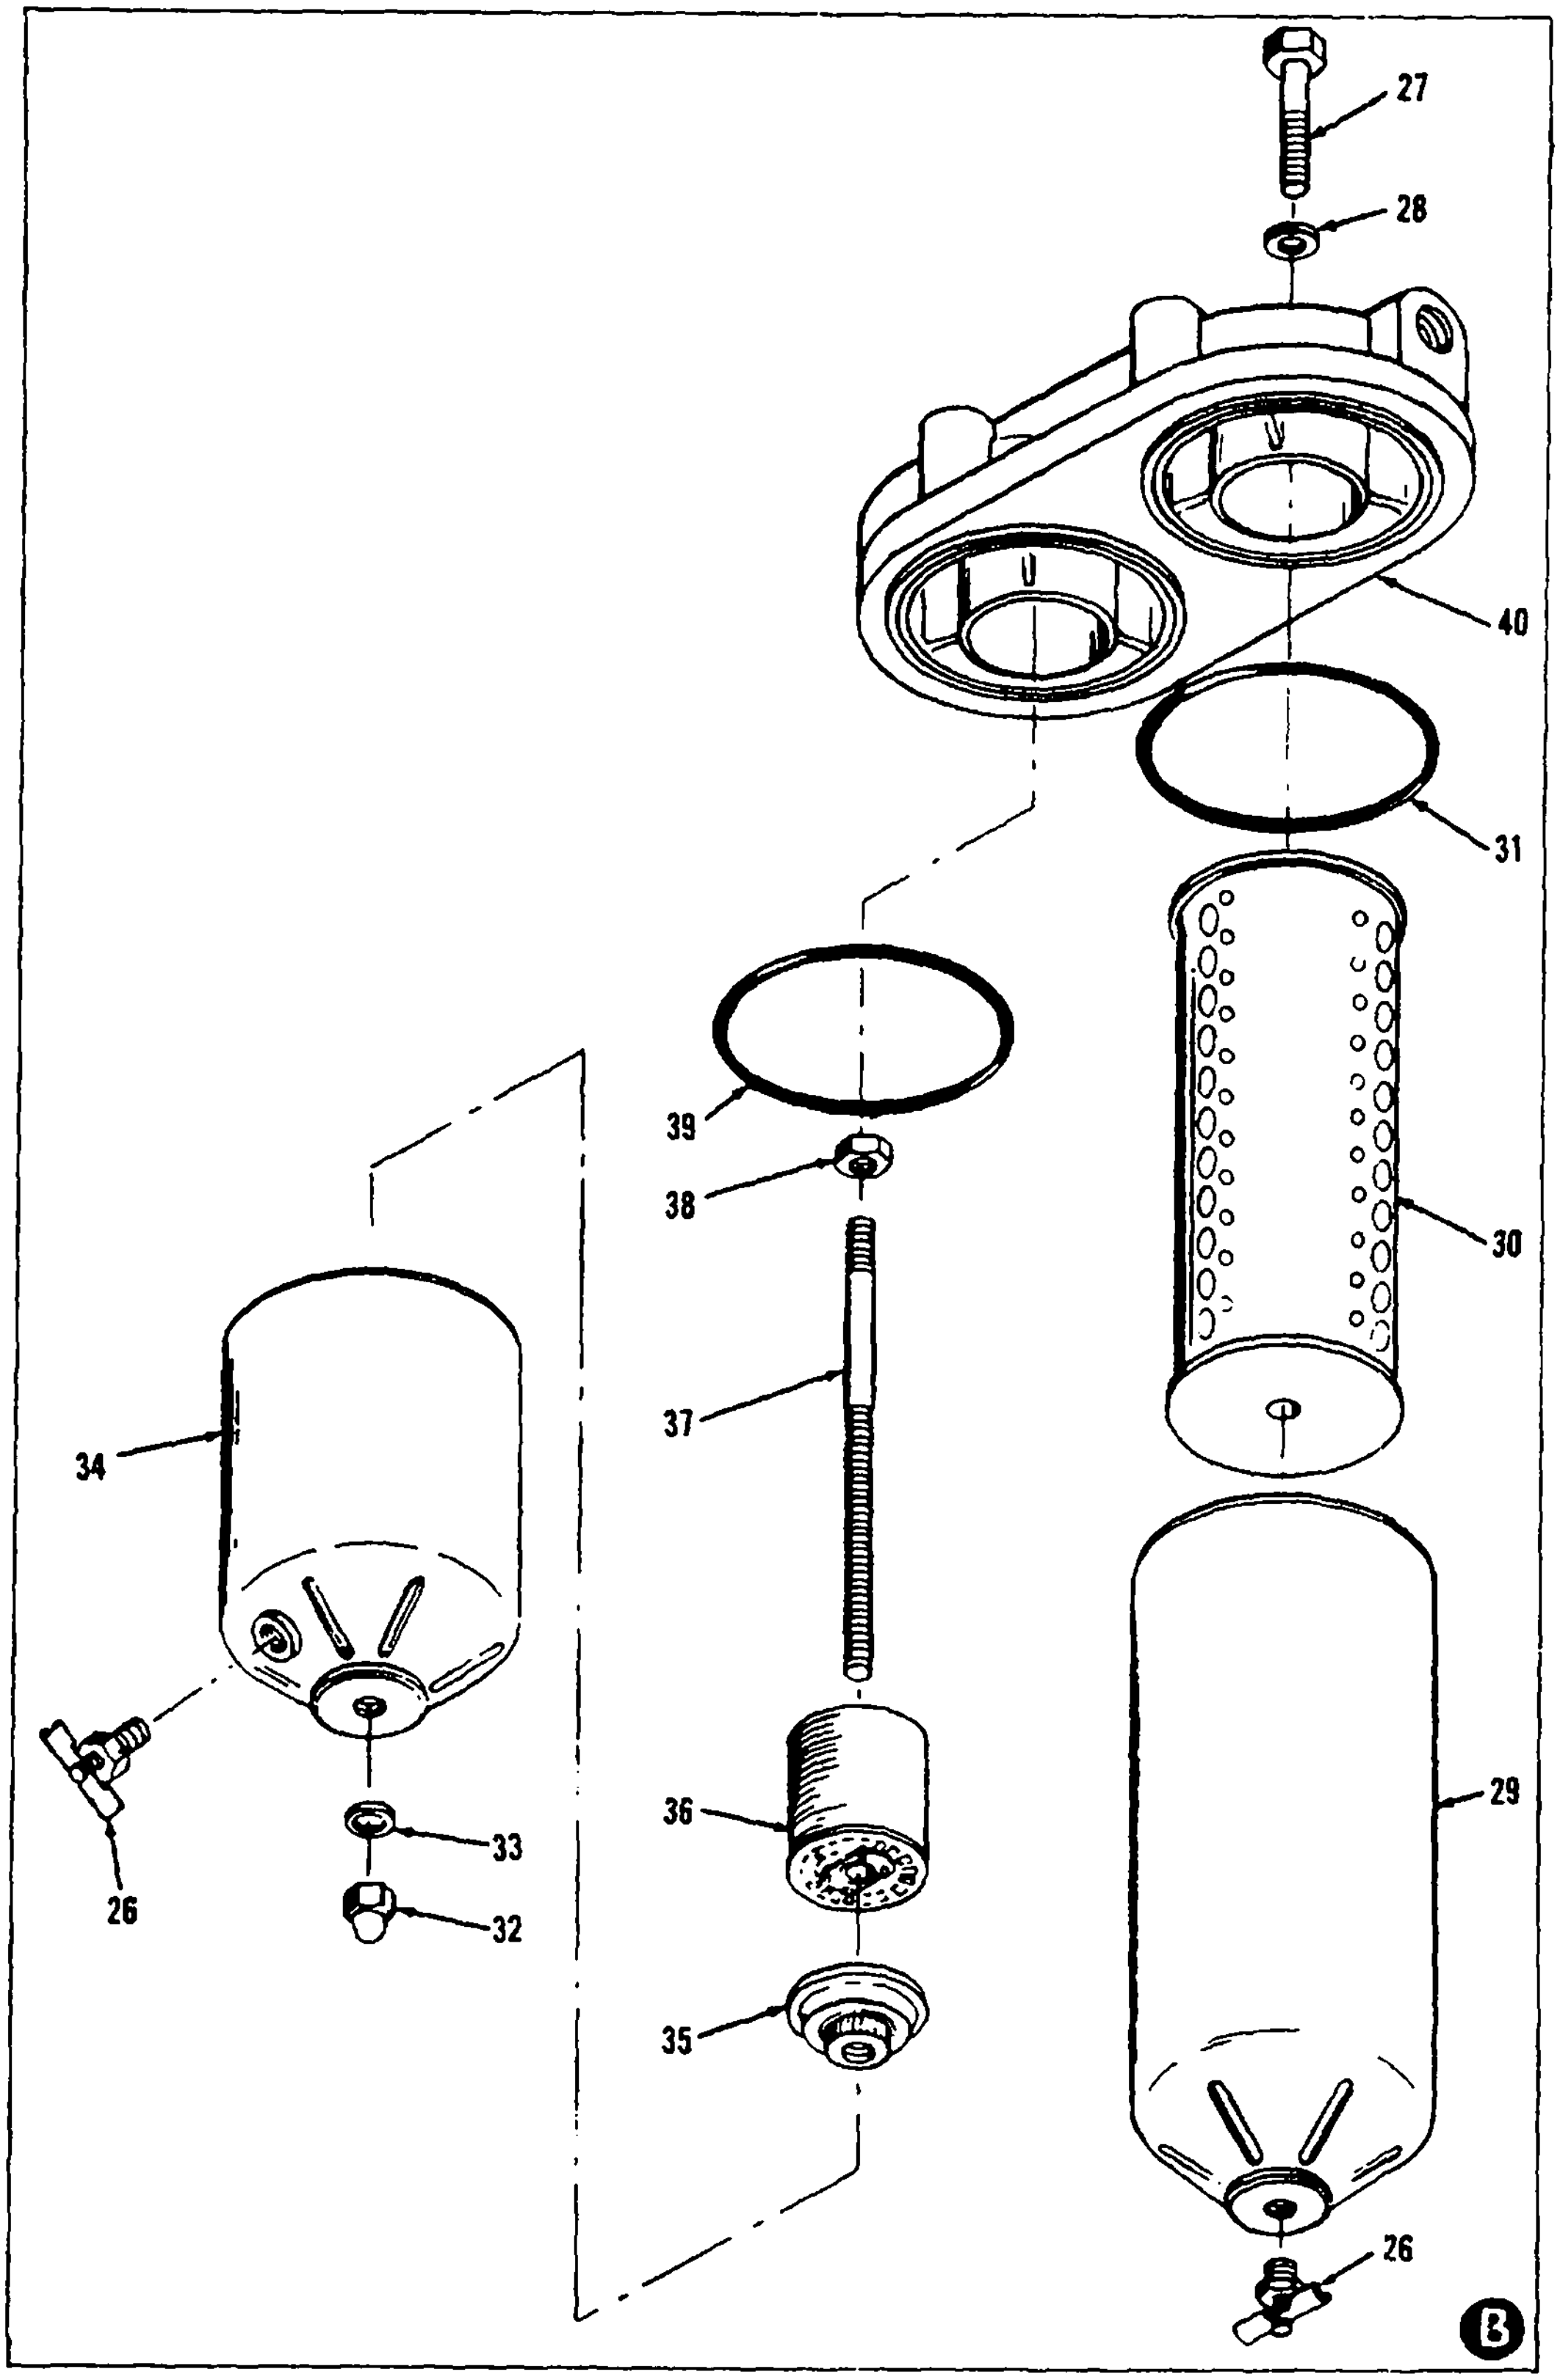
27
28
40
31
30
39
38
37
34
36
33
32
26
29
35
26
B

Figure 34. Fuel Filter and Pump Assembly and Related Parts
(Sheet 2 of 2)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 05 - FUEL SYSTEM | | | | |
| 35 | | | | | | | | | FUEL LINES AND FILTER AND RELATED PARTS | | | | |
| 35 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-231-9013 | ELBOW<br>MS20822-6 | 96906 | EA | 1 | 3 |
| 35 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-143-394 | ELBOW<br>MS51527A6 | 96906 | EA | 1 | 1 1 |
| 35 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .030 | 5330-00-865-5253 | PACKING, PREFORMED<br>3J1907 | 11083 | EA | 1 | 1 |
| 35 | 4 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-812-7999 | ELBOW<br>321268 | 11083 | EA | 1 | 1 |
| 35 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-637-4956 | BOLT, HEX HEAD<br>S1588 | 11083 | EA | 2 | 21 |
| 35 | 6 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-01-030-3355 | NUT, HEX<br>1D4717 | 11083 | EA | 2 | 17 |
| 35 | 7 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-514-6849 | WASHER, LOCK<br>3B4506 | 11083 | EA | 2 | 47 |
| 35 | 8 | PAOZZ | PAOZZ | PAOOO | PAOOO | | .003 | 2910-00-640-5622 | FILTER ASSY, FUEL<br>5R1453<br>5578186 | 11083<br>80463 | EA | 1 | 1 |
| 35 | 9 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .005 | 4820-00-752-9040 | COCK, DRAIN<br>MS35782-4 | 96906 | EA | 1 | 1 |
| 35 | 10 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5306-00-604-7961 | BOLT, HEX HEAD<br>5573723 | 70040 | EA | 1 | 1 |
| 35 | 11 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .030 | 5310-00-551-0433 | WASHER<br>853562 | 70040 | EA | 1 | 1 |
| 35 | 12 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 4730-00-044-4577 | PLUG<br>444577<br>1-4SHPS | 70040<br>30780 | EA | 2 | 2 |
| 35 | 13 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 2940-01-210-0486 | HEAD<br>6435735 | 70040 | EA | 1 | 1 |
| 35 | 14 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .030 | 5330-00-846-9841 | GASKET<br>5573725 | 70040 | EA | 1 | 1 |
| 35 | 15 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .050 | 2910-00-287-1912 | ELEMENT<br>6438472 | 70040 | EA | 1 | 1 |
| 35 | 16 | XA | XA | XA | XA | | | | BODY<br>5577646 | 70040 | EA | 1 | 1 |
| 35 | 17 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-426-3209 | BOLT, HEX HEAD<br>1B4367 | 11083 | EA | 1 | 3 |
| 35 | 18 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-045-5001 | WASHER, LOCK<br>3B4510 | 11083 | EA | 1 | 1 |
| 35 | 19 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 5365-01-125-4533 | SPACER<br>5R3906 | 11083 | EA | 1 | 1 |
| 35 | 20 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-423-8393 | BOLT, HEX HEAD<br>1C2251 | 11083 | EA | 1 | 4 |
| 35 | 21 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 9905-01-131-9161 | PLATE<br>5R4147 | 11083 | EA | 1 | 1 |
| 35 | 22 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | 4820-00-274-3547 | COCK, PLUG<br>00664-0281 | 93568 | EA | 1 | 1 |

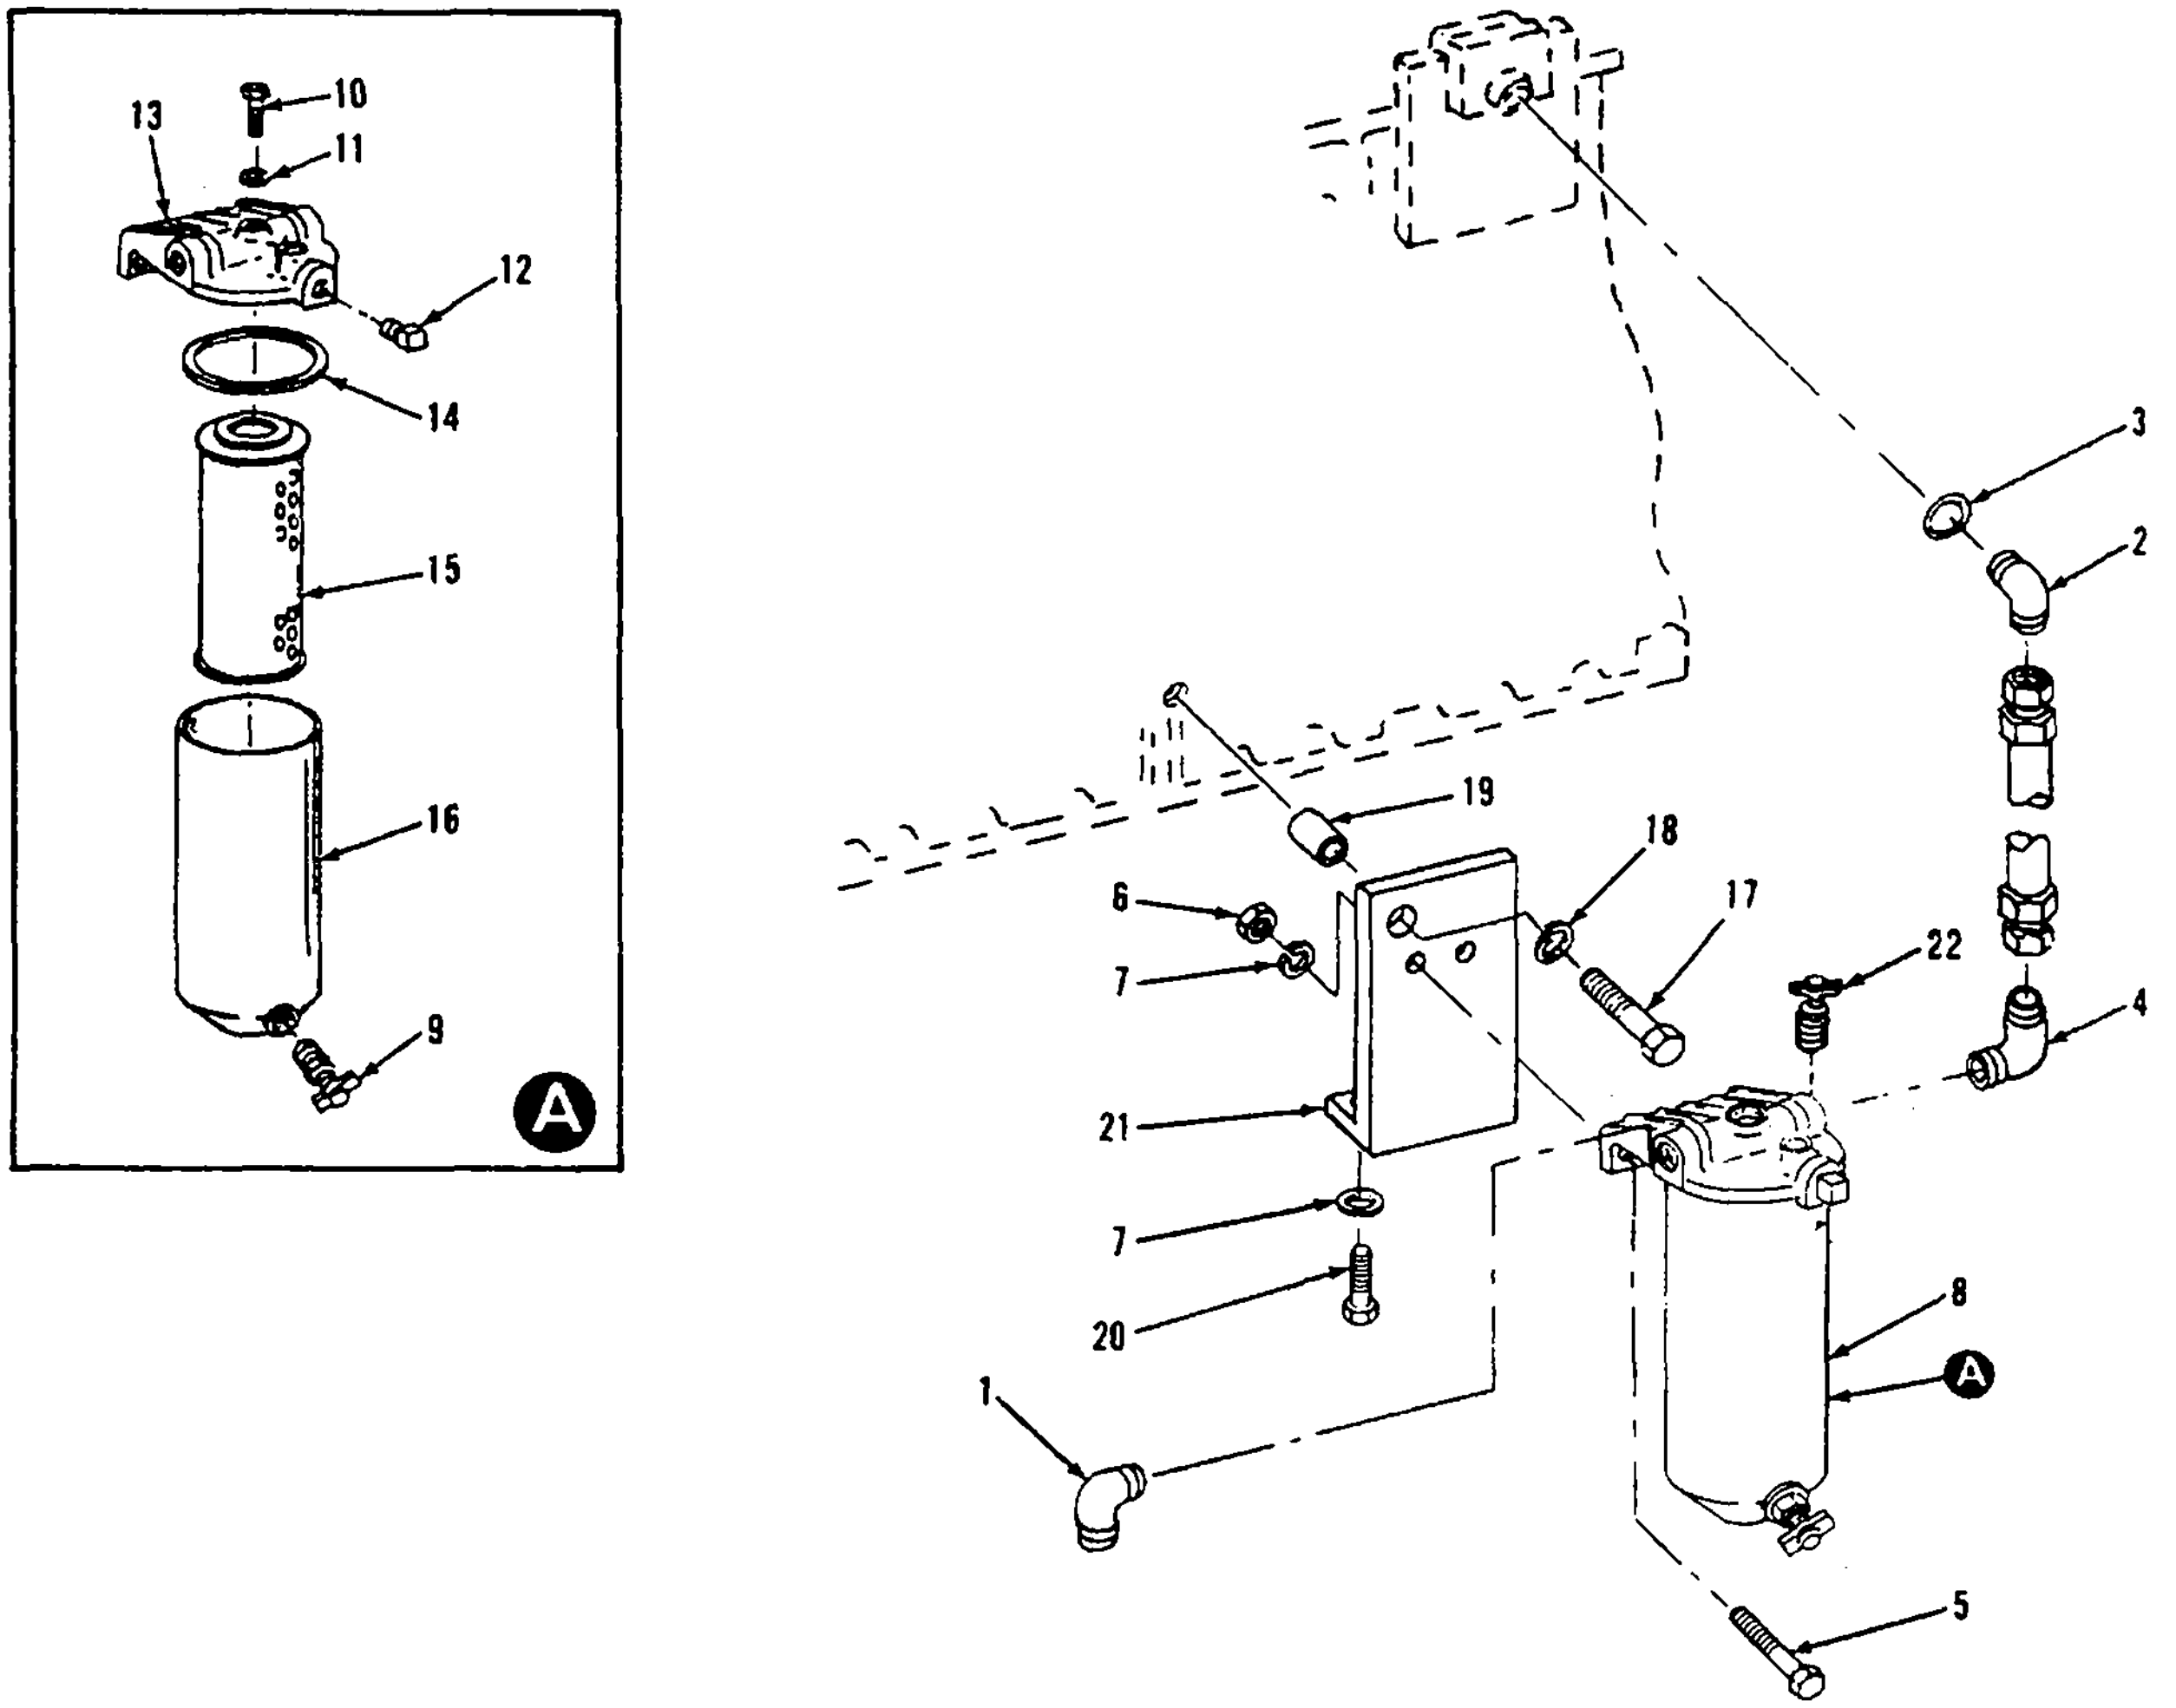
13
10
11
12
14
15
16
9
A
3
2
19
18
17
6
7
22
4
21
7
20
8
A
1
5

Figure 35. Fuel Lines and Filter and Related Parts

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 05 - FUEL SYSTEM | | | | |
| 36 | | | | | | | | | DAY TANK, ETHER KIT, AND RELATED PARTS | | | | |
| 36 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4710-00-804-9249 | TUBE, ETHER LINE<br>71-4925<br>HD1-10191 | <br>30554<br>83616 | FT | 4 | 4 |
| 36 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .030 | 2815-00-269-7075 | JET ASSY<br>70-4050-01<br>31-3 | <br>30554<br>50999 | EA | 1 | 1 |
| 36 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-922-5069 | BUSHING<br>71-4843<br>1-4X1-8PTRB | <br>30554<br>30780 | EA | 1 | 1 |
| 36 | 4 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0502 | SCREW, HEX HEAD<br>MS90725-6 | <br>96906 | EA | 4 | 118 |
| 36 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C | <br>96906 | EA | 4 | 167 |
| 36 | 6 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | <br>96906 | EA | 4 | 252 |
| 36 | 7 | AFF | AOO | AFF | AFF | | | | DAY TANK ASSY<br>70-4246 | <br>30554 | EA | 1 | 1 |
| 36 | 8 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0501 | SCREW, HEX HEAD<br>MS90725-5 | <br>96906 | EA | 2 | 114 |
| 36 | 9 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-761-6882 | NUT, PLAIN HEX<br>MS51967-2 | <br>96906 | EA | 2 | 22 |
| 36 | 10 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK<br>MS35338-44 | <br>96906 | EA | 2 | 154 |
| 36 | 11 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .005 | 5340-01-088-2385 | BRACKET, ETHER TANK<br>69-777<br>QS1189 | <br>30554<br>61112 | EA | 1 | 1 |
| 36 | 12 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6967 | SCREW AND WASHER ASSY<br>69-662-16<br>61-060441-40-0142B-0542B | <br>30554<br>78189 | EA | 2 | 14 |
| 36 | 13 | XB | XB | XB | XB | | | | BRACKET, MOUNTING<br>71- 4702 | <br>30554 | EA | 1 | 1 |
| 36 | 14 | PAOZZ | PAOOO | PAFZZ | PAFZZ | | .050 | 5961-00-342-3676 | DIODE ASSY<br>71-4700 30554 | | EA | 1 | 1 |
| 36 | 15 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .050 | 5961-00-924-6981 | DIODE<br>JAN1N4245 | <br>81349 | EA | 2 | 4 |
| 36 | 16 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5940-01-281-8845 | TERMINAL BOARD ASSY<br>71-4701 | <br>30554 | EA | 1 | 1 |
| 36 | 17 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .050 | 5940-01-214-8722 | STUD.TERMINAL<br>71-4939<br>8000A | <br>30554<br>16258 | EA | 3 | 3 |
| 36 | 18 | XA--- | XA--- | XA | XA | | | | NUT, STANDOFF<br>71-4940 | <br>30554 | EA | 2 | 2 |
| 36 | 19 | XA--- | XA-- | XA | XA | | | | BOARD, TERMINAL<br>71-4701-01 | <br>30554 | EA | 1 | 1 |
| 36 | 20 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0502 | SCREW, HEX HEAD<br>MS90725-6 | <br>96906 | EA | 2 | 118 |
| 36 | 21 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C | <br>96906 | EA | 2 | 167 |
| 36 | 22 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | <br>96906 | EA | 2 | 252 |
| 36 | 23 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | | 4810-00-279-2825 | VALVE ASSY, SOLENOID.<br>24 VOLT<br>70-513 30554 | | EA | 1 | 1 |

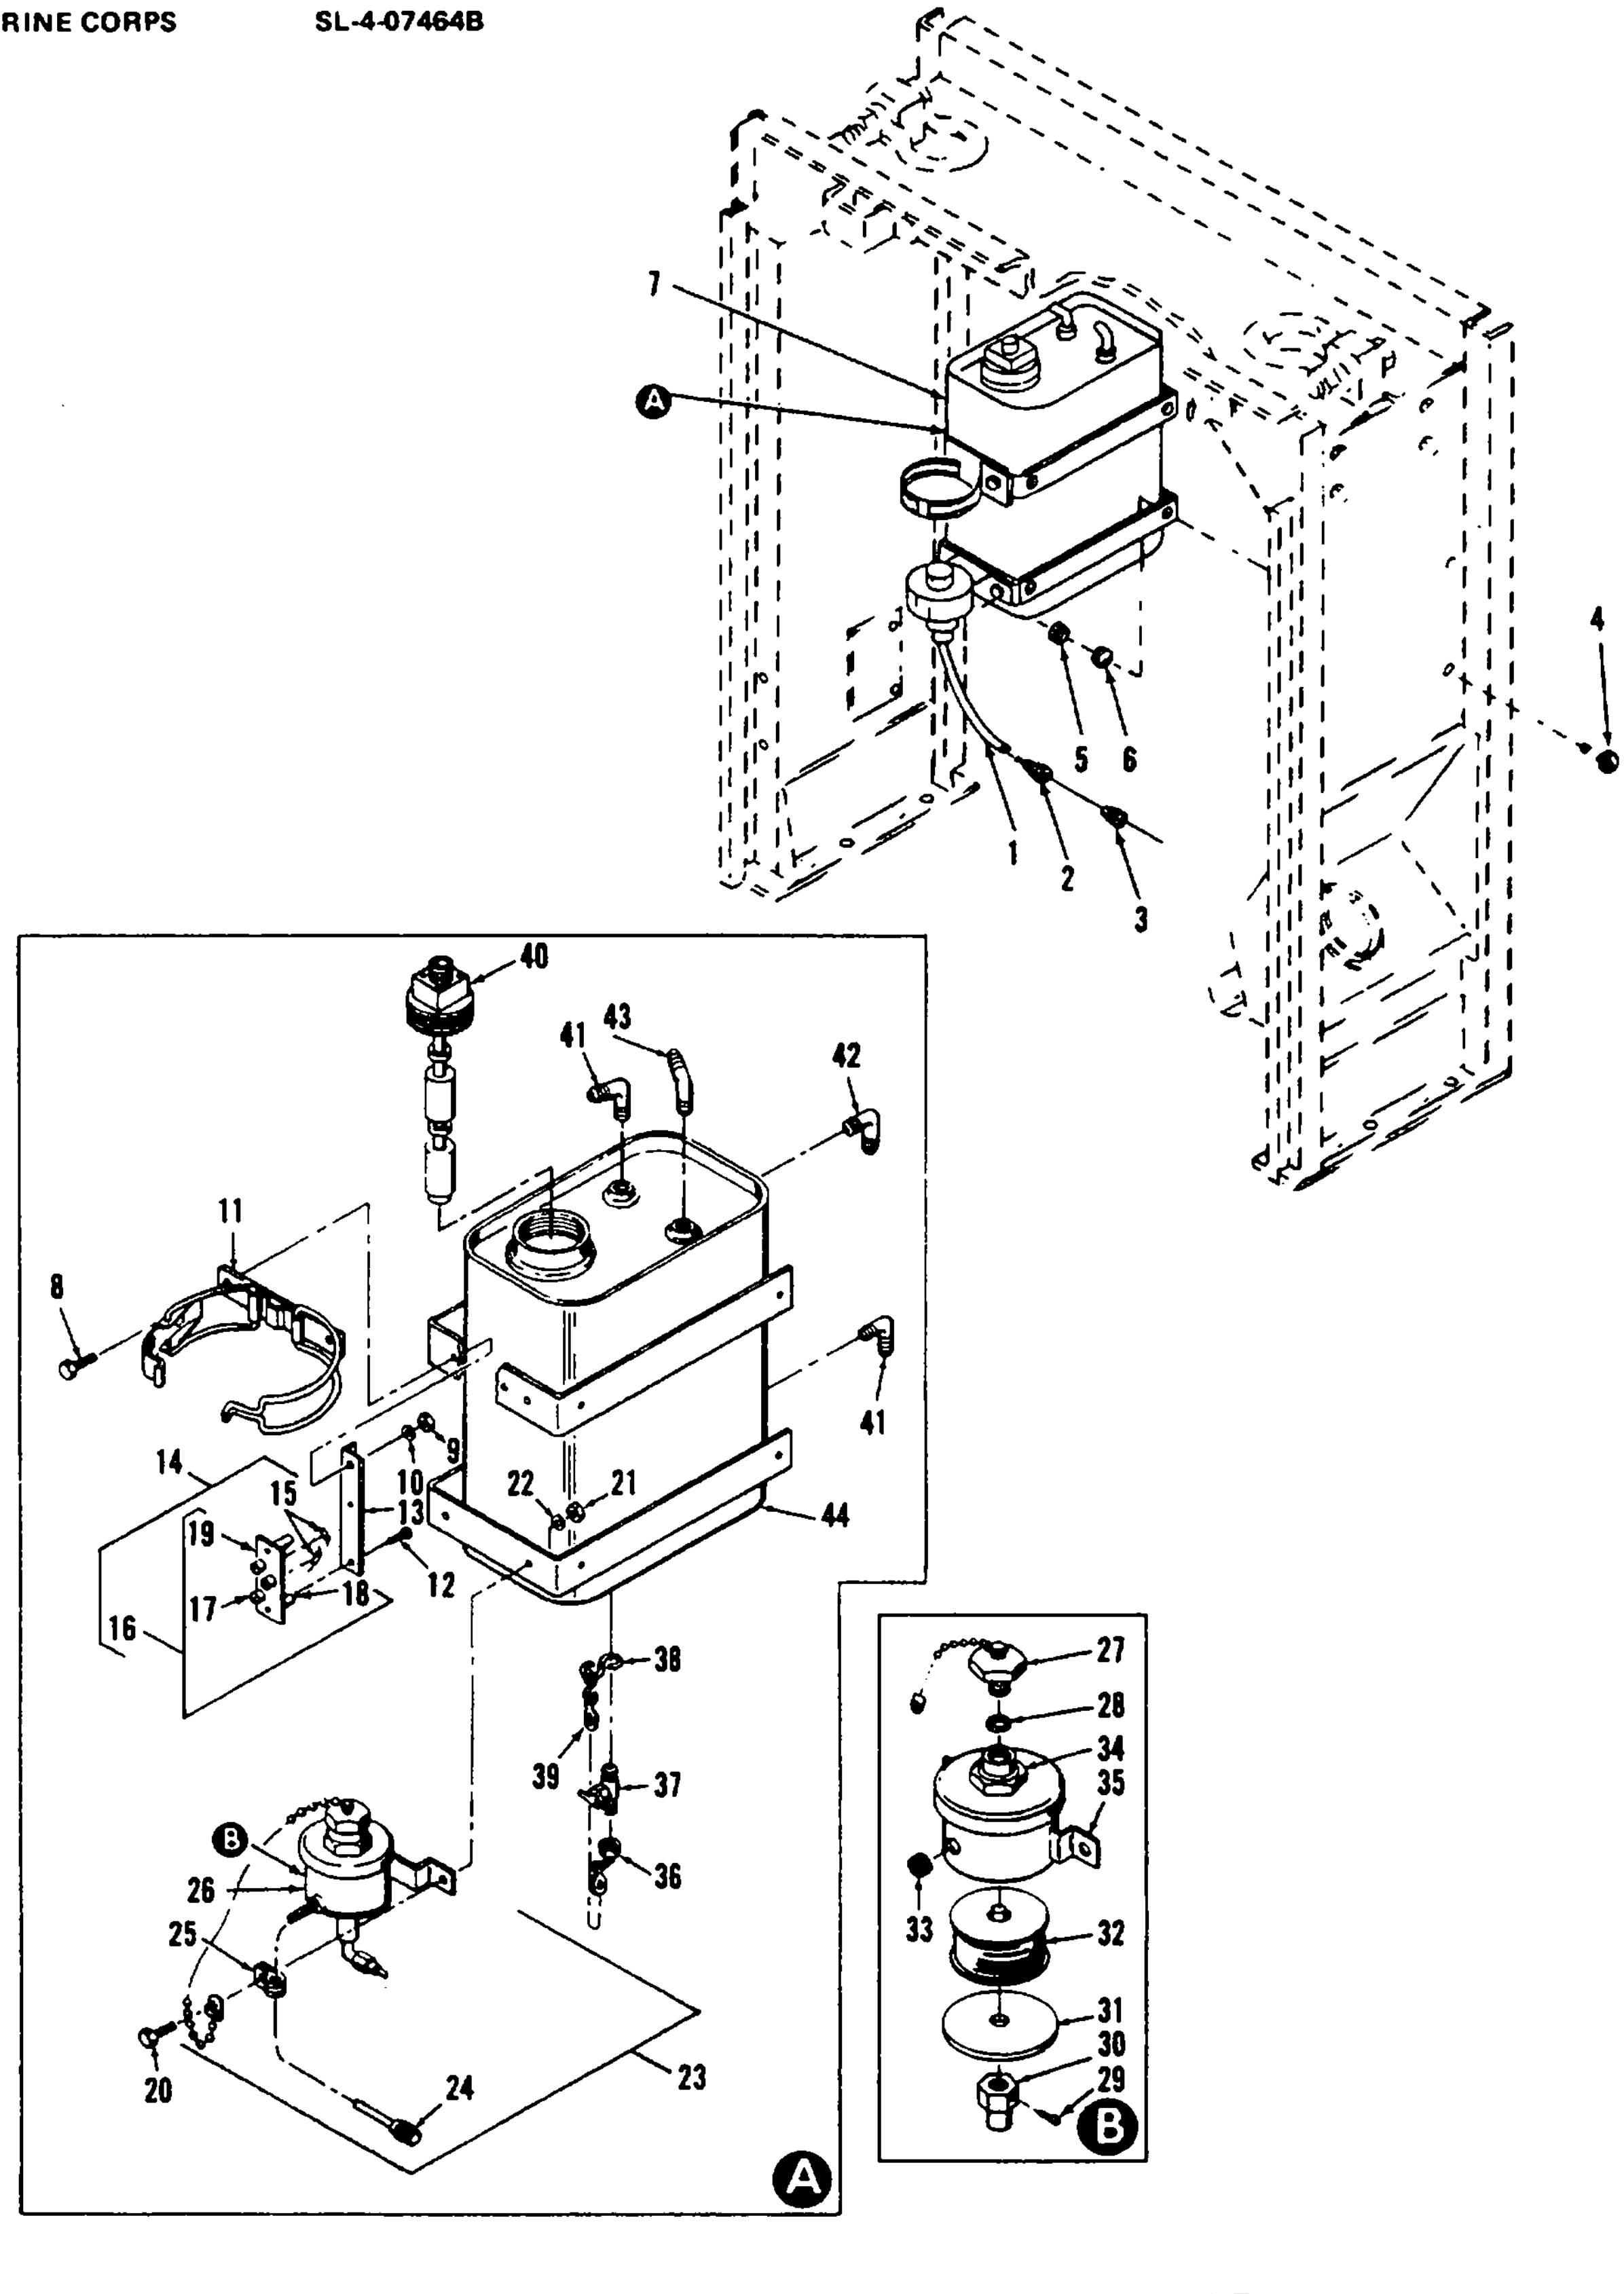
7
A
4
5
6
1
2
3
40
41
43
42
11
8
41
14
15
10
9
13
22
21
44
19
17
18
12
16
38
39
37
36
B
26
25
20
24
23
A
27
28
34
35
33
32
31
30
29
B

Figure 36. Day Tank, Ether Kit, and Related Parts

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 05 - FUEL SYSTEM -CONTINUED | | | | |
| 36 | | | | | | | | | DAY TANK, ETHER KIT, AND RELATED PARTS - CONTINUED | | | | |
| 36 | 24 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-938-7841 | CONNECTOR<br>MS3101R10SL-4P 96906 | | EA | 1 | 1 |
| 36 | 25 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .080 | 5340-00-080-9853 | CLAMP, CUSHIONED<br>MS21333-97 96906 | | EA | 1 | 1 |
| 36 | 26 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .030 | 4810-01-067-8276 | VALVE, SOLENOID, 24 VOLT<br>69-778 30554<br>QS-4-2TC 61112 | | EA | 1 | 1 |
| 36 | 27 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 2910-00-901-1304 | CAP ASSY<br>LP2401-1 61112 | | EA | 1 | 1 |
| 36 | 28 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .050 | 5330-00-225-0161 | GASKET<br>LP1233 61112 | | EA | 1 | 1 |
| 36 | 29 | XA-- | XA— | XA | XA | | | | SCREW, PAN HEAD<br>LP1507 61112 | | EA | 1 | 1 |
| 36 | 30 | XA-- | XA-- | XA | XA | | | | NUT<br>LP1505 61112 | | EA | 1 | 1 |
| 36 | 31 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5950-00-482-2167 | COVER<br>LP15333 61112 | | EA | 1 | 1 |
| 36 | 32 | XA— | XA-- | XA | | | | | COIL<br>LP1728 61112 | | EA | 1 | 1 |
| 36 | 33 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5325-00-213-5165 | GROMMET<br>LP1305 61112 | | EA | 1 | 1 |
| 36 | 34 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 4820-00-491-3103 | VALVE ASSY<br>LP1395-1 61112 | | EA | 1 | 1 |
| 36 | 35 | XA-- | XA— | XA | XA | | | | BRACKET<br>LP1530-1 61112 | | EA | 1 | 1 |
| 36 | 36 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .006 | 4730-00-812-1333 | CAP, TUBE<br>69-539-2 30554 | | EA | 1 | 4 |
| 36 | 37 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .005 | 4820-00-595-3191 | VALVE, NEEDLE<br>70-4059 30554<br>15V-5L 70411 | | EA | 1 | 1 |
| 36 | 38 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 4030-00-948-7315 | HOOK, CHAIN<br>MS87006-33 96906 | | EA | 2 | 4 |
| 36 | 39 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .003 | 4010-00-554-8661 | CHAIN<br>RR-C-271 81349 | | FT | 1 | 12 |
| 36 | 40 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 2910-00-405-6153 | SWITCH, LEVEL<br>70-1594 30554<br>LS40820 04034 | | EA | 1 | 1 |
| 36 | 41 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-231-3012 | ELBOW<br>MS20822-6-6 96906 | | EA | 2 | 2 |
| 36 | 42 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-231-4010 | ELBOW<br>MS20822-4-4 96906 | | EA | 1 | 6 |
| 36 | 43 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-898-3878 | ELBOW<br>76-4195 30554 | | EA | 1 | 1 |
| 36 | 44 | PBOZZ | PAOZZ | PBFZZ | PAFZZ | D | .003 | 2910-00-208-7316 | TANK, FUEL<br>70-4247 30554 | | EA | 1 | 1 |

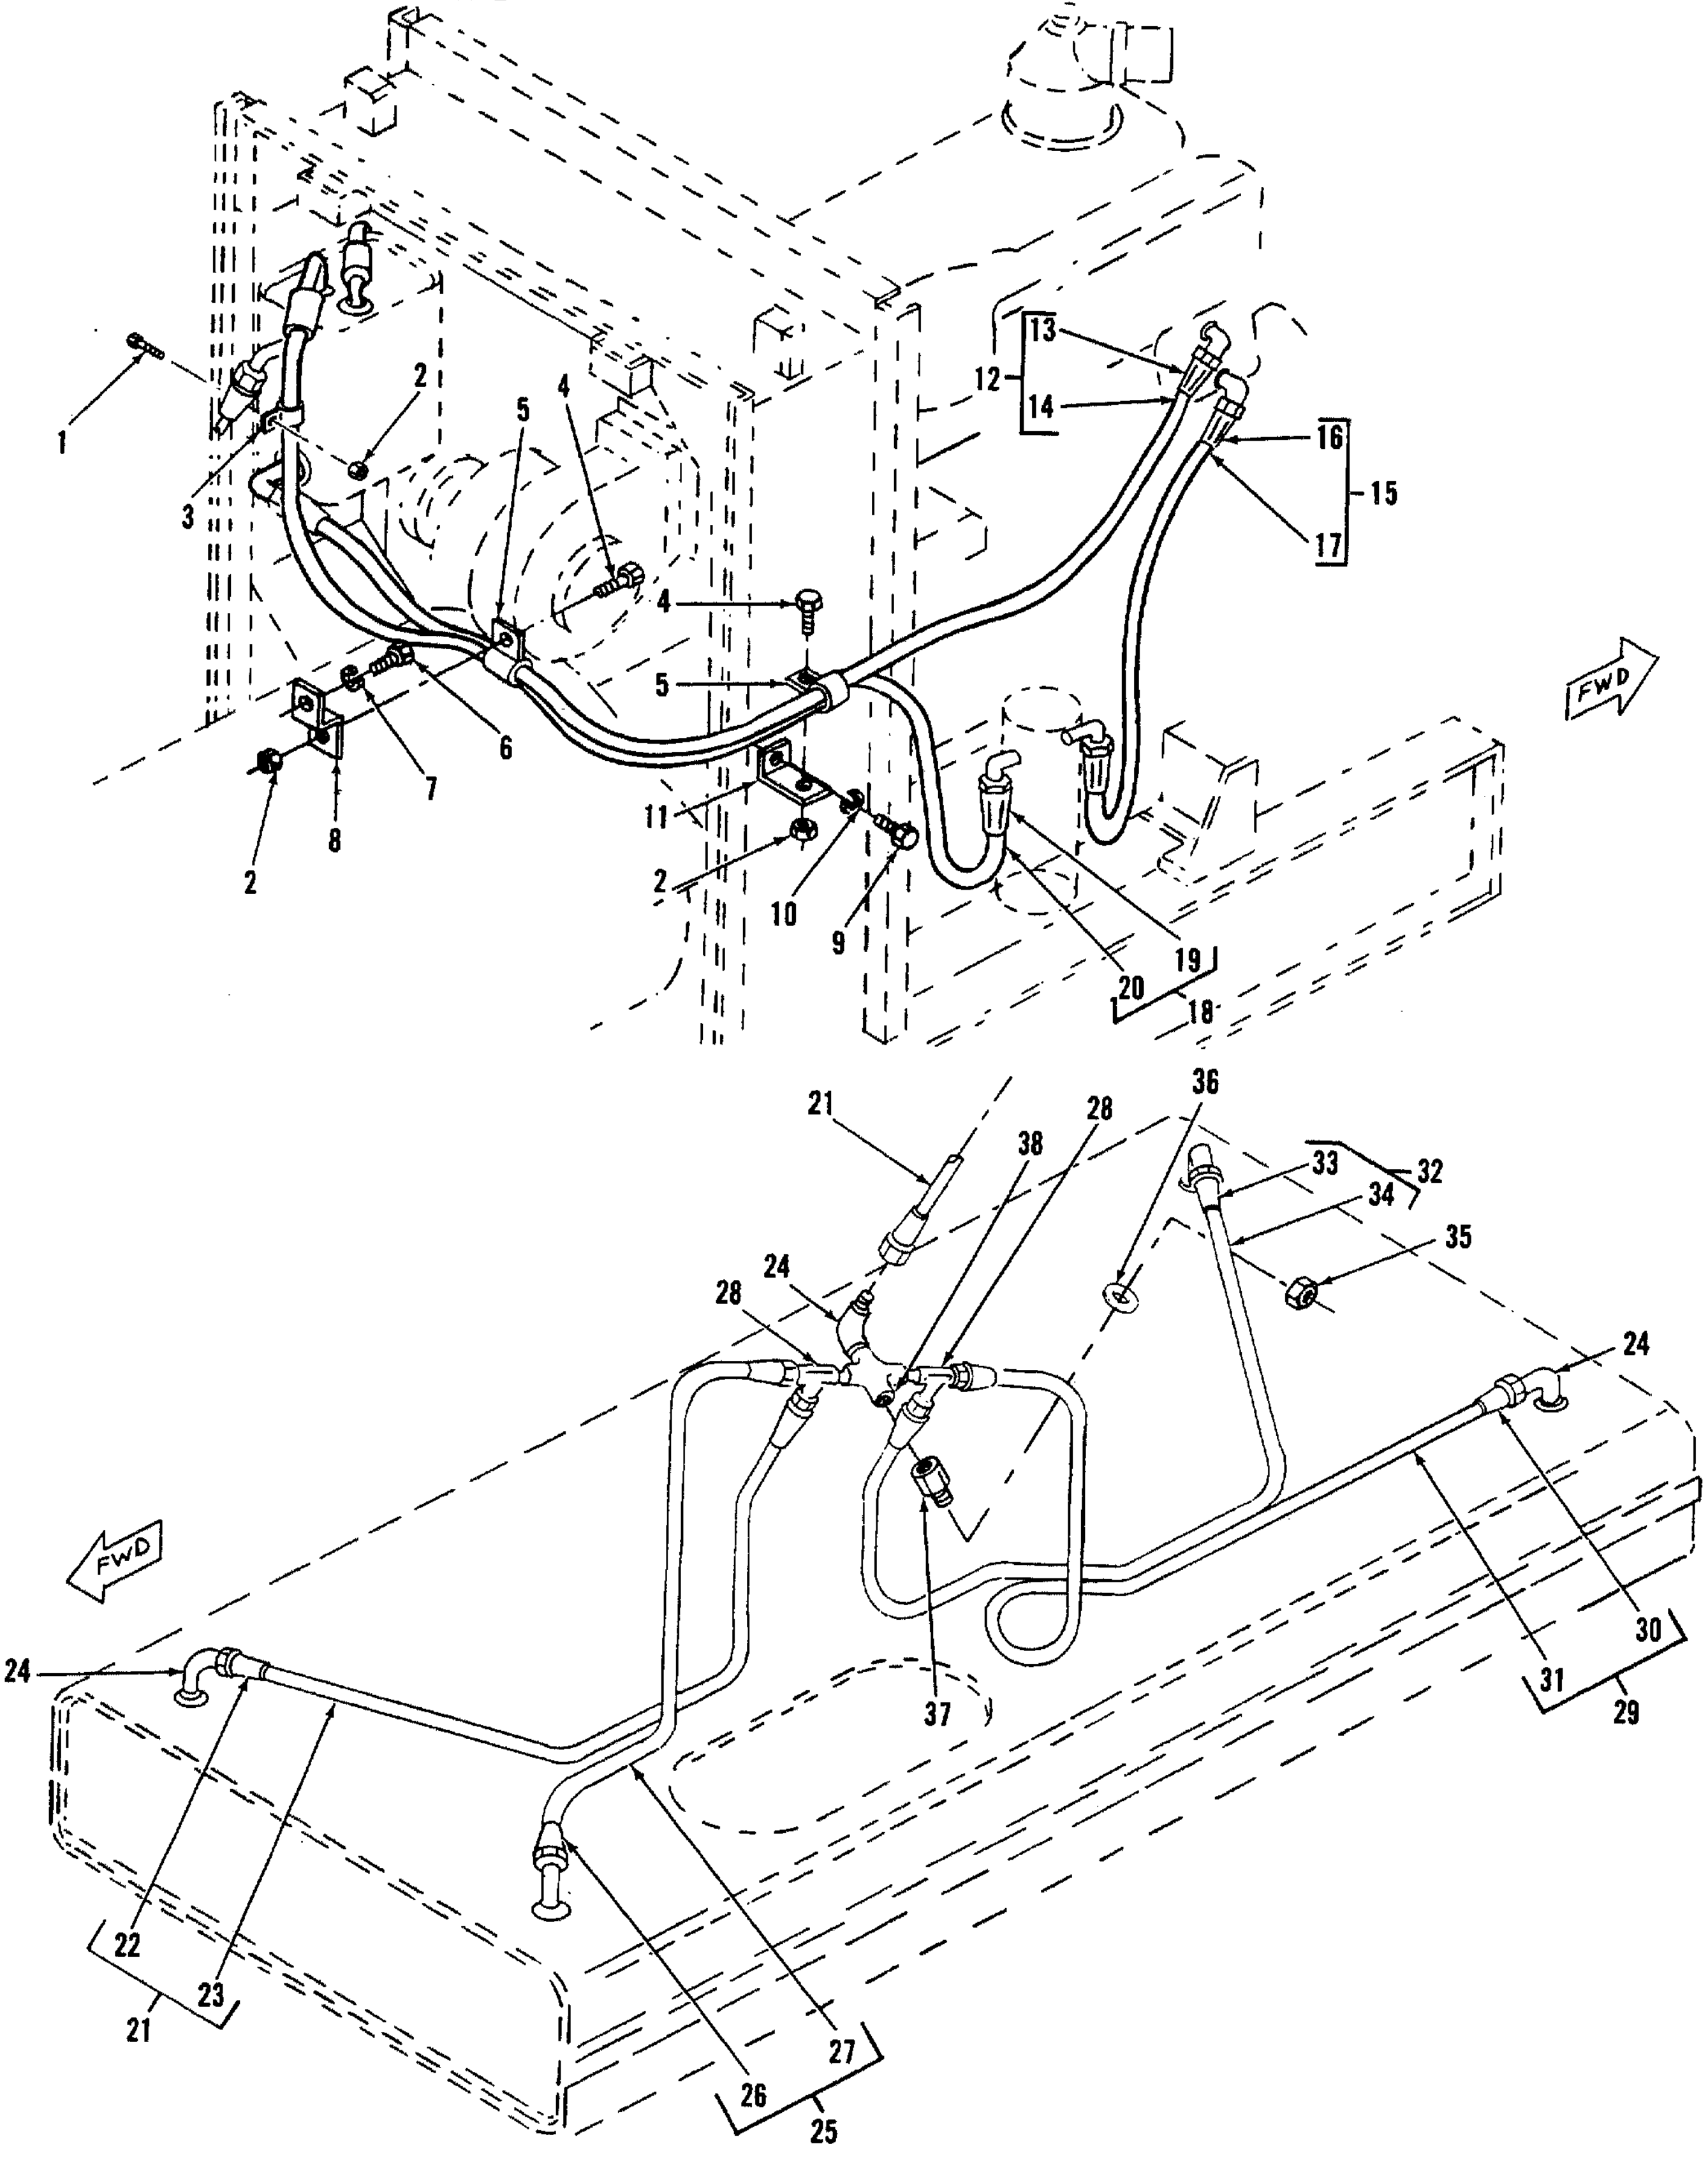
1
2
3
5
4
4
5
6
7
8
2
11
2
10
9
12
13
14
16
15
17
FWD
19
20
18
21
36
28
38
33
32
34
35
24
28
24
FWD
37
30
31
29
24
22
23
21
26
27
25

Figure 37. Fuel Lines and Related Parts (Sheet 1 of 3)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 05 - FUEL SYSTEM | | | | |
| 37 | | | | | | | | | FUEL LINES AND RELATED PARTS | | | | |
| 37 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0500 | SCREW, HEX HEAD<br>MS90725-3 | <br>96906 | EA | 1 | 24 |
| 37 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C | <br>96906 | EA | 3 | 167 |
| 37 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-057-3052 | CLAMP, LOOP<br>MS21333-114 | <br>96906 | EA | 1 | 1 |
| 37 | 4 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-068-0501 | BOLT<br>MS90725-5 | <br>96906 | EA | 2 | 114 |
| 37 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-081-5172 | CLAMP, CUSHIONED<br>71-4919-03<br>TA726S2-11 | <br>30554<br>84971 | EA | 2 | 2 |
| 37 | 6 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-057-1153 | BOLT<br>MS90725-109 | <br>96906 | EA | 1 | 1 |
| 37 | 7 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-584-5272 | WASHER, LOCK<br>MS35338-48 | <br>96906 | EA | 1 | 26 |
| 37 | 8 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .090 | 5340-01-173-5104 | BRACKET<br>79-517 | <br>30554 | EA | 1 | 1 |
| 37 | 9 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-269-3209 | BOLT<br>MS90725-58 | <br>96906 | EA | 1 | 9 |
| 37 | 10 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-637-9541 | WASHER, LOCK<br>MS35338-46 | <br>96906 | EA | 1 | 40 |
| 37 | 11 | MOO | MOO | MOO | MOO | | | | BRACKET<br>1539 | <br>30554 | EA | 1 | 1 70- |
| 37 | 12 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 4720-00-203-0917 | HOSE ASSY<br>MS28741-4-0720 | <br>96906 | EA | 1 | 1 |
| 37 | 13 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-842-2200 | FITTING<br>MS24587-4 | <br>96906 | EA | 2 | 12 |
| 37 | 14 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-639-9907 | HOSE<br>MIL-H-8794-4 | <br>81349 | FT | 6 | 26 |
| 37 | 15 | AFF | AFF | AFF | AFF | | | | HOSE ASSY<br>MS28741-6-0410 | <br>96906 | EA | 1 | 1 |
| 37 | 16 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-843-0269 | FITTING<br>MS24587-6 | <br>96906 | EA | 2 | 12 |
| 37 | 17 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-278-1323 | HOSE<br>MIL-H-8794-6 | <br>81349 | FT | 4 | 17 |
| 37 | 18 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 4720-00-935-9330 | HOSE ASSY<br>MS28741-6-0580 | <br>96906 | EA | 1 | 1 |
| 37 | 19 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-843-0269 | FITTING<br>MS24587-6 | <br>96906 | EA | 2 | 12 |
| 37 | 20 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-278-1323 | HOSE<br>MIL-H-8794-6 | <br>81349 | FT | 5 | 17 |
| 37 | 21 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .070 | 4720-00-214-6252 | HOSE ASSY<br>MS28741-4-0454 | <br>96906 | EA | 1 | 1 |
| 37 | 22 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-842-2200 | FITTING<br>MS24587-4 | <br>96906 | EA | 1 | 12 |
| 37 | 23 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-639-9907 | HOSE<br>MIL-H-8794-4 | <br>81349 | FT | 4 | 26 |
| 37 | 24 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-231-4010 | ELBOW<br>MS20822-4-4 | <br>96906 | EA | 5 | 6 |

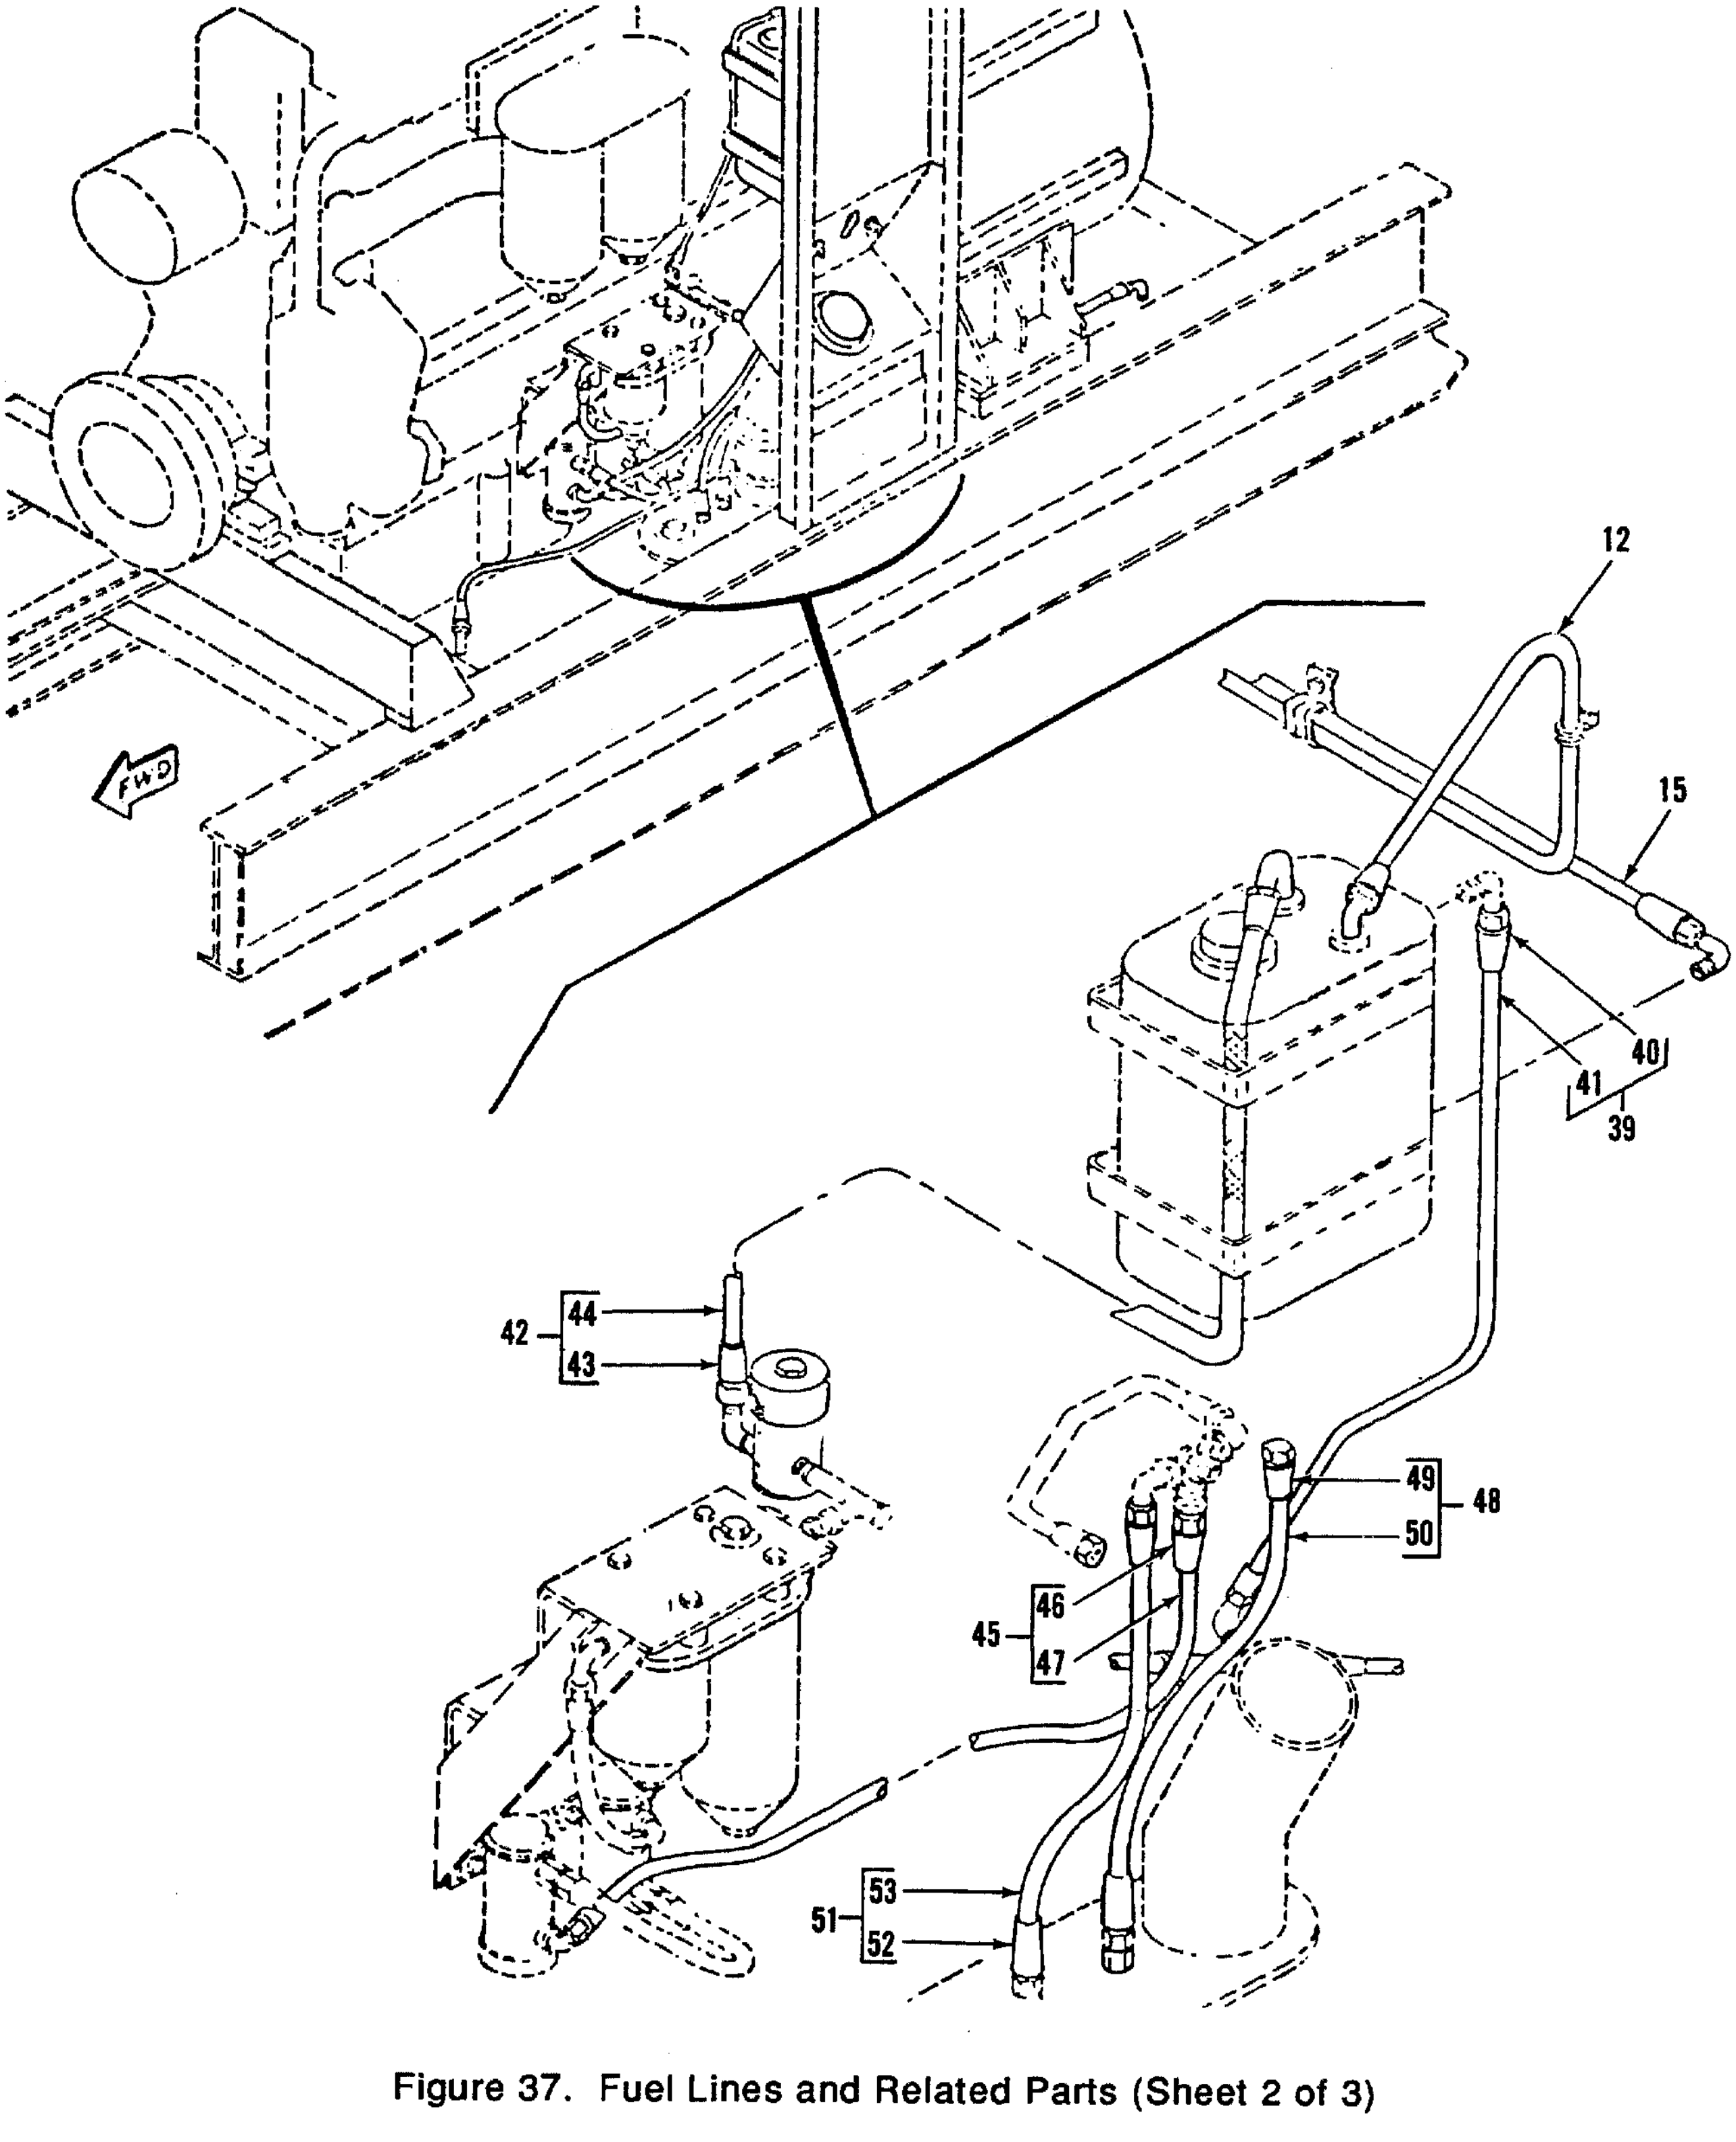
FWD
12
15
40
41
39
42
44
43
49
48
50
45
46
47
51
53
52

Figure 37. Fuel Lines and Related Parts (Sheet 2 of 3)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 05 - FUEL SYSTEM CONTINUED | | | | |
| 37 | | | | | | | | | FUEL LINES AND RELATED PARTS CONTINUED | | | | |
| 37 | 25 | AFF | AFF | AFF | AFF | | | | HOSE ASSY<br>MS28741-4-0394 | <br>96906 | EA | 1 | 1 |
| 37 | 26 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-842-2200 | FITTING<br>MS24587-4 | <br>96906 | EA | 2 | 12 |
| 37 | 27 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-630-9907 | HOSE<br>MIL-H-8794-4 | <br>81349 | FT | 3 | 26 |
| 37 | 28 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-992-4548 | TEE<br>71-4916<br>2028-4-4S | <br>30554<br>01276 | EA | 2 | 2 |
| 37 | 29 | AFF | AFF | AFF | AFF | | | | HOSE ASSY<br>MS28741-4-0424 | <br>96906 | EA | 1 | 1 |
| 37 | 30 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-842-2200 | FITTING<br>MS24587-4 | <br>96906 | EA | 2 | 12 |
| 37 | 31 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-639-9907 | HOSE<br>MIL-H-8794-4 | <br>81349 | FT | 4 | 26 |
| 37 | 32 | AFF | AFF | AFF | AFF | | | | HOSE ASSY<br>MS28741-4-0524 | <br>96906 | EA | 1 | 1 |
| 37 | 33 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-842-2200 | FITTING<br>MS24587-4 | <br>96906 | EA | 2 | 12 |
| 37 | 34 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-639-9907 | HOSE<br>MIL-H-8794-4 | <br>81349 | FT | 5 | 26 |
| 37 | 35 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-209-1570 | NUT, SEAL<br>71-4917<br>C3059X2 | <br>30554<br>79470 | EA | 1 | 1 |
| 37 | 36 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4085 | WASHER, FLAT<br>MS27183-16 | <br>96906 | EA | 1 | 1 |
| 37 | 37 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-802-2560 | NIPPLE<br>71-4881-03<br>1/4X1/8FFS | <br>30554<br>45681 | EA | 1 | 1 |
| 37 | 38 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-575-0405 | CROSS, PIPE<br>71-4915<br>1/4KMMOOS | <br>30554<br>30780 | EA | 1 | 1 |
| 37 | 39 | AFF | AFF | AFF | AFF | | | | HOSE ASSY<br>MS28741-4-0300 | <br>96906 | EA | 1 | 1 |
| 37 | 40 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-084-2200 | FITTING<br>MS24587-4 | <br>96906 | EA | 2 | 12 |
| 37 | 41 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-639-9907 | HOSE<br>MIL-H-8794-4 | <br>81349 | FT | 3 | 26 |
| 37 | 42 | AFF | AFF | AFF | AFF | | | | HOSE ASSY<br>MS28741-6-0284 | <br>96906 | EA | 1 | 1 |
| 37 | 43 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-843-0269 | FITTING<br>MS24587-6 | <br>96906 | EA | 2 | 12 |
| 37 | 44 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-278-1322 | HOSE<br>MIL-H-8794-6 | <br>81349 | FT | 3 | 17 |
| 37 | 45 | AFF | AFF | AFF | AFF | | | | HOSE ASSY<br>MS28741-6-0250 | <br>96906 | EA | 1 | 1 |
| 37 | 46 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-843-0269 | FITTING<br>MS24587-6 | <br>96906 | EA | 2 | 12 |
| 37 | 47 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-278-1323 | HOSE<br>MIL-H-8794-6 | <br>81349 | FT | 3 | 17 |
| 37 | 48 | AFF | AFF | AFF | AFF | | | | HOSE ASSY<br>MS28741-5-0234 | <br>96906 | EA | 2 | 1 |

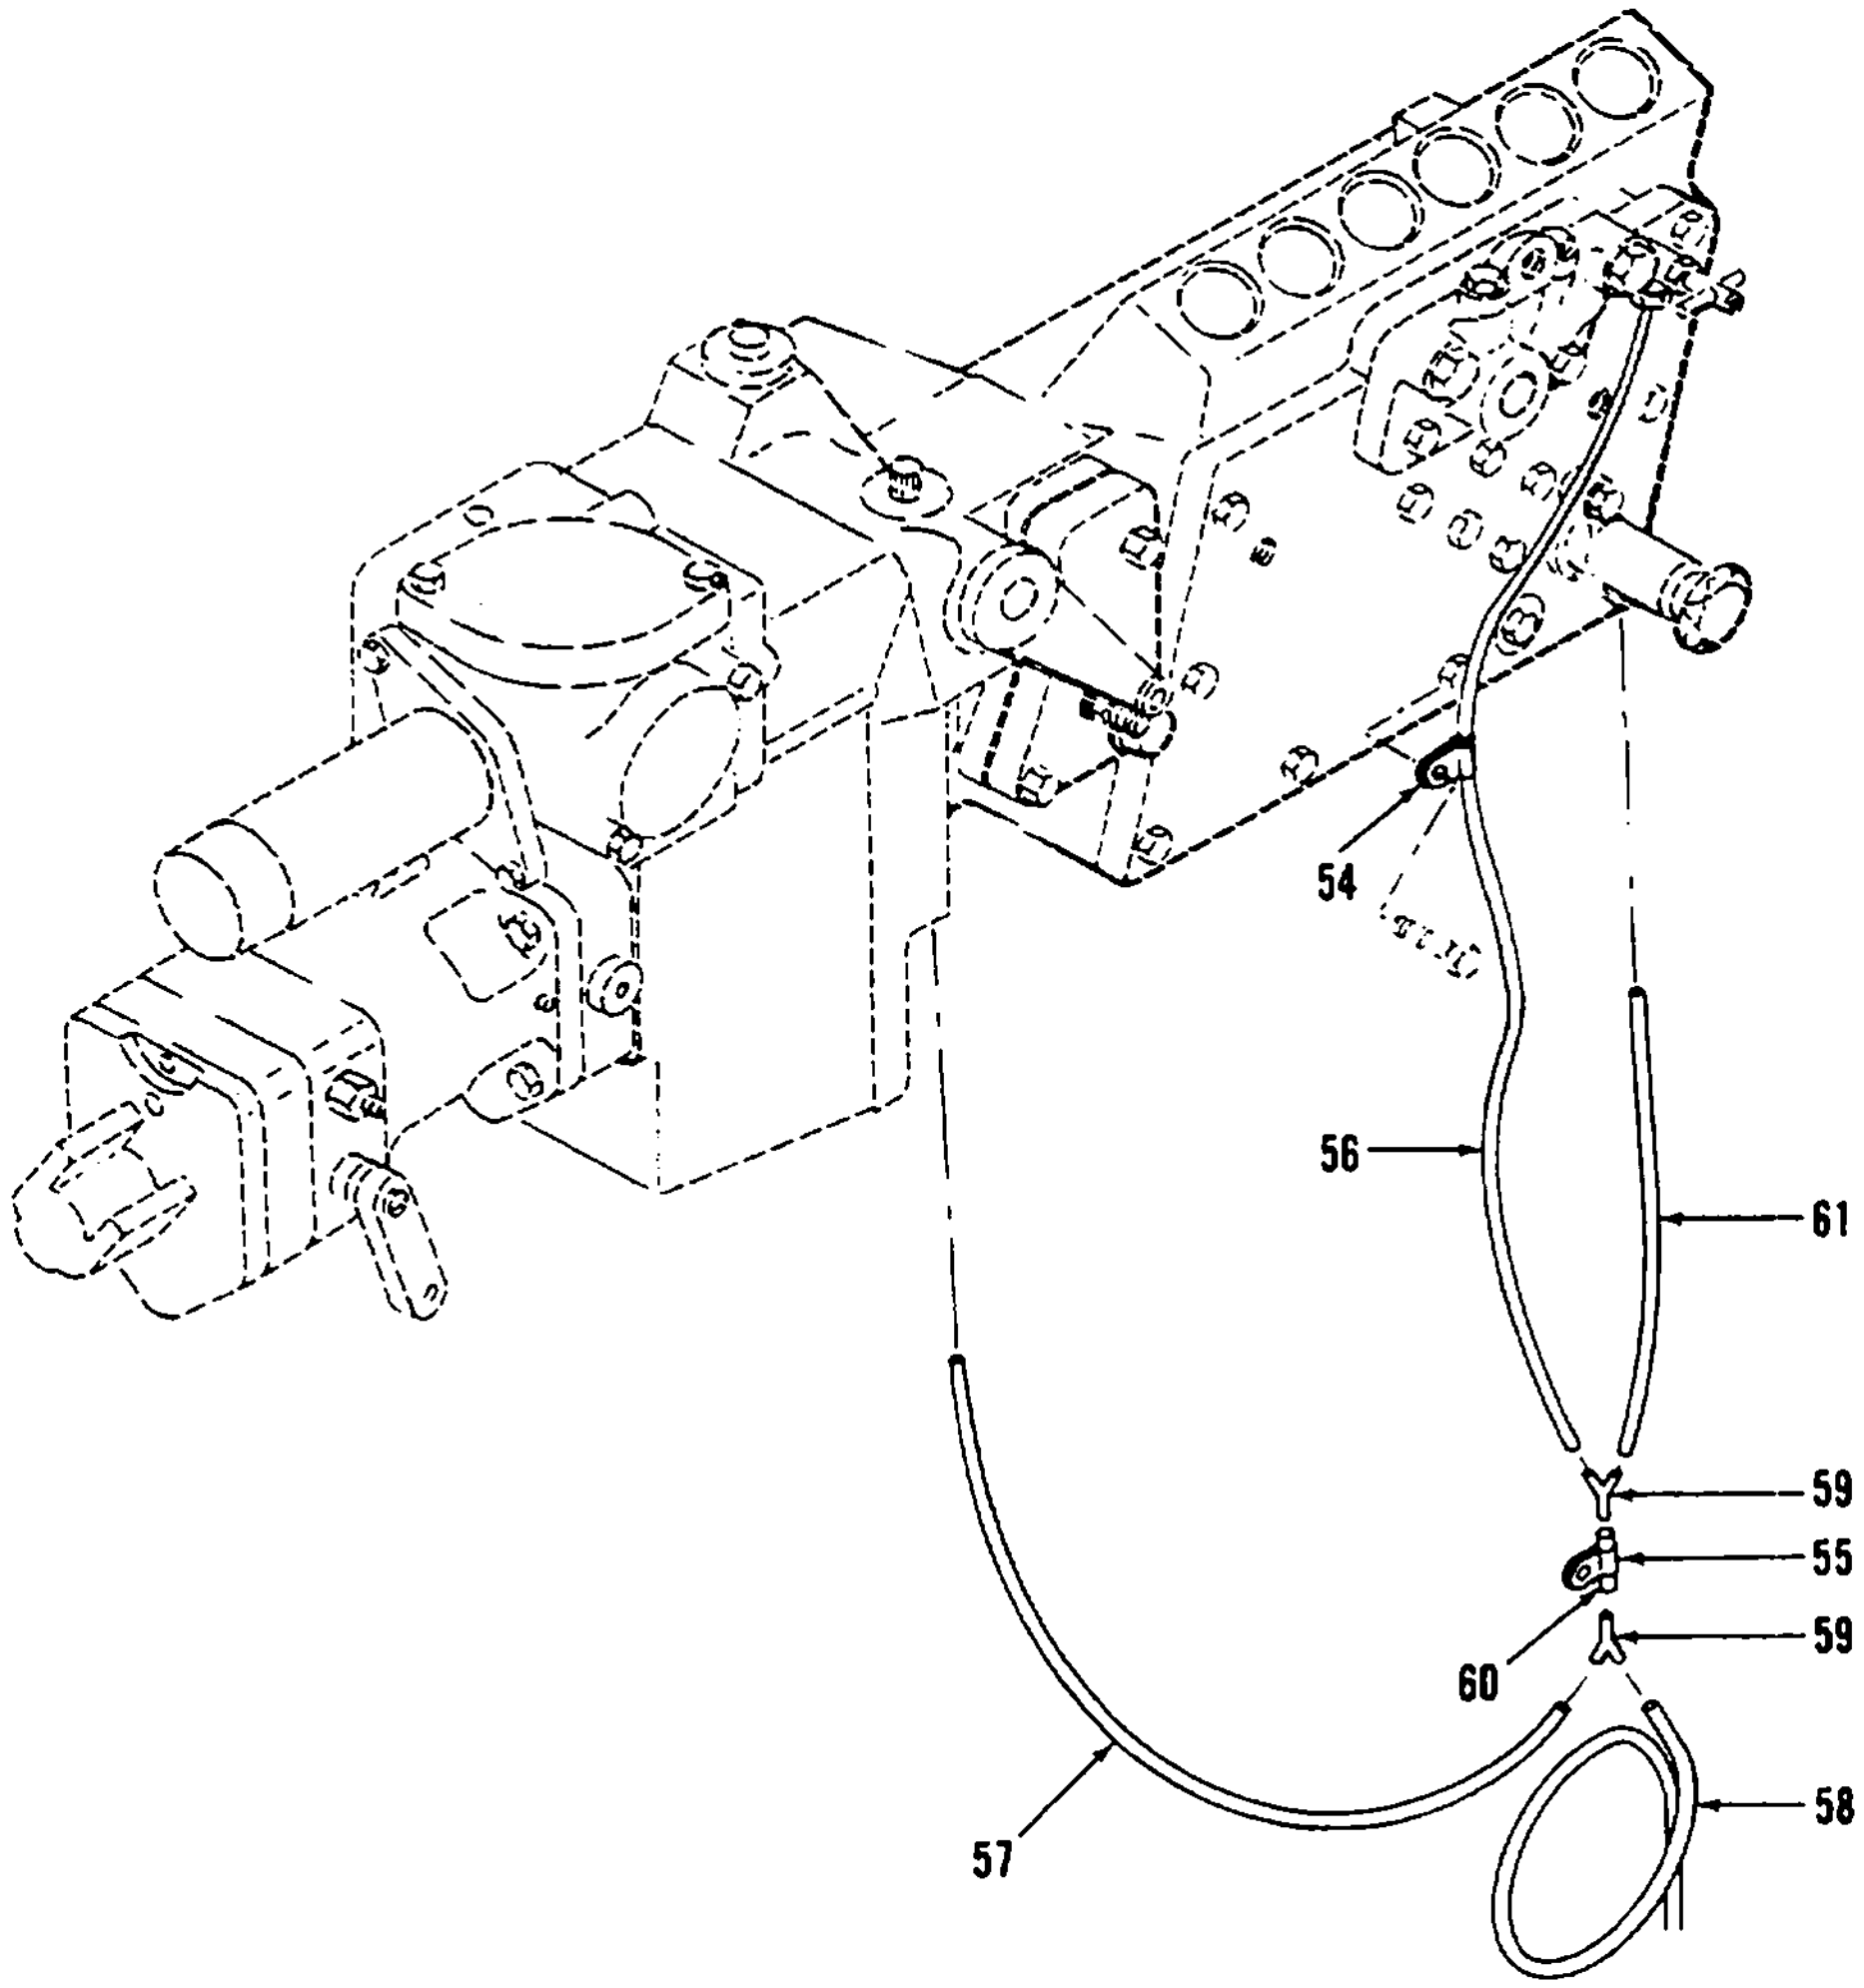
54
56
61
59
55
59
60
58
57

Figure 37. Fuel Lines and Related Parts (Sheet 3 of 3)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 05 - FUEL SYSTEM CONTINUED | | | | |
| 37 | | | | | | | | | FUEL LINES AND RELATED PARTS CONTINUED | | | | |
| 37 | 49 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-842-2201 | FITTING<br>MS24587-5 96906 | | EA | 2 | 2 |
| 37 | 50 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-289-9197 | HOSE<br>MIL-H-8794-5 81349 | | FT | 2 | 4 |
| 37 | 51 | AFF | AFF | AFF | AFFZZ | | | | HOSE ASSY<br>MS28741-6-0204 96906 | | EA | 1 | 1 |
| 37 | 52 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-843-0269 | FITTING<br>MS24587-6 96906 | | EA | 2 | 12 |
| 37 | 53 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | 070 | 4720-00-278-1323 | HOSE<br>MIL-H-8794-6 81349 | | FT | 2 | 17 |
| 37 | 54 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .013 | 5340-00-282-7519 | CLIP<br>1A5350 11083 | | EA | 1 | 1 |
| 37 | 55 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5340-00-993-6207 | CLAMP, CUSHIONED<br>MS21333-99 96906 | | EA | 1 | 1 |
| 37 | 56 | MOO | MOO | MOO | MOO | | | | TUBING, PLASTIC, MFR FROM:<br>76-4210-01 30554 | | EA | 1 | 1 |
| 37 | 56A | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .005 | 4720-00-916-7092 | TUBING<br>44-SN 30327 | | FT | 2 | 8 |
| 37 | 57 | MOO | MOO | MOO | MOO | | | 4720-00-916-7092 | TUBING, PLASTIC, MFR FROM:<br>76-4210-02 30554 | | EA | 1 | 2 |
| 37 | 57A | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .005 | | TUBING<br>44-SN 30327 | | FT | 2 | 8 |
| 37 | 58 | MOO | MOO | MOO | MOO | | | | TUBING, PLASTIC, MFR FROM:<br>76-4210-03 30554 | | EA | 1 | 1 |
| 37 | 58A | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .005 | 4720-00-916-7092 | TUBING<br>44-SN 30327 | | FT | 4 | 8 |
| 37 | 59 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .005 | 4730-01-129-4654 | FITTING, PLASTIC<br>76-4211 30554<br>1710 23050 | | EA | 2 | 2 |
| 37 | 60 | MOO | MOO | MOO | MOO | | | | TUBING, PLASTIC, MFR FROM:<br>76-4210-04 30554 | | EA | 1 | 1 |
| 37 | 60A | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .005 | | TUBING<br>44-SN 30327 | | FT | 1 | 8 |
| 37 | 61 | MOO | MOO | MOO | MOO | | | | TUBING, PLASTIC, MFR FROM:<br>76-4210-05 30554 | | EA | 1 | 1 |
| 37 | 61A | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .005 | 4720-00-916-7092 | TUBING<br>44-SN 30327 | | FT | 1 | 8 |

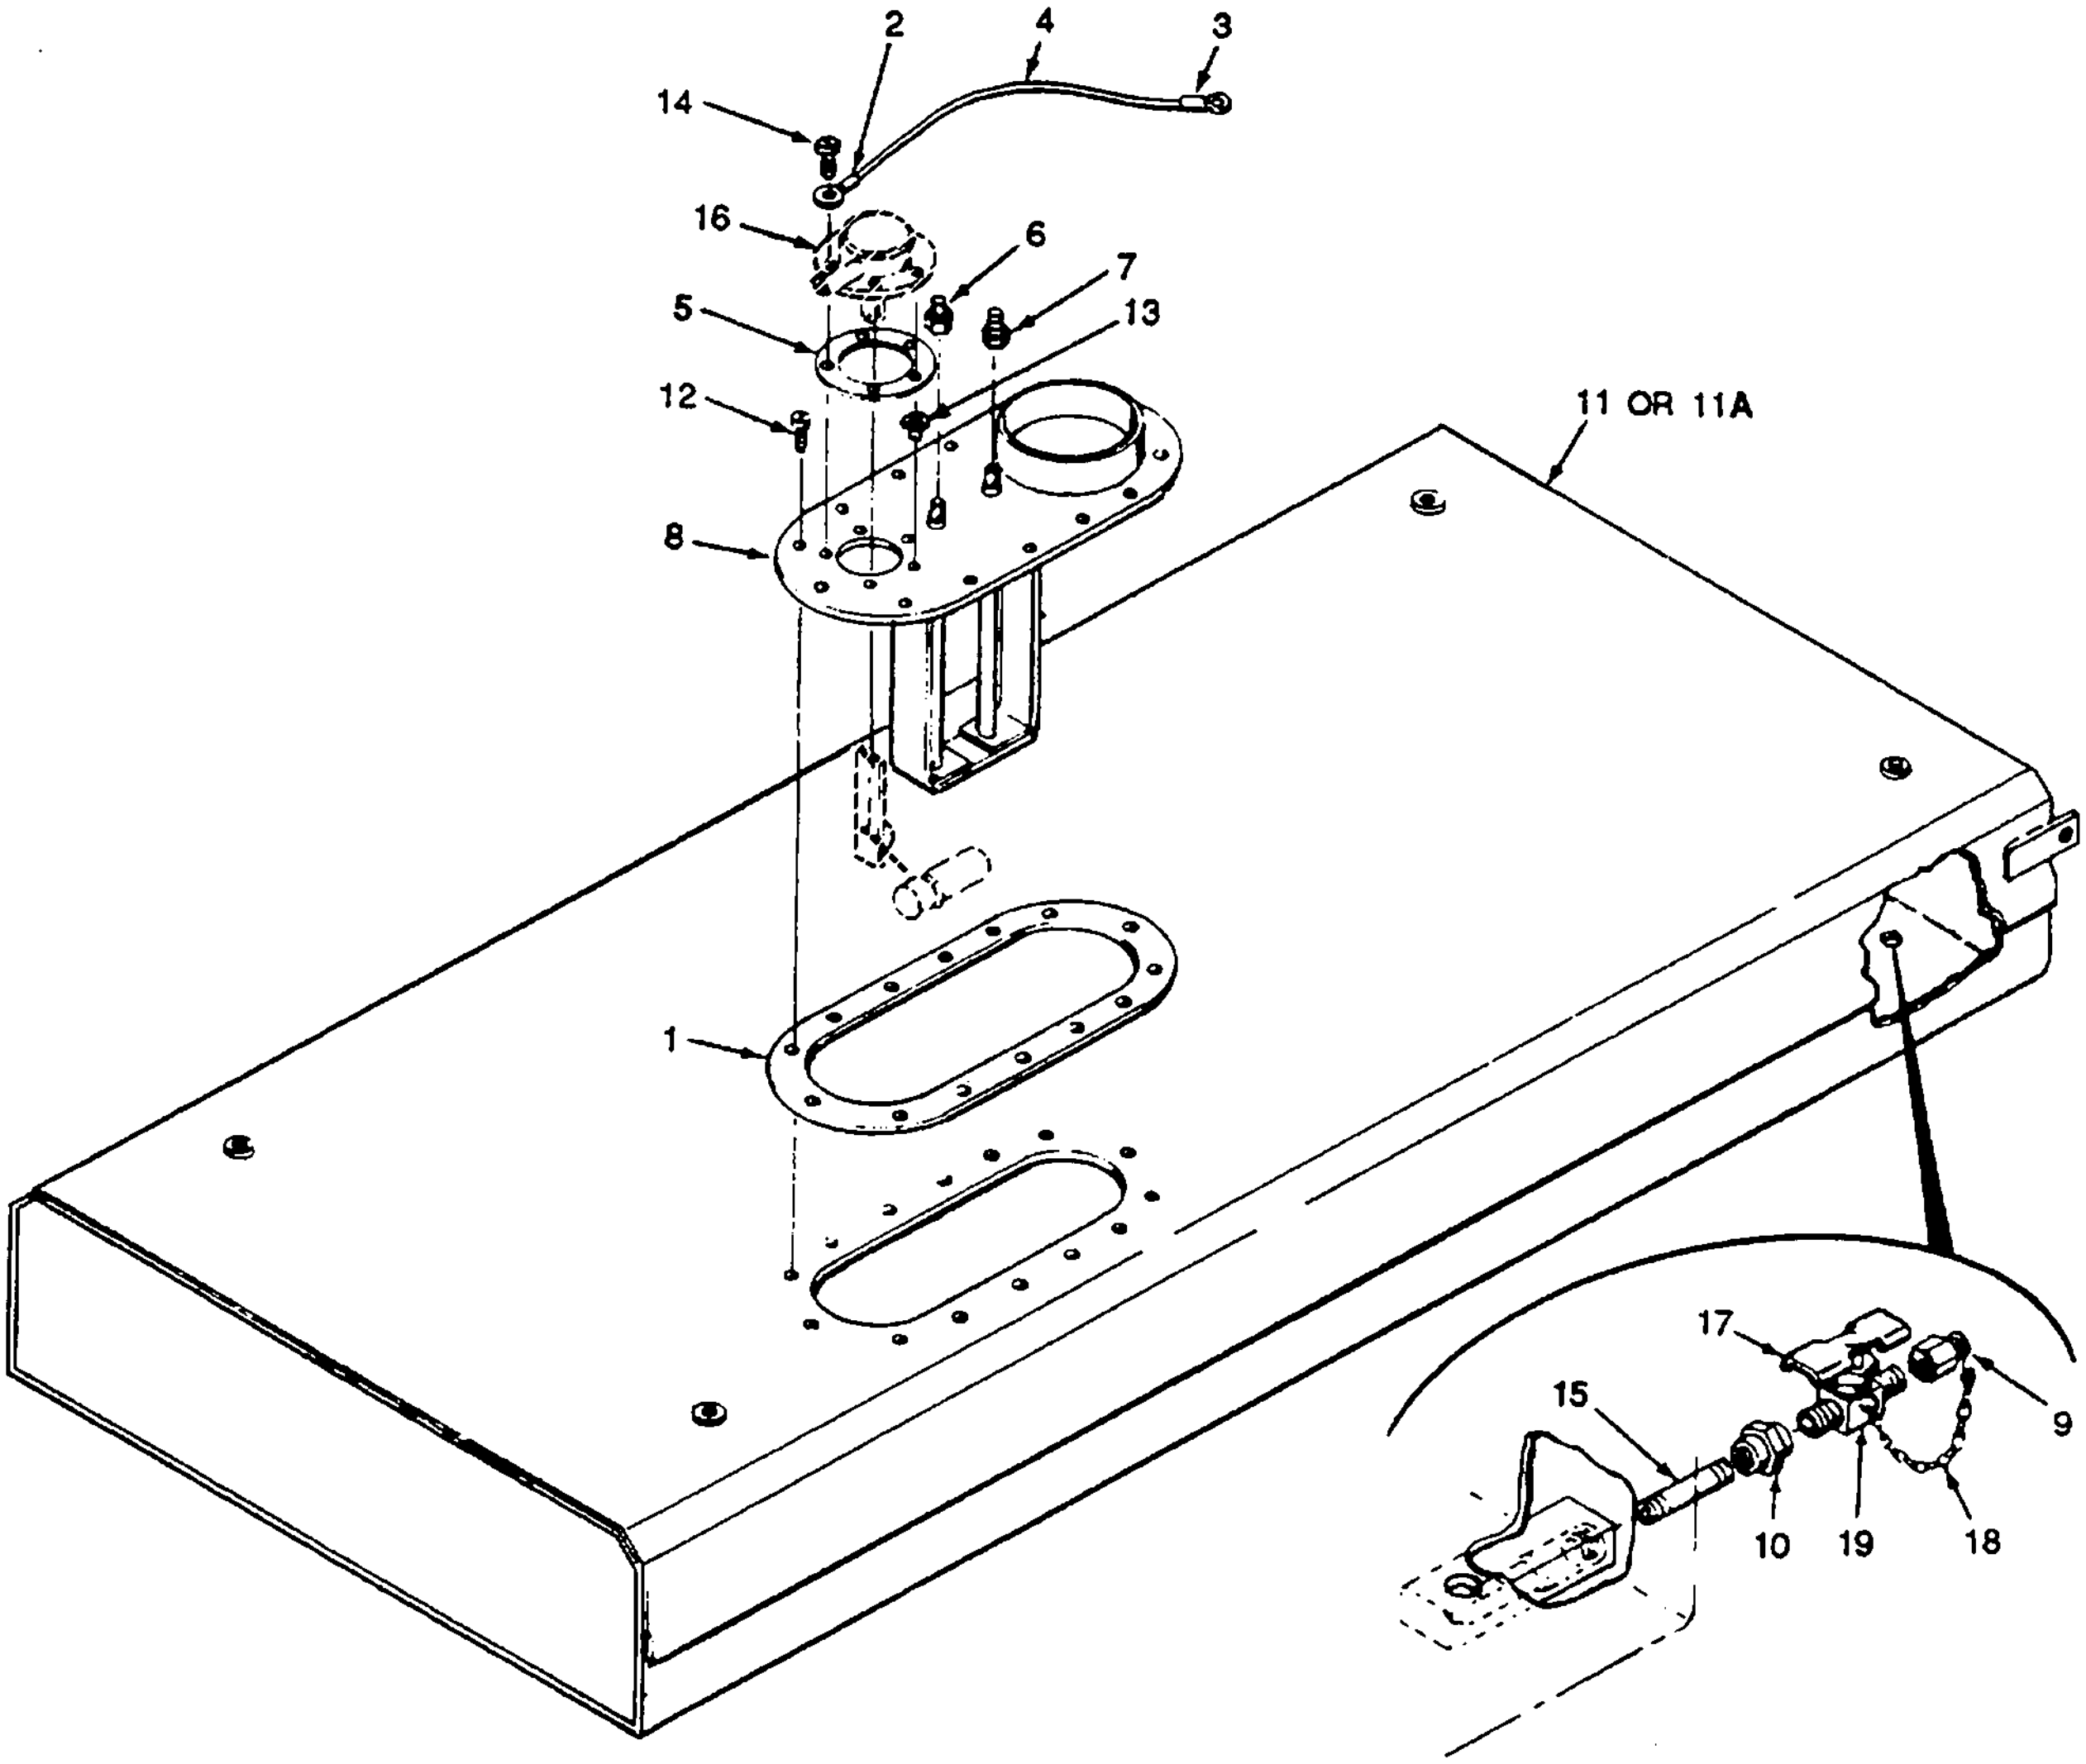
2
4
3
14
16
6
7
5
13
12
11 OR 11A
8
1
17
15
9
10
19
18

Figure 38. Fuel Tank Assembly

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 05 - FUEL SYSTEM | | | | |
| 38 | AFF | AFF | AFF | AFF | | | | | FUEL TANK ASSEMBLY<br>70-4170 | 30554 | EA | 1 | 1 |
| 38 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5330-00-216-8512 | GASKET, FUEL TANK<br>70-4164 | 30554 | EA | 1 | 1 |
| 38 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-230-0515 | LUG, TERMINAL NO. 10<br>MS25036-154 | 96906 | EA | 1 | 10 |
| 38 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4780 | LUG, TERMINAL 1/4<br>MS25036-108 | 96906 | EA | 1 | 35 |
| 38 | 4 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 | 81349 | FT | 2 | 1178 |
| 38 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .030 | 5330-00-221-9846 | GASKET, FLOAT, FUEL TANK<br>70-4165 | 30554 | EA | 1 | 1 |
| 38 | 6 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-202-9997 | CONNECTOR, FEMALE<br>71-4840<br>MS51503A6 | 30554<br>96906 | EA | 1 | 3 |
| 38 | 7 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-208-7228 | CONNECTOR, TUBE<br>71-4897<br>MS5150385-4 | 30554<br>96906 | EA | 1 | 1 |
| 38 | 8 | XB | XB | XB | XB | | | | PLATE ASSEMBLY<br>70- 4173 | 30554 | EA | 1 | 1 |
| 38 | 9 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .027 | 4730-00-812-1333 | CAP TUBE<br>69-539-2<br>69-539-2 | 30554<br>93742 | EA | 1 | 4 |
| 38 | 10 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .006 | 4730-00-223-9255 | COUPLING<br>AN910-2 | 88044 | EA | 1 | 1 |
| 38 | 11 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .080 | | FUEL TANK, PLASTIC<br>90-4000 | 30554 | EA | 1 | 1 |
| 38 | 11A | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .080 | 2910-01-145-1943 | FUEL TANK, STEEL<br>79-4501 | 30554 | EA | 1 | 1 |
| 38 | 12 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-038-3145 | SCREW-WASHER ASSEMBLY<br>69-662-37 | | EA | 14 | |
| 38 | 13 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5310-01-009-9785 | BLIND NUT<br>MS27130-A25 | 96906 | EA | 5 | |
| 38 | 14 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6902 | SCREW-WASHER ASSEMBLY<br>69-662 | 30554 | EA | 5 | |
| 38 | 15 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .006 | 4730-00-196-1539 | NIPPLE, PIPE<br>MS51953-36 | 96906 | EA | 1 | 1 |
| 38 | 16 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .003 | 6680-00-676-9292 | FUEL LEVEL TRANSMITTER<br>MS500040-2 | | EA | 1 | 1 |
| 38 | 17 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .005 | 4820-00-595-319 | VALVE, NEEDLE<br>70-4059<br>695 | 30554<br>93742 | EA | 1 | 2 |
| 38 | 18 | PAOZZ | POAZZ | PAFZZ | PAFZZ | | .003 | 4010-00-554-8661 | CHAIN<br>42C16550 | 81349 | EA | 1 | 1 |
| 38 | 19 | PAOZZ | PAOZZ | PAOZZ | PAFZZ | | .003 | 4030-00-948-7315 | HOOK, CHAIN-S<br>MS87006-33 | 96906 | EA | 1 | 4 |

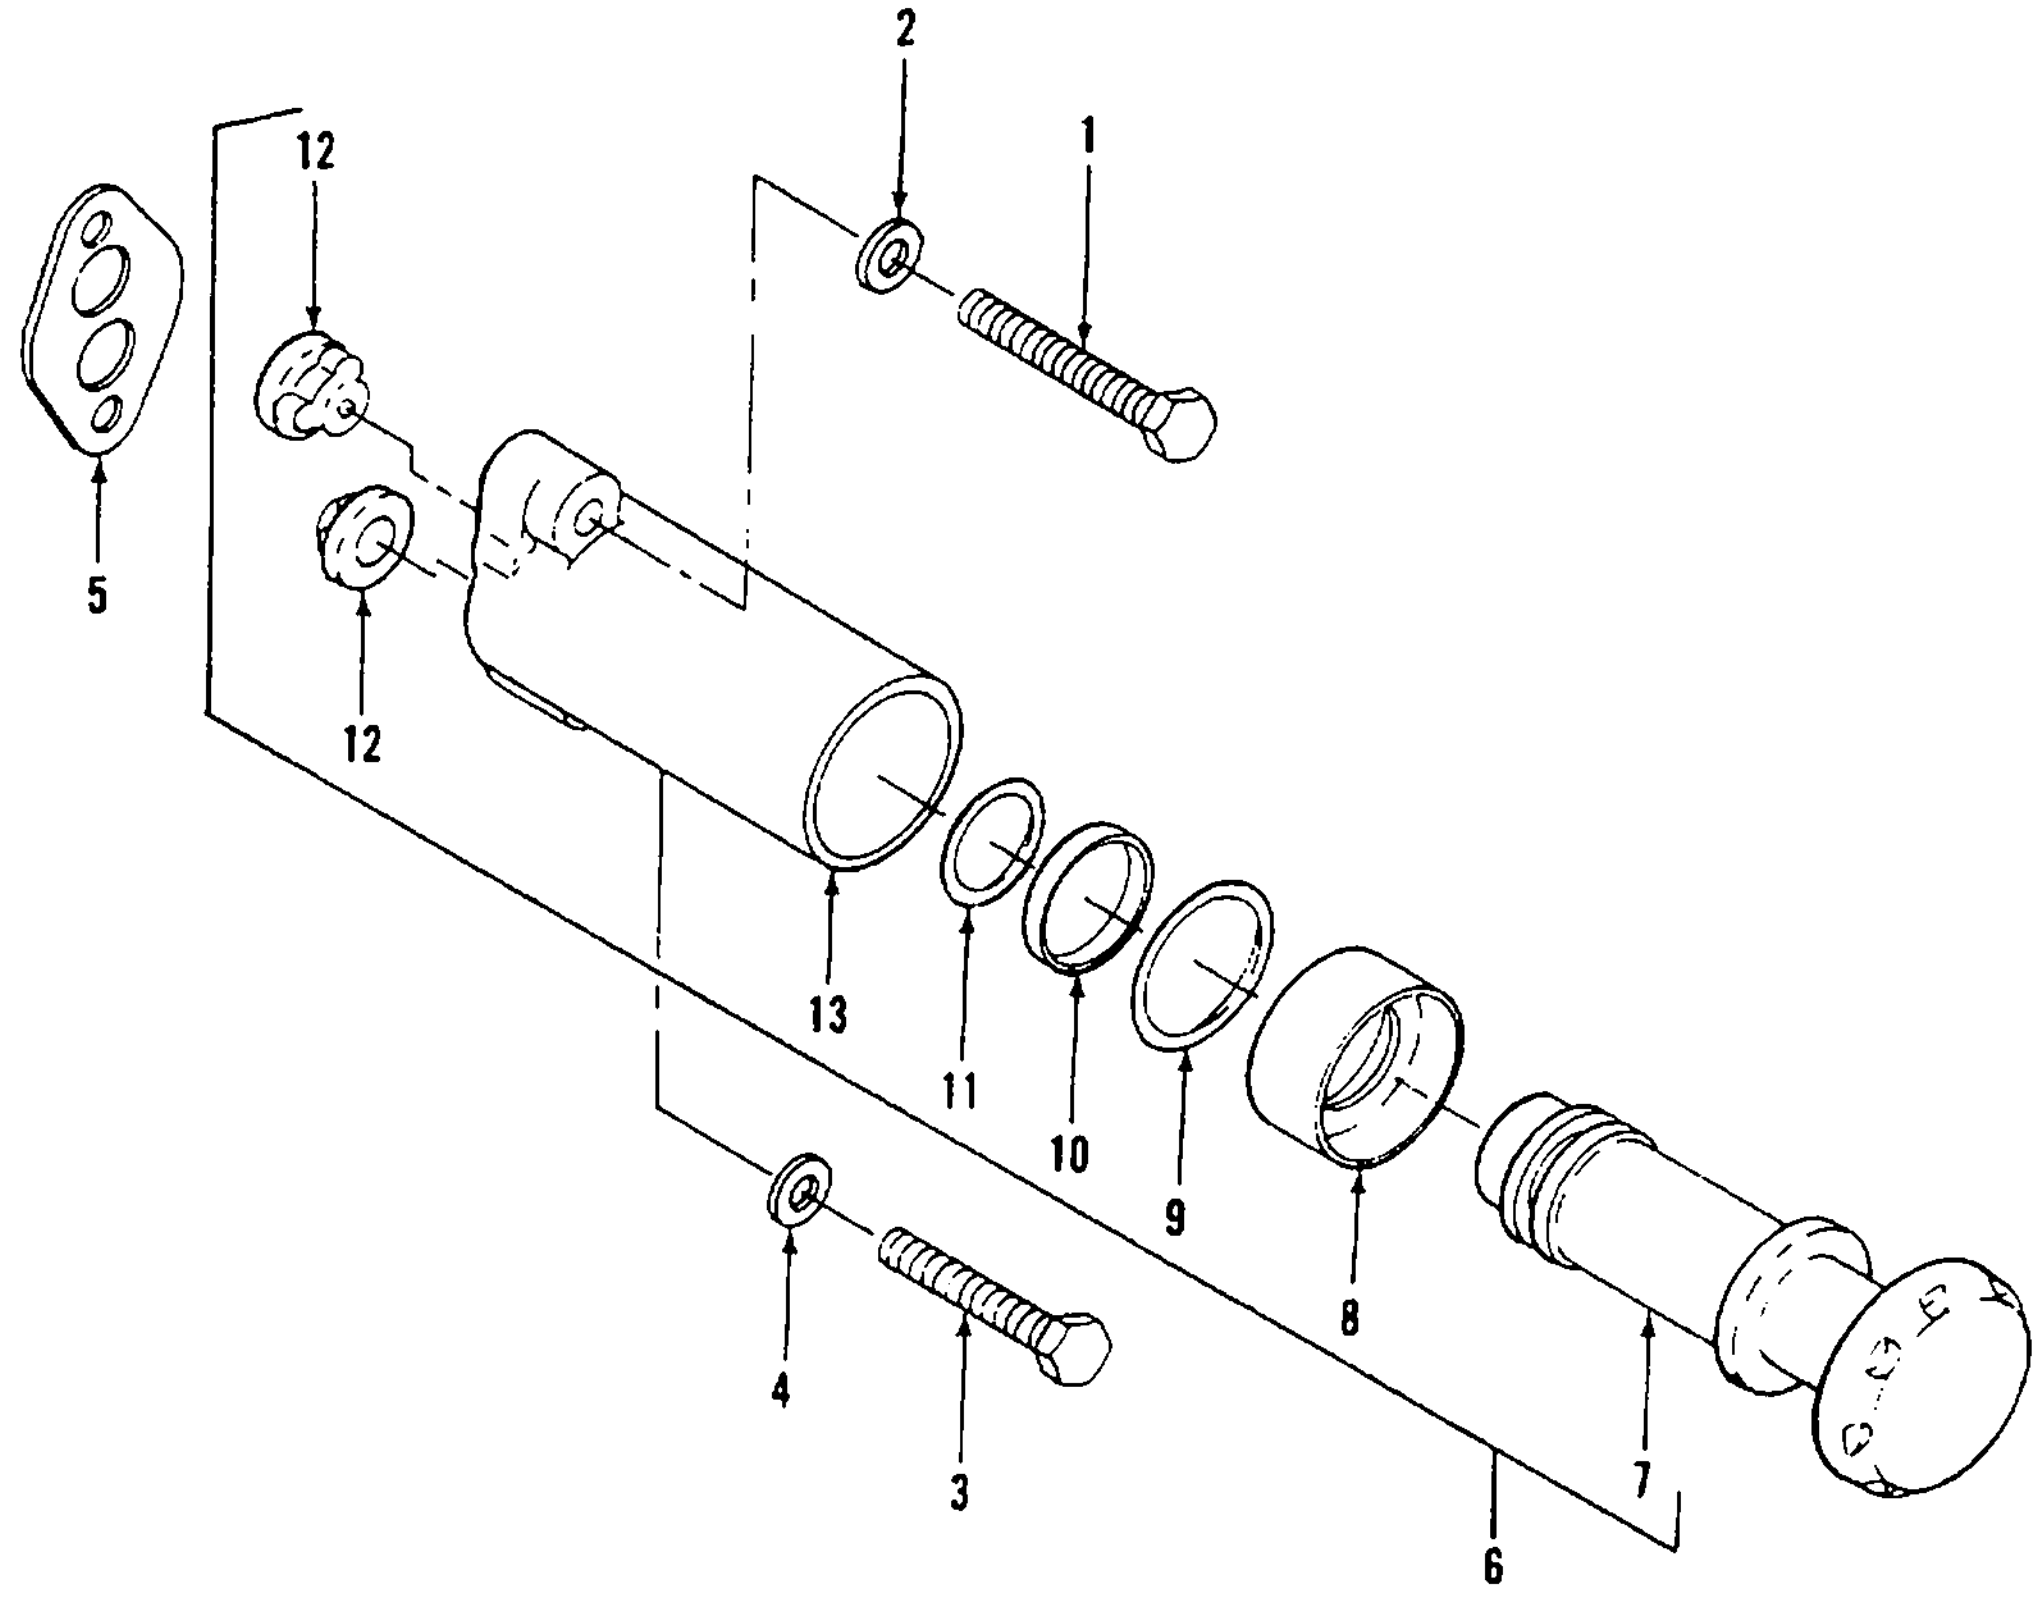
2
1
12
5
12
13
11
10
9
8
7
4
3
6

Figure 39. Fuel Priming Pump

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 05 - FUEL SYSTEM | | | | |
| 39 | | | | | | | | | FUEL PRIMING PUMP | | | | |
| 39 | 1 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-175-7468 | BOLT<br>1H5514 | 11083 | EA | 1 | 1 |
| 39 | 2 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .013 | 5310-00-432-4064 | WASHER<br>9M1974 | 11083 | EA | 1 | 8 |
| 39 | 3 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-404-1417 | BOLT, HEX<br>9F7022 | 11083 | EA | 1 | 4 |
| 39 | 4 | PAOZZ | PAFZZ | AFZZ | PAFZZ | D | .010 | 5310-01-051-2360 | WASHER<br>5P537 | 11083 | EA | 1 | 3 |
| 39 | 5 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-01-024-4862 | GASKET, P/O KIT P/N 6N1133<br>1P436 | 11083 | EA | 1 | 1 |
| 39 | 6 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .003 | 2910-01-021-1845 | FUEL PRIMING PUMP ASSY<br>4N2511 | 11083 | EA | 1 | 1 |
| 39 | 7 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | | 2910-01-115-2238 | PLUNGER<br>4N2512 | 11083 | EA | 1 | 1 |
| 39 | 8 | PAFZZ | PAFFZ | PAFZZ | PAFZZ | | | 5365-01-105-9319 | SEAL<br>4N2513 | 11083 | EA | 1 | 1 |
| 39 | 9 | XA--- | XA | XA | XA | | | | RING<br>9S8614 | 11083 | EA | 1 | 1 |
| 39 | 10 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5330-01-107-3623 | RING<br>9S8611 | 11083 | EA | 1 | 1 |
| 39 | 11 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5330-00-591-7543 | PACKING, PREFORMED<br>7F8607 | 11083 | EA | 1 | 2 |
| 39 | 12 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | | 2910-00-033-2200 | VALVE ASSY<br>8N2156<br>5622759 | 11083<br>70040 | EA | 2 | 2 |
| 39 | 13 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 2910-01-123-1263 | BARREL<br>9S8615 | 11083 | EA | 1 | 1 |

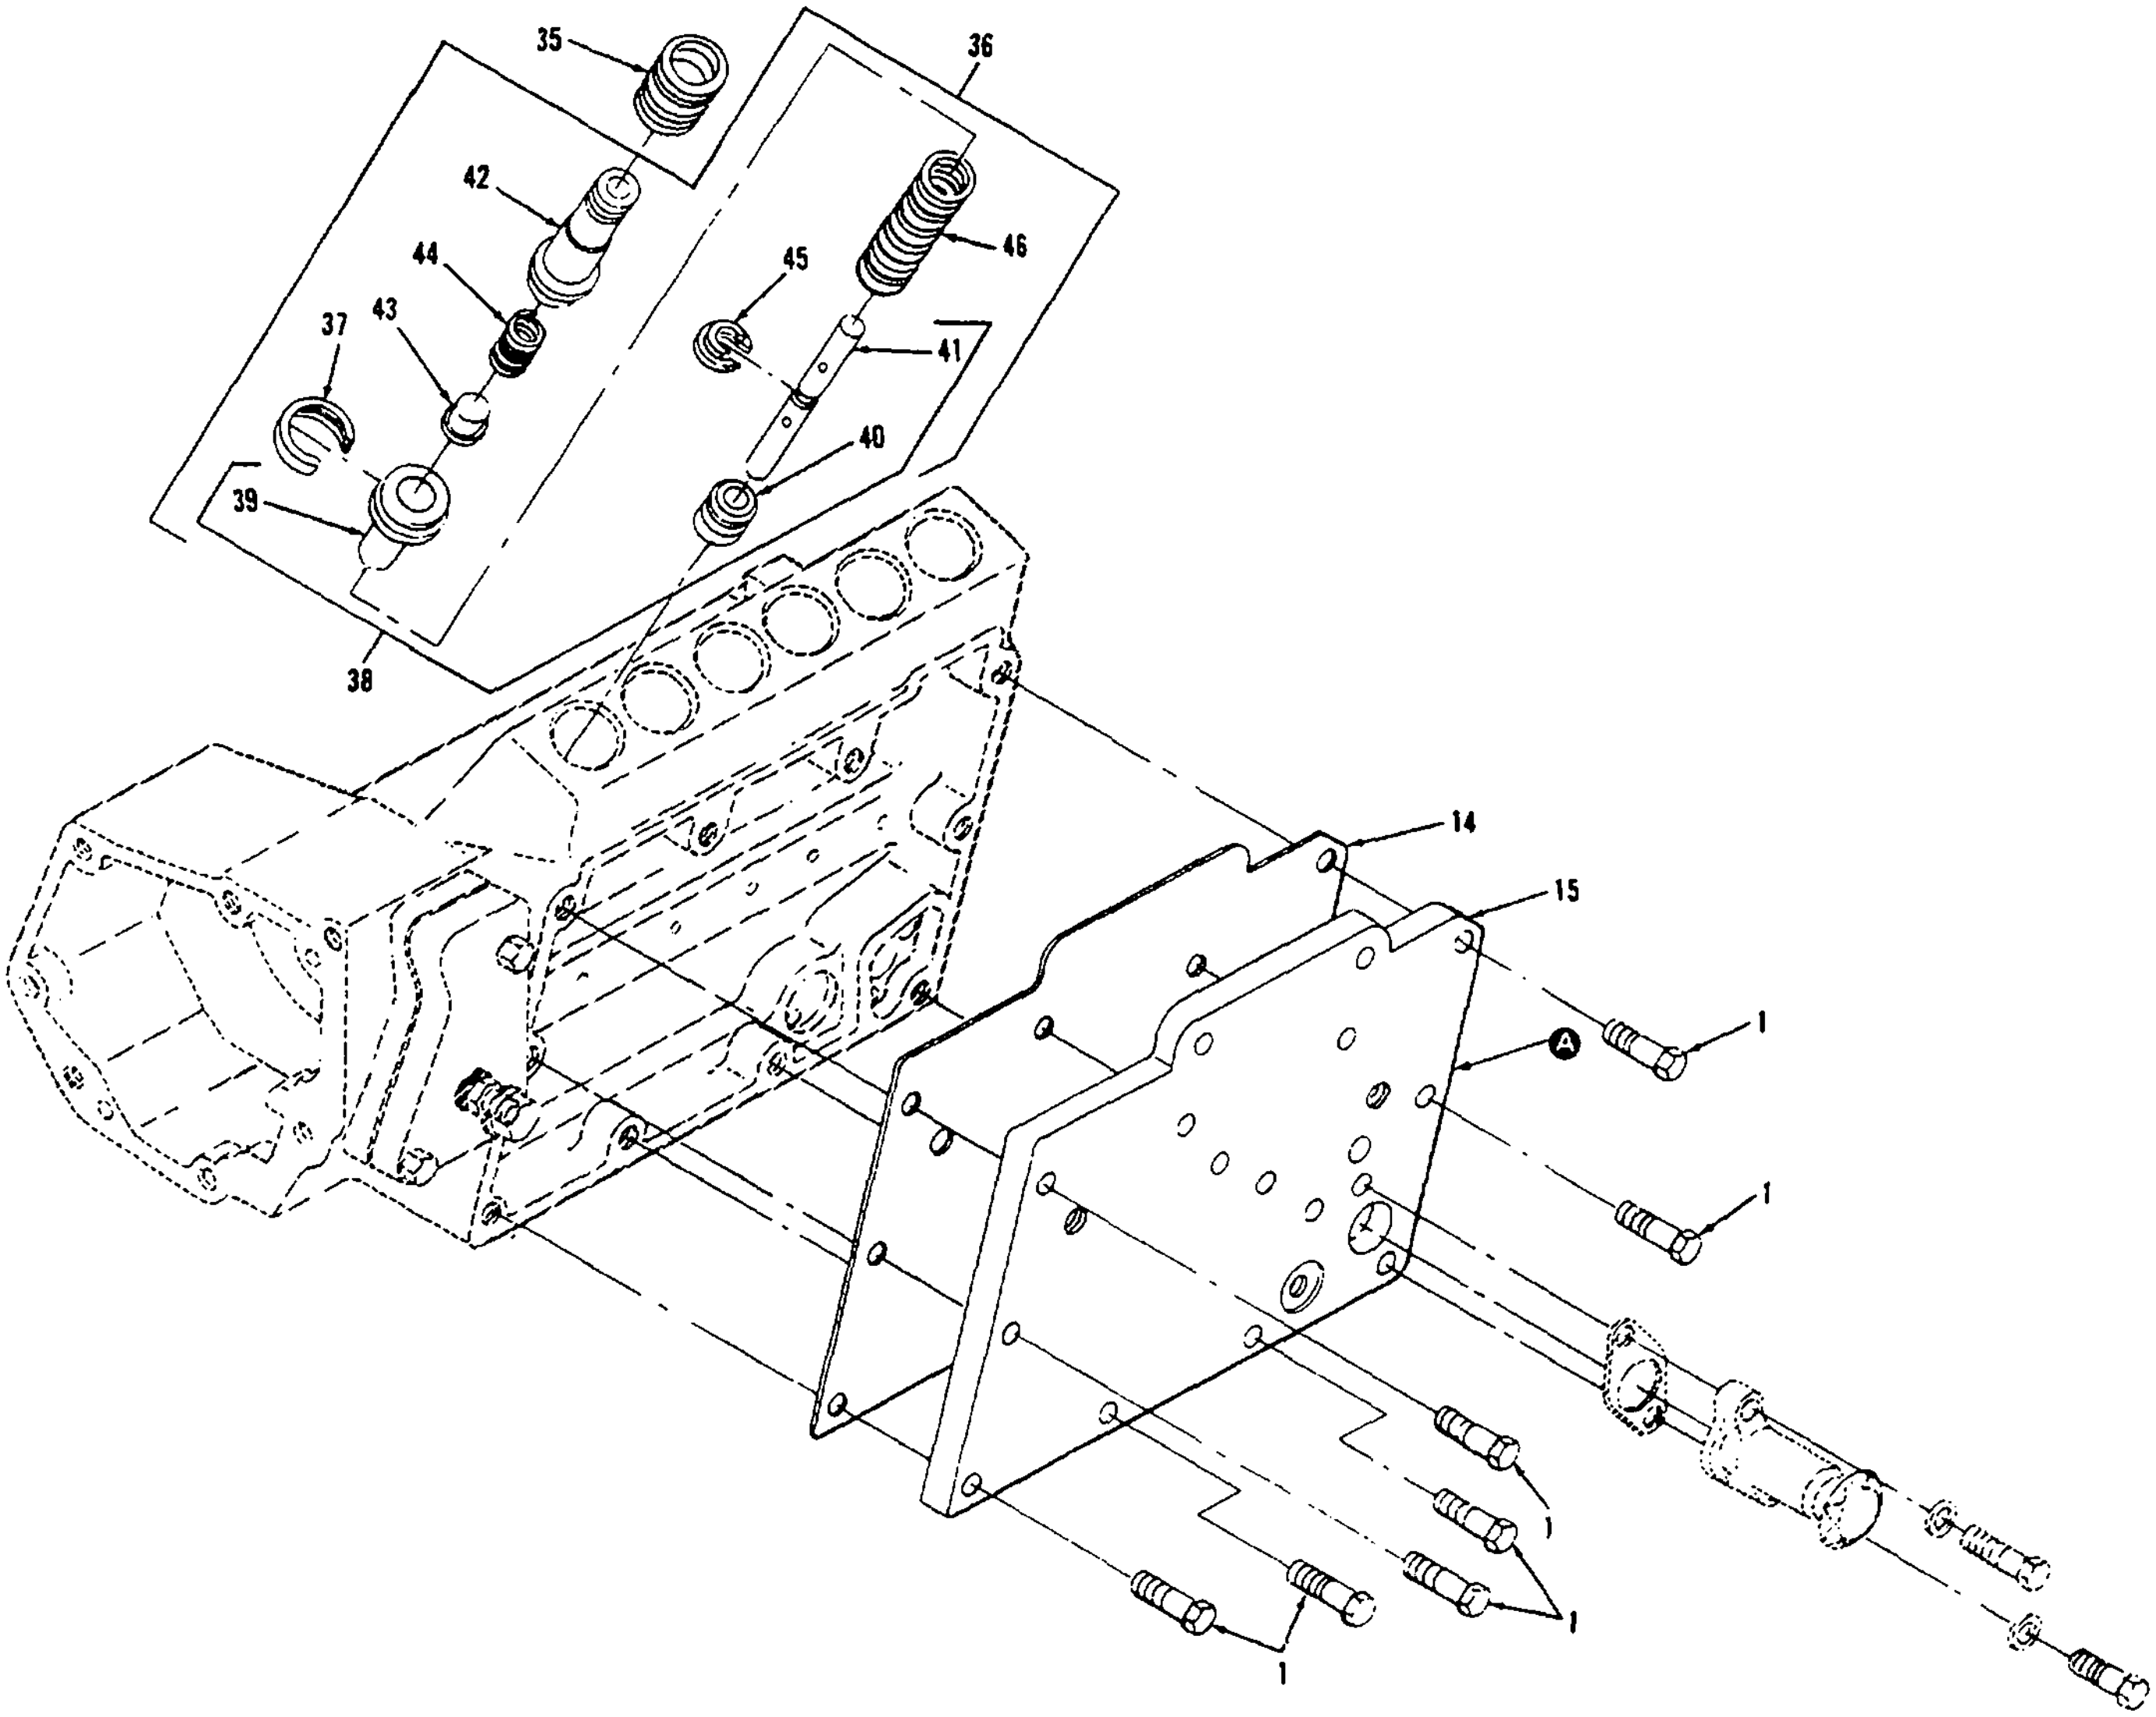
35
36
42
46
44
45
37
43
41
40
39
38
14
15
1
A
1
1
1
1
1

Figure 40. Fuel Injection Pump (Sheet 1 of 4)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 05 FUEL SYSTEM | | | | |
| 40 | | PBFHH | PAFFF | PAHZZ | PAHHH | | .013 | 2910-01-125-4519 | FUEL INJECTION PUMP<br>5R3882 | 11083 | EA | 1 | 1 |
| 40 | 1 | PAAZZ | PAFZZ | PAAZZ | PAHZZ | D | .008 | 5306-00-261-4453 | BOLT, HEX<br>51615 | 11083 | EA | 13 | 28 |
| 40 | 2 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-721-5679 | BOLT, HEX<br>9P6580 | 11083 | EA | 4 | 4 |
| 40 | 3 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-068-7345 | GASKET. P/O KIT P/N 6N1133<br>6N2843 | 11085 | EA | 1 | 1 |
| 40 | 4 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 4731-00-069-1411 | ELBOW<br>4N7572 | 11083 | EA | 1 | 1 |
| 40 | 4A | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 4820-01-053-4586 | ELBOW, CHECK VALVE<br>HN1828 | 11083 | EA | 1 | 1 |
| 40 | 5 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-068-7344 | GASKET, P O KIT P/N 6N1133<br>4N9337 | 11083 | EA | 1 | 1 |
| 40 | 6 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2910-01-068-9785 | DISC<br>4N9336 | 11085 | EA | 1 | 1 |
| 40 | 7 | XB | XB | XB | XB | | | | HOUSING<br>1P1420 | 11085 | EA | 1 | 1 |
| 40 | 8 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 4820-01-103-3732 | VALVE ASSY<br>7N450 | 11083 | EA | 1 | 1 |
| 40 | 9 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-01-106-4024 | PLUG<br>4N5050 | 11083 | EA | 1 | 1 |
| 40 | 10 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | | 2910-01-068-6095 | CHANNEL<br>6N2810 | 11085 | EA | 1 | 1 |
| 40 | 11 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-069-0995 | GASKIT, P O KIT P/N 6N1133<br>4N4431 | 11083 | EA | 1 | 1 |
| 40 | 12 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2520-01-067-2179 | PLUG<br>954180 | 11083 | EA | 1 | 1 |
| 40 | 13 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5365-00-194-4472 | PACKING, P O KIT P/N 6N1133<br>4J7533 | 11083 | EA | 1 | 1 |
| 40 | 14 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-127-8567 | GASKET, P O KIT P/N 6N1133<br>4N9057 | 11083 | EA | 1 | 1 |
| 40 | 15 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | | 2910-01-128-9190 | COVER<br>4N4351 | 11083 | EA | 1 | 1 |
| 40 | 16 | AFF | AFF | AHHZZ | AHHZZ | | | | PUMP, FUEL INJECTION<br>6N205 | 11083 | EA | 1 | 1 |
| 40 | 17 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-004-7245 | BOLT, HEX<br>2M5471 | 11083 | EA | 2 | 2 |
| 40 | 18 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | | 2910-01-140-8212 | COVER ASSY<br>4N1591 | 11083 | EA | 1 | 1 |
| 40 | 19 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-01-024-7524 | BOLT, HEX<br>2P3200 | 11083 | EA | 1 | 1 |
| 40 | 20 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-613-6500 | SEAL P O KIT P/N 6N1133<br>1J1671 | 11083 | EA | 1 | 2 |
| 40 | 21 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-025-4359 | SCREW ASSY<br>6N412 | 11083 | EA | 1 | 1 |
| 40 | 22 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-138-0258 | NUT<br>4B2042 | 11083 | EA | 1 | 1 |
| 40 | 23 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-045-3299 | WASHER, LOCK<br>MS382338-42 | 11083 | EA | 1 | 1 |
| 40 | 24 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-450-0414 | WASHER, FLAT<br>8F1326 | 11083 | EA | 1 | 1 |

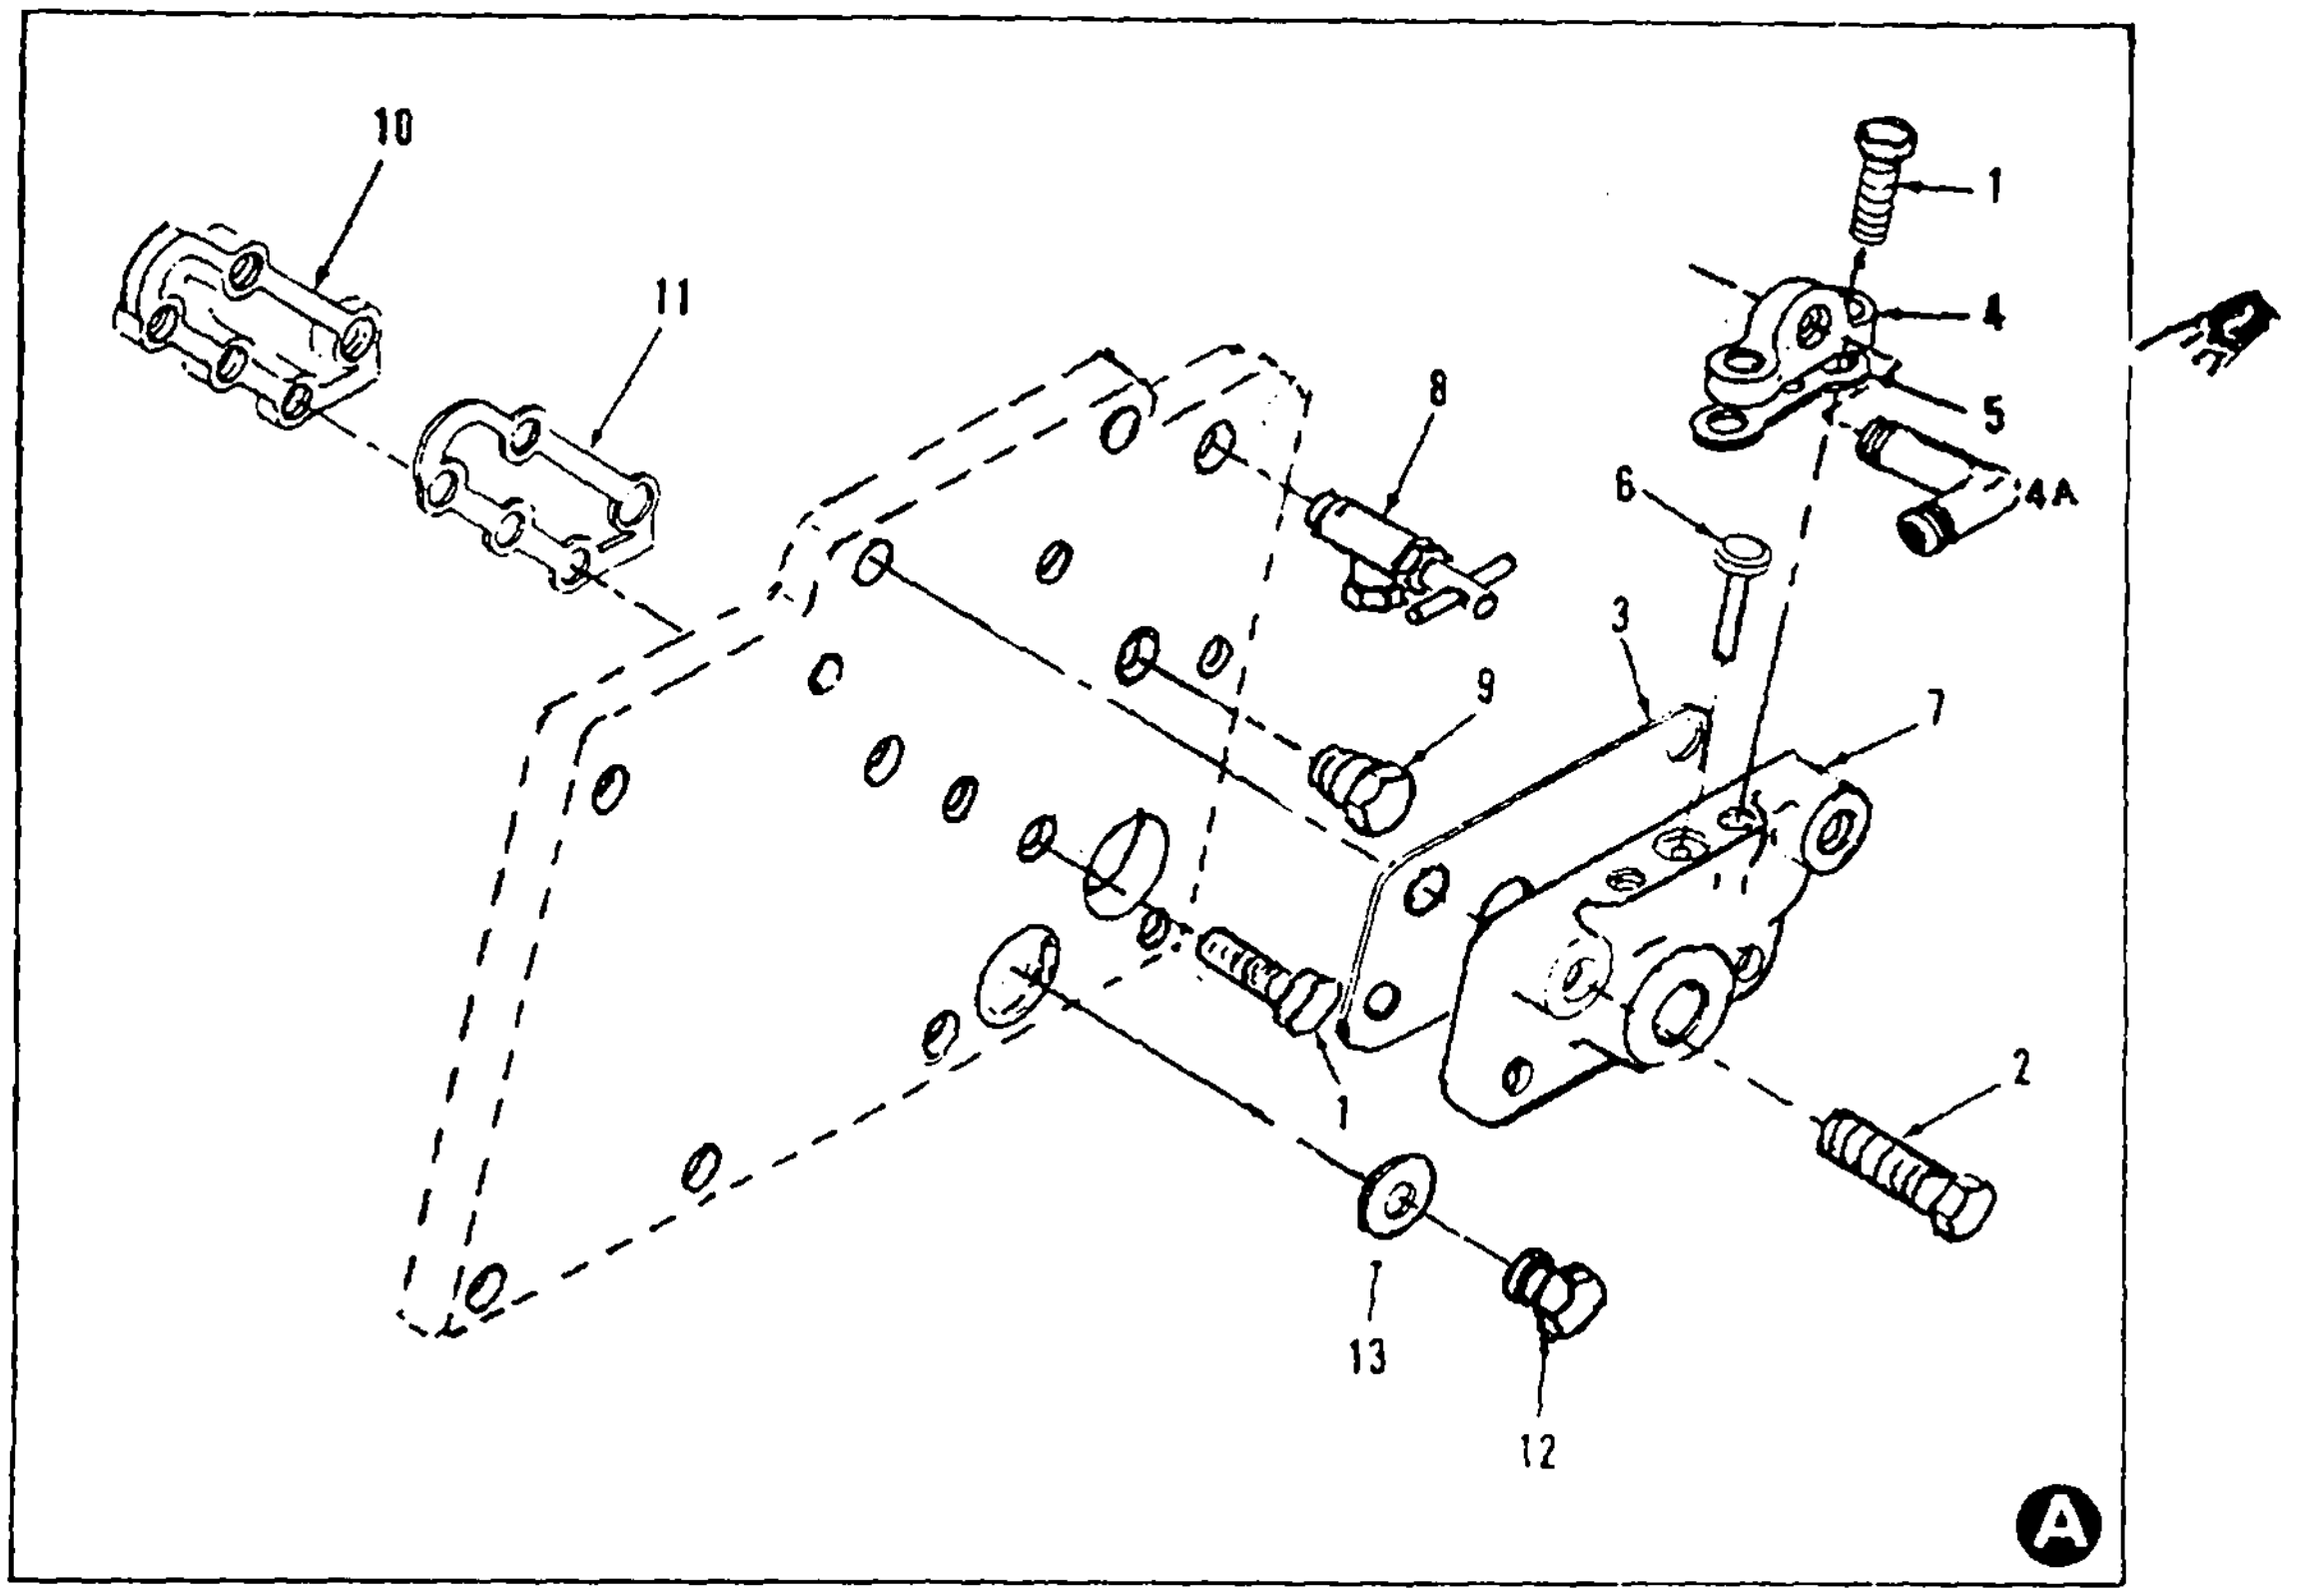
10
11
8
1
4
5
4A
6
3
9
7
1
2
13
12
A

Figure 40. Fuel Injection Pump (Sheet 2 of 4)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION |  | (2) SMR CODE |  |  |  | (3) USMC |  | (4) | (5) DESCRIPTION |  | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M |  |  |
|  |  |  |  |  |  |  |  |  | GROUP 05 - FUEL SYSTEM -CONTINUED |  |  |  |  |
| 40 |  |  |  |  |  |  |  |  | FUEL INJECTION PUMP -CONTINUED |  |  |  |  |
| 40 | 25 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-023-9105 | WASHER, FLAT<br>1P7326 11083 |  | EA | 1 | 1 |
| 40 | 26 | XBHZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 2910-01-104-9318 | COVER<br>6N411 11083 |  | EA | 1 | 1 |
| 40 | 27 | PAHZZ | PAFZZ | PAHZZ | PAHZZ |  | .030 | 5330-01-024-3368 | GASKET, P/O KIT P/N 6N1133<br>4N508 11083 |  | EA | 1 | 1 |
| 40 | 28 | PAHZZ | PAFZZ | PAHZZ | PAHZZ |  | .030 | 5330-00-292-0577 | PACKING, P/O KIT P/N 6N1133<br>MS28775-007 96906 |  | EA | 1 | 1 |
| 40 | 29 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2530-01-068-9709 | SHAFT<br>4N528 11083 |  | EA | 1 | 1 |
| 40 | 30 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 5360-01-023-9435 | PRING<br>4N605 11083 |  | EA | 1 | 1 |
| 40 | 31 | PAAZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2910-01-024-1512 | VALVE<br>4N1767 11083 |  | EA | 1 | 1 |
| 40 | 32 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-024-4794 | SCREW, PAN HEAD<br>2N2658 11083 |  | EA | 1 | 7 |
| 40 | 33 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 4310-01-068-9779 | LEVER<br>4N1763 11083 |  | EA | 1 | 6 |
| 40 | 34 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2910-01-125-4534 | SHAFT ASSY<br>4N0572 11083 |  | EA | 1 | 1 |
| 40 | 35 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 3120-01-022-3955 | BUSHING<br>4N218 11083 |  | EA | 6 | 6 |
| 40 | 36 | AFF | AFF | AHH | AHH |  |  | 2910-01-024-0963 | PUMP ASSY<br>4N8898 11083 |  | EA | 6 | 6 |
| 40 | 37 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 5365-01-024-5118 | RING<br>4N224 11083 |  | EA | 1 | 6 |
| 40 | 38 | PAHZZ | PAFZZ | PAHZZ | PAHZZ |  | .013 | 2910-01-024-0939 | PUMP, FUEL INJECTION<br>6N7527 11083 |  | EA | 1 | 6 |
| 40 | 39 | XA | XA | XA | XA |  |  |  | BARREL<br>4N2034 11083 |  | EA | 1 | 6 |
| 40 | 40 | XA | XA | XA | XA |  |  |  | SLEEVE<br>4N1764 11083 |  | EA | 1 | 6 |
| 40 | 41 | XA | XA | XA | XA |  |  |  | PLUNGER<br>4N1762 11083 |  | EA | 1 | 6 |
| 40 | 42 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2910-01-024-1513 | BONNET<br>4N209 11083 |  | EA | 1 | 6 |
| 40 | 43 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2910-00-923-2466 | VALVE<br>9B1320 11083 |  | EA | 1 | 6 |
| 40 | 44 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 5360-01-024-2608 | SPRING<br>9L9424 11083 |  | EA | 1 | 6 |
| 40 | 45 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 5310-01-062-0380 | WASHER<br>4N2728 11083 |  | EA | 1 | 6 |
| 40 | 46 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 5360-01-105-9599 | SPRING<br>9N5862 11083 |  | EA | 1 | 6 |
| 40 | 47 | PAHZZ | PAFZZ | PAHZZ | PAHZZ |  | .030 | 5330-00-310-6575 | SEAL, P/O KIT P/N1133<br>6F6672 11083 |  | EA | 6 | 6 |
| 40 | 48 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2910-01-125-4520 | LIFTER<br>8N1317 11083 |  | EA | 6 | 6 |
| 40 | 49 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .009 | 2910-01-024-2868 | ROLLER<br>4N2685 11083 |  | EA | 6 | 6 |

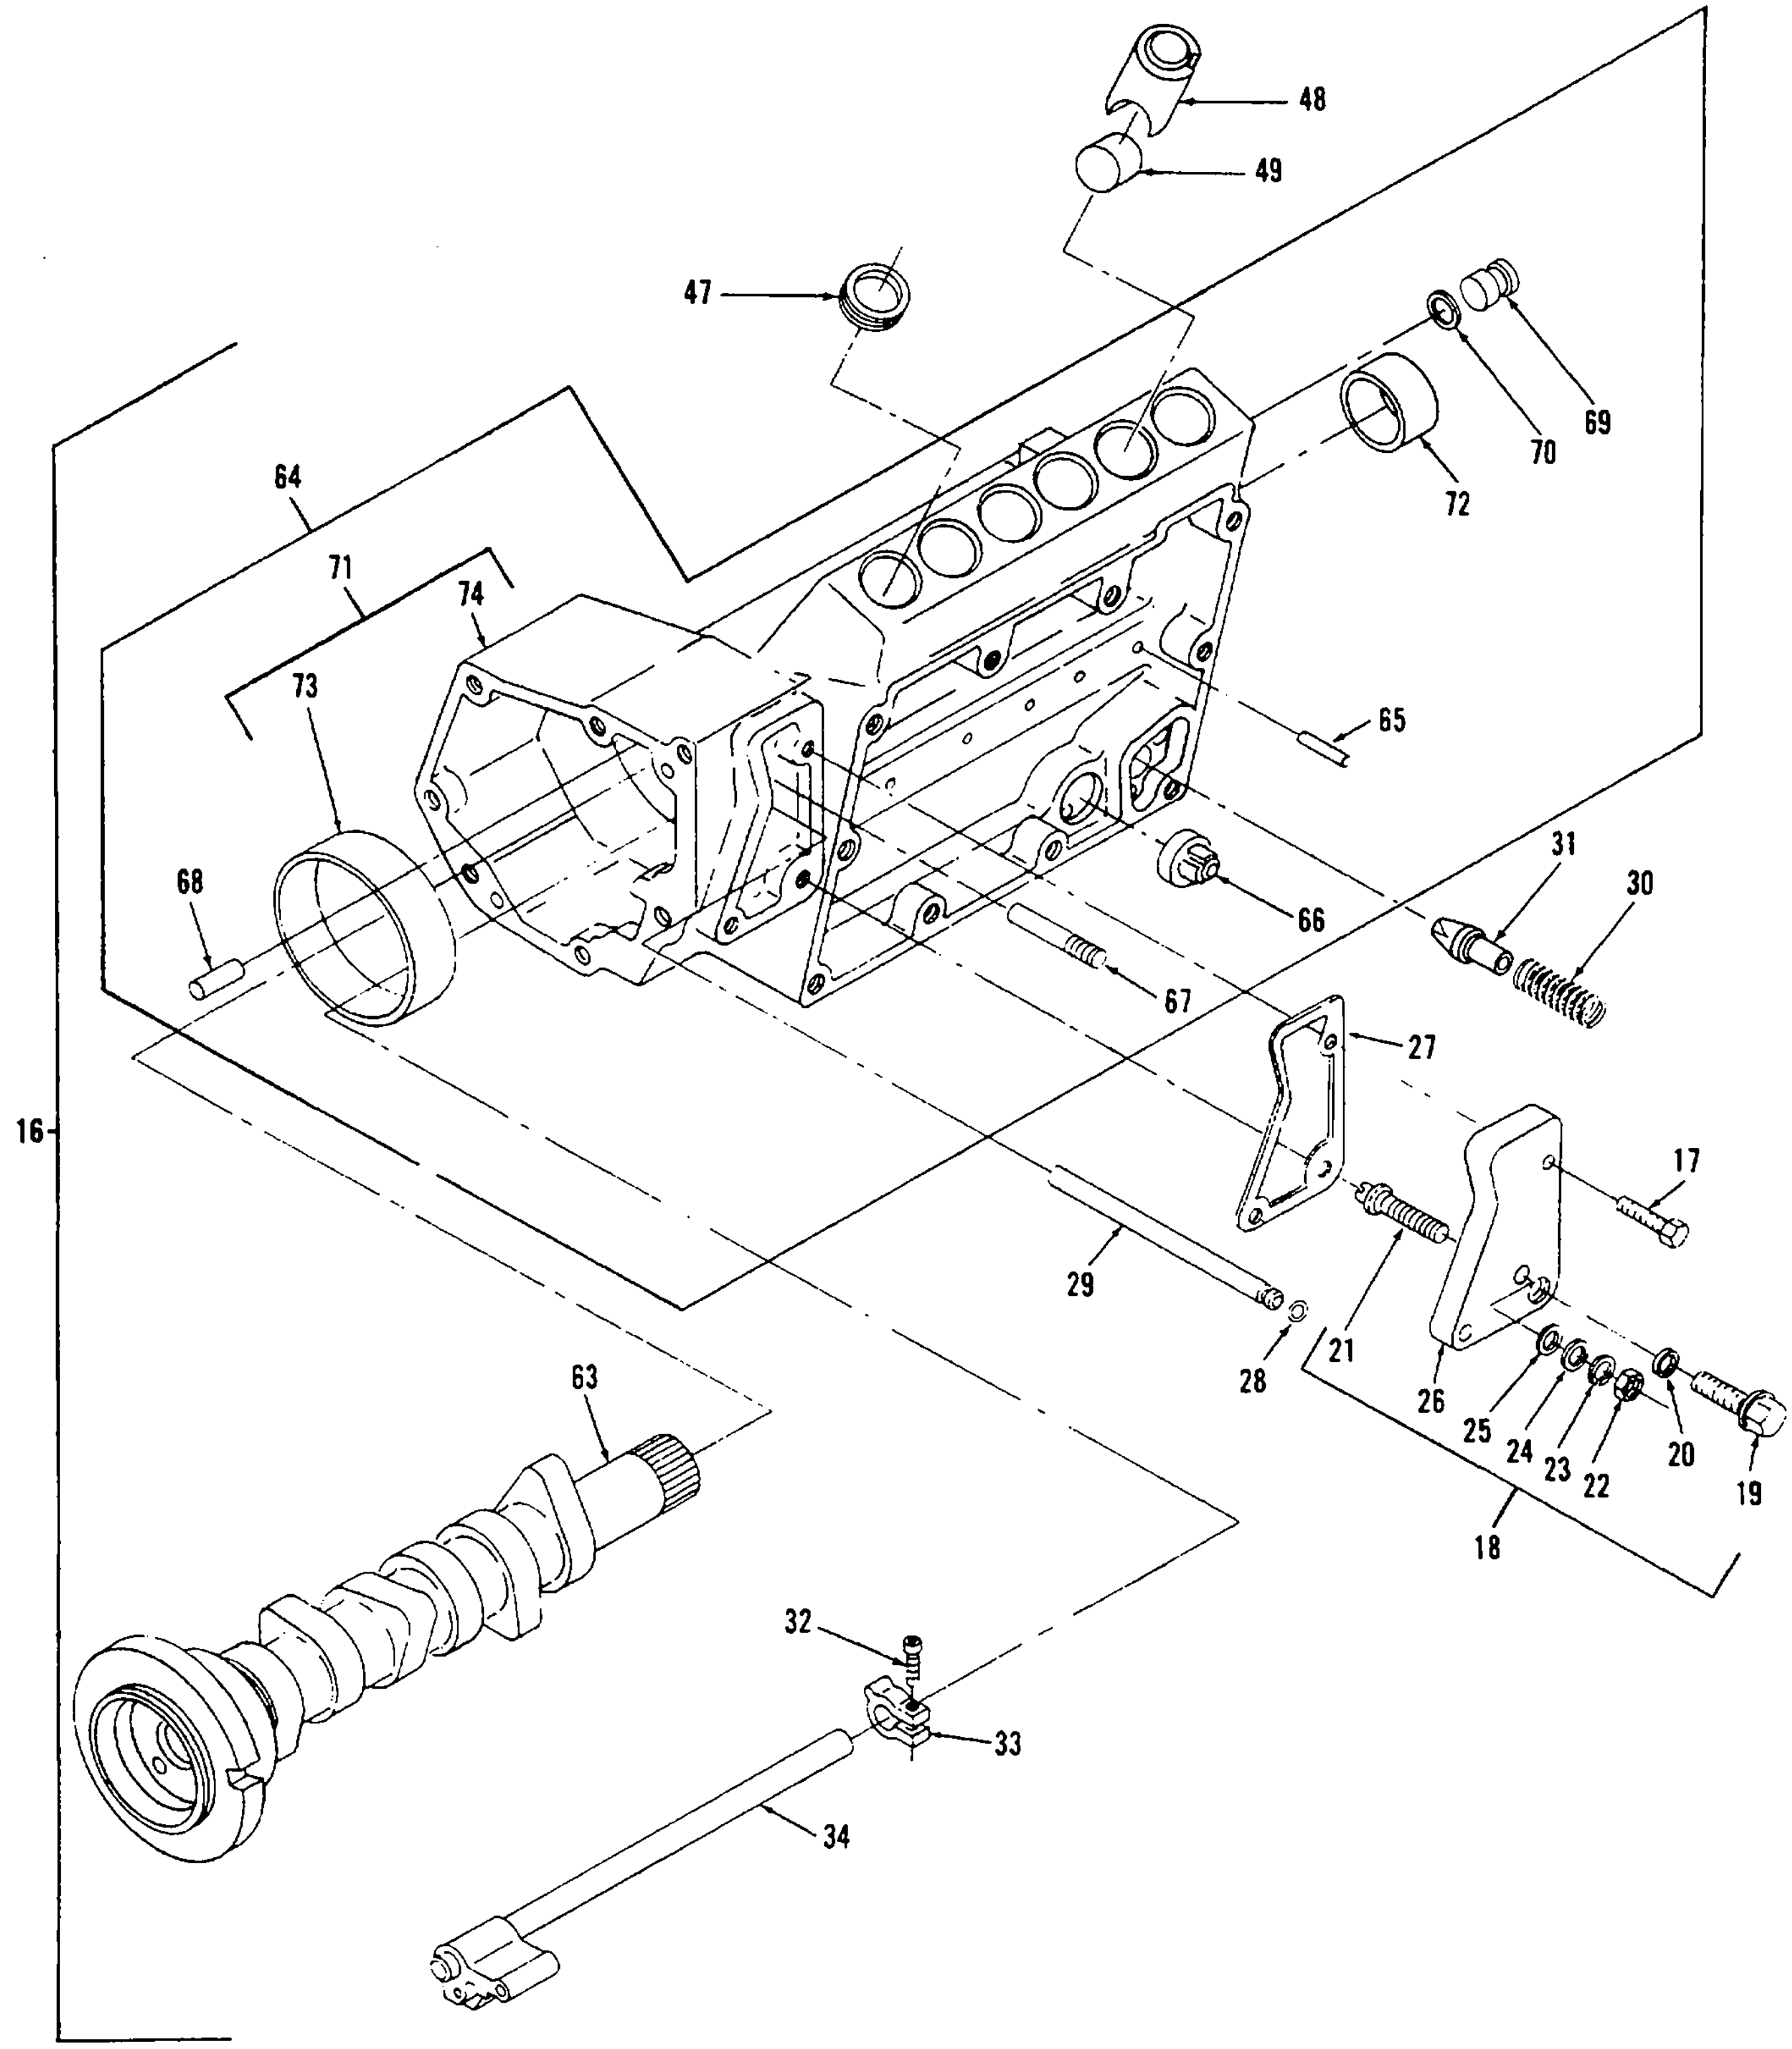
48
49
47
69
70
72
64
71
74
73
65
68
31
30
66
67
27
16
17
29
21
28
26
25
24
23
22
20
19
18
63
32
33
34

Figure 40. Fuel Injection Pump (Sheet 3 of 4)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO. | (1) ILLUSTRATION b ITEM NO. | (2) SMR CODE a ARMY | (2) SMR CODE b AIR FORCE | (2) SMR CODE c NAVY | (2) SMR CODE d USMC | (3) USMC a SSI | (3) USMC b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | (5) DESCRIPTION USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 05 - FUEL SYSTEM - CONTINUED | | | | |
| 40 | | | | | | | | | FUEL INJECTION PUMP - CONTINUED | | | | |
| 40 | 50 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 4730-01-023-8633 | FITTING<br>1P4001 11083 | | EA | 1 | 2 |
| 40 | 51 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-01-068-7124 | SLEEVE, CAMSHAFT<br>4N2954 11083 | | EA | 1 | 1 |
| 40 | 52 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-01-053-7366 | BOLT<br>5J5314 11083 | | EA | 4 | 4 |
| 40 | 53 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-945-0494 | PACKING, P/O KIT P/N 6N1133<br>5M6509 11083 | | EA | 1 | 1 |
| 40 | 54 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 3020-01-024-0102 | GEAR<br>4N406 11083 | | EA | 1 | 1 |
| 40 | 55 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2910-01-147-3000 | BODY ASSY, TRANSFER PUMP<br>9L6863 11083 | | EA | 1 | 1 |
| 40 | 56 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-061-9380 | SEAL, LIP-TYPE, P/O KIT P/N 6N1133<br>4N1584 11083 | | EA | 1 | 2 |
| 40 | 57 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-069-9381 | SEAL, LIP-TYPE, P/O KIT P/N 6N1133<br>4N636 11083 | | EA | 1 | 2 |
| 40 | 58 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-406-7278 | DOWEL<br>8S6814 11083 | | EA | 1 | 3 |
| 40 | 59 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 5315-00-999-8416 | SHAFT<br>8H9804 11083 | | EA | 1 | 1 |
| 40 | 60 | XA | XA | XA | XA | | | | BODY<br>9L6788 11083 | | EA | 1 | 1 |
| 40 | 61 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 3020-01-024-2915 | GEAR<br>4N429 11083 | | EA | 1 | 1 |
| 40 | 62 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-01-068- 9780 | KEY<br>4N3779 11083 | | EA | 1 | 1 |
| 40 | 63 | PAHZZ | PAFFF | PAHZZ | PAHZZ | D | .009 | 2910-01-107-2419 | CAMSHAFT<br>4N4313 11083 | | EA | 1 | 1 |
| 40 | 64 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .009 | 3040-01-148-8880 | HOUSING ASSY<br>8N1570 11083 | | EA | 1 | 1 |
| 40 | 65 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 5315-01-129-6772 | PIN, SPRING<br>8N984 11083 | | EA | 6 | 6 |
| 40 | 66 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .009 | 2910-00-033-2200 | VALVE ASSY<br>1P2298 11083 | | EA | 1 | 1 |
| 40 | 67 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5307-01-103-3673 | STUD<br>4N5481 11083 | | EA | 1 | 1 |
| 40 | 68 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 5315-01-068-9711 | PIN, SPRING<br>4N2333 11083 | | EA | 1 | 2 |
| 40 | 69 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-01-069-1410 | DOWEL<br>4N1826 11083 | | EA | 1 | 2 |
| 40 | 70 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-843-7194 | PACKING, PREFORMED, P/O KIT P/N 6N1133<br>2D6392 11083 | | EA | 1 | 2 |
| 40 | 71 | XA | XA | XA | XB | | | | HOUSING<br>4N256 11083 | | EA | 1 | 1 |
| 40 | 72 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3110-01-062-0950 | BEARING<br>6N1078 11083 | | EA | 1 | 1 |
| 40 | 73 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3110-01-062-6770 | BEARING<br>4N3711 11083 | | EA | 1 | 1 |
| 40 | 74 | XA | XA | XA | XA | | | | HOUSING, FUEL INJECTION<br>4N145 11083 | | EA | 1 | 1 |

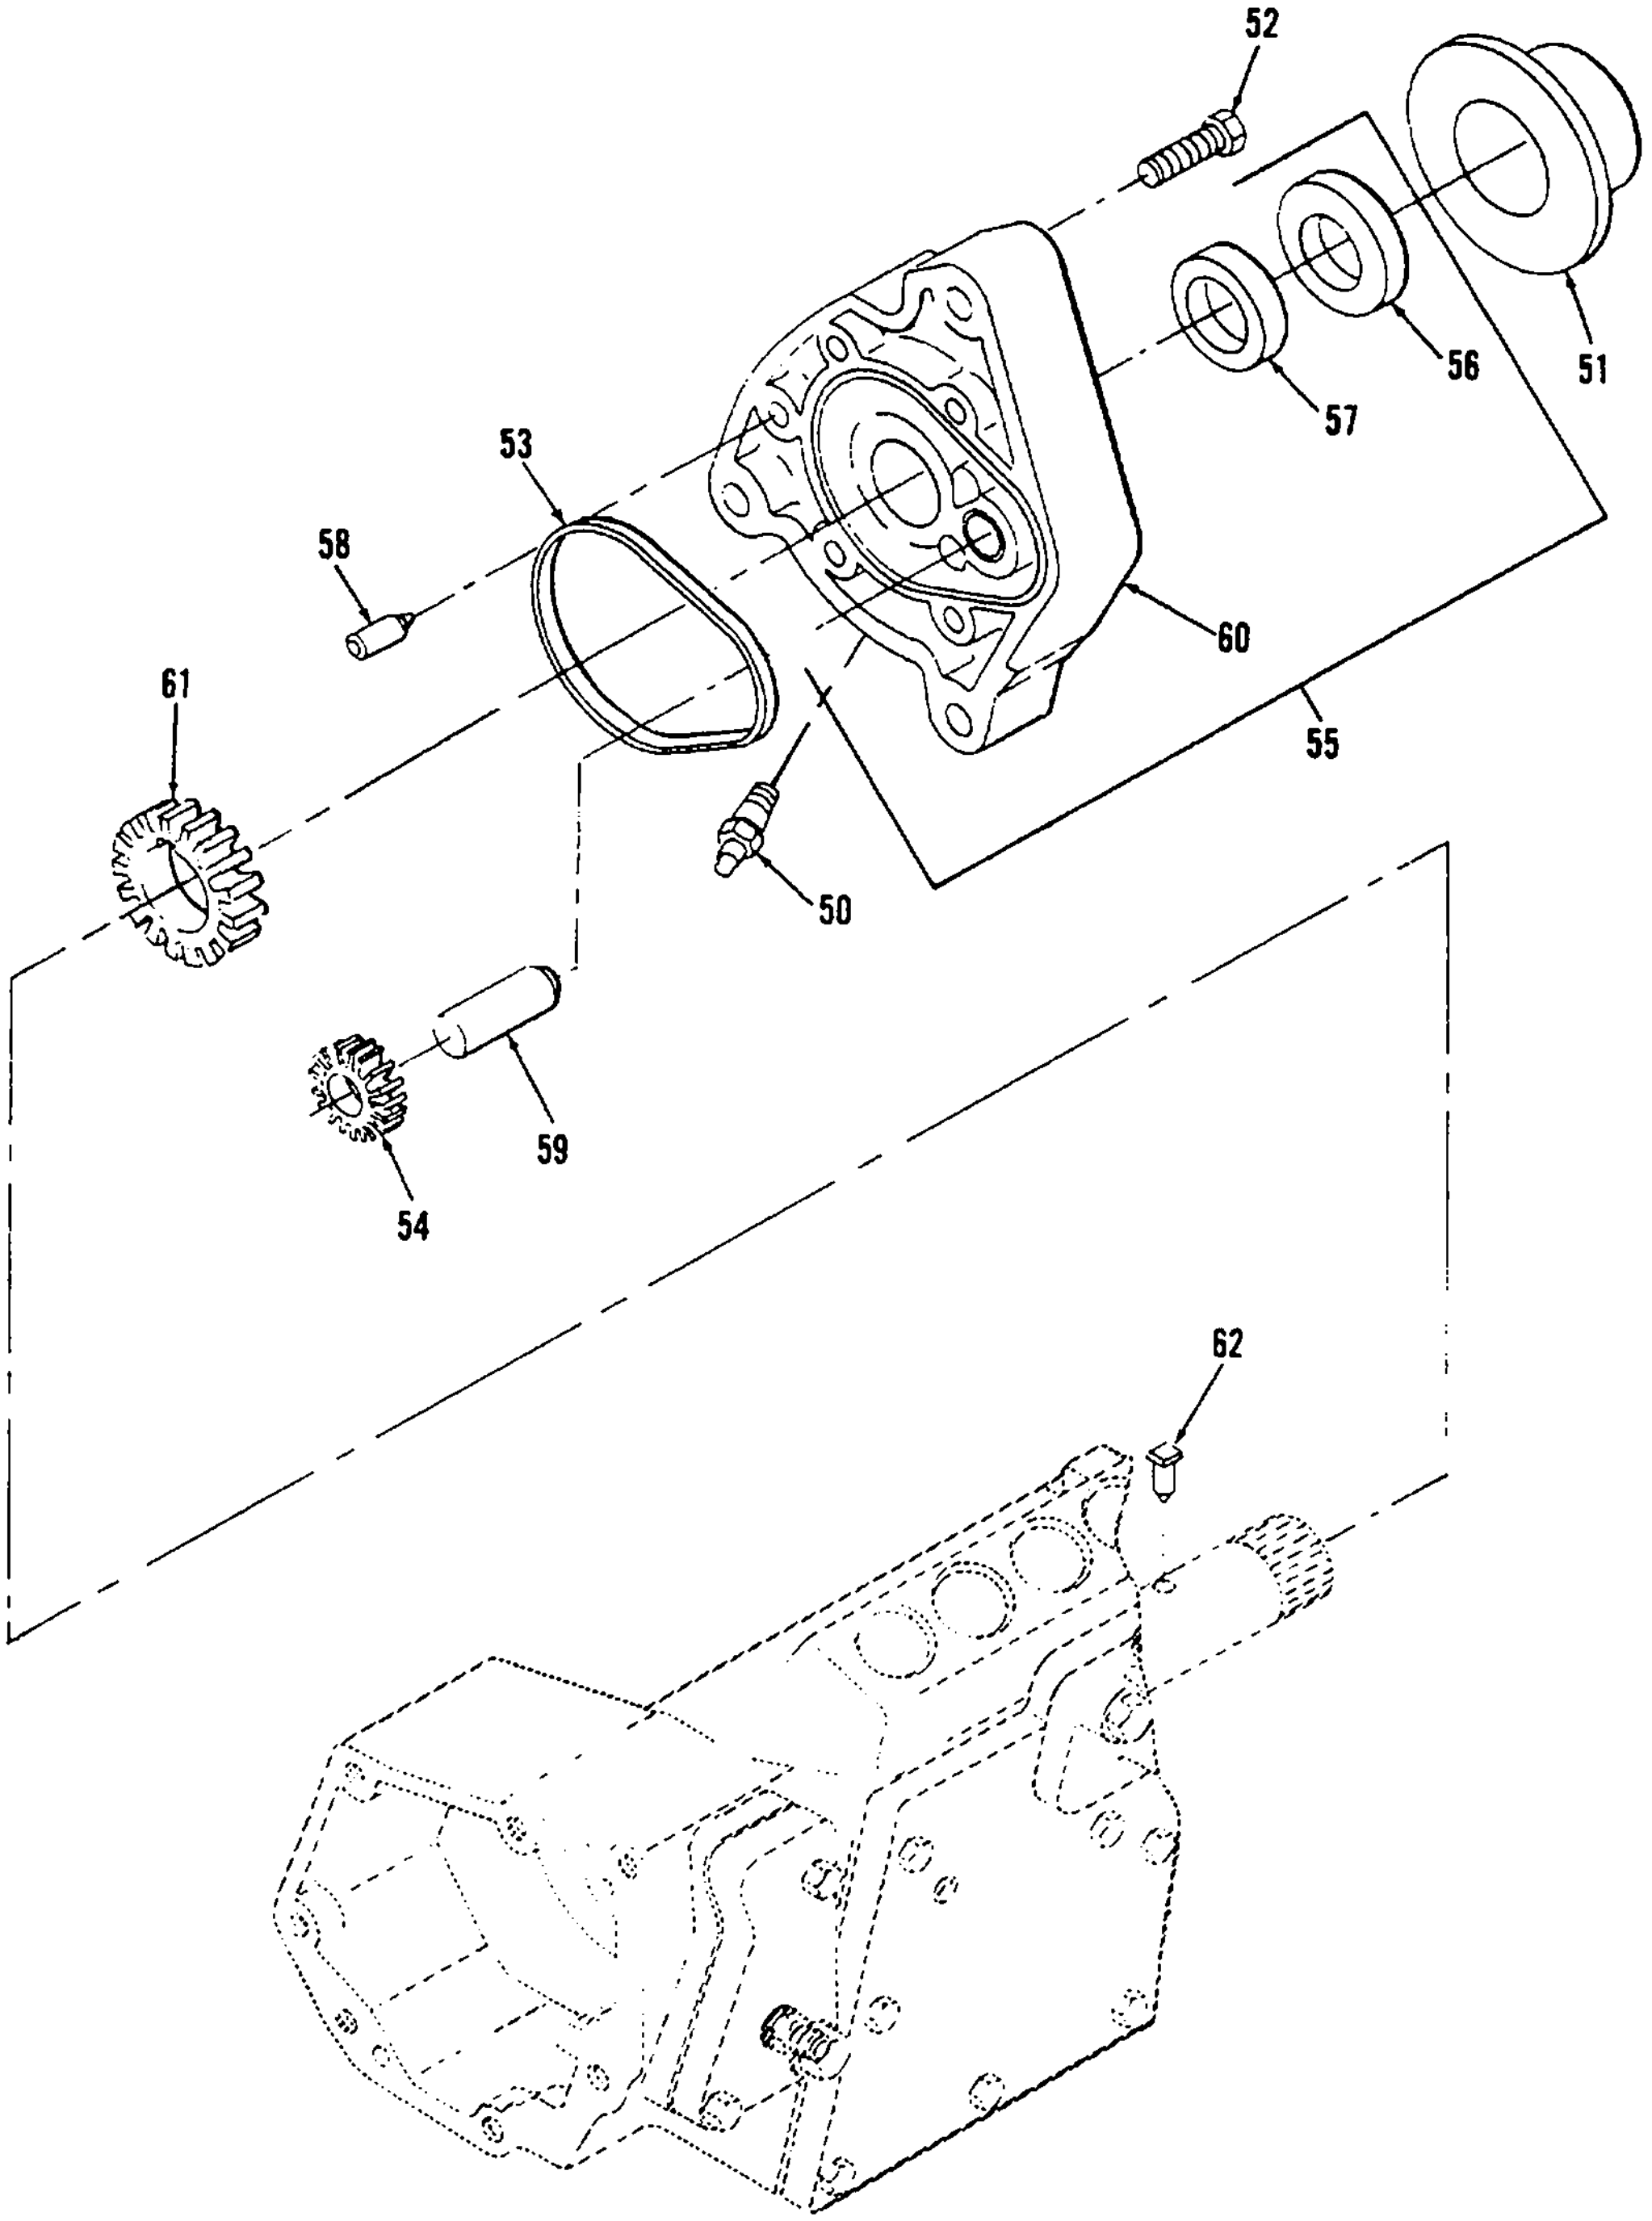
52
51
56
57
53
58
60
55
61
50
59
54
62

Figure 40. Fuel Injection Pump (Sheet 4 of 4)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 05 - FUEL SYSTEM | | | | |
| 41 | | | | | | | | | FUEL INJECTION VALVES AND LINES | | | | |
| 41 | 1 | AFF | AFF | AHH | AHH | | | | VALVE ASSY, FUEL INJECTION<br>8N4698 | 11083 | EA | 6 | 6 |
| 41 | 2 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .008 | 2910-01-125-9799 | BODY ASSY, FUEL INJECTION<br>7N2626 | 11083 | EA | 6 | 6 |
| 41 | 3 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2910-00-477-3439 | BODY<br>8S2389 | 11083 | EA | 6 | 6 |
| 41 | 4 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-00-363-9320 | NUT<br>5H7225 | 11083 | EA | 6 | 6 |
| 41 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 2910-01-125-9825 | NOZZLE ASSY<br>8N4694 | 11083 | EA | 6 | 6 |
| 41 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-198-6169 | PACKING, PREPORMED,<br>P/O KIT P/N 5P8766<br>5B3718 | 11083 | EA | 6 | 6 |
| 41 | 7 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-333-5032 | SEAL ASSY, FUEL VALVE.<br>P/O KIT P/N 5P8766<br>6F1069 | 11083 | EA | 6 | 6 |
| 41 | 8 | AFF | AFF | AHH | AHH | | | | LINES, FUEL INJECTION (BASIC)<br>8N9616 | 11083 | EA | 1 | 1 |
| 41 | 9 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5305-01-131 -5030 | SCREW ASSY, MACHINE<br>6H9954 | 11083 | EA | 14 | 14 |
| 41 | 10 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5340-01-116-1312 | CLAMP<br>6N6403 | 11083 | EA | 11 | 11 |
| 41 | 11 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5340-01-116-3799 | CLAMP<br>6N6404 | 11083 | EA | 11 | 11 |
| 41 | 12 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5340-01-130-1964 | CLAMP ASSY<br>7N3181 | 11083 | EA | 1 | |
| 41 | 13 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5340-01-129-7839 | CLAMP<br>8N9809 | 11083 | EA | 2 | 2 |
| 41 | 14 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5340-01-130-1963 | CLAMP<br>8N9810 | 11083 | EA | 2 | 2 |
| 41 | 15 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .005 | 4710-01-094 | LINE ASSY, FUEL -1807<br>INJECTION (LINE 1)<br>7N2871 | 11083 | EA | 1 | 1 |
| 41 | 16 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .005 | 4710-01-093 | LINE ASSY, FUEL -7440<br>INJECTION (LINE 2)<br>7N2872 | 11083 | EA | 1 | 1 |
| 41 | 17 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .005 | 4710-01-129 | LINE ASSY, FUEL -8085<br>INJECTION (LINE 3)<br>8N9733 | 11083 | EA | 1 | 1 |
| 41 | 18 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .005 | 4710-01-094 | LINE ASSY, FUEL -1963<br>INJECTION (LINE 4)<br>7N2874 | 11083 | EA | 1 | 1 |
| 41 | 19 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .005 | 4710-01-128 | LINE ASSY, FUEL -4739<br>INJECTION (LINE 5)<br>8N9735 | 11083 | EA | 1 | 1 |
| 41 | 20 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .005 | 4710-01-128 | LINE ASSY, FUEL -4740<br>INJECTION (LINE 6)<br>8N9736 | 11083 | EA | 1 | 1 |

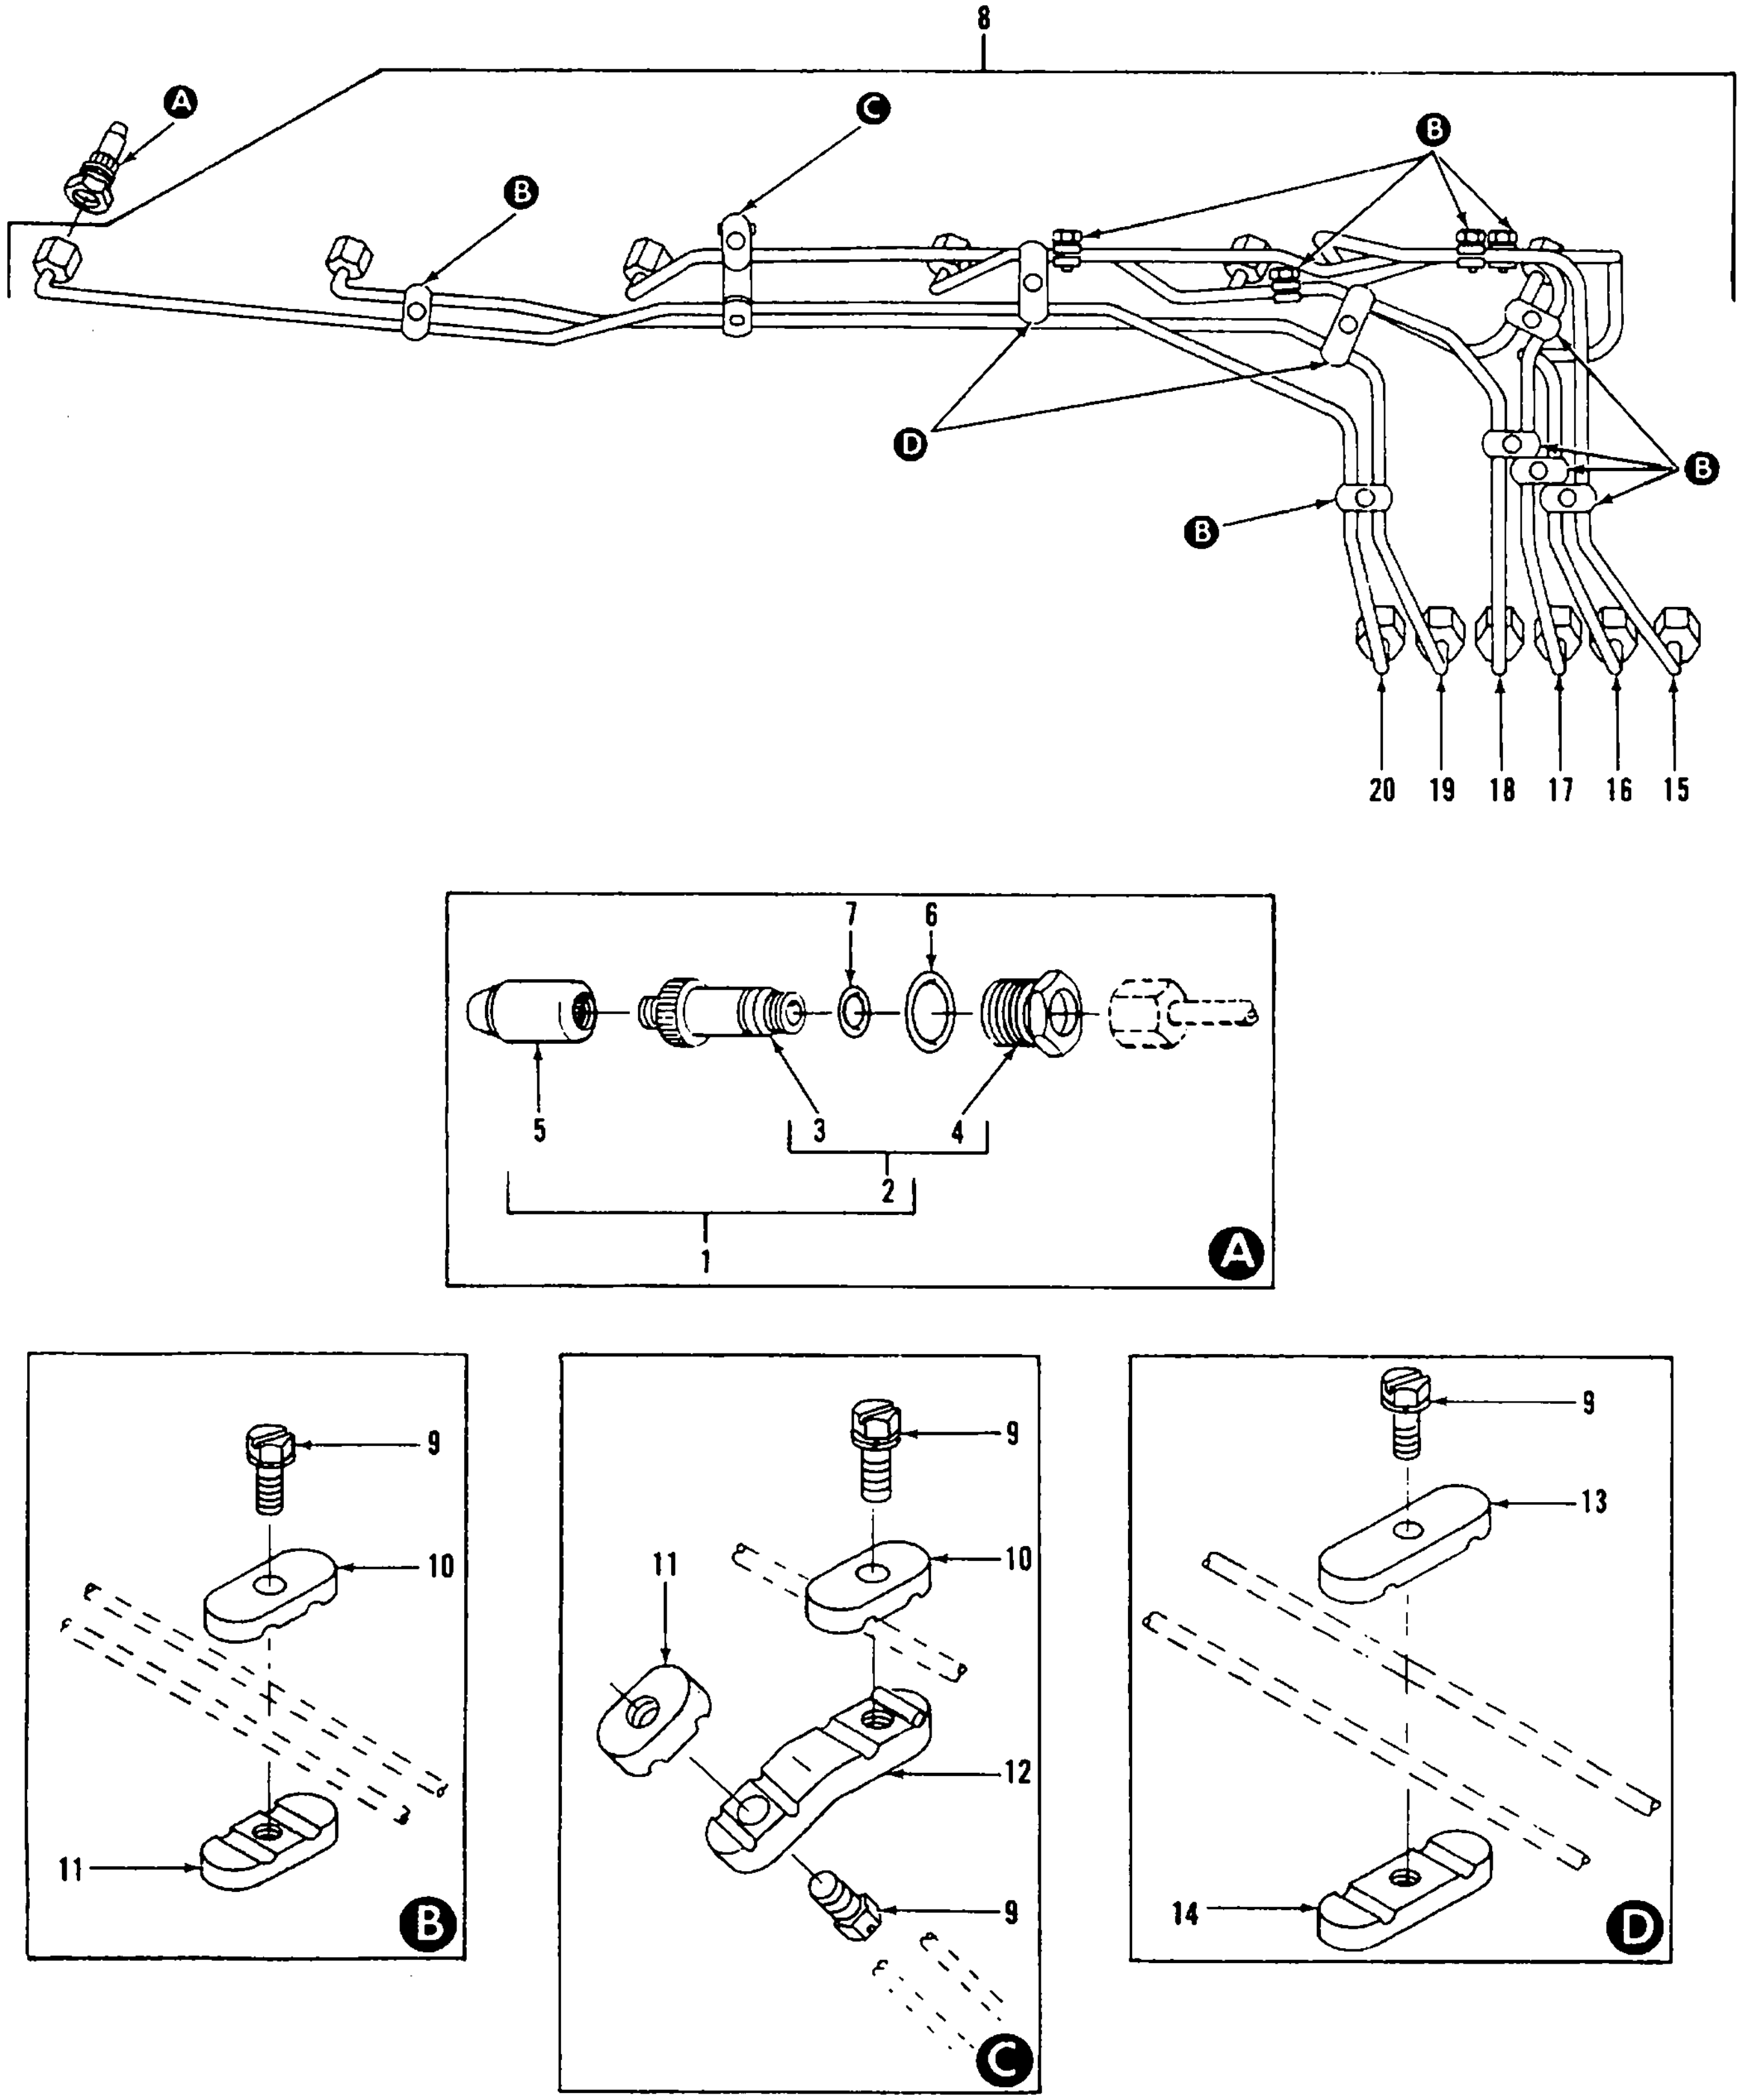
8
A
C
B
B
D
B
B
20
19
18
17
16
15
7
6
5
3
4
2
1
A
9
10
11
B
9
10
11
12
9
C
9
13
14
D

Figure 41. Fuel Injection Valves and Lines

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 05 - FUEL SYSTEM | | | | |
| 42 | | | | | | | | | FILLER NECK AND CAP | | | | |
| 42 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-908-6294 | CLAMP, HOSE<br>MS35842-16 | <br>96906 | EA | 2 | 4 |
| 42 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .007 | 4720-00-209-1563 | HOSE, PREFORMED<br>70-4163 | <br>30554 | EA | 1 | 1 |
| 42 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-038-3143 | SCREW AND WASHER<br>69-662-51<br>61-101041-40-0142B-0542B | <br>30554<br>78189 | EA | 6 | 24 |
| 42 | 4 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-094-3421 | NUT AND WASHER<br>69-561-4<br>511-101800-00 | <br>30554<br>78189 | EA | 6 | 95 |
| 42 | 5 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .027 | 2910-00-141-9758 | CAP, FUEL TANK<br>MS35645-1 | <br>96906 | EA | 1 | 1 |
| 42 | 6 | PBOZZ | PAOZZ | PAOZZ | PAOZZ | D | .003 | 2910-00-752-9138 | TUBE, FILLER<br>MS90908-1 | <br>96906 | EA | 1 | 1 |
| 42 | 7 | XB | XB | XB | XB | | | | FILLER NECK, FUEL<br>70-4053 | <br>30554 | EA | 1 | 1 |
| 42 | 8 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .030 | 5330-00-213-8856 | GASKET<br>70-4166 | <br>30554 | EA | 1 | 1 |

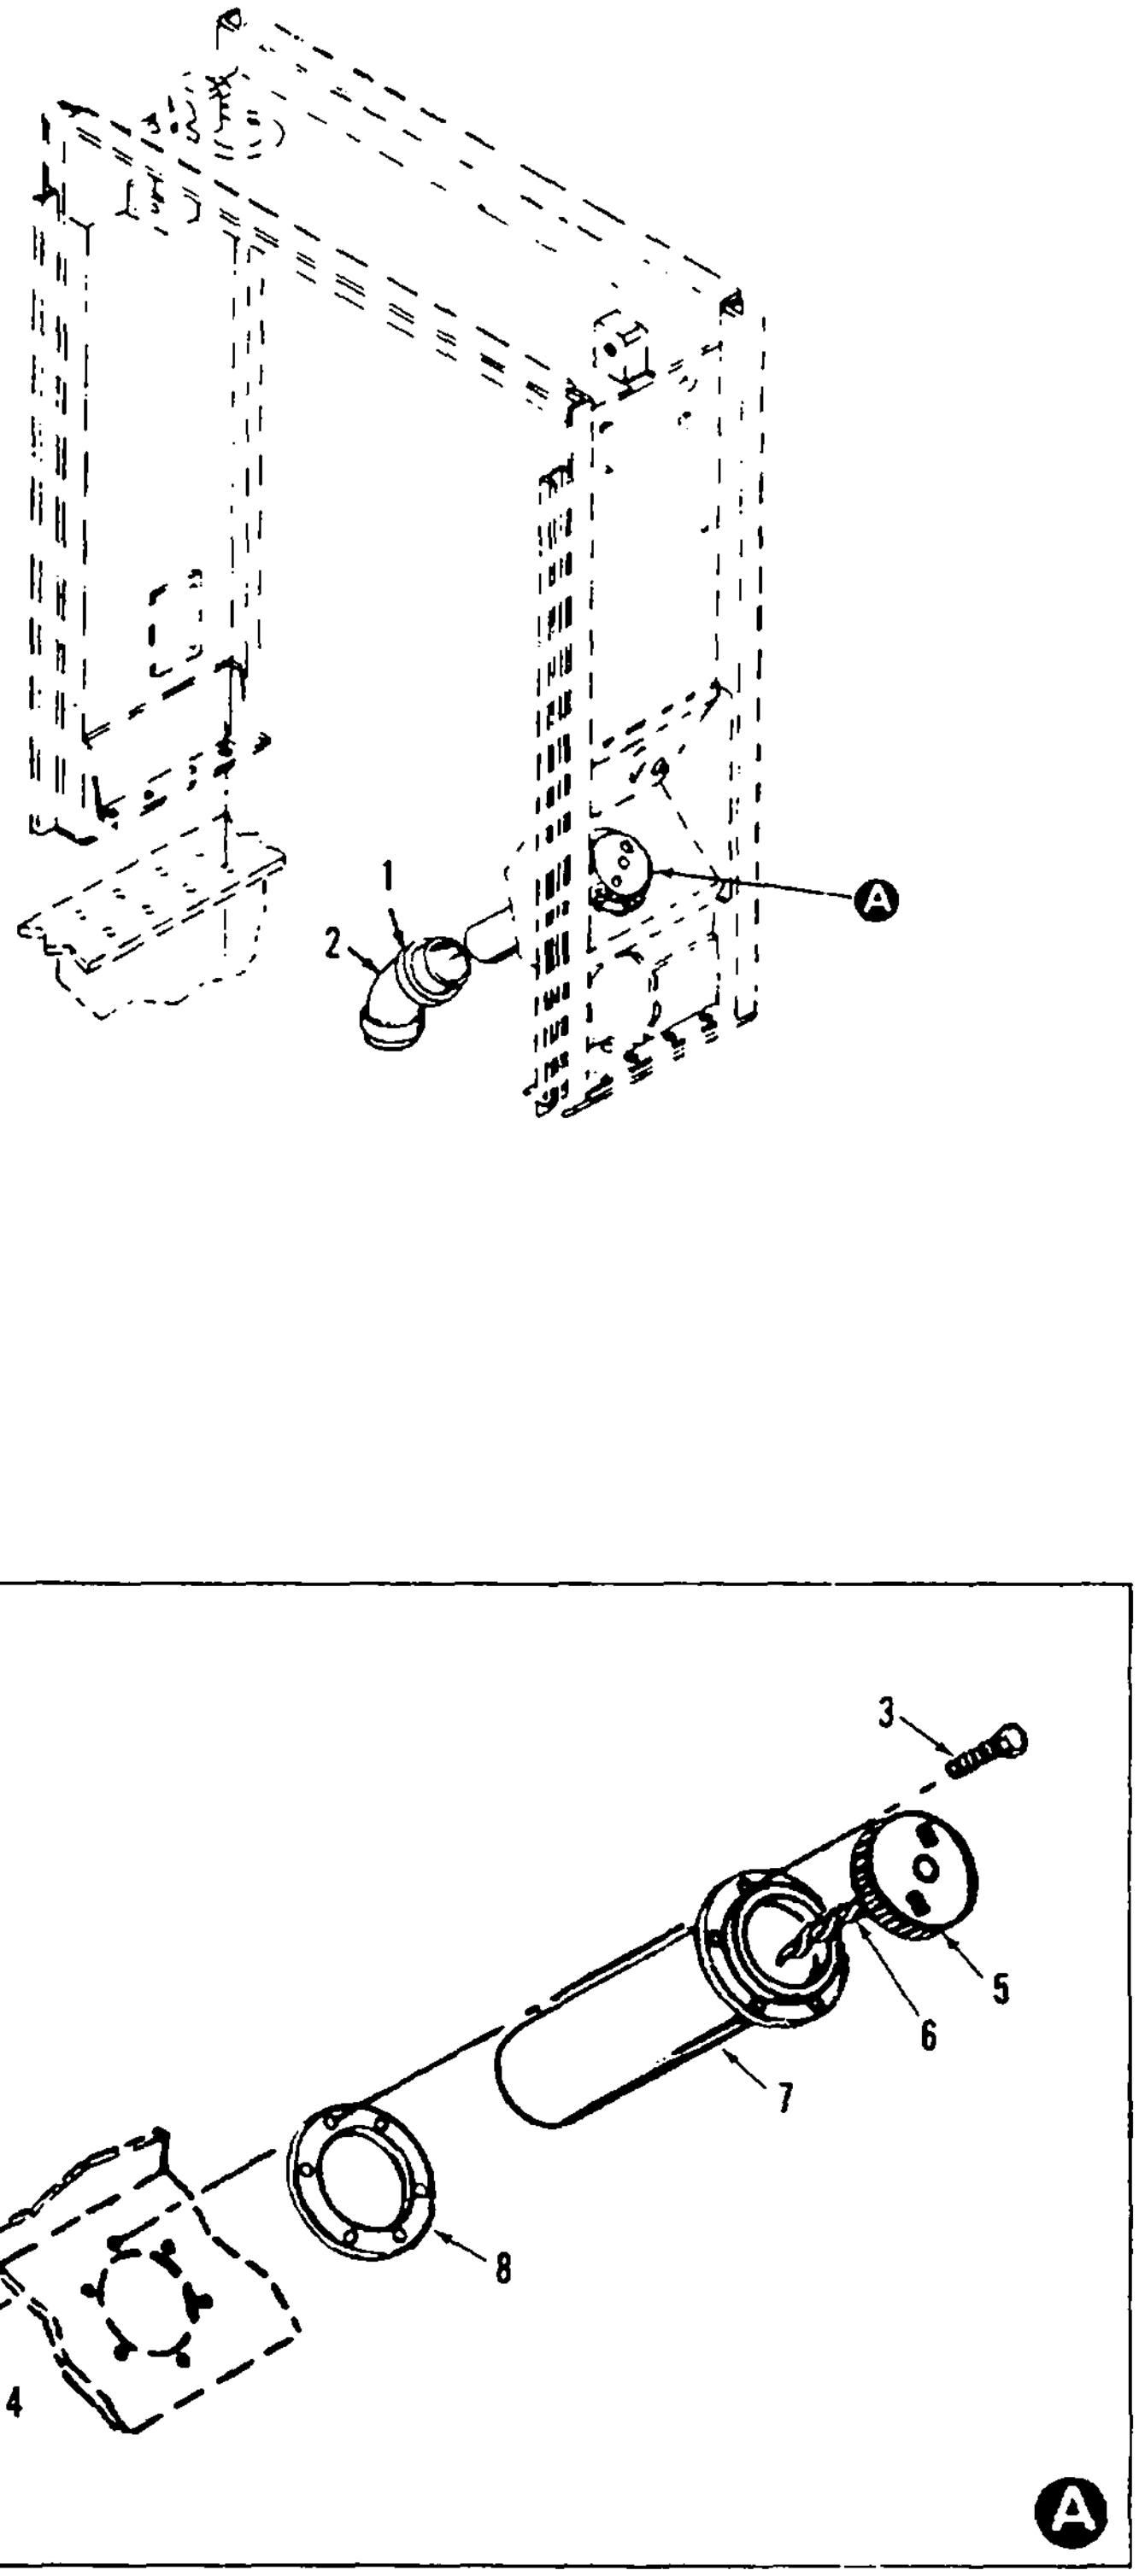

Figure 42. Filler Neck and Cap

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 06 - EXHAUST AND BREATHER SYSTEM | | | | |
| 43 | | | | | | | | | EXHAUST AND BREATHER SYSTEM | | | | |
| 43 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-071-2070 | SCREW, HEX HEAD<br>MS90728-114 96906 | | EA | 8 | 16 |
| 43 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-768-0318 | NUT, PLAIN HEX<br>MS51967-14 96906 | | EA | 8 | 8 |
| 43 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-584-5272 | WASHER, LOCK<br>MS35338-48 96906 | | EA | 8 | 26 |
| 43 | 4 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 4720-00-209-1568 | HOSE ASSY, METAL<br>71-4631 30554 | | EA | 1 | 1 |
| 43 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .030 | 5330-00-216-8375 | GASKET<br>71-4624 30554 | | EA | 2 | 2 |
| 43 | 6 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5306-00-225-8497 | SCREW, HEX HEAD<br>MS90725-32 96906 | | EA | 1 | 27 |
| 43 | 7 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5310-00-245-3424 | NUT, SELF-LOCKING<br>MS17829-5C 96906 | | EA | 2 | 27 |
| 43 | 8 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-081-4219 | WASHER, FLAT<br>MS27183-12 96906 | | EA | 2 | 62 |
| 43 | 9 | PAOZZ | PAOZZ | PAHZZ | PAHZZ | | .010 | 5340-01-170-4494 | STRAP, RETAINING<br>71-4376 30554 | | EA | 1 | 1 |
| 43 | 10 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 4730-00-908-6294 | CLAMP<br>MS35842-16 96906 | | EA | 2 | 4 |
| 43 | 11 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-068 -0500 | SCREW, HEX HEAD<br>MS90725-3 96906 | | EA | 2 | 24 |
| 43 | 12 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK<br>MS35338-44 96906 | | EA | 2 | 154 |
| 43 | 13 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 96906 | | EA | 2 | 252 |
| 43 | 14 | XB | XB | XB | XB | | | | SUPPORT<br>70-4325 30554 | | EA | 1 | 1 |
| 43 | 15 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5315-00-236-8362 | PIN, COTTER<br>67944 55284 | | EA | 1 | 1 |
| 43 | 16 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-983-8483 | WASHER, FLAT<br>MS27183-5 96906 | | EA | 1 | 73 |
| 43 | 17 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .005 | 2990-00-089-2079 | CAP, EXHAUST<br>70-4203 30554 | | EA | 1 | 1 |
| 43 | 18 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-068-0502 | SCREW, HEX HEAD<br>MS90725-6 96906 | | EA | 4 | 24 |
| 43 | 19 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK<br>MS35338-44 96906 | | EA | 4 | 154 |
| 43 | 20 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5340-01-221-6005 | PLATE<br>71-4378 30554 | | EA | 4 | 1 |
| 43 | 21 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .030 | 5330-00-399-0242 | GASKET<br>71-4396 30554 | | EA | 1 | 1 |
| 43 | 22 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .009 | 2990-00-221-5810 | MUFFLER<br>71-4934 30554<br>2520 80672 | | EA | 1 | 1 |
| 43 | 23 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0501 | SCREW, HEX HEAD<br>MS90725-5 96906 | | EA | 1 | 114 |
| 43 | 24 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK<br>MS35338-44 96906 | | EA | 1 | 154 |
| 43 | 25 | XB | XB | XB | XB | | | | RAINSHIELD<br>71-4619 30554 | | EA | 1 | 1 |

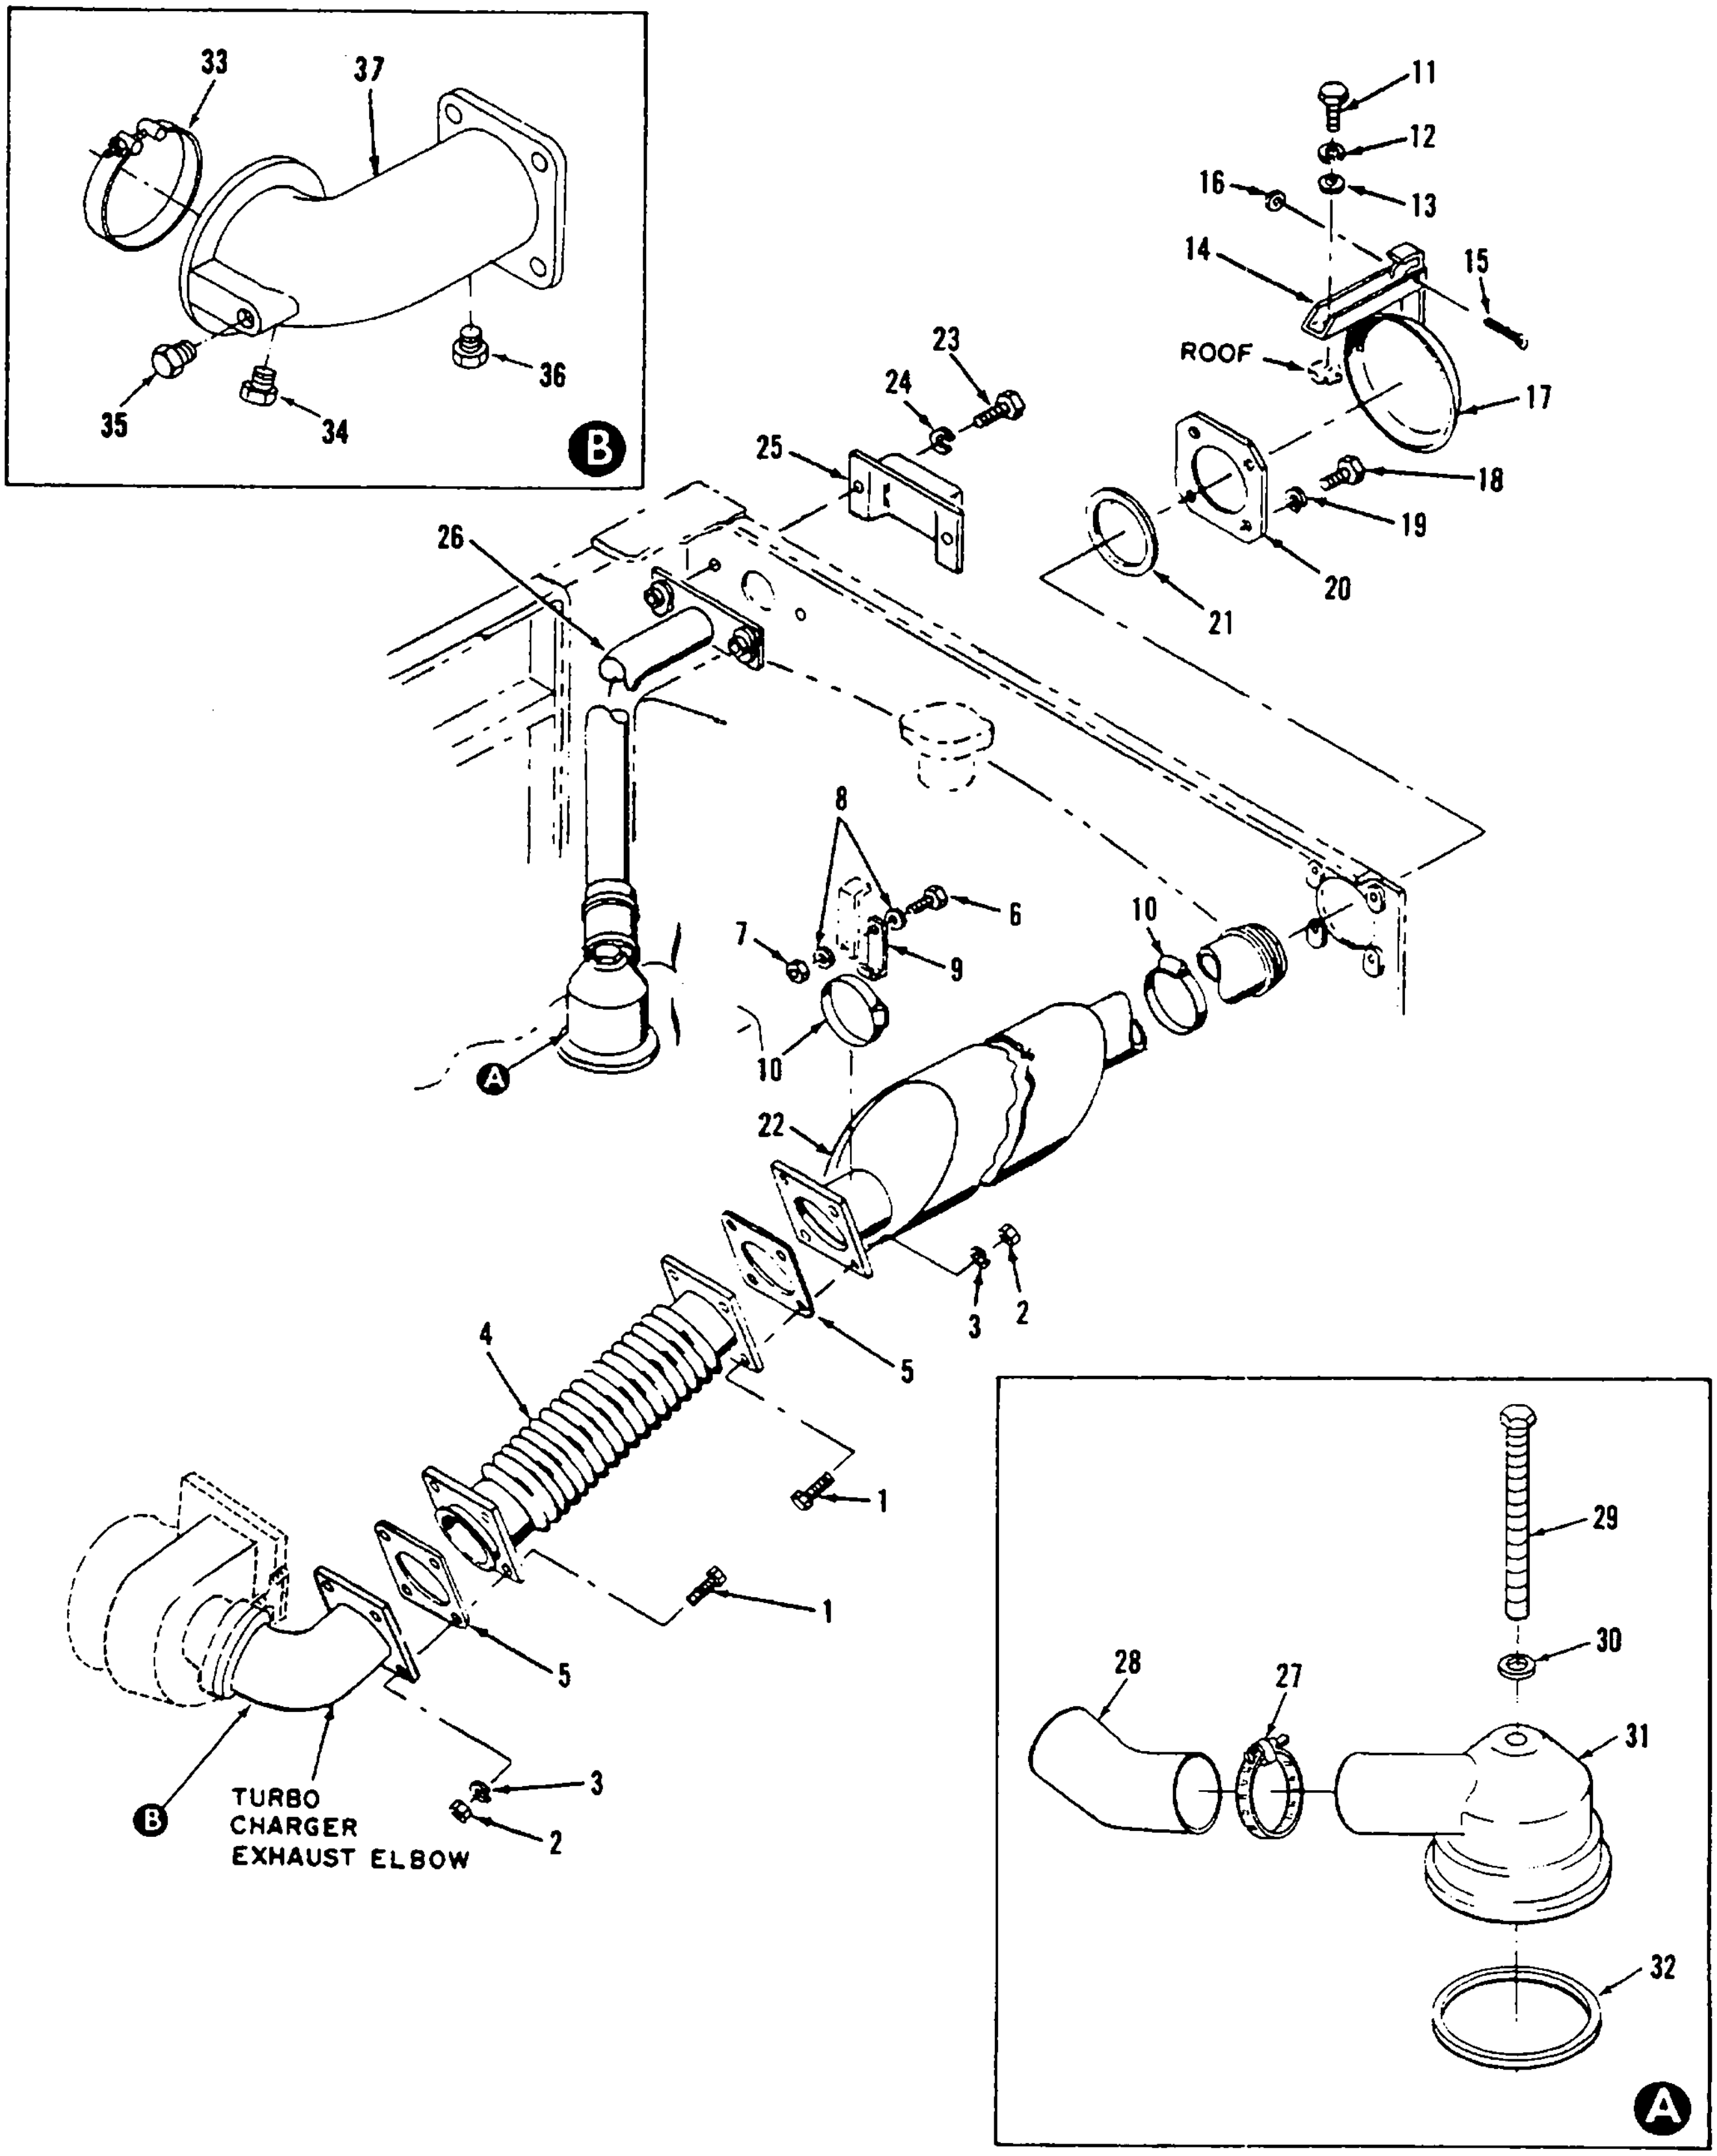
33
37
35
34
36
B
11
12
16
13
14
15
ROOF
17
23
24
25
18
19
20
21
26
8
6
7
9
10
10
A
22
3
2
4
5
1
1
5
TURBO
CHARGER
EXHAUST ELBOW
3
2
B
29
30
28
27
31
32
A

Figure 43. Exhaust and Breather System

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 06 - EXHAUST AND BREATHER SYSTEM - CONTINUED | | | | |
| 43 | | | | | | | | | EXHAUST AND BREATHER SYSTEM - CONTINUED | | | | |
| 43 | 26 | XB | XB | XB | XB | | | | BREATHER, CRANKCASE<br>71-4616 30554 | | EA | 1 | 1 |
| 43 | 27 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-908-3193 | CLAMP<br>21024 | 08484 | EA | 1 | 1 |
| 43 | 28 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 4720-00-138-3895 | HOSE<br>8S780 | 11083 | EA | 1 | 1 |
| 43 | 29 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-472-5282 | BOLT, HEX<br>3H3243 | 11083 | EA | 1 | 1 |
| 43 | 30 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-138-4426 | WASHER, FLAT<br>4K9890<br>MS15795-572 | 11083<br>96906 | EA | 1 | 1 |
| 43 | 31 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 2815-00-192-8768 | BREATHER ASSY<br>85248 | 11083 | EA | 1 | 1 |
| 43 | 32 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-00-690-8104 | SEAL, P/O KIT P/N 5P8766<br>6L5359 | 11083 | EA | 1 | 1 |
| 43 | 33 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5340-00-135-1074 | CLAMP<br>5L7631 | 11083 | EA | 1 | 1 |
| 43 | 34 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 4730-00-278-3462 | PLUG<br>MS27769-2 | 96906 | EA | 1 | 1 |
| 43 | 35 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5340-00-762-4115 | PLUG<br>9B887 | 11083 | EA | 1 | 1 |
| 43 | 36 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 4730-00-011-2578 | PLUG<br>5B7890 | 11083 | EA | 1 | 3 |
| 43 | 37 | PAOZZ | PAFZZ | PAOZZ | PAFZZ | D | .008 | 2815-00-135-2333 | ELBOW<br>71-4441 | 30554 | EA | 1 | 1 |

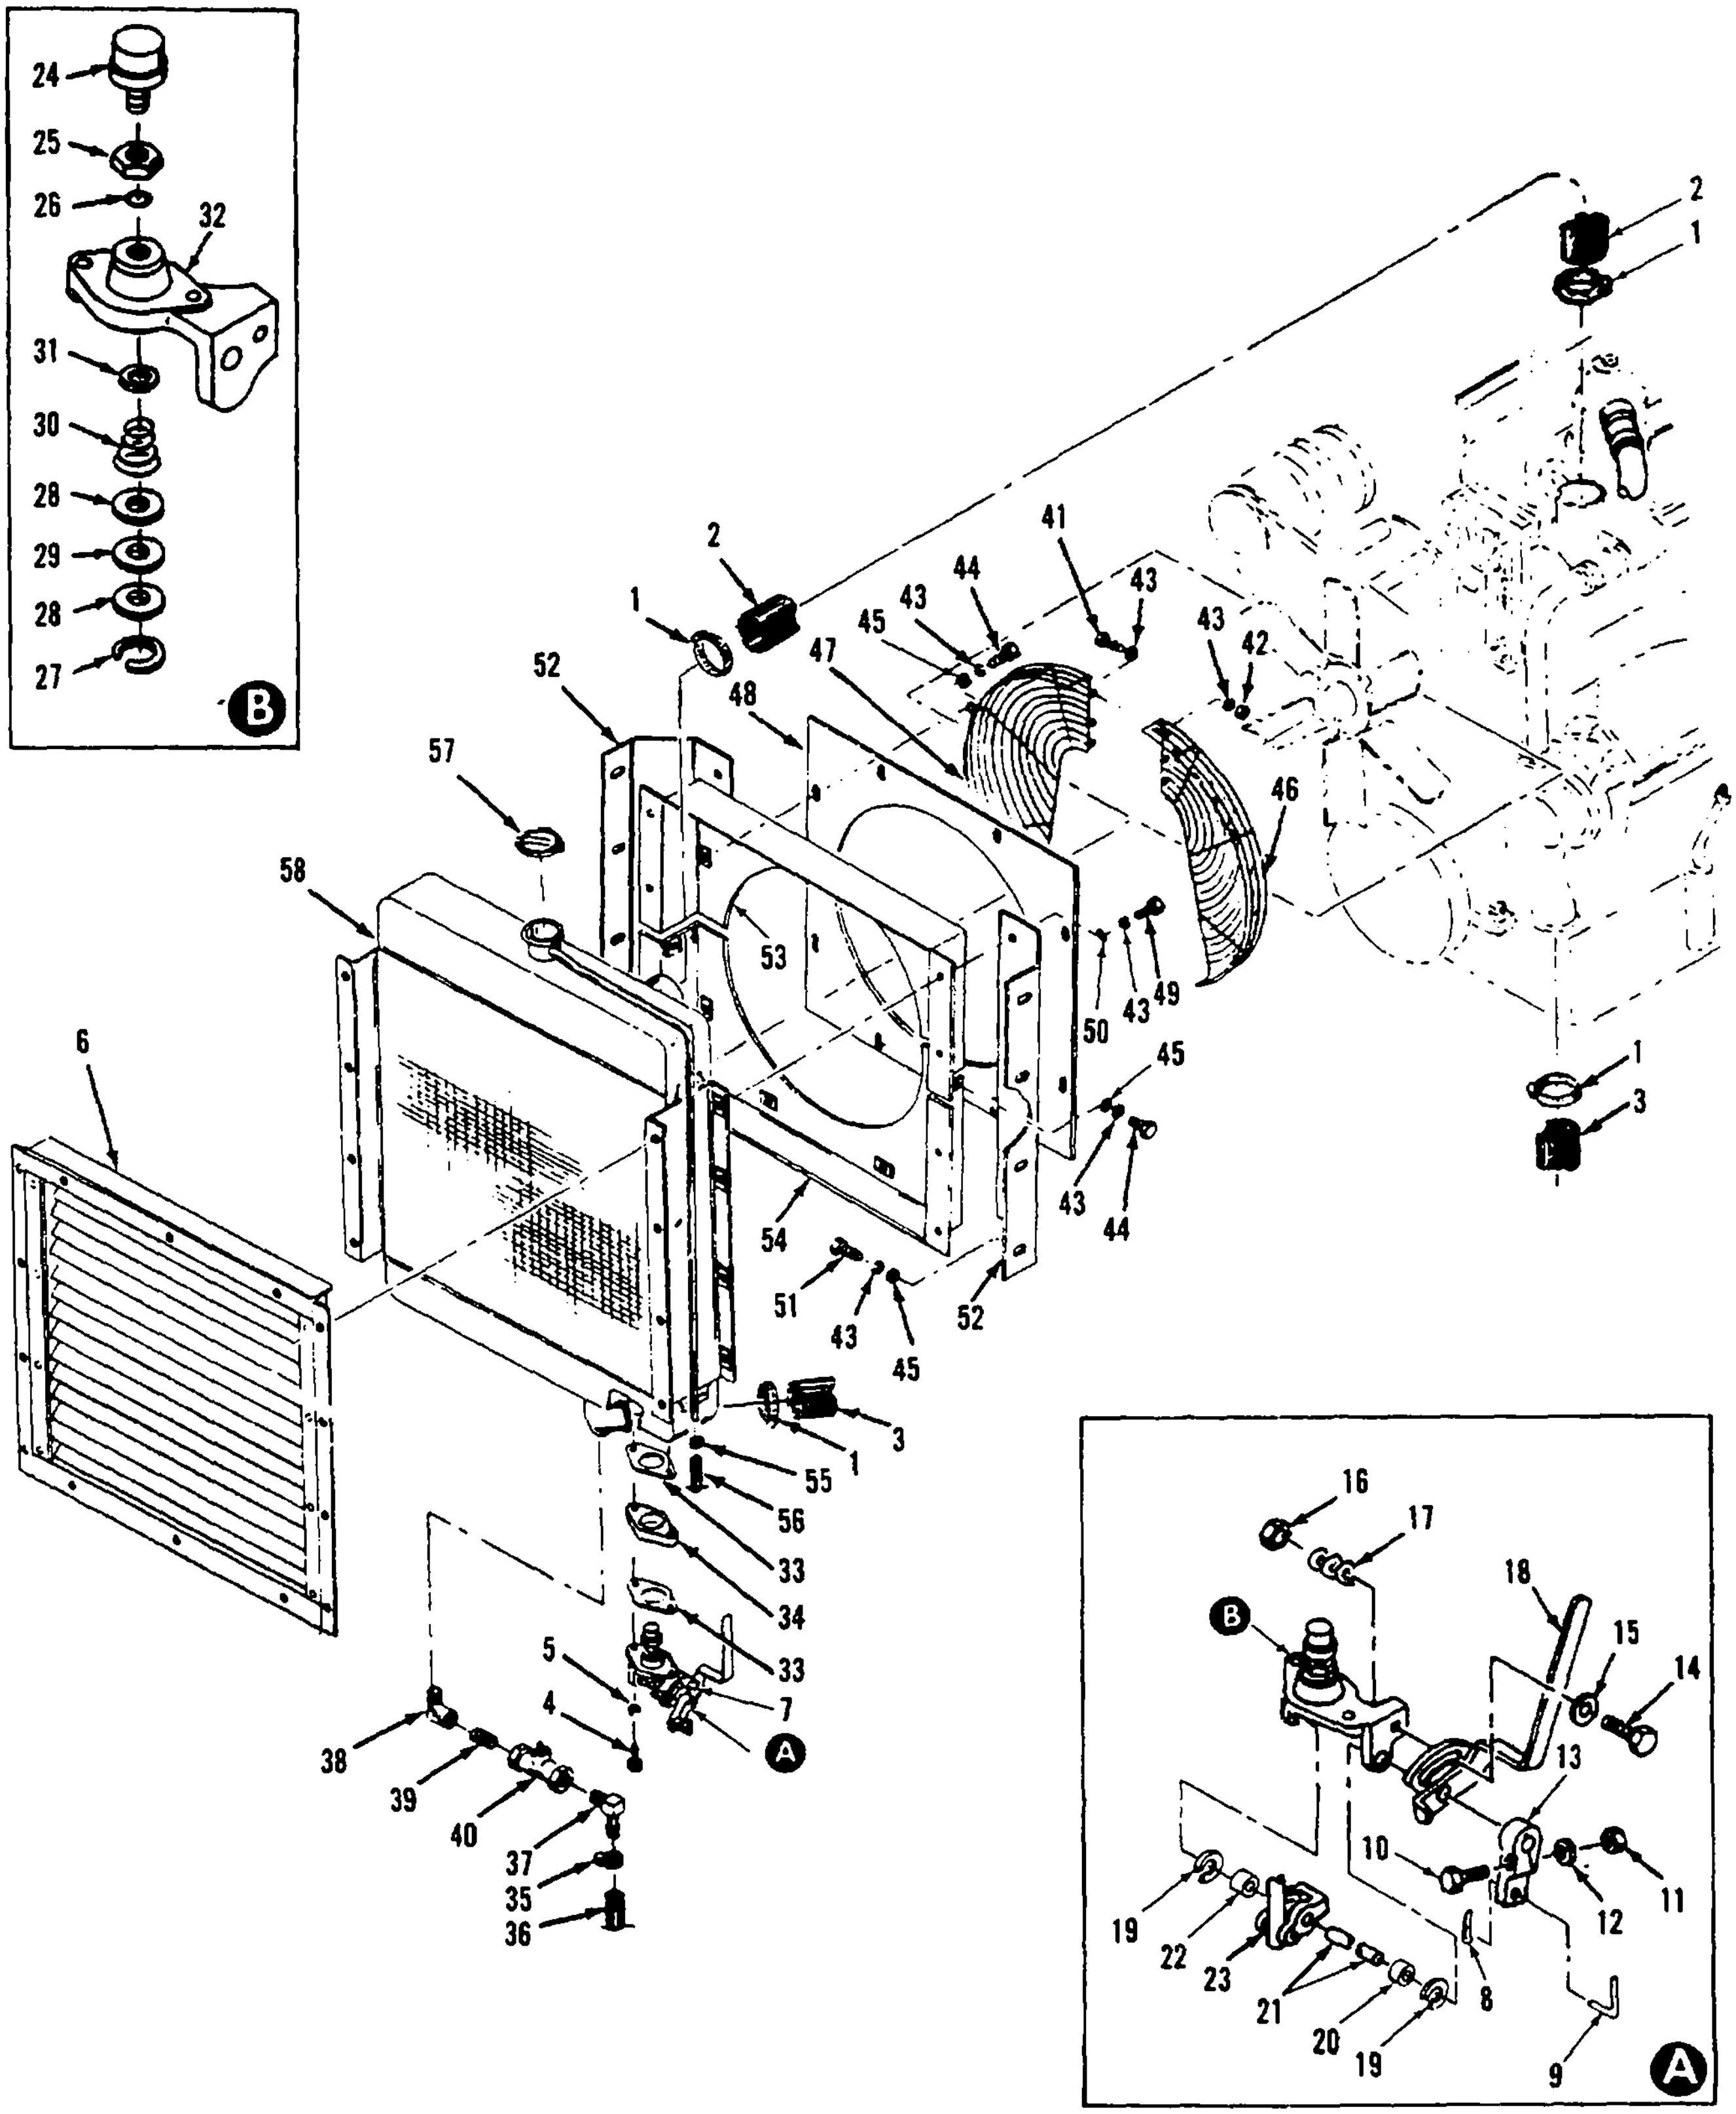
24
25
26
32
31
30
28
29
28
27
B
2
1
2
1
41
44
43
43
45
47
43
42
48
52
57
46
58
53
50
43
49
6
45
43
44
54
51
43
45
52
1
3
3
1
55
56
33
34
33
5
7
4
A
38
39
40
37
35
36
16
17
18
B
15
14
13
10
12
11
19
22
23
21
20
19
8
9
A

Figure 44. Radiator and Shutter Assembly and Related Parts

# SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO | (1) b ITEM NO | (2) SMR CODE a ARMY | (2) b AIR FORCE | (2) c NAVY | (2) d USMC | (3) USMC a SSI | (3) b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 07 - COOLING SYSTEM | | | | |
| 44 | | | | | | | | | RADIATOR AND SHUTTER ASSEMBLY AND RELATED PARTS | | | | |
| 44 | 1 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 4730-00-908-6292 | CLAMP, HOSE<br>MS35842-14 | 96906 | EA | 4 | 4 |
| 44 | 2 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | .070 | 4720-20-129-3135 | HOSE, UPPER RADIATOR<br>76-4122 | 30554 | EA | 1 | 1 |
| 44 | 3 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | .070 | 4720-01-129-9402 | HOSE, LOWER RADIATOR<br>76-4212 | 30554 | EA | 1 | 1 |
| 44 | 4 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-269-3218 | SCREW, HEX HEAD<br>MS90725-68 | 96906 | EA | 2 | 2 |
| 44 | 5 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-637-9541 | WASHER, LOCK<br>MS35338-46 | 96906 | EA | 2 | 40 |
| 44 | 6 | PAOZZ | PAOZZ | PAHZZ | PAHZZ | D | .010 | 2930-00-248-0802 | LOUVER ASSY<br>1G409<br>70-4092 | 96309<br>30554 | EA | 1 | 1 |
| 44 | 7 | XA | XA | XA | XA | | | | CONTROL ASSY<br>1G4091 | 96309 | EA | 1 | 1 |
| 44 | 8 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | | COTTER, PIN<br>1155 | 96309 | EA | 1 | 3 |
| 44 | 9 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 2930-00-388-9960 | ROD, ASSEMBLY<br>1G4094 | 96309 | EA | 1 | 1 |
| 44 | 10 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5303-00-988-7847 | SCREW<br>MS16995-86 | 96906 | EA | 1 | 1 |
| 44 | 11 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-655-6534 | NUT AND WASHER<br>69-5616<br>511-101800-50-532-4102 | 30554<br>78189 | EA | 1 | 1 |
| 44 | 12 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-533-9529 | WASHER, LOCK<br>1A588 | 96309 | EA | 1 | 1 |
| 44 | 13 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | | 2930-00-023-5568 | LEVER<br>A19 | 96309 | EA | 1 | 1 |
| 44 | 14 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-618-0709 | SCREW<br>1490 | 96309 | EA | 1 | 1 |
| 44 | 15 | PAOZZ | PAFZZ | PAPZZ | PAFZZ | D | .010 | 5310-01-335-7092 | WASHER<br>MS27183-11 | 96309 | EA | 1 | 1 |
| 44 | 16 | PAOZZ | PAFZZ | PAPZZ | PAFZZ | D | .008 | | NUT<br>1176 | 96309 | EA | 1 | 1 |
| 44 | 17 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .015 | | SPRING, FRICTION<br>13616 | 96309 | EA | 1 | 1 |
| 44 | 18 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 3040-01-216-2741 | LEVER<br>1G40905 | 21102 | EA | 1 | 1 |
| 44 | 19 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .013 | 5365-00-442-5845 | RETAINER<br>1A113 | 96309 | EA | 2 | 1 |
| 44 | 20 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 3120-00-379-5942 | BUSHING, SLEEVE<br>1A136 | 96309 | EA | 1 | 1 |
| 44 | 21 | XA | XA | XA | XA | | | | SHAFT<br>1G40906 | 96309 | EA | 1 | 1 |
| 44 | 22 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 3120-00-547-4349 | BUSHING<br>1028 | 96309 | EA | 1 | 1 |
| 44 | 23 | XA | XA | XA | XA | | | | YOKE ASSY<br>1107A | 96309 | EA | 1 | 1 |
| 44 | 24 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 2930-00-572-6148 | POWER ELEMENT<br>383 | 96309 | EA | 1 | 1 |

# SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO | b ITEM NO | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 07 - COOLING SYSTEM - CONTINUED | | | | |
| 44 | | | | | | | | | RADIATOR AND SHUTTER ASSEMBLY AND RELATED PARTS - CONTINUED | | | | |
| 44 | 25 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-860-0341 | NUT<br>3903 | 9630 | EA | 1 | 1 |
| 44 | 26 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-00-776-0580 | PACKING, PREFORMED<br>3906 | 96309 | EA | 1 | 1 |
| 44 | 27 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .013 | 5365-00-252-4746 | RING, RETAINER<br>3913 | 96309 | EA | 1 | 1 |
| 44 | 28 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-118-3015 | SEAT, SPRING<br>3912 | 96309 | EA | 2 | 2 |
| 44 | 29 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5310-00-854-4342 | WASHER, FLAT<br>3914 | 96309 | EA | 1 | 1 |
| 44 | 30 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .015 | 2930-00-776-0491 | SPRING<br>3910 | 96309 | EA | 1 | 1 |
| 44 | 31 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 2930-00-034-3802 | SEAT, SMALL<br>3911 | 96309 | EA | 1 | 1 |
| 44 | 32 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 6620-00-340-9303 | HOUSING, POWER ELEMENT<br>1G4092 | 96309 | EA | 1 | 1 |
| 44 | 33 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-00-251-4082 | GASKET<br>14803 | 96309 | EA | 2 | 2 |
| 44 | 34 | XB | XB | XB | XB | | | | PLATE, SPACER<br>71-4411 | 30554 | EA | 1 | 1 |
| 44 | 35 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 4730-00-908-3194 | CLAMP, HOSE<br>MS35842-11 | 96906 | EA | 2 | 2 |
| 44 | 36 | AFF | AFF | AFF | AFF | | | | HOSE, MFR FROM:<br>71-4802-03 | 30554 | EA | 1 | 1 |
| 44 | 36A | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .070 | 4720-00-937-1114 | HOSE<br>ZZH-428 | 81349 | FT | 2 | 2 |
| 44 | 37 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-209-1559 | ELBOW<br>71-4820<br>23916-8 | 30554<br>99103 | EA | 1 | 1 |
| 44 | 38 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-231-5598 | ELBOW<br>AN914-4 | 88044 | EA | 1 | 1 |
| 44 | 39 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-921-3612 | NIPPLE, CLOSE<br>MS51953-73 | 96906 | EA | 1 | 1 |
| 44 | 40 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4820-00-136-1085 | COCK, PLUG<br>69659<br>A4003 | 30554<br>16024 | EA | 1 | 1 |
| 44 | 41 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-225-3839 | SCREW, HEX HEAD<br>MS90725-8 | 96906 | EA | 3 | 35 |
| 44 | 42 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C | 96906 | EA | 3 | 167 |
| 44 | 43 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | 96906 | EA | 32 | 252 |
| 44 | 44 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-071-2072 | SCREW, HEX HEAD<br>MS90728-116 | 96906 | EA | 10 | 10 |
| 44 | 45 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5320-00-582-5965 | WASHER, LOCK<br>MS35338-44 | 96906 | EA | 18 | 154 |
| 44 | 46 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 6115-01-143-0350 | GUARD, FAN, LH<br>71-4571-01 | 30554 | EA | 1 | 1 |
| 44 | 47 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 2930-01-146-4187 | GUARD, FAN, RH<br>71-4571-02 | 30554 | EA | 1 | 1 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 07 - COOLING SYSTEM - CONTINUED | | | | |
| 44 | | | | | | | | | RADIATOR AND SHUTTER ASSEMBLY AND RELATED PARTS - CONTINUED | | | | |
| 44 | 48 | MOO | MOO | MOO | MOO | | | | PLATE, SHROUD<br>B4700 | <br>96309 | EA | 1 | 1 |
| 44 | 49 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0502 | SCREW, HEX HEAD<br>MS90725-6 | <br>96906 | EA | 8 | 118 |
| 44 | 50 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-407-9566 | WASHER, LOCK<br>MS35338-45 | <br>96906 | EA | 8 | 67 |
| 44 | 51 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-225-3840 | SCREW, HEX HEAD<br>MS90725-7 | <br>96906 | EA | 8 | 18 |
| 44 | 52 | MOO | MOO | MOO | MOO | | | | BRACKET, RADIATOR, SUPPORT<br>70-4332 | <br>30554 | EA | 2 | 2 |
| 44 | 53 | XB | XB | XB | XB | | | | FLANGE, SHROUD UPPER<br>X1817112T | <br>73540 | EA | 1 | 1 |
| 44 | 54 | XB | XB | XB | XB | | | | FLANGE, SHROUD LOWER<br>X1817112B | <br>73540 | EA | 1 | 1 |
| 44 | 55 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 4730-00-908-3195 | CLAMP, HOSE<br>MS35842-10 | <br>96906 | EA | 1 | 4 |
| 44 | 56 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .070 | 4720-00-533-2840 | HOSE<br>71-4801-01 | <br>30554 | EA | 1 | 1 |
| 44 | 57 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .035 | 2930-00-720-2677 | CAP, FILLER OPENING<br>MS35840-1 | <br>96906 | EA | 1 | 1 |
| 44 | 58 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | | .008 | 2930-00-191-8996 | RADIATOR<br>70-4088<br>X1817 | <br>30554<br>73540 | EA | 1 | 1 |

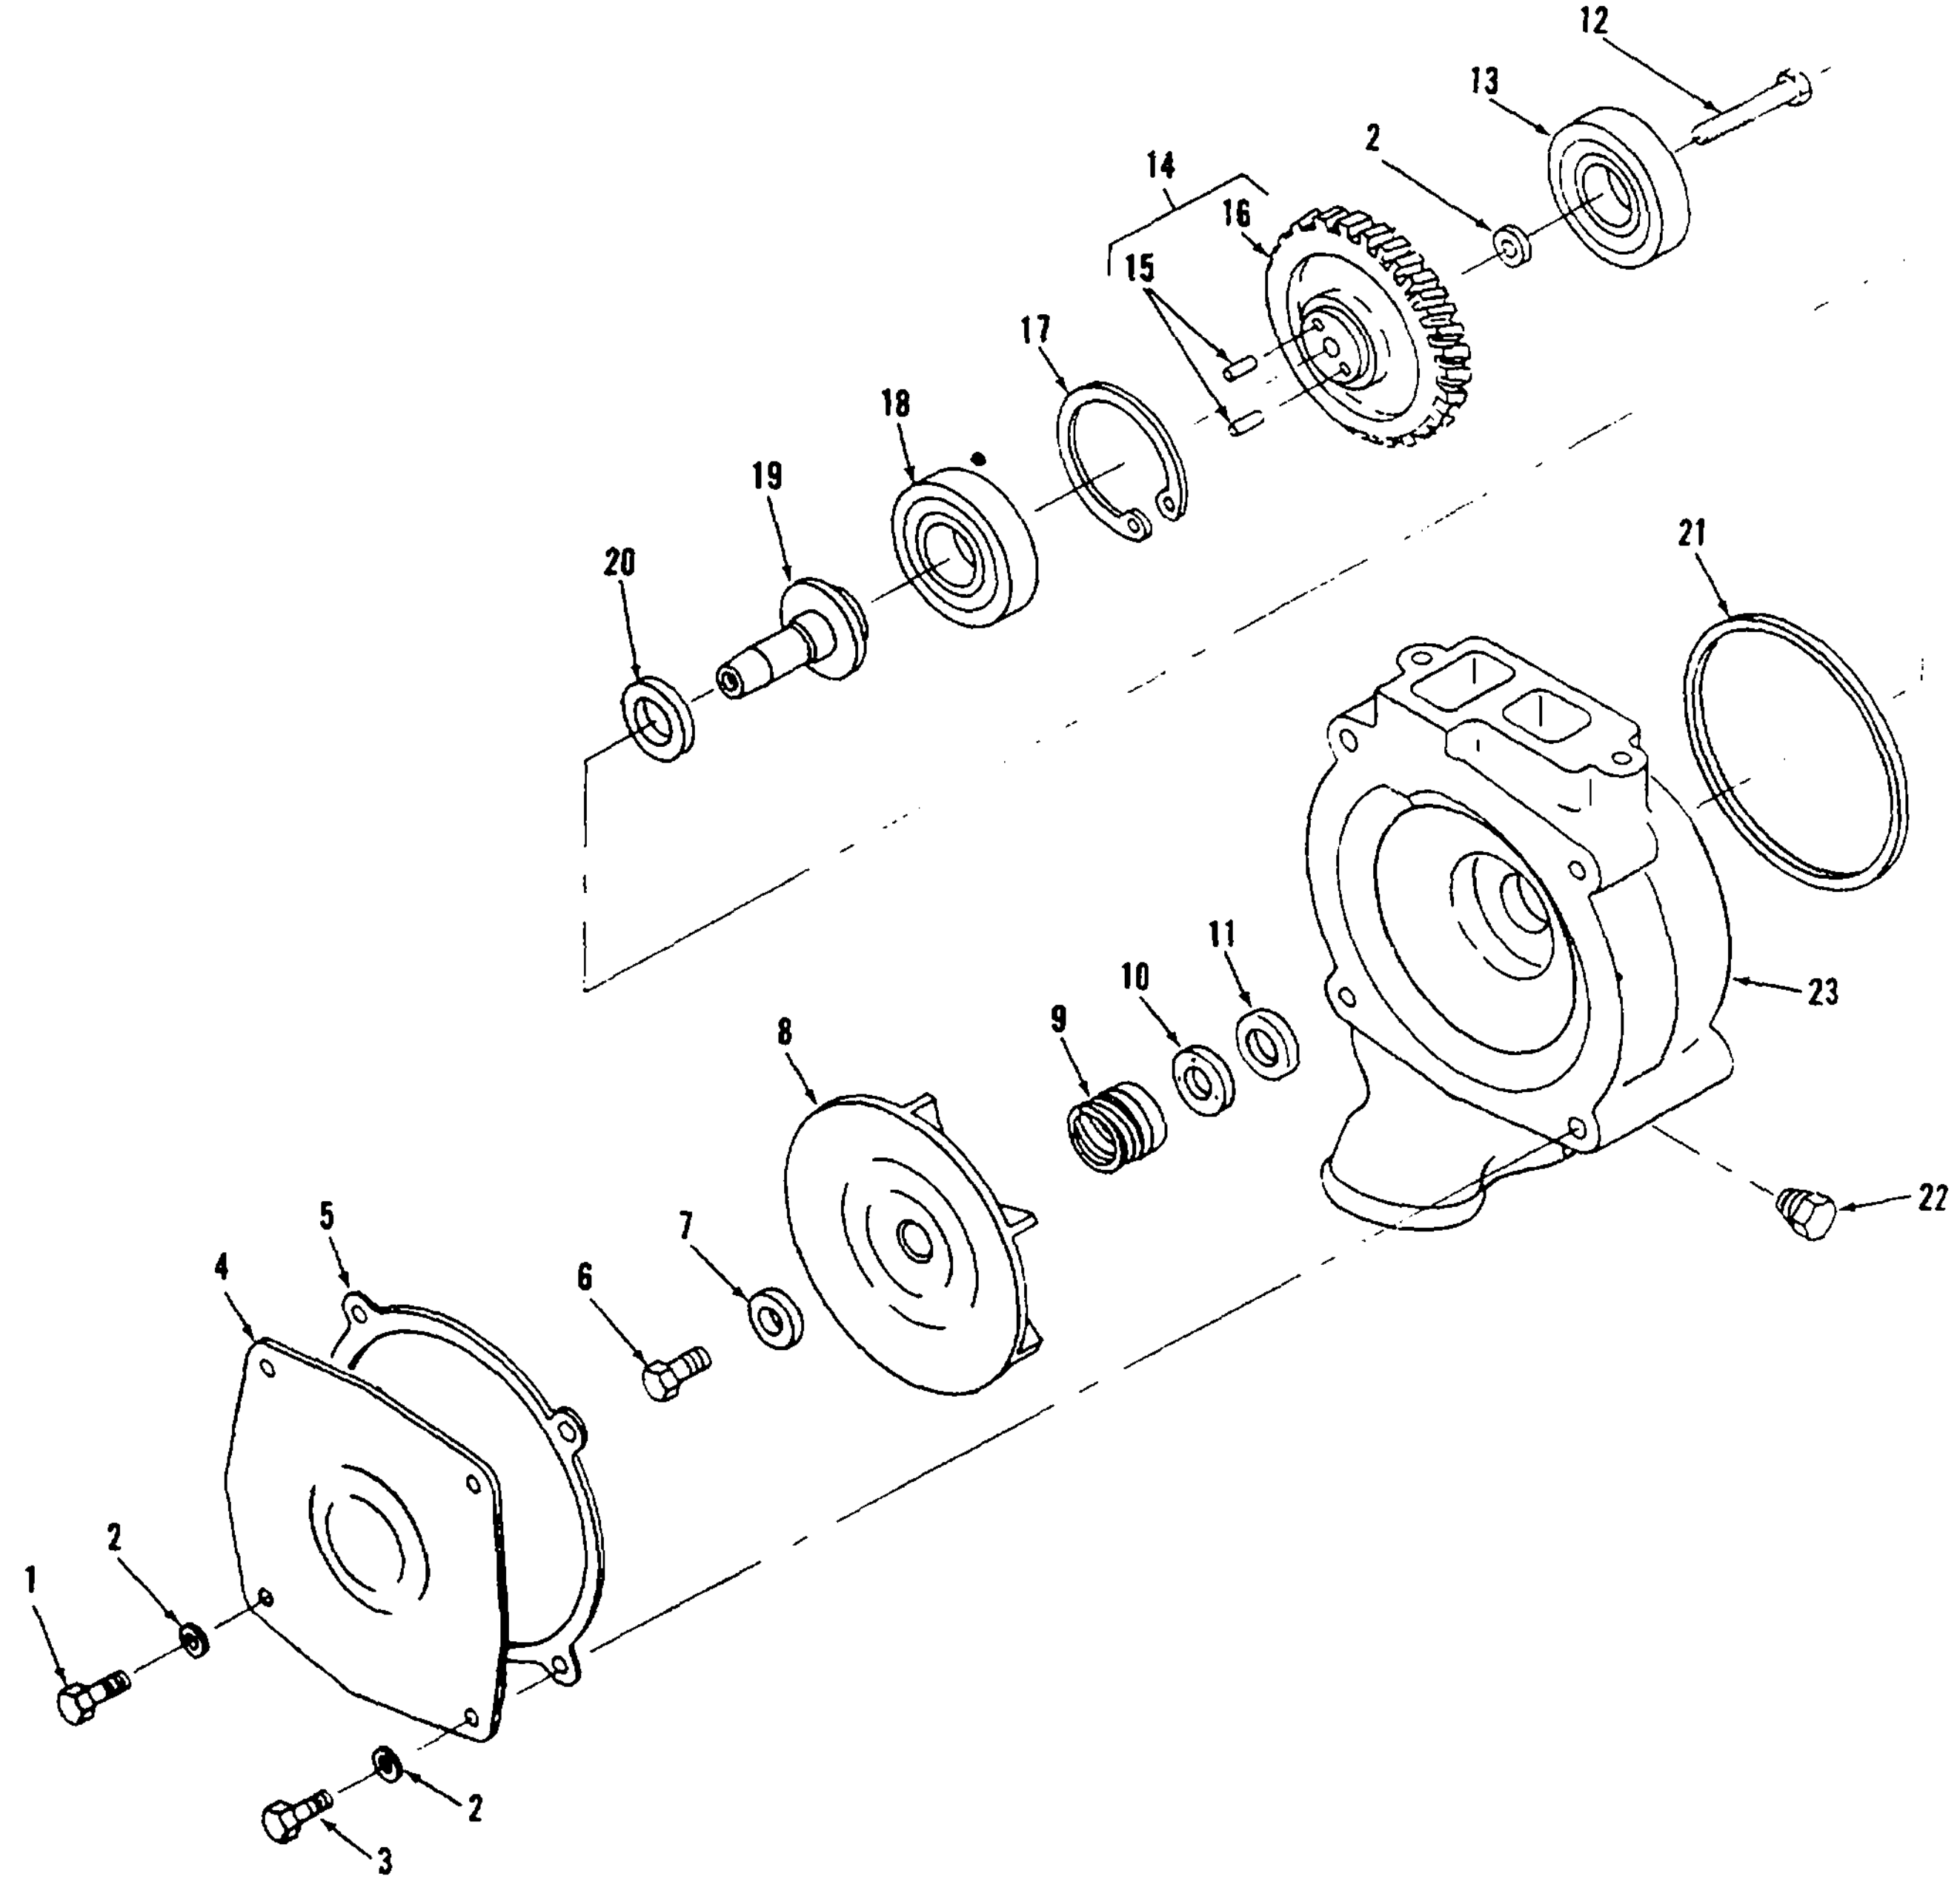
12
13
14
2
16
15
17
18
19
20
21
23
11
10
9
8
22
7
6
5
4
2
1
2
3

Figure 45. Water Pump

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 07 COOLING SYSTEM | | | | |
| 45 | | PAOFF | PAFFF | PAFHH | PAFHH | | .014 | | WATER PUMP<br>7N5909 | 11083 | EA | 1 | 1 |
| 45 | 1 | PAFZZ | PAFZZ | PAHZZ | PAFZZ | D | .008 | 5306-00-263-7301 | BOLT, HEX HEAD<br>L1351 | 11083 | EA | 2 | 14 |
| 45 | 2 | PAFZZ | PAFZZ | PAHZZZ | PAFZZ | D | .010 | 5310-00-117 -4788 | WASHER, LOCK<br>5M2894 | 11083 | EA | 5 | 71 |
| 45 | 3 | PAFZZ | PAFZZ | PAHZZ | PAFZZ | D | .008 | 5305-00-781-3929 | BOLT, HEX HEAD<br>MS90728-75 | 96906 | EA | 2 | 2 |
| 45 | 4 | XA | XA | XA | XA | | | | COVER<br>8N5929 | 11083 | EA | 1 | 1 |
| 45 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-132-2201 | GASKET<br>8N5928 | 11083 | EA | 1 | 1 |
| 45 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-228-6835 | BOLT, HEX HEAD<br>4L6454 | 11083 | EA | 2 | 2 |
| 45 | 7 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-999-8288 | WASHER<br>9M6527 | 11083 | EA | 1 | 1 |
| 45 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2930-01-126-4959 | IMPELLER<br>7N5910 | 11083 | EA | 1 | 1 |
| 45 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-097-8142 | SEAL ASSY, WATER PUMP<br>P/O KIT P/N 5P8771<br>6N9312 | 11083 | EA | 1 | 1 |
| 45 | 10 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 5365-00-432-8183 | RING<br>8S7762 | 11083 | EA | 1 | 1 |
| 45 | 11 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-431-7137 | SEAL, IMPELLER<br>8S8821 | 11083 | EA | 1 | 1 |
| 45 | 12 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .008 | 5306-00-426 -2932 | BOLT, HEX HEAD<br>S1619 | 11083 | EA | 1 | 11 |
| 45 | 13 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3110-00-516-5490 | BEARING<br>8H9789<br>1207 | 11083<br>21760 | EA | 1 | 1 |
| 45 | 14 | AFF | AFF | AFF | AFF | | | | GEAR ASSY<br>7N5195 | 11083 | EA | 1 | 1 |
| 45 | 15 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-533-9530 | PIN<br>2L5893 | 11083 | EA | 2 | 2 |
| 45 | 16 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .004 | 3020-01-127-3363 | GEAR<br>7N5193 | 11083 | EA | 1 | 1 |
| 45 | 17 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 5365-00-598-6232 | RING, RETAINING<br>MS16625-1315 | 96906 | EA | 1 | 1 |
| 45 | 18 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3110-00-554-5302 | BEARING<br>6H3957<br>3208 | 11083<br>43334 | EA | 1 | 1 |
| 45 | 19 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2930-01-127-6149 | SHAFT<br>7N5899 | 11083 | EA | 1 | 1 |
| 45 | 20 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-067-5652 | SEAL, LIP TYPE,<br>P/O KIT P/N 5P8771<br>8H9520 | 11083 | EA | 1 | 1 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 07 COOLING SYSTEM - CONTINUED | | | | |
| 45 | | | | | | | | | WATER PUMP - CONTINUED | | | | |
| 43 | 21 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-663-5709 | PACKING, PREFORMED,<br>P/O KIT P/N 5P8771<br>2 5F3106 | 11083 | EA | 1 | |
| 45 | 22 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-00-287-3279 | PLUG<br>5M6213 | 11083 | EA | 1 | 10 |
| 45 | 23 | XA | XA | XA | XA | | | | HOUSING<br>7N196 | 11083 | EA | 1 | 1 |
| | | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-129-5793 | KIT, GASKET<br>5P8771 | 11083 | EA | 1 | 1 |
| 45 | 9 | | | | | | | | SEAL ASSEMBLY | | EA | 1 | |
| 45 | 20 | | | | | | | | SEAL, LIP TYPE | | EA | 1 | |
| 45 | 21 | | | | | | | | PACKING, PREFORMED | | EA | 1 | |

# SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 07 - COOLING SYSTEM | | | | |
| 46 | | | | | | | | | WATER LINES | | | | |
| 46 | 1 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-269-3216 | BOLT<br>MS90725-66 | 96906 | EA | 1 | 6 |
| 46 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-426-2974 | BOLT<br>T65 | 11083 | EA | 1 | 1 |
| 46 | 3 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .030 | 5330-01-067-5728 | GASKET, P/O KIT<br>P/N 5P8766<br>2P6132 | 11083 | EA | 1 | 1 |
| 46 | 4 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-426-2932 | BOLT<br>61619 | 11083 | EA | 2 | 11 |
| 46 | 5 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-01-127-8574 | GASKET, P/O KIT<br>P/N 5P8766<br>7N200 | 11083 | EA | 1 | 1 |
| 46 | 6 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | | 2930-01-281-5253 | WATER BYPASS AND<br>OUTLET ELBOW<br>7N172 | 11083 | EA | 1 | 1 |
| 46 | 7 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4730-01-106-7246 | CLAMP<br>5P4868 | 11083 | EA | 2 | 2 |
| 46 | 8 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-908-8217 | HOSE<br>9L1794 | 11083 | EA | 1 | 1 |
| 46 | 9 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-01-325-8387 | BOLT<br>MS90725-64 | 96906 | EA | 2 | 24 |
| 46 | 10 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4320-01-129-7911 | PIPE<br>2P8870 | 11083 | EA | 1 | 1 |
| 46 | 11 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-897-9295 | BOLT<br>5F4899 | 11083 | EA | 1 | 1 |
| 46 | 12 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .030 | 5330-01-130-9079 | GASKET<br>1W1172 | 11083 | EA | 1 | 1 |
| 46 | 13 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-263-3122 | PLUG<br>3B551 | 11083 | EA | 1 | 1 |
| 46 | 14 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-122-3969 | PLUG<br>1B5174 | 11083 | EA | 1 | 1 |
| 46 | 15 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-564-9527 | TEE, MALE BRANCH<br>76-4153<br>3/8 MMS-S | 30554<br>98441 | EA | 1 | 1 |
| 46 | 16 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-253-4413 | ELBOW, STREET<br>MS39230-3 | 96906 | EA | 1 | 1 |
| 46 | 17 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-226-4825 | BOLT<br>MS90728-32 | 96096 | EA | 2 | 17 |
| 46 | 18 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-432-4064 | WASHER<br>9M1974 | 11083 | EA | 2 | 8 |
| 46 | 19 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5340-01-107-4130 | COVER<br>4N3840 | 11083 | EA | 1 | 1 |
| 46 | 20 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .030 | 5330-01-063-9839 | GASKET, P/O KIT<br>P/N 5P9116<br>4N3841 | 11083 | EA | 1 | 1 |
| 46 | 21 | XA | XA | XA | XA | | | | BONNET<br>6N123 | 11083 | EA | 1 | 1 |
| 46 | 22 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-089-2515 | PLUG<br>5M6213 | 11083 | EA | 1 | 10 |
| 46 | 23 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-427-5121 | PLUG<br>P3C | 58553 | EA | 3 | 4 |

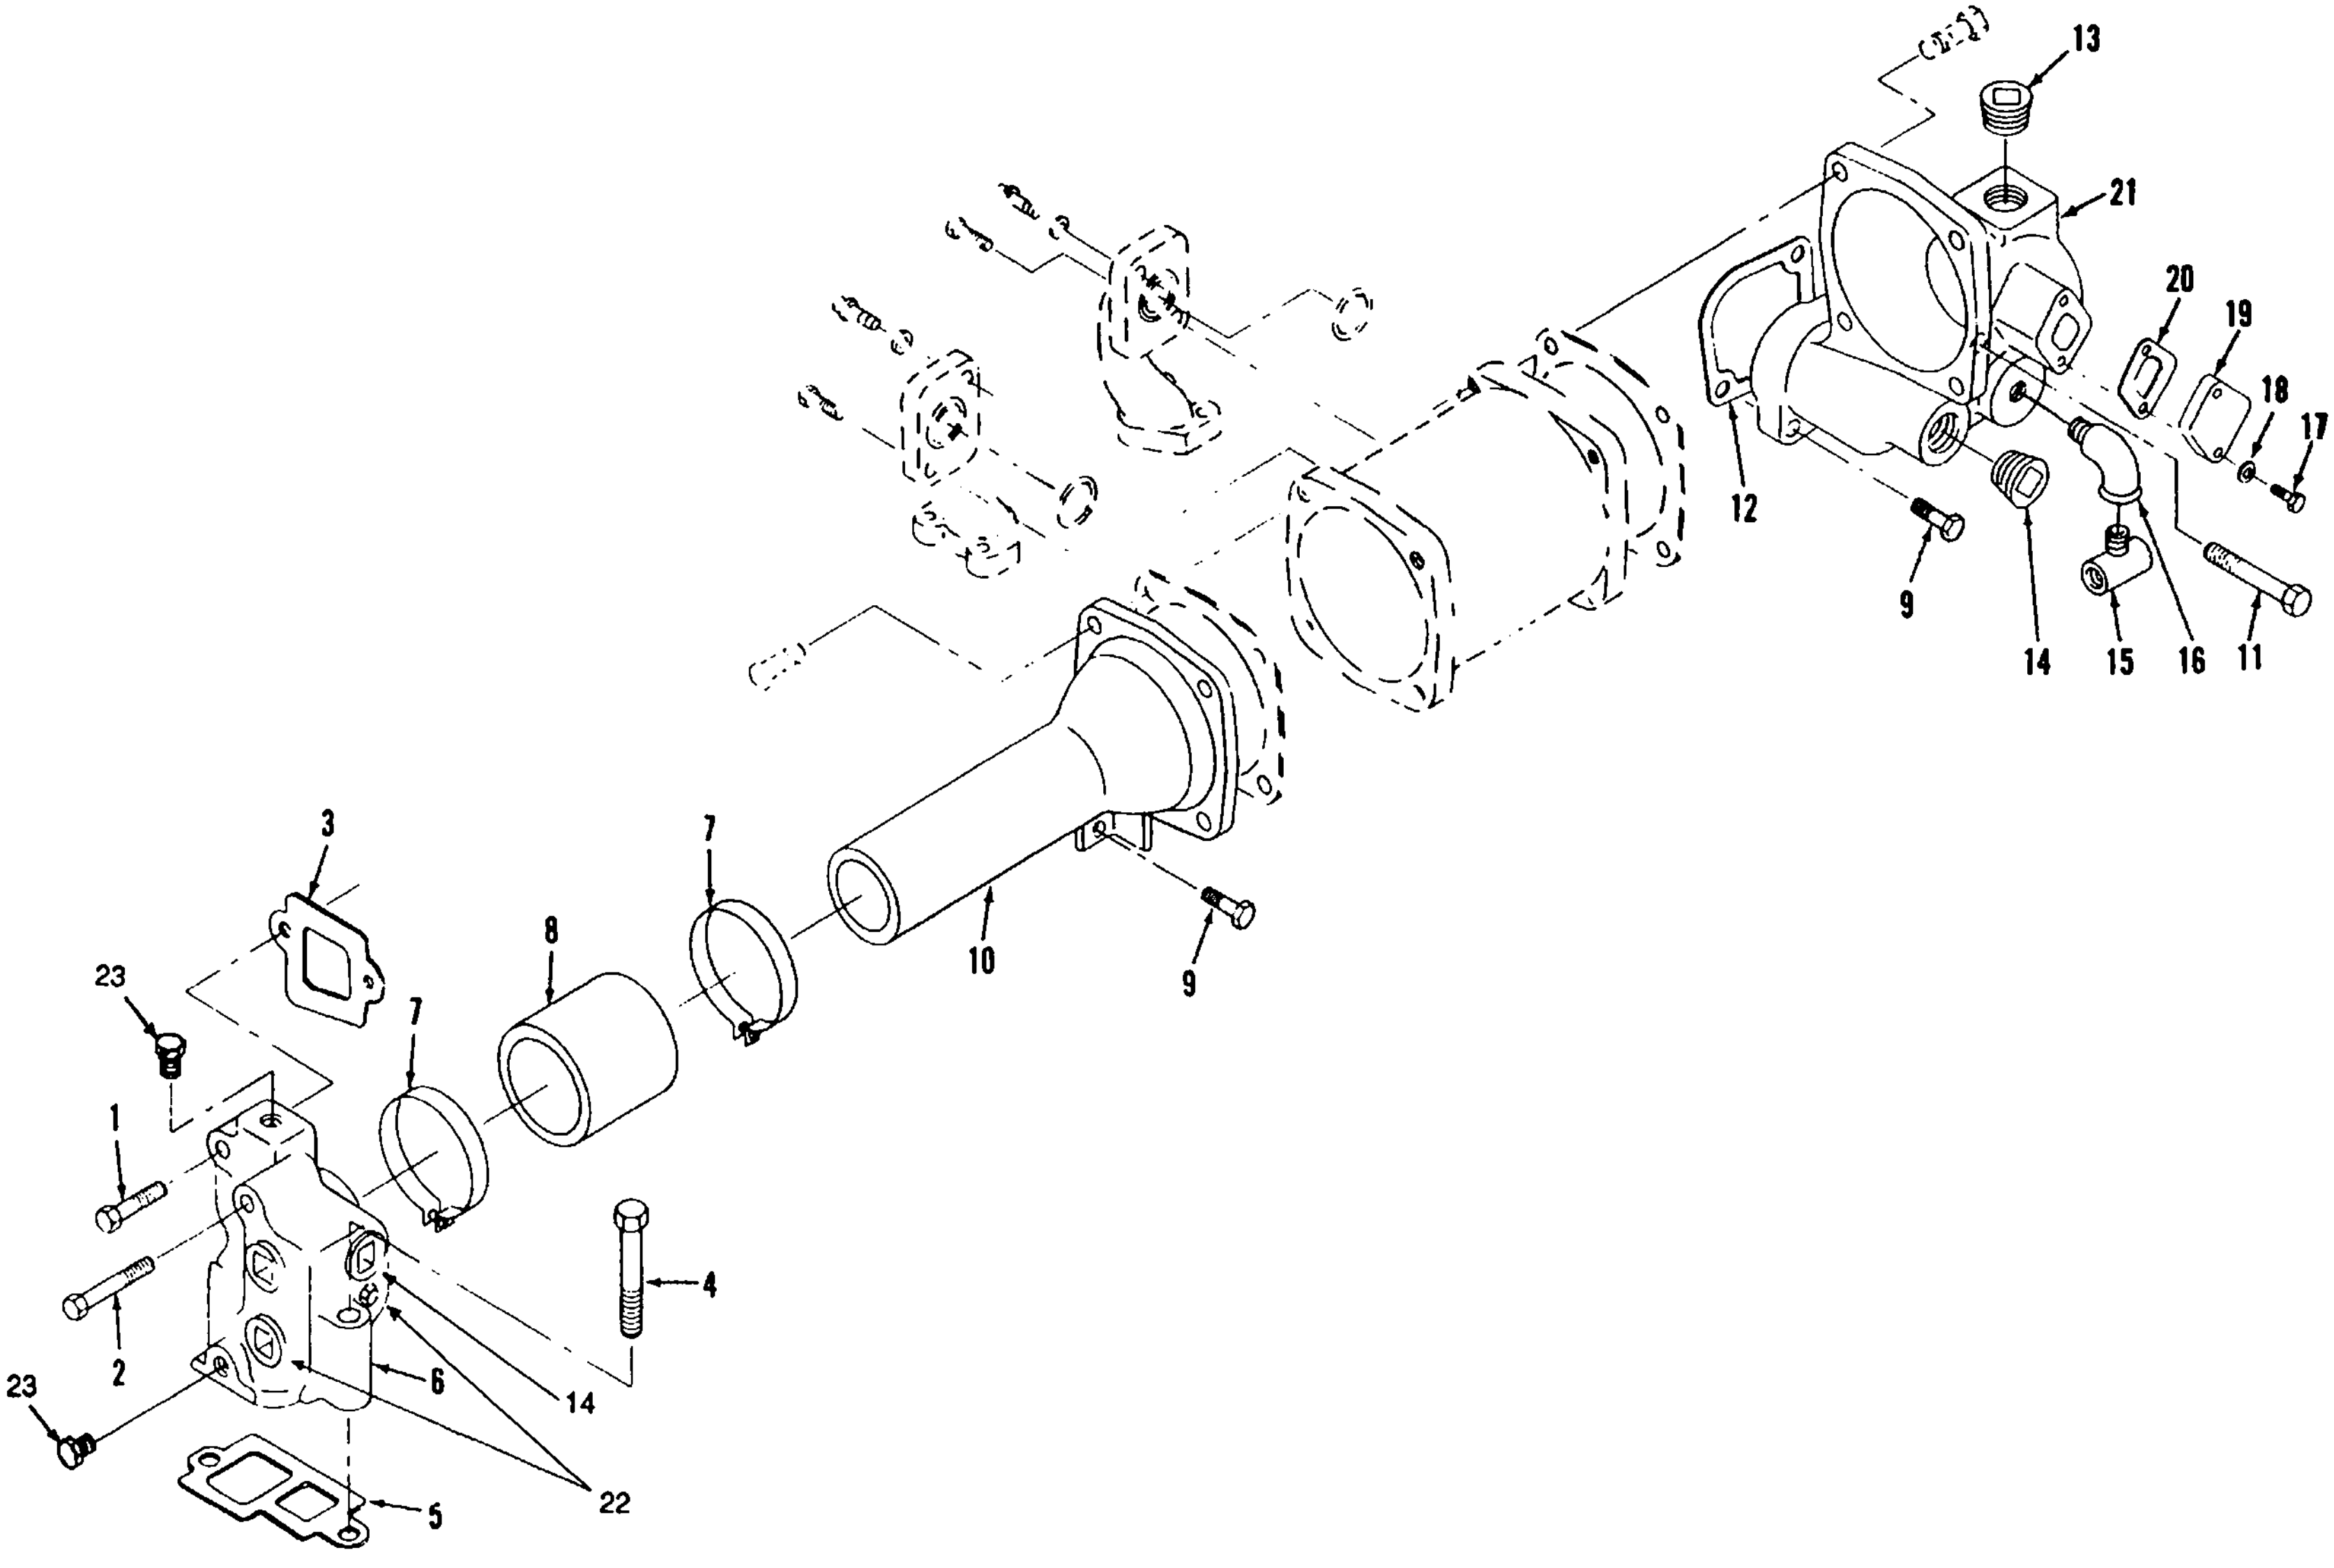
13
21
20
19
18
17
12
9
14
15
16
11
3
8
7
10
9
23
1
2
23
7
4
6
14
22
5

Figure 46. Water Lines

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 07 - COOLING SYSTEM | | | | |
| 47 | | | | | | | | | COOLANT THERMOSTAT | | | | |
| 47 | 1 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-260-4508 | BOLT<br>S1594 | <br>11083 | EA | 4 | 24 |
| 47 | 2 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-287-3279 | PLUG<br>5M6213 | <br>11083 | EA | 1 | 9 |
| 47 | 3 | XB | XB | XB | XB | | | | HOUSING, THERMOSTAT<br>8N743 | <br>11083 | EA | 1 | 1 |
| 47 | 4 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-01-124-1161 | GASKET, P/O KIT P/N 5P8766<br>7N944 | <br>11083 | EA | 1 | 1 |
| 47 | 5 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 6620-01-008-1893 | TEMPERATURE REGULATOR<br>7N208<br>4A308-21 | <br>11083<br>78493 | EA | 1 | 1 |

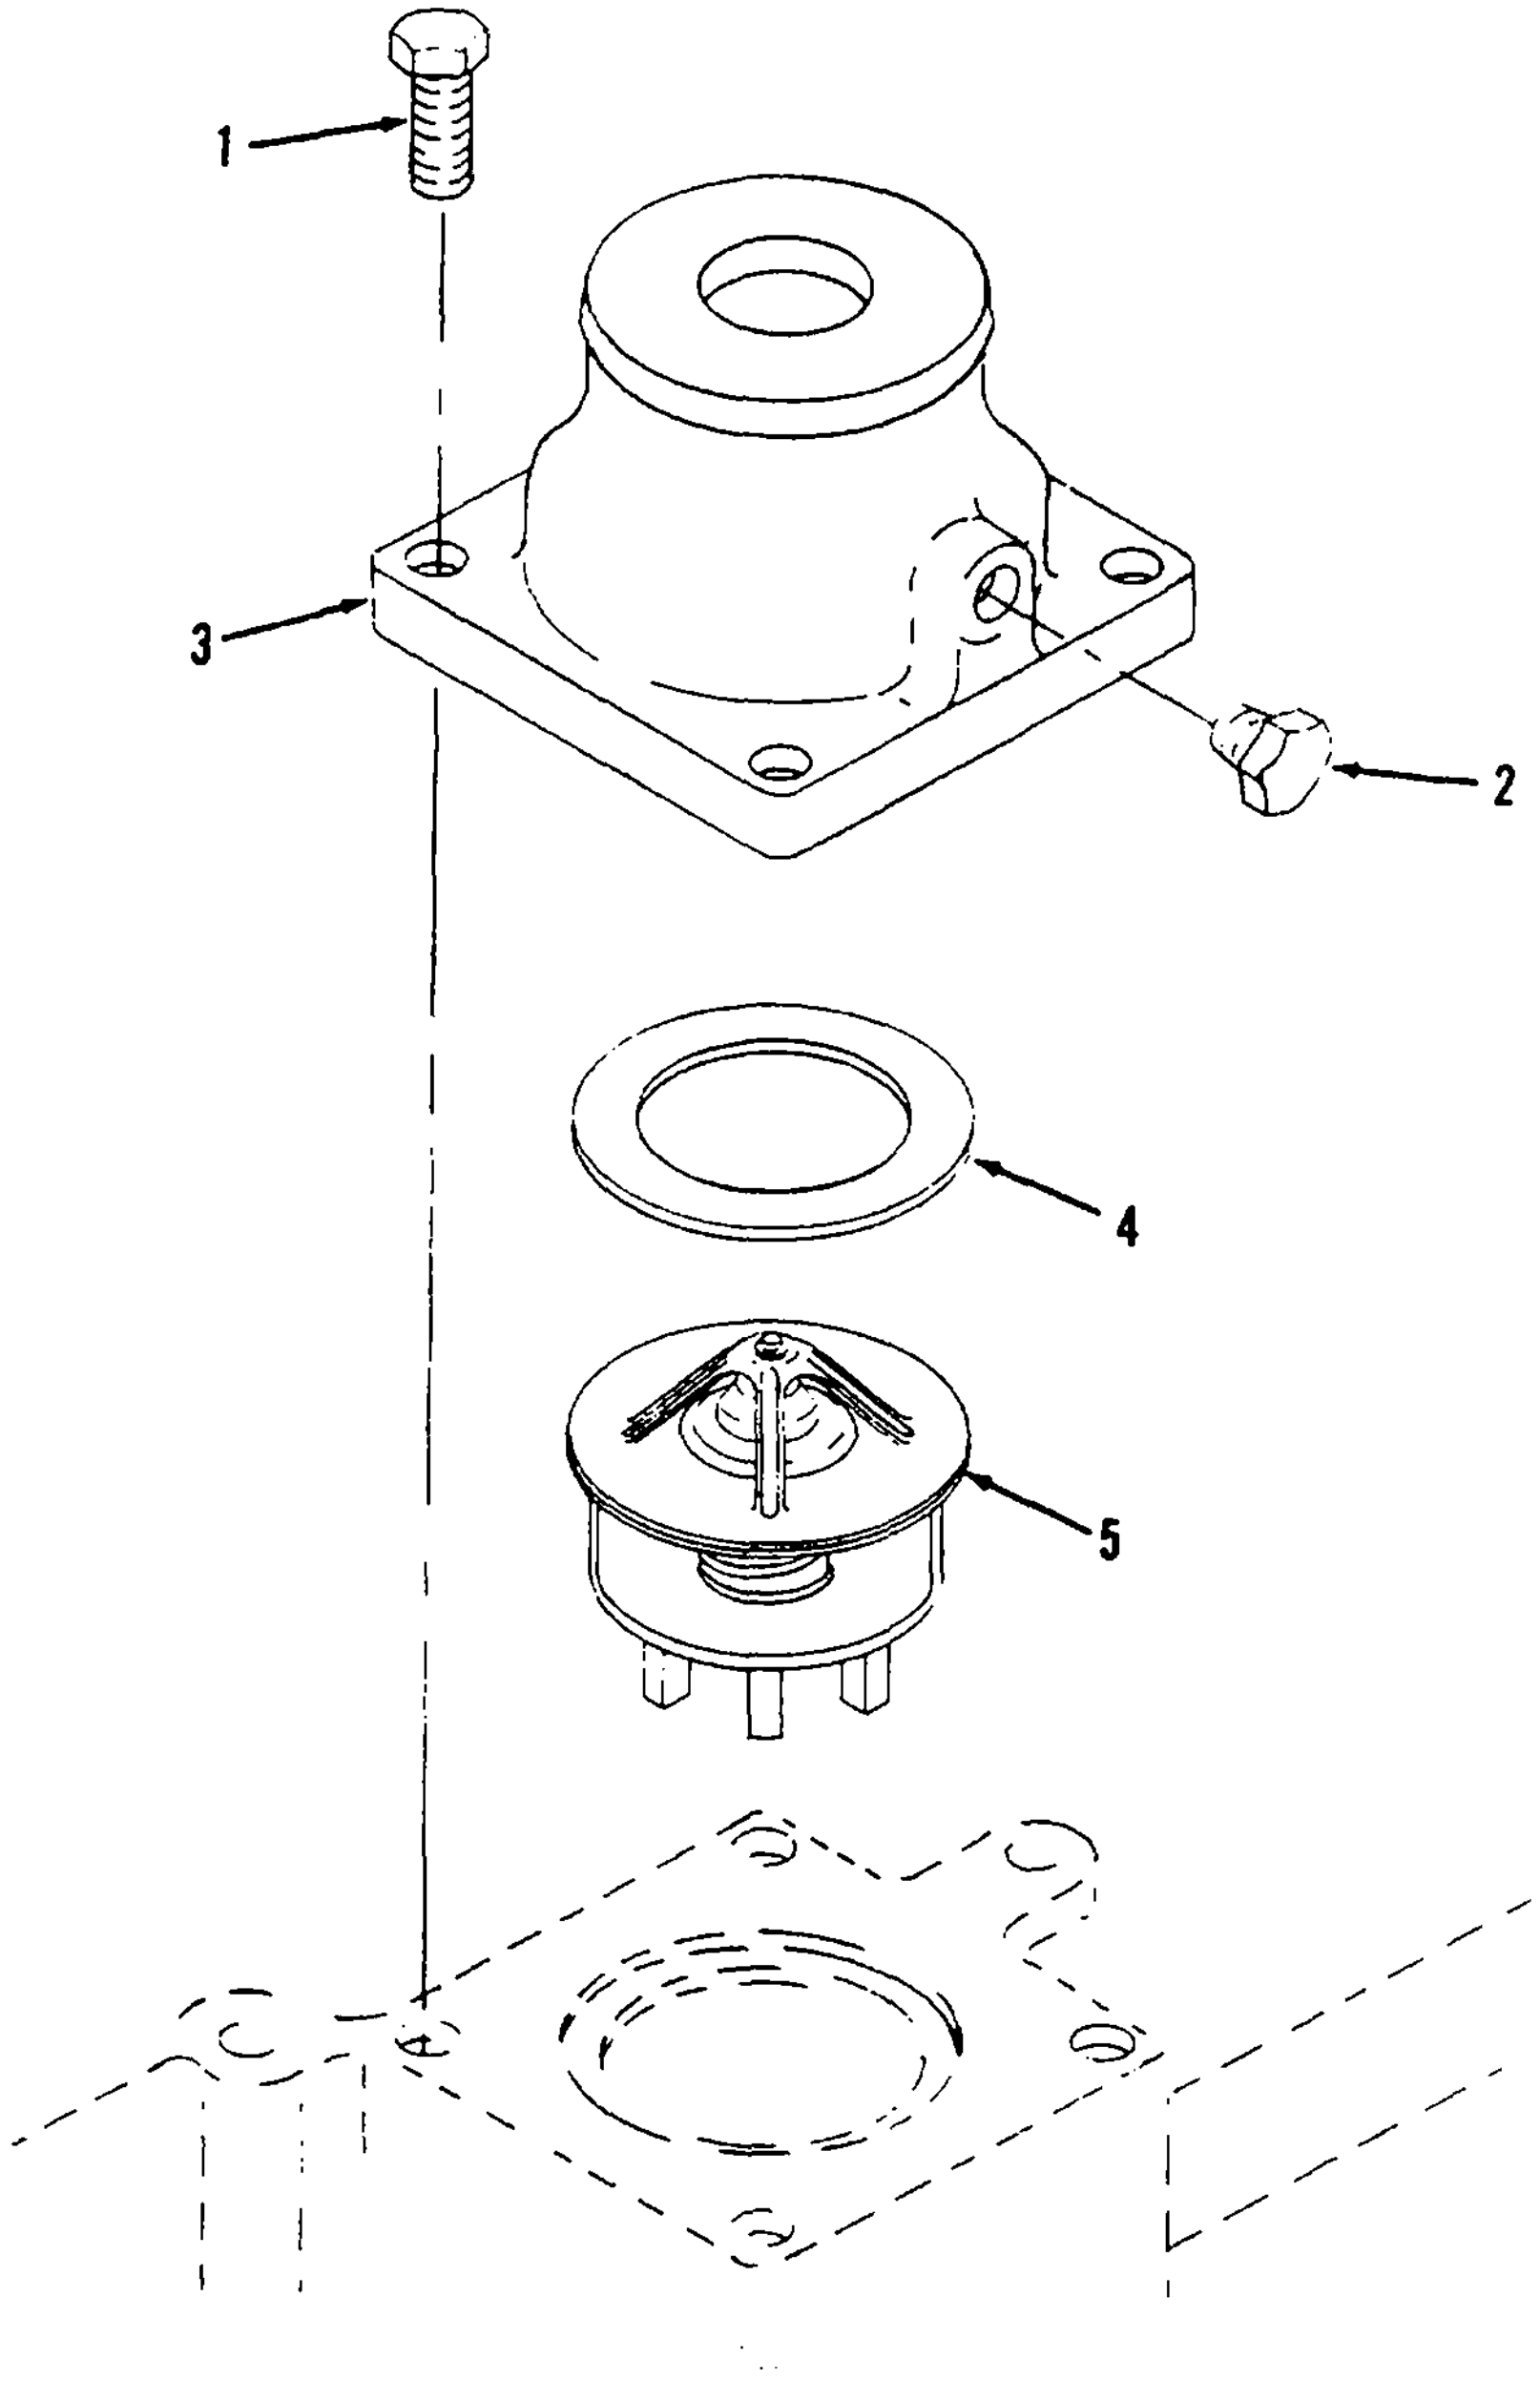

Figure 47. Coolant Thermostat

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 07 - COOLING SYSTEM | | | |
| 48 | | | | | | | | | FAN BELTS | | | |
| 48 | 1 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .035 | 3030-00-034-1865 | BELT, FAN DRIVE SET<br>MS51066C46-2 96906 | EA | 1 | 1 |

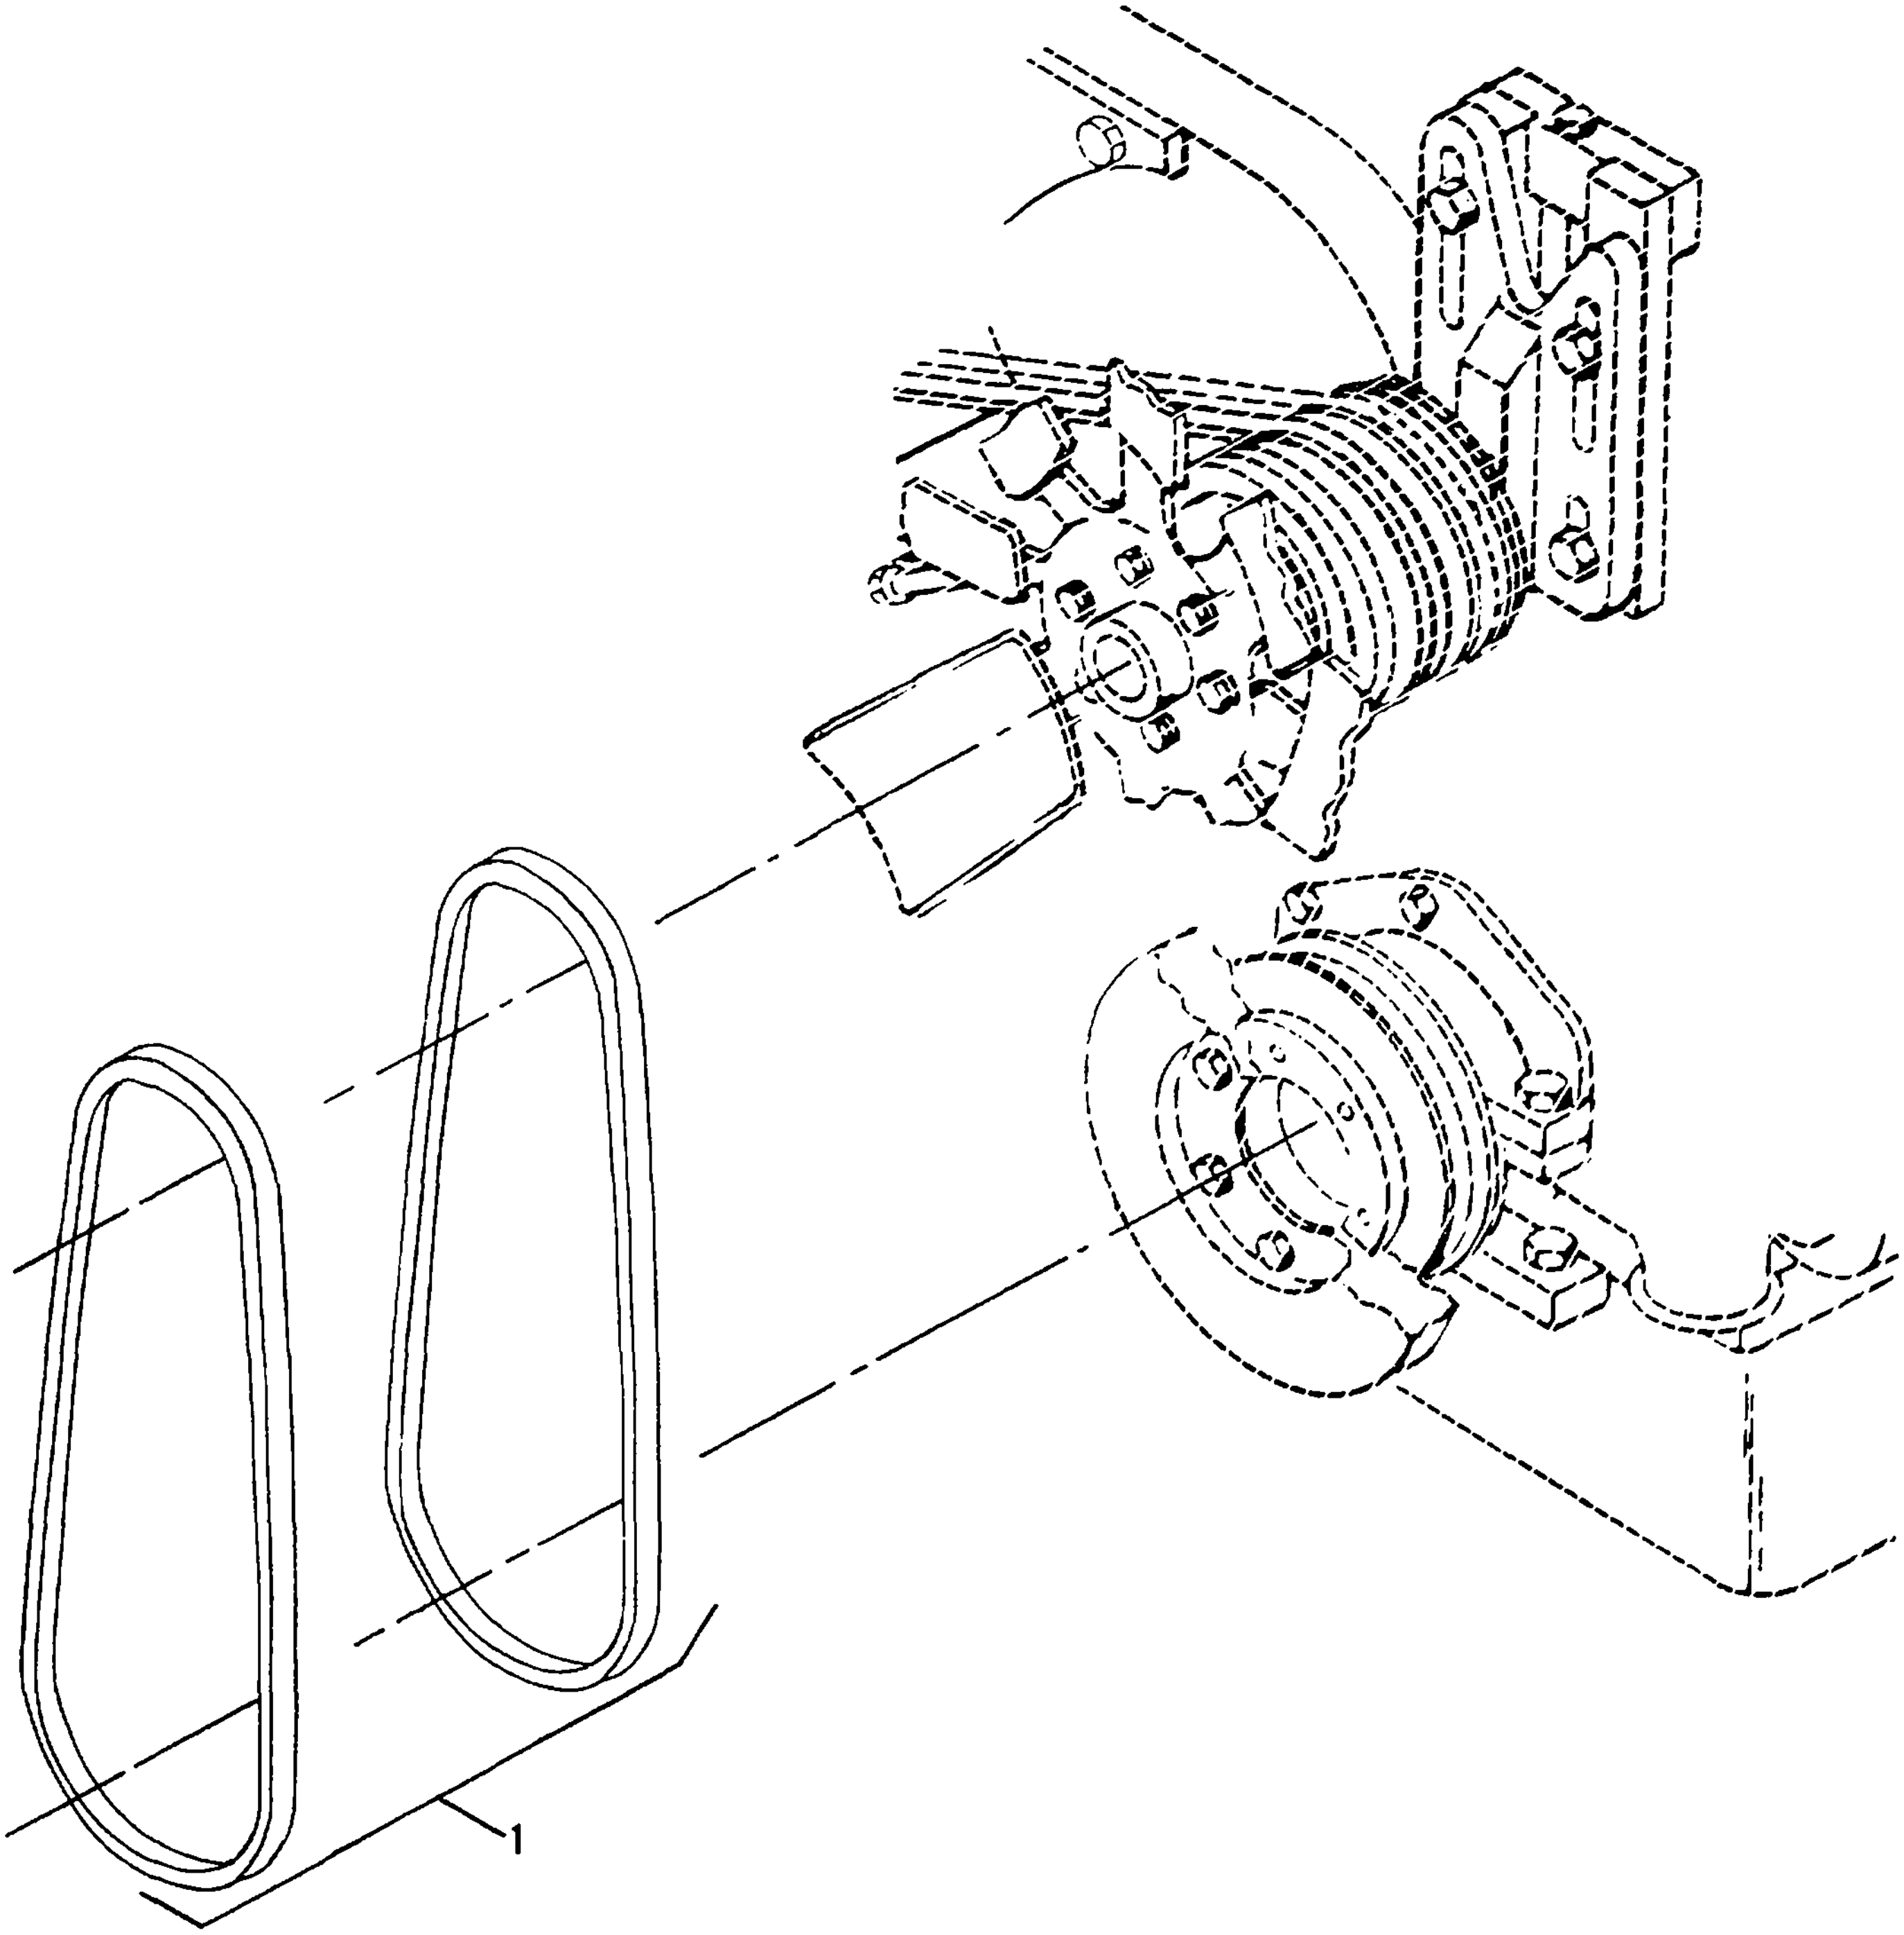

Figure 48. Fan Belts

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 08 - LIFTING AND SUPPORT SYSTEM | | | | |
| 49 | | | | | | | | | LIFTING FRAME | | | | |
| 49 | 1 | AFF | AFF | AFF | AFF | D | .008 | 4720-00-492-4225 | TUBE ASSY<br>71-4680<br>MS28741-5-0124 | <br>30554<br>96906 | EA | 1 | 1 |
| 49 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-278-4685 | ELBOW<br>MS20822-5-4 | <br>96906 | EA | 1 | 1 |
| 49 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-231-4013 | ELBOW<br>MS20822-6 | <br>96906 | EA | 1 | 3 |
| 49 | 4 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-995-1559 | CONNECTOR<br>MS51500A6 | <br>96096 | EA | 1 | 2 |
| 49 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0502 | SCREW, HEX HEAD<br>MS90725-6 | <br>96906 | EA | 2 | 118 |
| 49 | 6 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C | <br>96906 | EA | 2 | 167 |
| 49 | 7 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .080 | 4810-00-209-1562 | VALVE, 3-WAY<br>69-774<br>SP-2201 | <br>30554<br>70411 | EA | 1 | 1 |
| 49 | 8 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-038-3148 | SCREW AND WASHER<br>69-662-51<br>61-101041-40-0142B-0542B | <br>30554<br>78189 | EA | 1 | 24 |
| 49 | 9 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-036-6969 | NUT AND WASHER<br>69-561-4<br>511-101800-00 | <br>30554<br>78189 | EA | 1 | 95 |
| 49 | 10 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .027 | 4730-00-812-1333 | CAP, TUBE<br>69-539-2 | <br>30554 | EA | 2 | 4 |
| 49 | 11 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-228-3202 | NUT, LOCK<br>71-4848 | <br>30554 | EA | 2 | 2 |
| 49 | 12 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-221-5397 | UNION, BULKHEAD<br>71-4849<br>SWTBX-B | <br>30554<br>98441 | EA | 2 | 2 |
| 49 | 13 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-036-6903 | SCREW<br>69-662-4<br>61-040741-40-0142B-0542B | <br>30554<br>78189 | EA | 6 | 60 |
| 49 | 14 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5310-00-836-3520 | NUT AND WASHER<br>69-561-1<br>511-041800-00 | <br>30554<br>78189 | EA | 6 | 66 |
| 49 | 15 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION, FUEL SUPPLY INLET<br>71-4502-11 | <br>30554 | EA | 1 | 1 |
| 49 | 16 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION, FUEL SUPPLY OUTLET<br>71-4502-10 | <br>30554 | EA | 1 | 1 |
| 49 | 17 | MDO | MDO | MDO | MDO | | | | PLATE, FUEL SELECTOR<br>71-4501 | <br>30554 | EA | 1 | 1 |
| 49 | 18 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | | 4910-01-246-0923 | CLEVIS<br>69-782<br>XBN8190 | <br>30554<br>90202 | EA | 2 | 2 |
| 49 | 19 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-071-2072 | SCREW, HEX HEAD<br>MS90725-116 | <br>96906 | EA | 8 | 8 |
| 49 | 20 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-5998 | WASHER, FLAT<br>MS27183-18 | <br>96906 | EA | 32 | 32 |
| 49 | 21 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-595-7421 | NUT, SELF-LOCKING<br>MS17829-8C | <br>96906 | EA | 16 | 29 |
| 49 | 22 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-071-2070 | SCREW, HEX HEAD<br>MS90725-114 | <br>96906 | EA | 8 | 16 |
| 49 | 23 | XB | XB | XB | XB | | | | LIFTING FRAME<br>70-4347 | <br>30554 | EA | 1 | 1 |

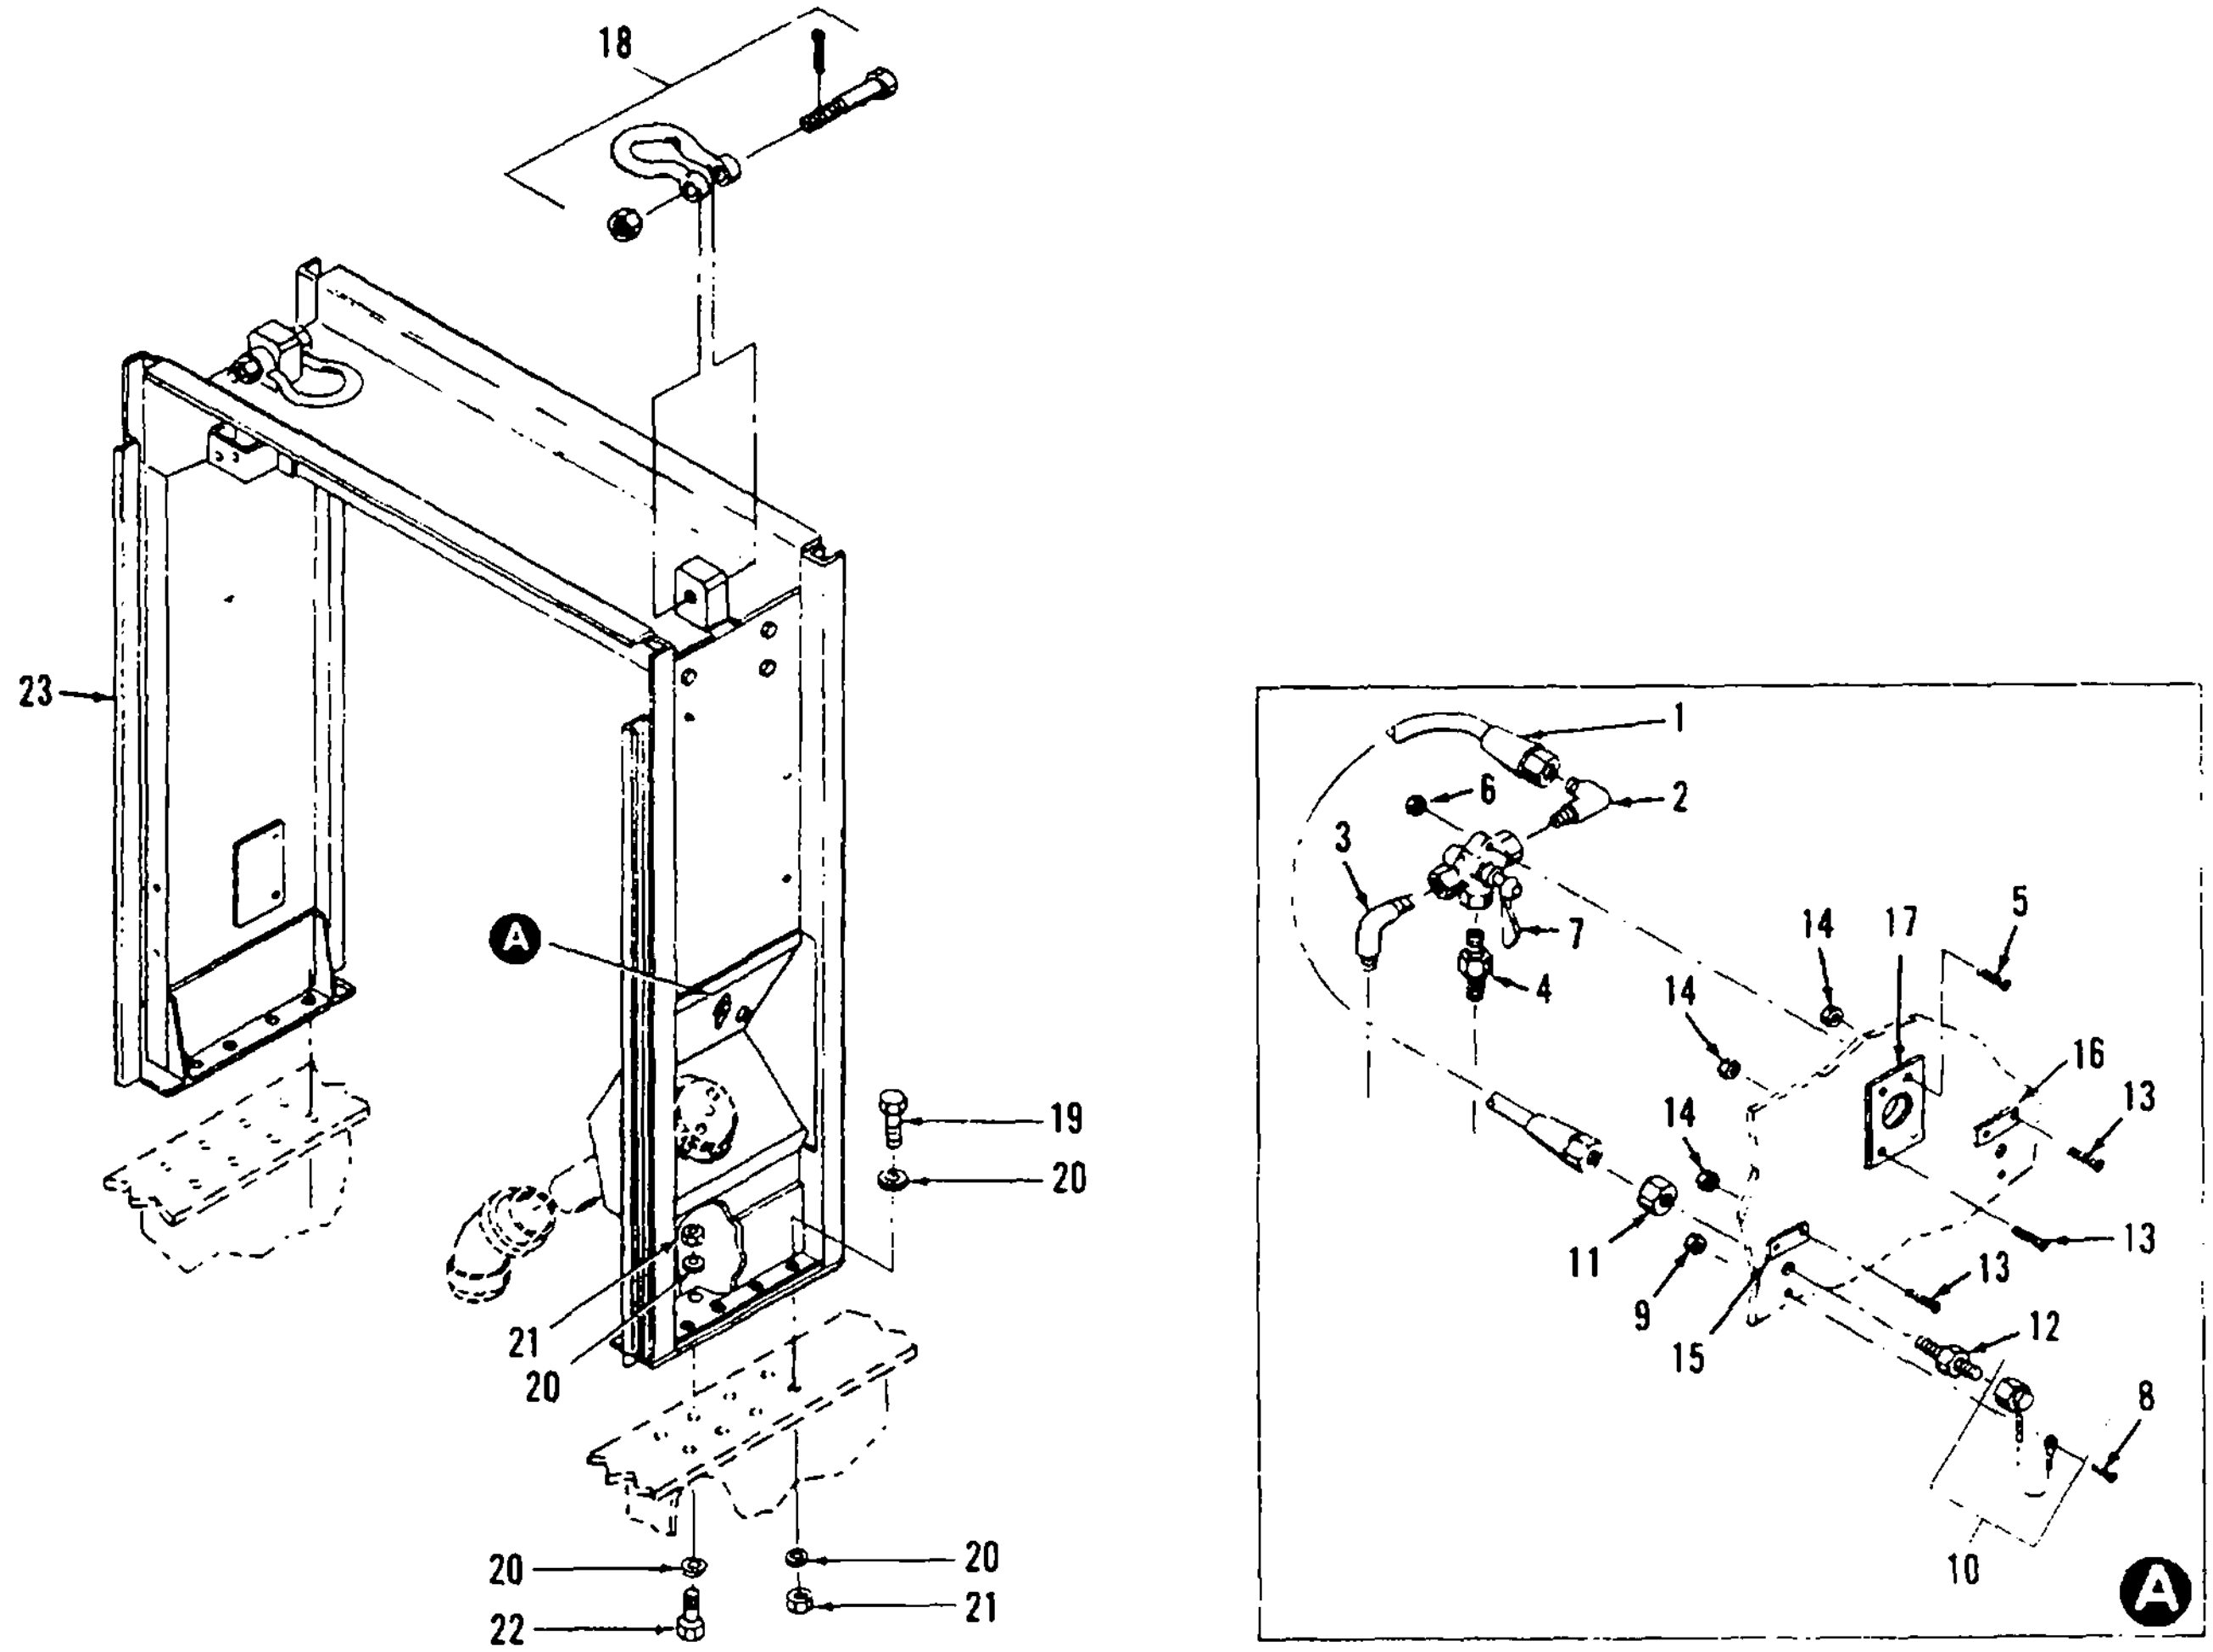
18
23
A
19
20
21
20
20
22
20
21
1
6
2
3
7
4
14
17
5
14
14
16
13
13
11
9
15
13
12
8
10
A

Figure 49. Lifting Frame

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 08 - LIFTING AND SUPPORT SYSTEM | | | | |
| 50 | | | | | | | | | CONTROL PANEL SUPPORTS | | | | |
| 50 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-225-8497 | SCREW<br>MS90725-32 | 96906 | EA | 6 | 27 |
| 50 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-407-9566 | WASHER, LOCK<br>MS35338-45 | 96906 | EA | 6 | 67 |
| 50 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-081-4219 | WASHER, FLAT<br>MS27183-12 | 96906 | EA | 6 | 62 |
| 50 | 4 | XB | XB | XB | XB | | | | SUPPORT, REAR HSG, RH<br>70-4348 | 30554 | EA | 1 | 1 |
| 50 | 5 | XB | XB | XB | XB | | | | SUPPORT, REAR HSG. LH<br>70-4349 | 30554 | EA | 1 | 1 |

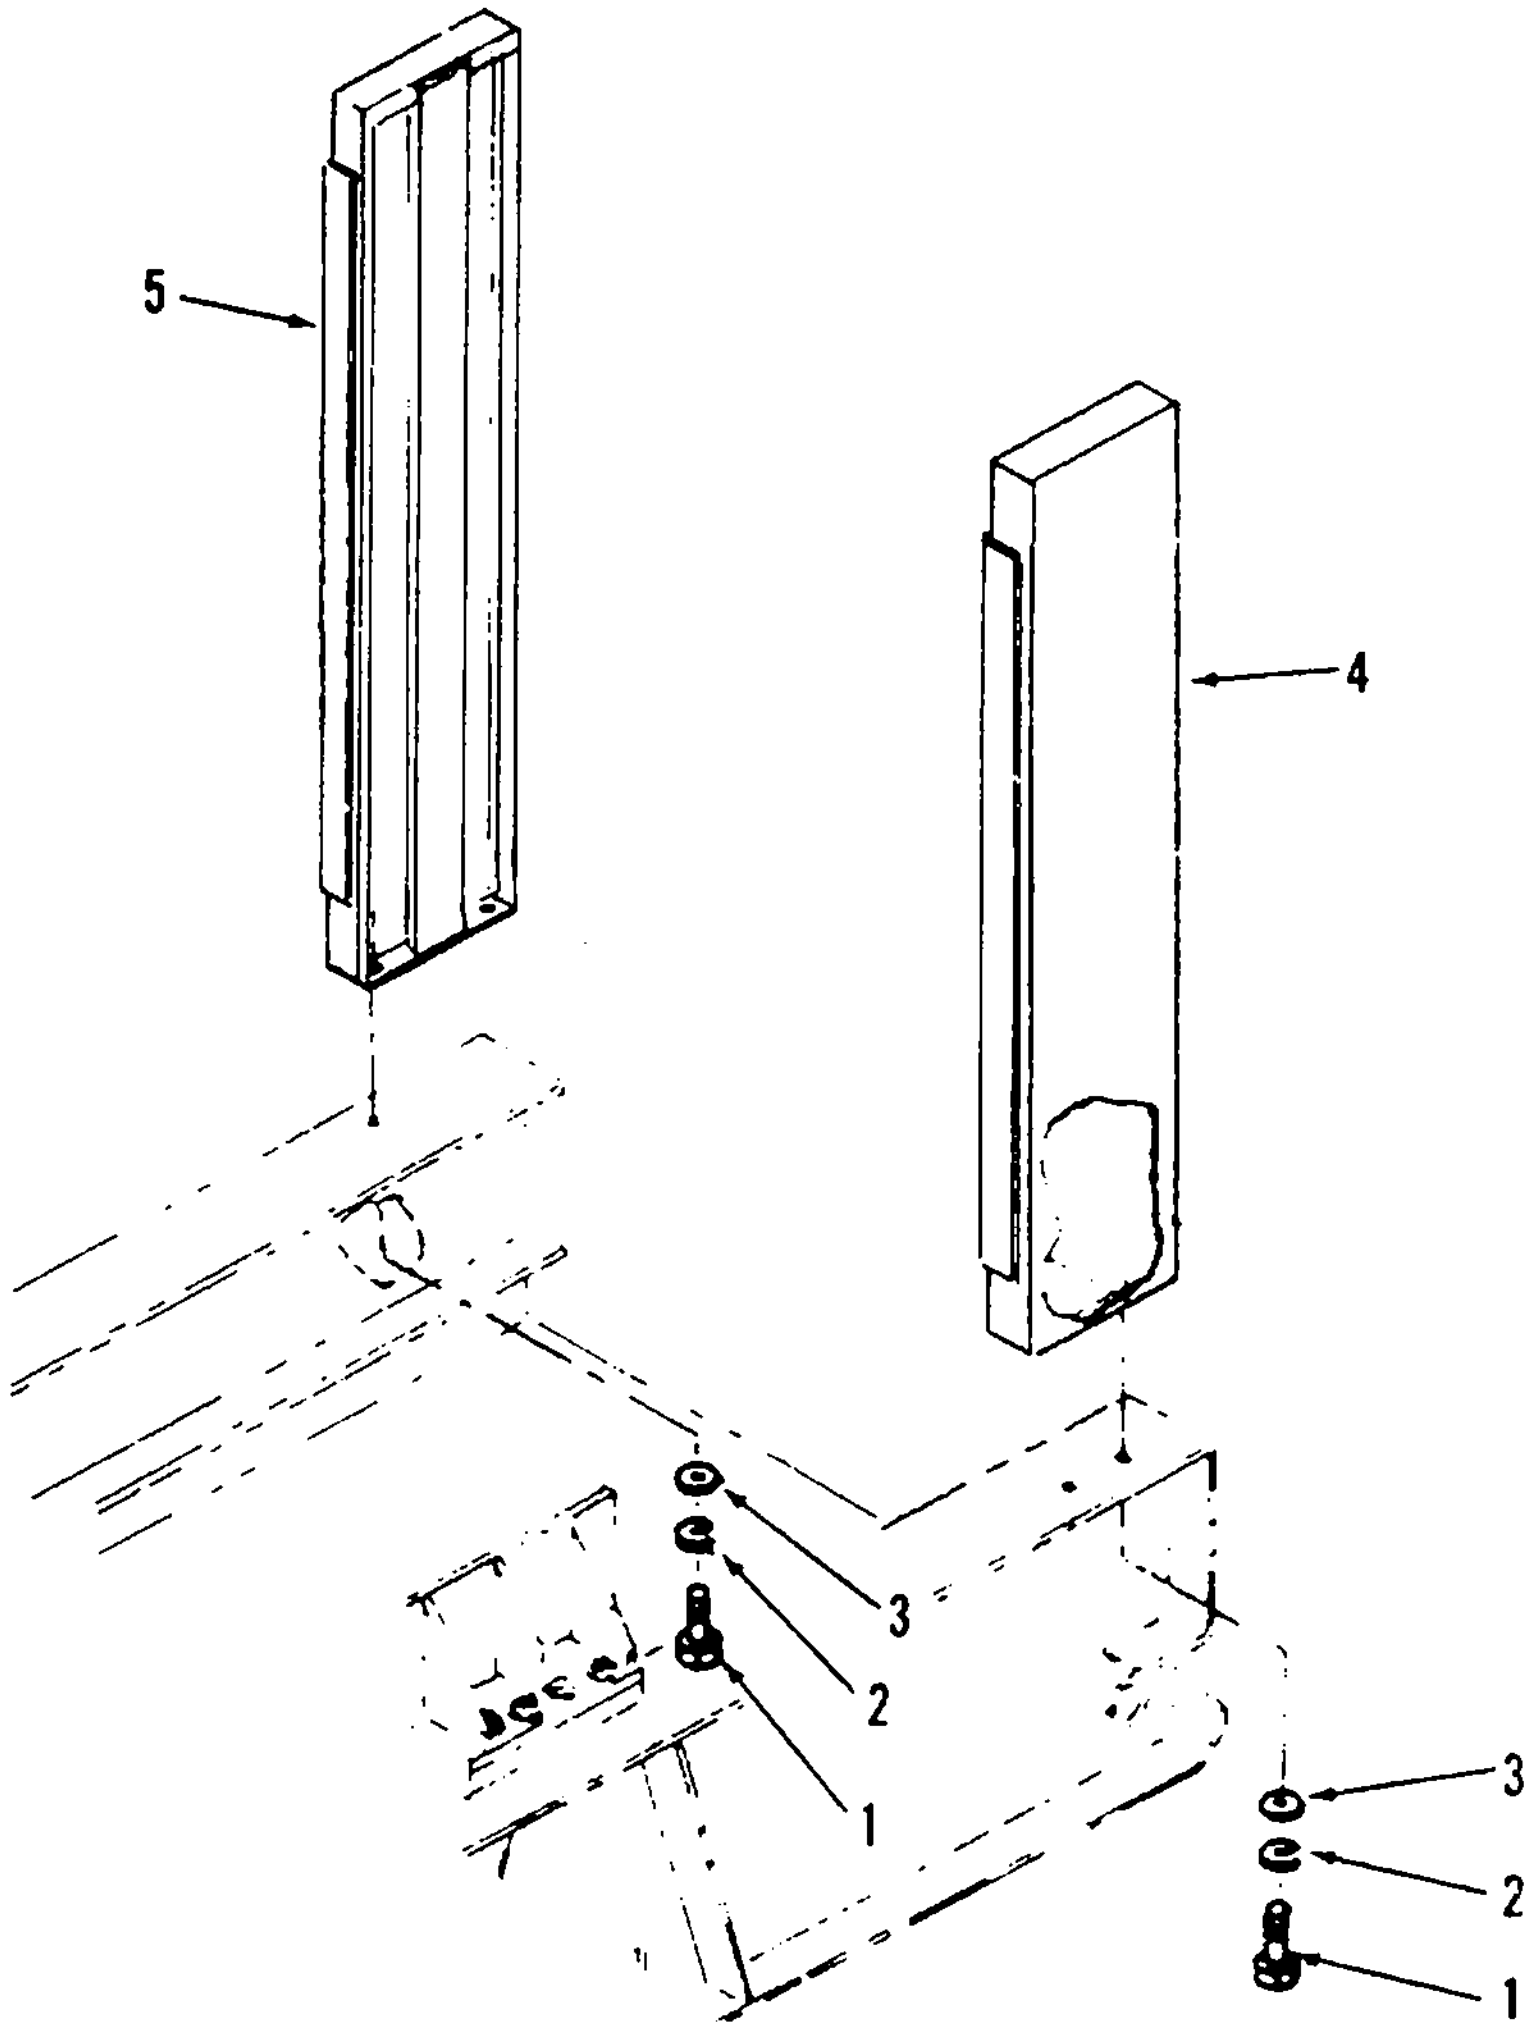

Figure 50. Control Panel Supports

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 09 - POWER GENERATION SYSTEM | | | | |
| 51 | | | | | | | | | GENERATOR ASSEMLBY AND RELATED PARTS | | | | |
| 51 | 1 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-926-5517 | SCREW, HEX HEAD<br>MS90725-219 | 96906 | EA | 8 | 9 |
| 51 | 2 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-912-7322 | WASHER, FLAT<br>MS9320-18 | 96906 | EA | 16 | 16 |
| 51 | 3 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-497-3895 | NUT, SELF-LOCKING<br>MS21044N14 | 96906 | EA | 8 | 8 |
| 51 | 4 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-042-6417 | SCREW, HEX HEAD<br>MS90725-113 | 96906 | EA | 12 | 16 |
| 51 | 5 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-584-5272 | WASHER, LOCK<br>MS35338-48 | 96906 | EA | 12 | 26 |
| 51 | 6 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | .5305-00-724-5911 | SCREW, HEX HEAD<br>MS90725-163 | 96906 | EA | 8 | 14 |
| 51 | 7 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | | 5340-00-230-7278 | PLATE, LOCKING<br>71-4470 | 30554 | EA | 4 | 4 |
| 51 | 8 | XB | XB | XB | XB | | | | SPACER STEPPED<br>70-4532 | 30554 | EA | 1 | 1 |
| 51 | 9 | XB | XB | XB | XB | | | | WASHER, SPRING TENSION<br>AM8031-40<br>70-4534-1 | 02368<br>30554 | EA | 1 | 1 |
| 51 | 10 | XB | XB | XB | XB | | | | SPACER<br>70-4533 | 30554 | EA | 1 | 1 |
| 51 | 11 | PAFZZ | PAFZZ | PAHZZ | PAFZZ | D | .008 | 5305-00-115-9526 | SCREW, HEX HEAD<br>MS90725-58 | 96906 | EA | 6 | 9 |
| 51 | 12 | PAFZZ | PAFZZ | PAHZZ | PAFZZ | D | .010 | 5310-00-010-3319 | WASHER LOCK<br>MS39338-6 | 96906 | EA | 16 | 32 |
| 51 | 13 | XB | XB | XB | XB | | | | CHASSIS, ELECTRICAL EQUIPMENT<br>71-4382 | 30554 | EA | 1 | 1 |
| 51 | 14 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-269-3208 | SCREW, HEX HEAD<br>MS90725-57 | 96906 | EA | 10 | 11 |
| 51 | 15 | XB | XB | XB | XB | | | | PANEL<br>70-4361 | 30554 | EA | 1 | 1 |
| 51 | 16 | XB | XB | XB | XB | | | | BRACKET<br>76-4169 | 30554 | EA | 1 | 1 |
| 51 | 17 | PBFHD | PBFDD | PAFHD | PAFHD | | | 6115-00-182-7153 | GENERATOR, 100 KW<br>70-4001 | 30554 | EA | 1 | 1 |

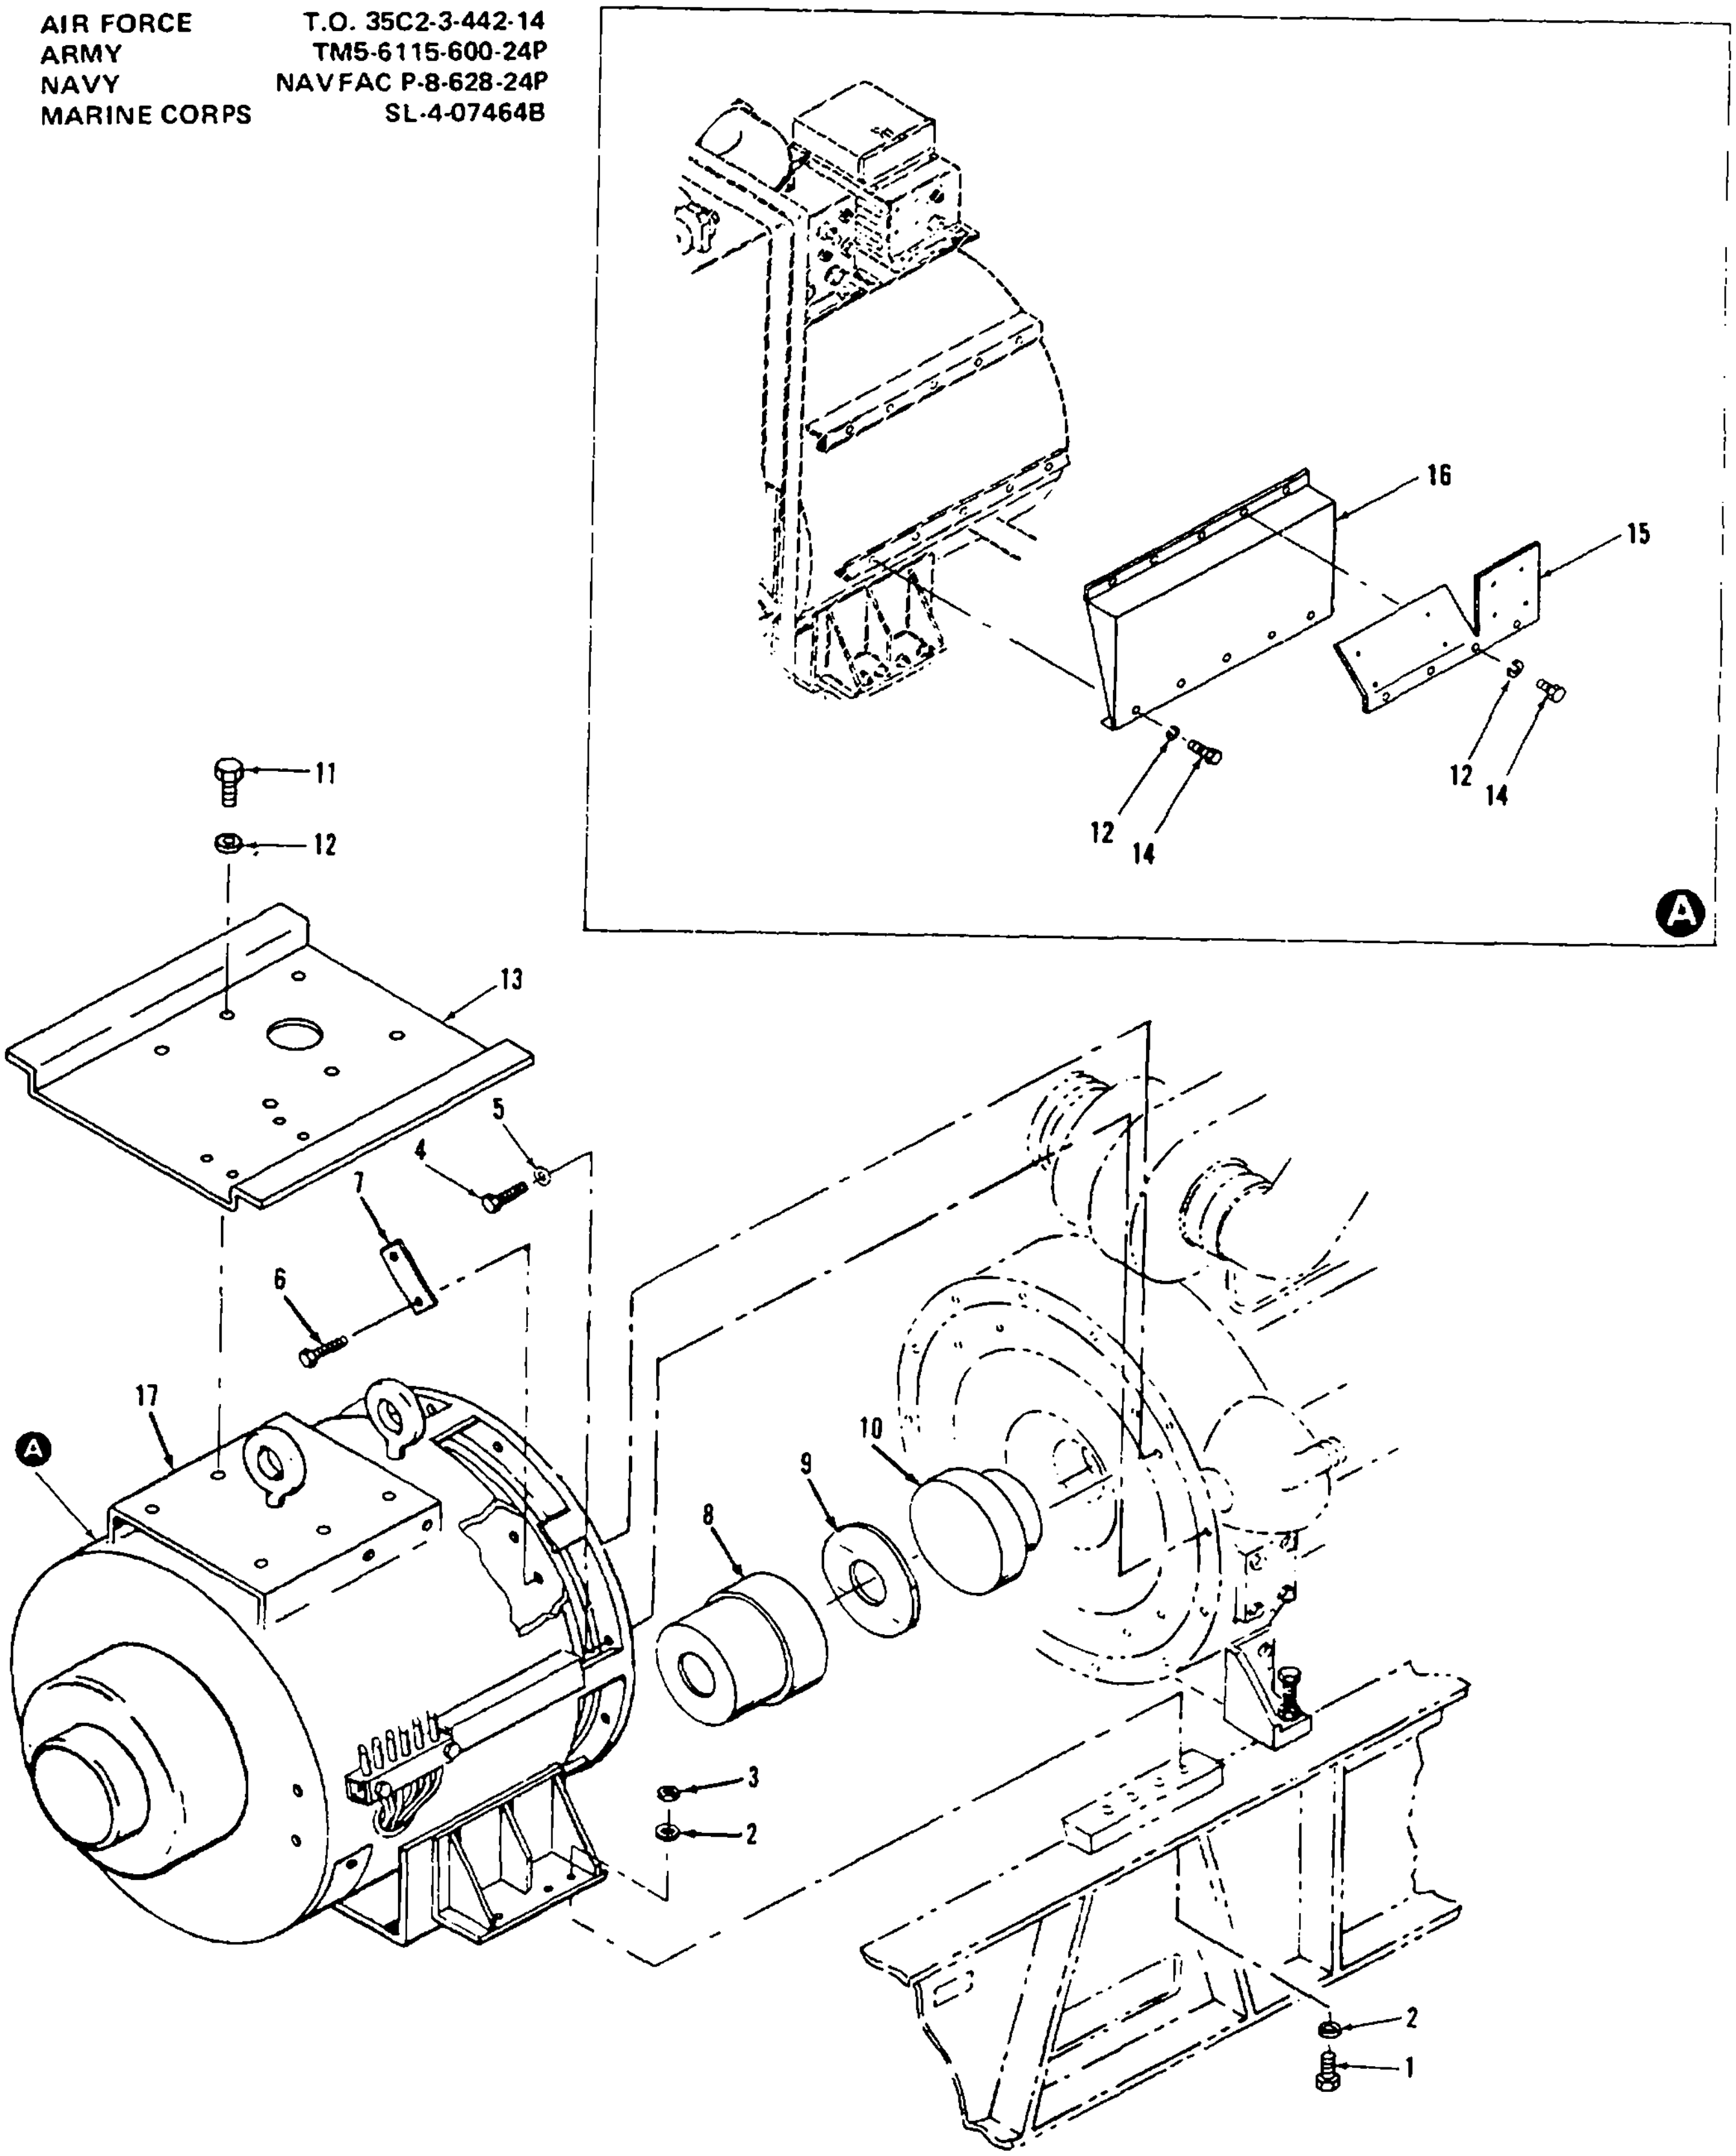
16
15
12
14
12
14
A
11
12
13
5
4
7
6
17
A
10
9
8
3
2
2
1

Figure 51. Generator Assembly and Related Parts

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | *GROUP 09 - POWER GENERATION SYSTEM* | | | | |
| 52 | | PBFHD | PAFDD | PAFHD | PAFHD | | | 6115-00-182-7153 | GENERATOR ASSEMBLY<br>70-4001 | 30554 | EA | 1 | 1 |
| 52 | 1 | PAFZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-253-5617 | SCREW<br>MS21318-23 | 96906 | EA | 4 | 4 |
| 52 | 2 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION<br>70-4501 | 30554 | EA | 1 | 1 |
| 52 | 3 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-068-0500 | SCREW, HEX HEAD<br>MS90725-3 | 96906 | EA | 4 | 24 |
| 52 | 4 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-209-0786 | WASHER, LOCK<br>MS35335-33 | 96906 | EA | 1 | 35 |
| 52 | 5 | MOO | MOO | MOO | MOO | | | | RETAINER, SCREEN<br>70-4543 | 30554 | EA | 2 | 2 |
| 52 | 6 | MOO | MOO | MOO | MOO | | | | SCREEN, AIR INTAKE<br>70-4542 | 30554 | EA | 1 | 1 |
| 52 | 7 | XB | XB | XB | XB | | | | COVER, GENERATOR<br>70-4544 | 30554 | EA | 1 | 1 |
| 52 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-021-2509 | SCREW, CAP, HEX<br>MS90728-12 | 96906 | EA | 4 | 4 |
| 52 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-761-6882 | NUT, HEX<br>MS51967-2 | 96906 | EA | 4 | 22 |
| 52 | 10 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-209-0786 | WASHER, LOCK<br>MS35335-33 | 96906 | EA | 4 | 35 |
| 52 | 11 | PAFZZ | PAFZZ | PAFZZ | PAHZZ | D | .008 | 5305-00-042-6417 | SCREW, HEX HEAD<br>MS90725-113 | 96906 | EA | 6 | 18 |
| 52 | 12 | PAFZZ | PAFZZ | PAFZZ | PAHZZ | D | .010 | 5310-00-584-5272 | WASHER, LOCK<br>MS35338-48 | 96906 | EA | 6 | 26 |
| 52 | 13 | AFF | AFF | AHH | AHH | | | 6150-00-274-5536 | ENDBELL, ELECTRICAL<br>70-4508 | 30554 | EA | 1 | 1 |
| 52 | 14 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0500 | SCREW, HEX HEAD<br>MS90725-3 | 96906 | EA | 4 | 24 |
| 52 | 15 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-209-0786 | WASHER, LOCK<br>MS35335-33 | 96906 | EA | 8 | 35 |
| 52 | 16 | MOO | MOO | MOO | MOO | | | | PLATE, COVER<br>70-4539 | 30554 | EA | 1 | 1 |
| 52 | 17 | MOO | MOO | MOO | MOO | | | | RETAINER, SCREEN<br>70-4628 | 30554 | EA | 2 | 2 |
| 52 | 18 | MOO | MOO | MOO | MOO | | | | SCREEN<br>70-4540 | 30554 | EA | 1 | 1 |
| 52 | 19 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-218-4864 | SCREW AND WASHER<br>69-662-22<br>61-061241-40-0142B-0542B | 30554<br>78189 | EA | 4 | 6 |
| 52 | 20 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | | CONNECTOR, RECEPTACLE<br>70-4565 | 30554 | EA | 1 | 1 |
| 52 | 21 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-141-1795 | WASHER, FLAT<br>AN960-416 | 88044 | EA | 4 | 4 |
| 52 | 22 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-13 | 30554 | EA | 1 | 1 |
| 52 | 23 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-14 | 30554 | EA | 1 | 1 |

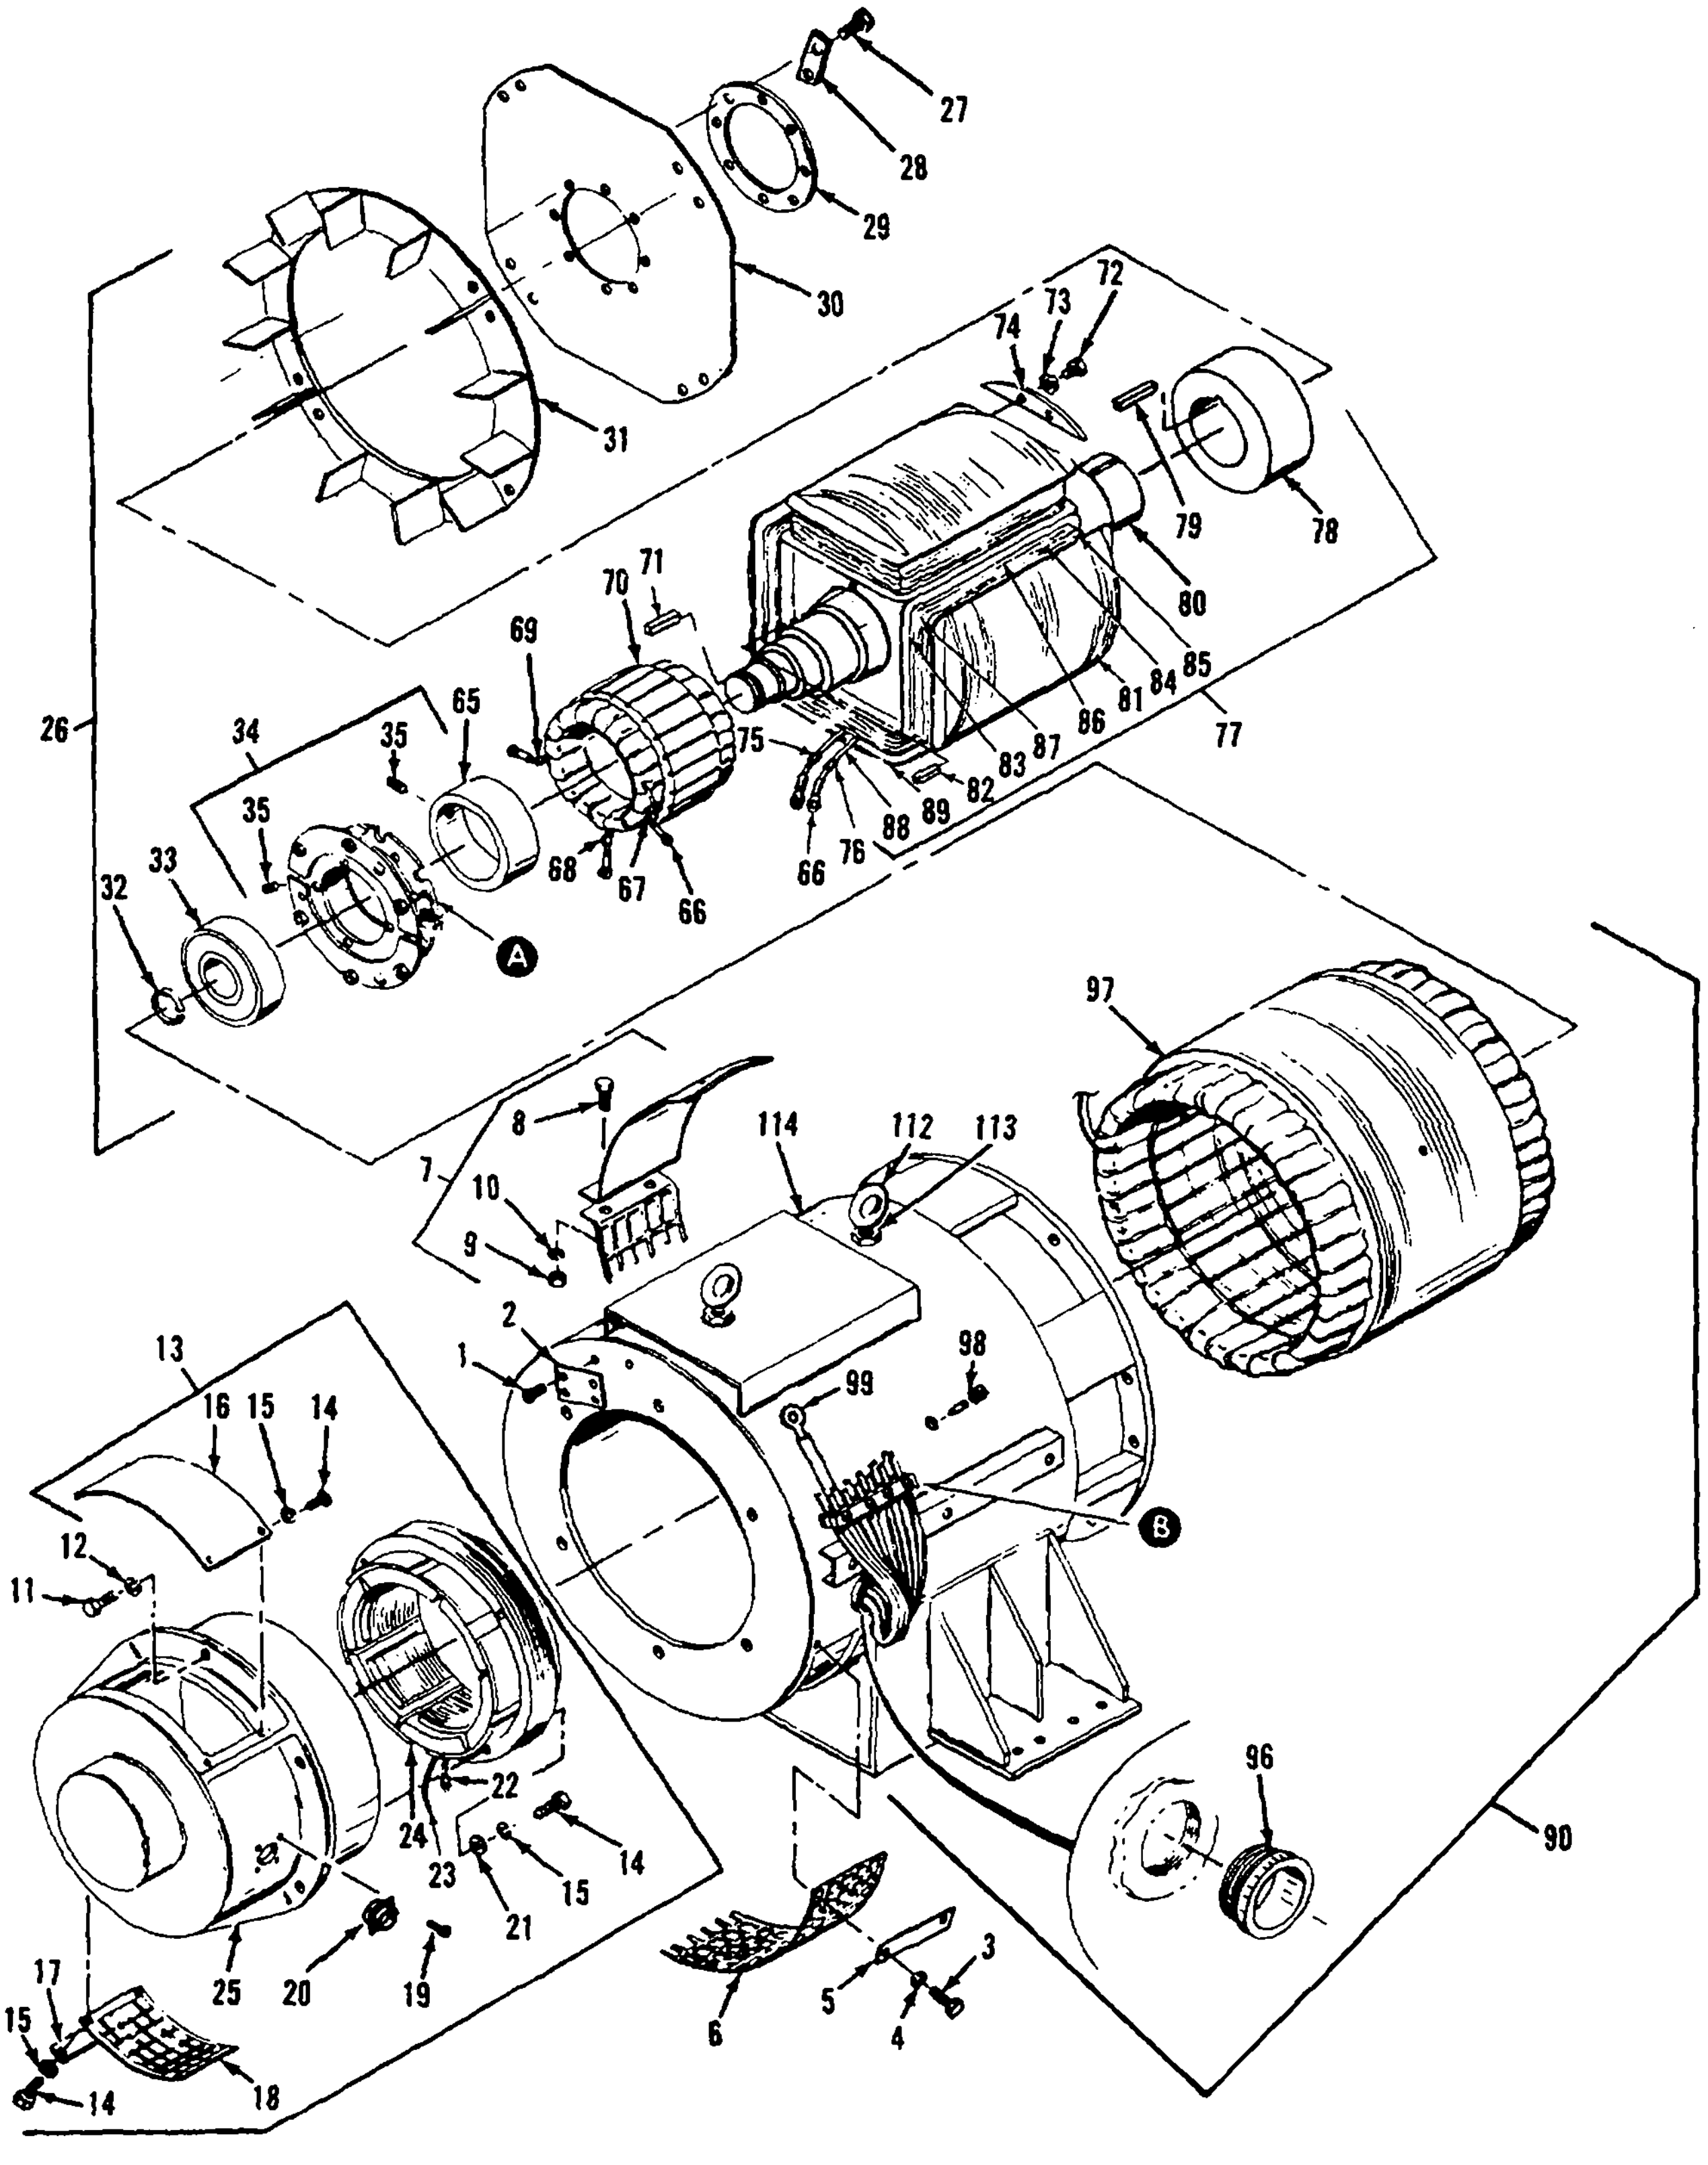
27
28
29
30
31
74
73
72
79
78
71
70
80
69
65
85
84
81
86
87
83
77
26
34
35
75
88
89
82
35
33
32
68
67
66
66
76
A
97
8
114
112
113
7
10
9
2
1
98
99
13
16
15
14
12
11
B
22
24
23
14
15
21
96
90
17
25
20
19
3
5
4
6
15
14
18

Figure 52. Generator Assembly (Sheet 1 of 3)

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 09 - POWER GENERATION SYSTEM - CONTINUED | | | | |
| 52 | | | | | | | | | GENERATOR ASSEMBLY - CONTINUED | | | | |
| 52 | 24 | PBFZZ | PAFZZ | PAHZZ | PAHZZ | | .007 | 6115-00-185-8005 | STATOR ASSY, EXCITER<br>70-4514 30554 | | EA | 1 | 1 |
| 52 | 25 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 6115-00-368-8651 | ENDBELL, ELECTRICAL<br>70-4594 30554 | | EA | 1 | 1 |
| 52 | 26 | PAFDD | PAFDD | PAHHH | PAHHH | | .007 | 6115-00-182-7155 | ROTOR ASSY, MAIN<br>70-4506 30554 | | EA | 1 | 1 |
| 52 | 27 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-226-7768 | SCREW, CAP, HEX<br>MS90726-115 96906 | | EA | 2 | 8 |
| 52 | 28 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 5340-00-081-5094 | PLATE, LOCKING NUT<br>70-4530 30554 | | EA | 4 | 4 |
| 52 | 29 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 5115-00-262-4366 | INSERT, FLEXIBLE COUPLER<br>70-4528 30554 | | EA | 3 | 3 |
| 52 | 30 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 6115-00-320-1514 | PLATE, RETAINING, SHAFT<br>70-4529 93568 | | EA | 1 | 1 |
| 52 | 31 | PBFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 6115-00-248-5905 | FAN, GENERATOR<br>70-4531 30554 | | EA | 1 | 1 |
| 52 | 32 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 5365-00-225-2752 | RING, RETAINING<br>MS16624-4275 96906 | | EA | 1 | 1 |
| 52 | 33 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3110-00-214-0524 | BEARING, BALL<br>70-4564 30554 | | EA | 1 | 1 |
| 52 | 34 | PAFFF | PAFFF | PAHHH | PAHHH | | .050 | 5951-00-387-2527 | RECTIFIER ASSY<br>70-4512 30554 | | EA | 1 | 1 |
| 52 | 35 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-811 -0798 | SETSCREW, HEX SKT<br>MS51021-83 96906 | | EA | 2 | 2 |
| 52 | 36 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-845-7961 | BOLT, CARRIAGE<br>70-4577 30554 | | EA | 4 | 4 |
| 52 | 37 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-761-6882 | NUT, PLAIN HEX<br>MS51967-2 96906 | | EA | 8 | 22 |
| 52 | 38 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-209-0786 | WASHER, LOCK<br>MS35335-33 96906 | | EA | 9 | 35 |
| 52 | 39 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-080-6004 | WASHER, FLAT<br>MS27183-14 96906 | | EA | 1 | 43 |
| 52 | 40 | AFF | AFF | AHH | AHH | | | | DIODE ASSY<br>70-4547-1 30554 | | EA | 3 | 3 |
| 52 | 41 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5961-00-752-5701 | DIODE<br>JAN1N1188 81349 | | EA | 3 | 3 |
| 52 | 42 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-043-0520 | NUT, PLAIN HEX<br>MS35650-3252 96906 | | EA | 5 | 5 |
| 52 | 43 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5940-00-230-0515 | LUG, TERMINAL<br>MS25036-154 96906 | | EA | 3 | 10 |
| 52 | 44 | MFF | MFF | MFH | MFH | | | | LEAD, MFR. FROM:<br>70-4626-1 30554 | | EA | 3 | 3 |
| 52 | 45 | PAFZZ | PAFZZ | PAFZZ | PAHZZ | D | .080 | 6145-00-578-6604 | WIRE<br>M5086/2-14-9 81349 | | FT | 2 | 24 |

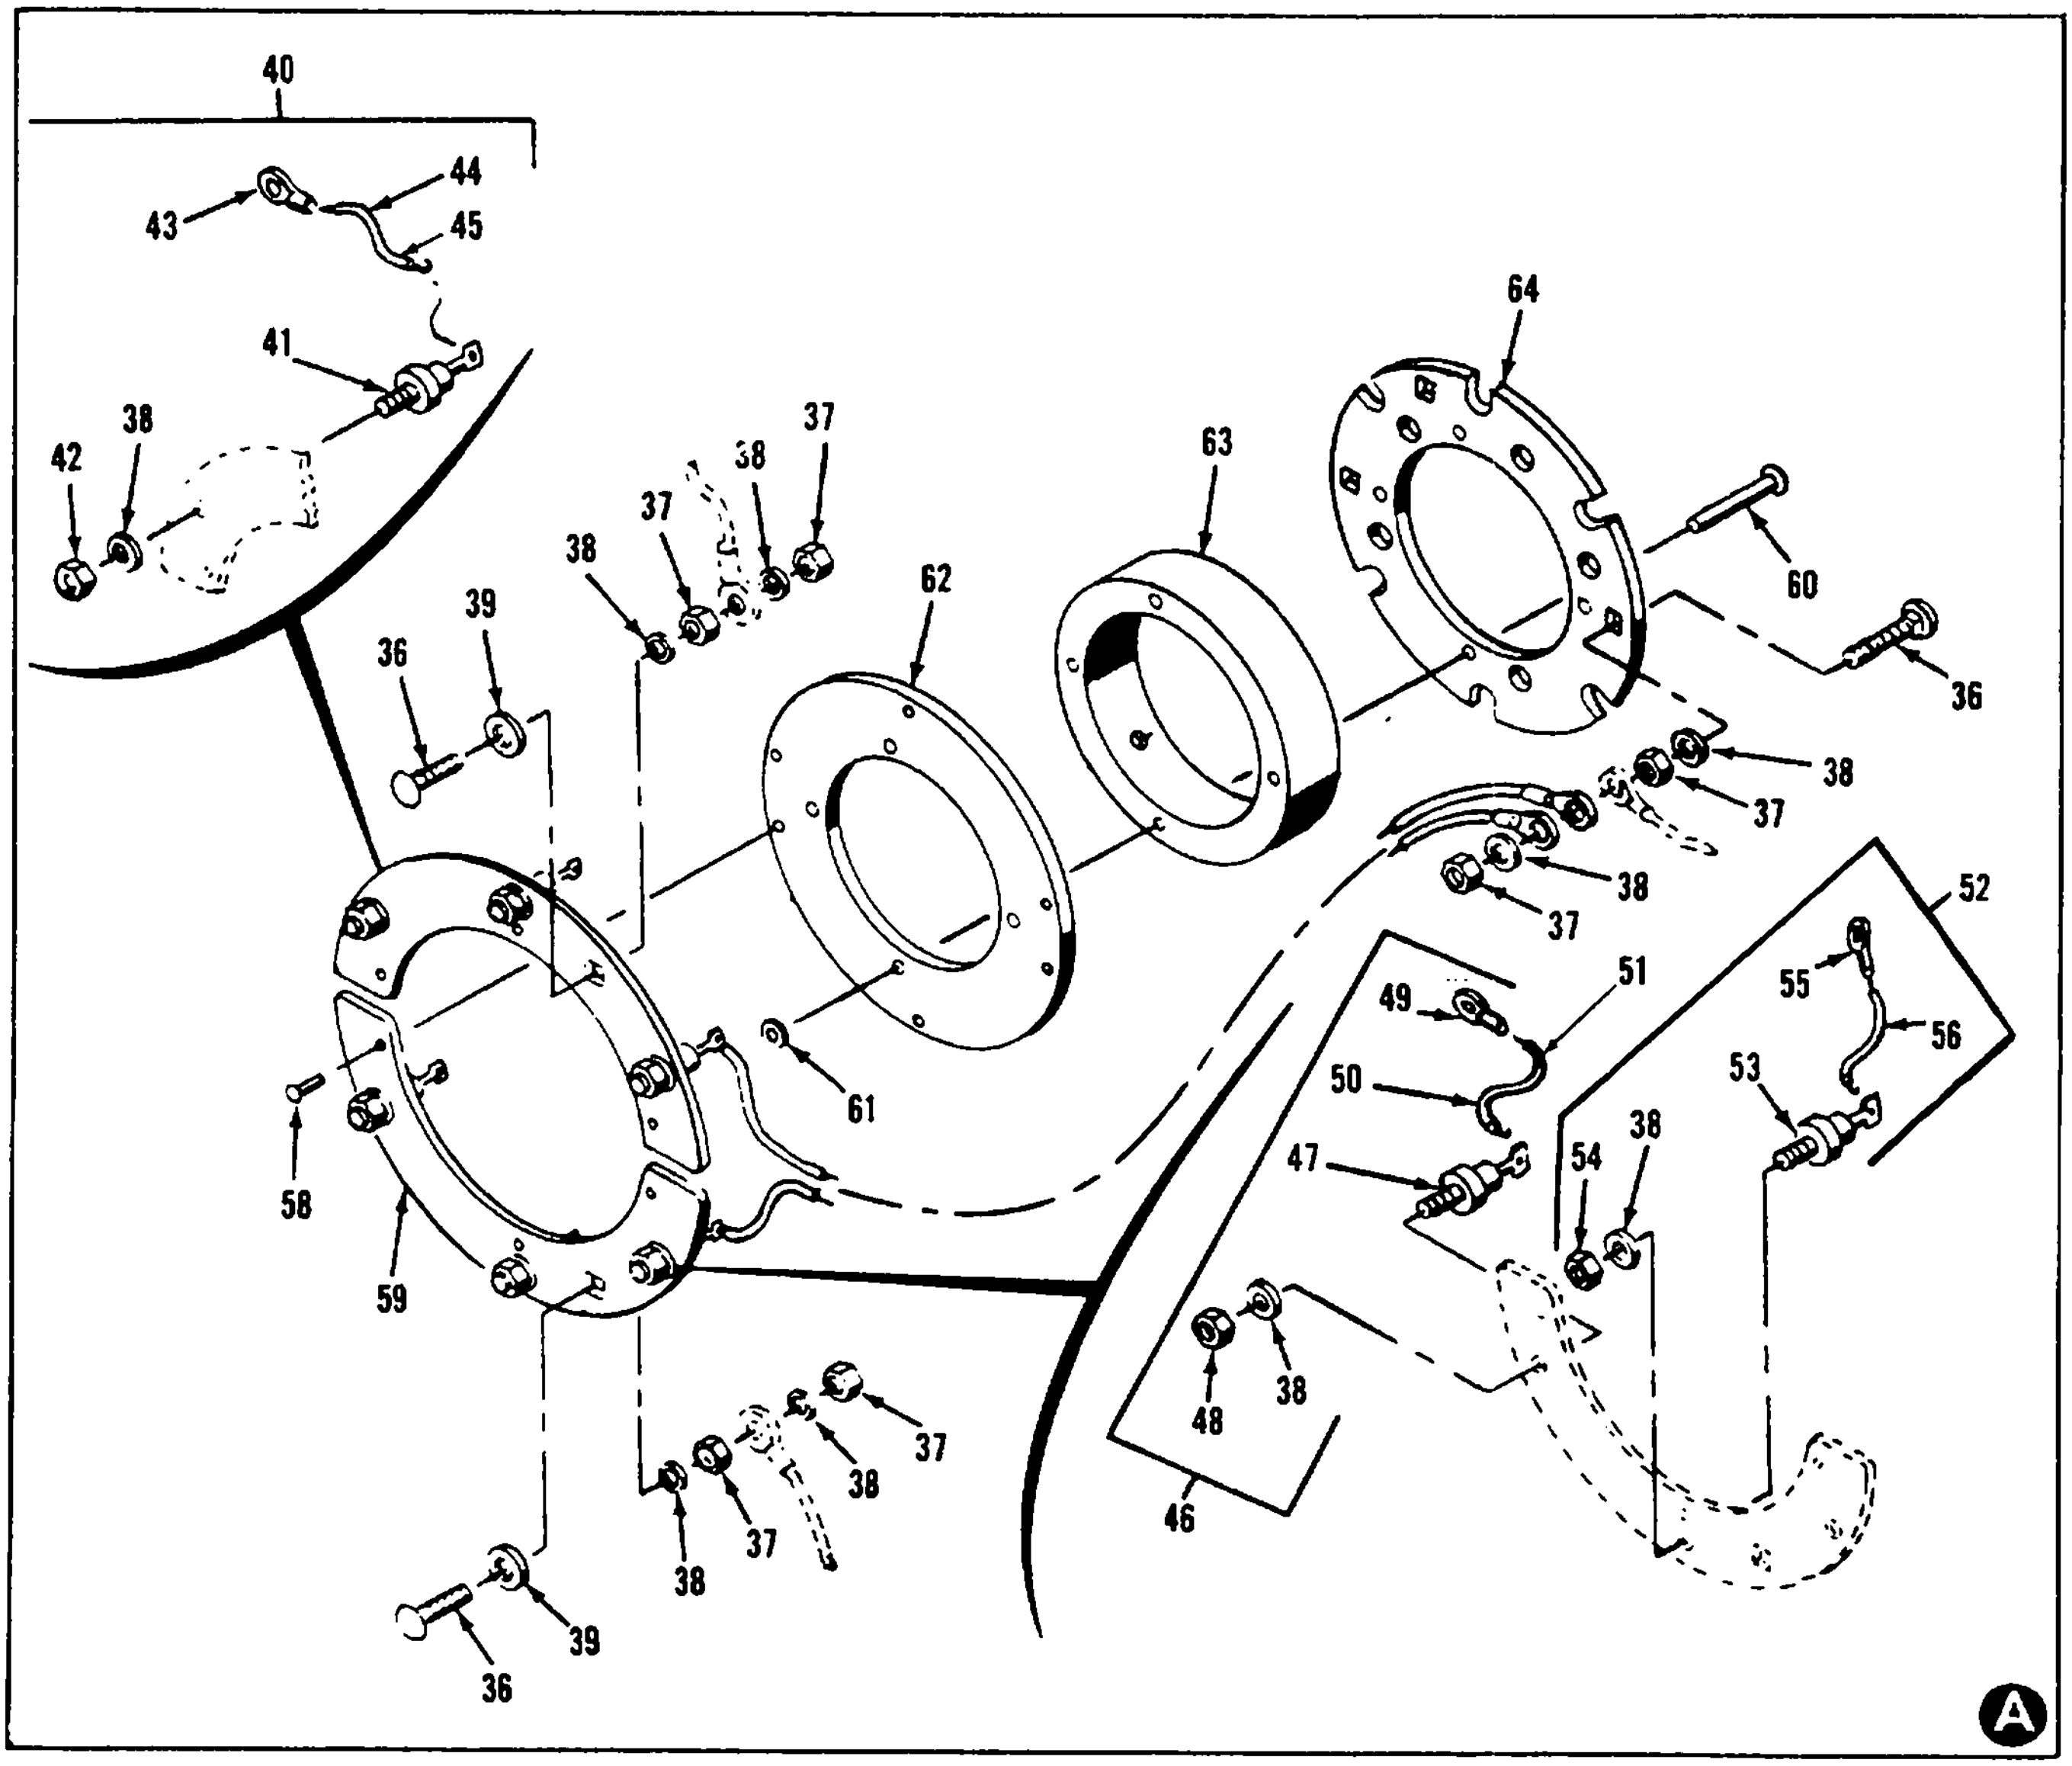
40
43
44
45
41
38
42
38
37
37
38
38
39
36
62
63
64
60
36
38
37
38
37
52
51
49
55
56
50
53
47
54
38
61
58
59
48
38
46
37
38
37
38
39
36
A

Figure 52. Generator Assembly (Sheet 2 of 3)

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 09 - POWER GENERATION SYSTEM - CONTINUED | | | | |
| 52 | | | | | | | | | GENERATOR ASSEMBLY - CONTINUED | | | | |
| 52 | 46 | AFF | AFF | AHH | AHH | | | | DIODE ASSY<br>70-4547-2 | 30554 | EA | 21 | 2 |
| 52 | 47 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 5961-01-101-3967 | DIODE<br>JAN1N1188R | 81349 | EA | 3 | 6 |
| 52 | 48 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-043-0520 | NUT, PLAIN HEX<br>MS35650-3252 | 96906 | EA | 3 | 5 |
| 52 | 49 | PAFZZ | PAFZZ | PHAZZ | PAHZZ | D | .050 | 5940-00-230-0515 | LUG, TERMINAL<br>MS25036-154 | 96906 | EA | 3 | 10 |
| 52 | 50 | MFF | MFF | MFH | MHH | | | | LEAD, MFR. FROM:<br>70-4626-1 | 30554 | EA | 3 | 3 |
| 52 | 51 | PAFZZ | PAFZZ | PAFZZ | PAHZZ | D | .080 | 6145-00-578-6604 | WIRE<br>M5086/2-14-9 | 81349 | FT | 2 | 24 |
| 52 | 52 | AFF | AFF | AHH | AHH | | | | DIODE ASSY<br>70-4547-3 | 30554 | EA | 1 | 1 |
| 52 | 53 | PAFZZ | PAFZZ | PHAZZ | PAHZZ | | .050 | 5961-01-101-3967 | DIODE<br>JAN1N1188R | 81349 | EA | 3 | 6 |
| 52 | 54 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-043 -0520 | NUT, PLAIN HEX<br>MS35650-3252 | 96906 | EA | 3 | 5 |
| 52 | 55 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5940-00-230-0515 | LUG, TERMINAL<br>MS25036-154 | 96906 | EA | 3 | 10 |
| 52 | 56 | MFF | MFF | MPH | MHH | | | | LEAD, MFR. FROM:<br>70-4626-2 | 30554 | EA | 3 | 3 |
| 52 | 57 | PAFZZ | PAFZZ | PAFZZ | PAHZZ | D | .080 | 6145-00-578-6604 | WIRE<br>M5096/2-14-9 | 81359 | FT | 2 | 24 |
| 52 | 58 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .080 | 5320-00-117-6830 | RIVET<br>MS20470AD 4-8 | 96906 | EA | 6 | 6 |
| 52 | 59 | XB | XB | XB | XB | | | | HEAT SINK<br>70-4597 | 30554 | EA | 2 | 2 |
| 52 | 60 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 5320-00-235-2770 | RIVET, TUBULAR<br>R3220-24-16<br>70-4552-1 | <br>12014<br>30554 | EA | 4 | 4 |
| 52 | 61 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-809-8544 | WASHER, FLAT<br>MS27183-7 | 96906 | EA | 4 | 28 |
| 52 | 62 | XB | XB | XB | XB | | | | PLATE, INSULATION<br>70-4598 | 30554 | EA | 1 | 1 |
| 52 | 63 | XB | XB | XB | XB | | | | HUB, RICTIEIER<br>70-4596 | 30554 | EA | 1 | 1 |
| 52 | 64 | XB | XB | XB | XB | | | | INSULATOR<br>70-4606 | 30554 | EA | 1 | 1 |
| 52 | 65 | XB | XB | XB | XB | | | | SPACER<br>70-4537 | 30554 | EA | 1 | 1 |
| 52 | 66 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5940-00-143-4777 | LUG, TERMINAL<br>MS25036-157 | 96906 | EA | 1 | 8 |
| 52 | 67 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-17 | 30554 | EA | 1 | 1 |
| 52 | 68 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4529-16 | 30554 | EA | 1 | 1 |

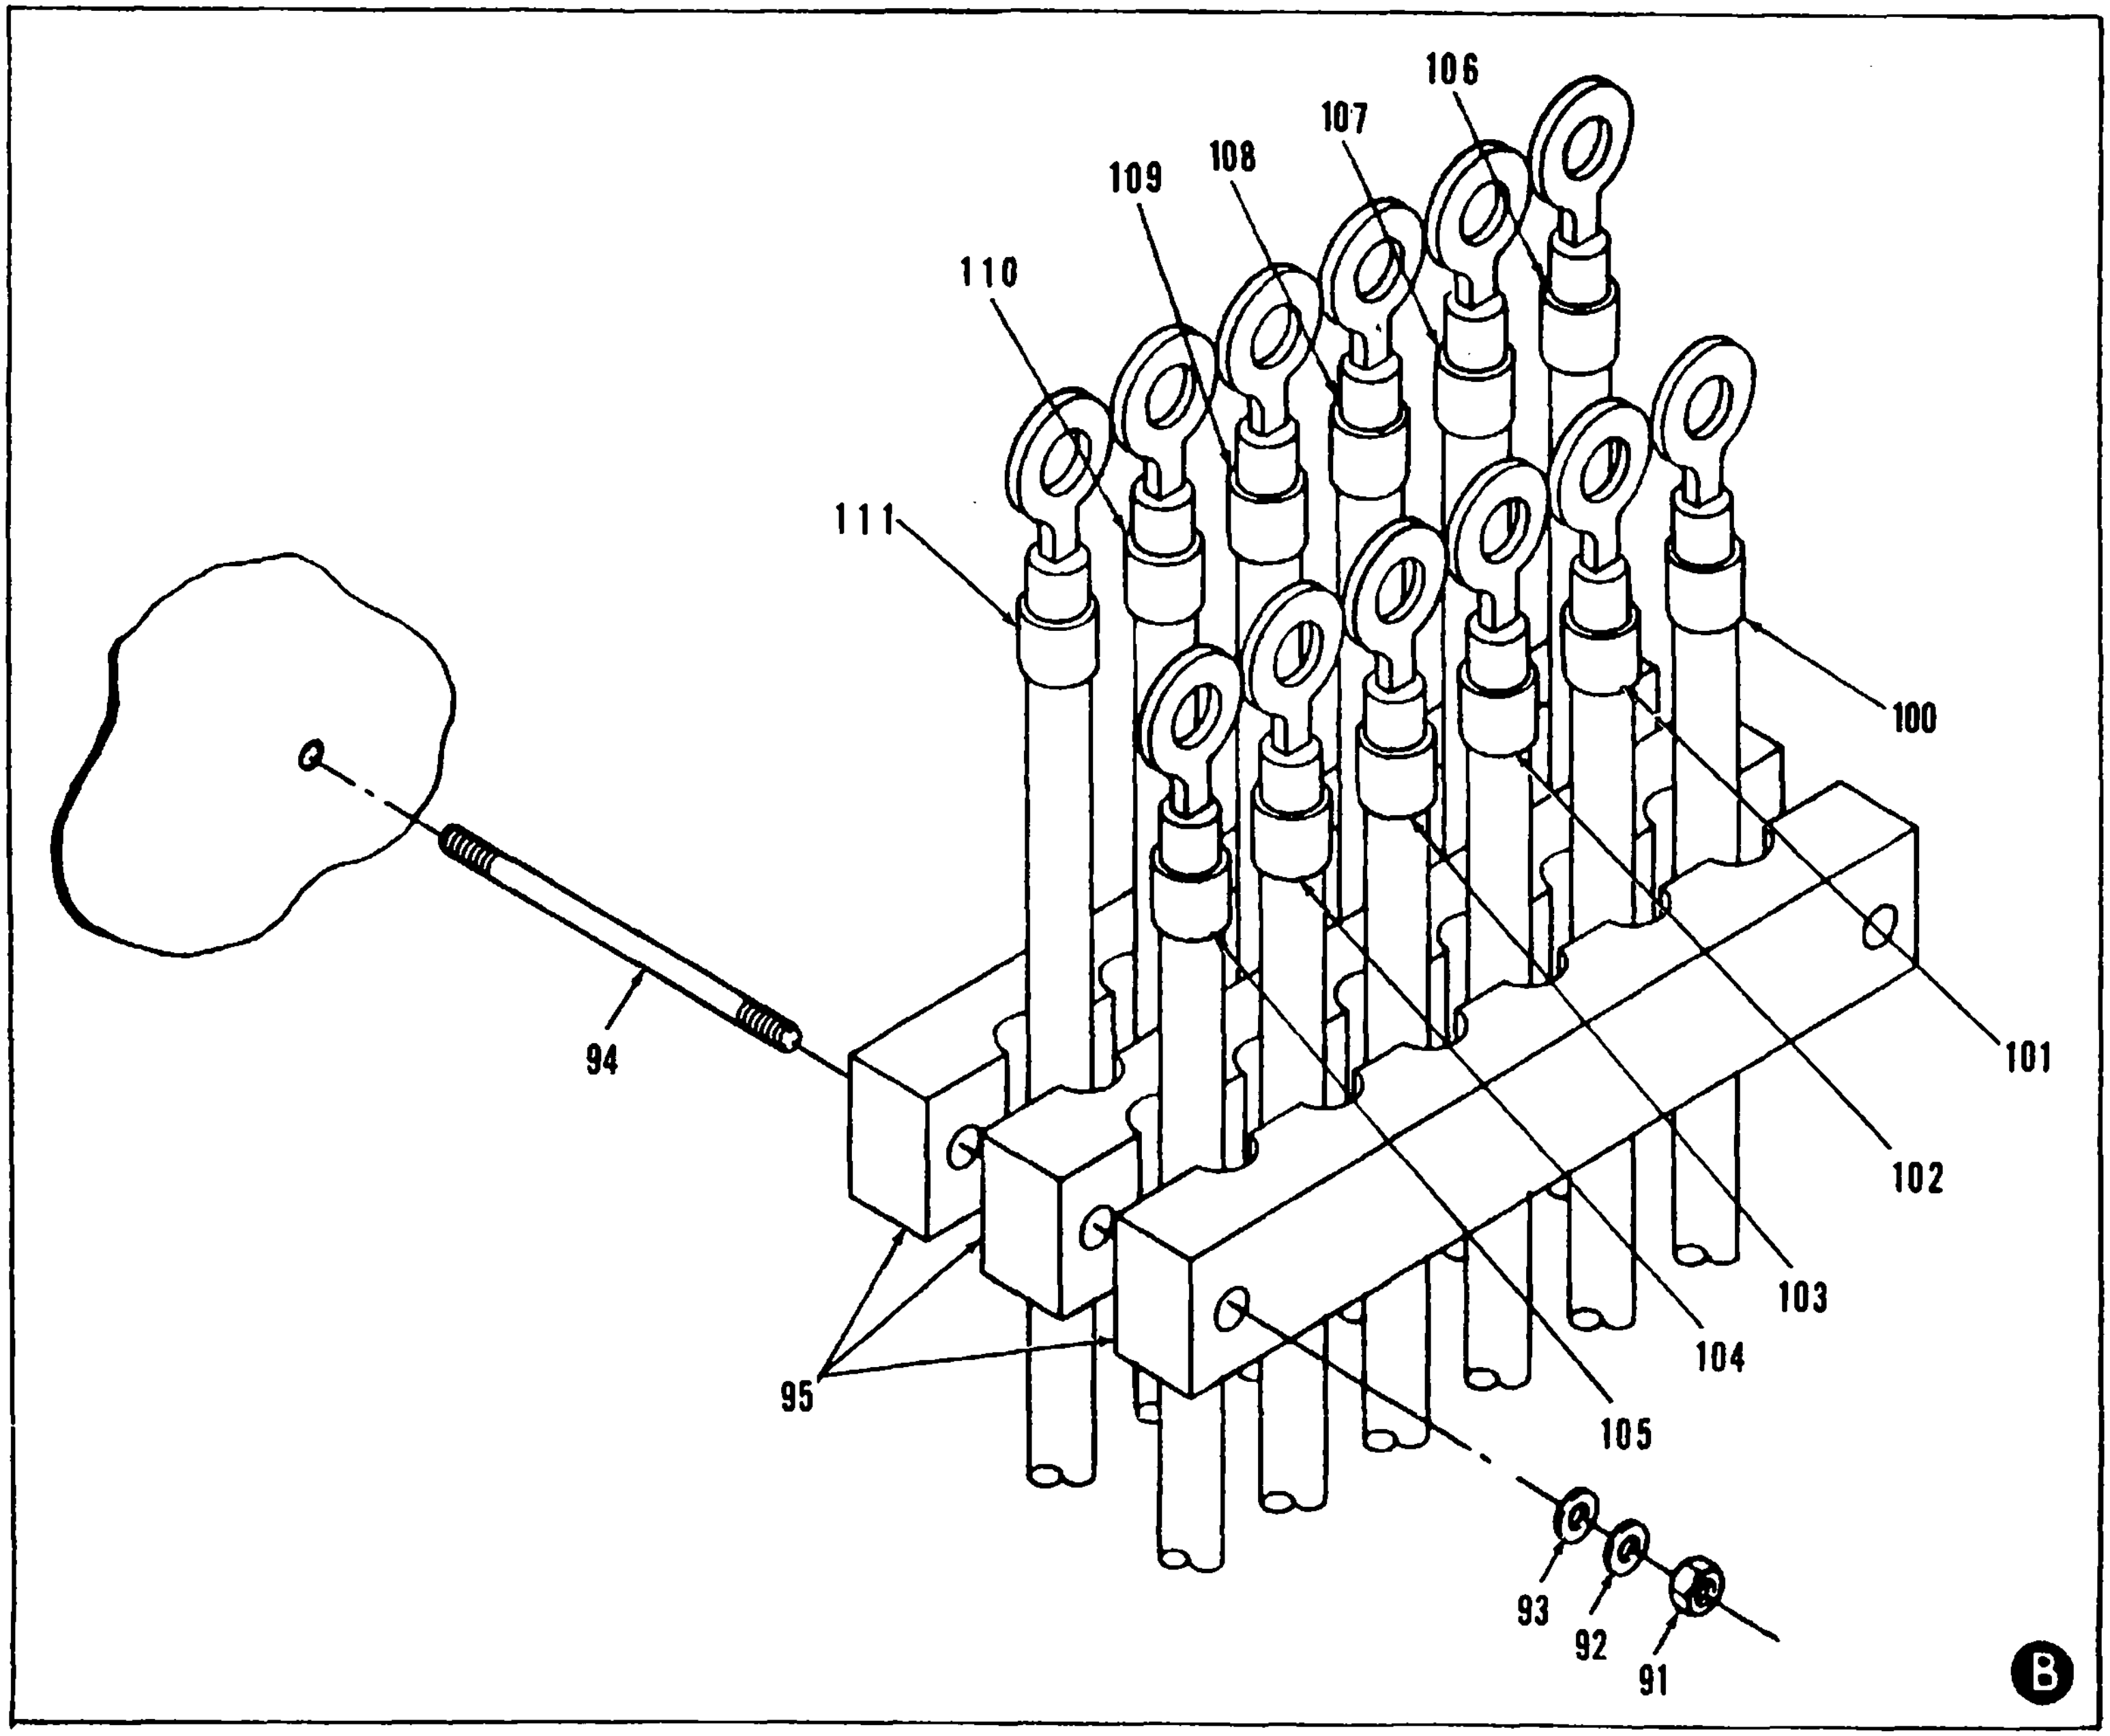
106
107
108
109
110
111
100
101
102
103
104
105
94
95
93
92
91
B

Figure 50. Generator Assembly (Sheet 3 of 3)

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 09 - POWER GENERATION SYSTEM - CONTINUED | | | | |
| 52 | | | | | | | | | GENERATOR ASSEMBLY - CONTINUED | | | | |
| 52 | 69 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-15 | 30554 | EA | 1 | 1 |
| 52 | 70 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .007 | 6115-00-182-7160 | ROTOR ASSY, EXCITER<br>70-4511 | 30554 | EA | 1 | 1 |
| 52 | 71 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-221-9837 | KEY<br>70-4535-1 | 30554 | EA | 1 | 1 |
| 52 | 72 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-225-8499 | SCREW, HEX HEAD<br>MS90725-34 | 96906 | EA | AR | 20 |
| 52 | 73 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-045-4007 | WASHER, LOCK<br>MS35338-45 | 96906 | EA | AR | 67 |
| 52 | 74 | XA | XA | XA | XA | | | | WEIGHT, BALANCE<br>70-4592 | 30554 | EA | AR | 4 |
| 52 | 75 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-18 | 30554 | EA | 1 | 1 |
| 52 | 76 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-19 | 30554 | EA | 1 | 1 |
| 52 | 77 | PAOZZ | PAOZZ | PAHZZ | PAHZZ | | | 6115-01-016-7742 | ROTOR SUBASSY, MAIN<br>70-4509 | 30554 | EA | 1 | 1 |
| 52 | 78 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 5115-00-263-0653 | HUB, COUPLING, DRIVE<br>70-4582 | 30554 | EA | 1 | 1 |
| 52 | 79 | PAOZZ | PAOZZ | PAHZZ | PAHZZ | D | .080 | 5315-00-213-5124 | KEY, MACHINE<br>70-4535-3 | 30554 | EA | 1 | 1 |
| 52 | 80 | XA | XA | XA | XA | | | | SHAFT, ROTOR, GENERATOR<br>70-4603 | 30554 | EA | 1 | 1 |
| 52 | 81 | XA | XA | XA | XA | | | | CORE, ROTOR, MAIN<br>70-4615 | 30554 | EA | 1 | 1 |
| 52 | 82 | PAOZZ | PAOZZ | PAHZZ | PAHZZ | D | .080 | 5315-00-213-5124 | KEY<br>70-4535-3 | 30554 | EA | 1 | 1 |
| 52 | 83 | XA | XA | XA | XA | | | | PIN, STRAIGHT, HDLS<br>70-4576-2 | 30554 | EA | 16 | 16 |
| 52 | 84 | XA | XA | XA | XA | | | | POLE, INSULATION<br>70-4571-1 | 30554 | EA | 8 | 8 |
| 52 | 85 | XA | XA | XA | XA | | | | POLE, INSULATION<br>70-4571-2 | 30554 | EA | 8 | 8 |
| 52 | 86 | XA | XA | XA | XA | | | | POLE, INSULATION<br>70-4569-2 | 30554 | EA | 8 | 8 |
| 52 | 87 | XA | XA | XA | XA | | | | POLE, INSULATION<br>70-4569-1 | 30554 | EA | 8 | 8 |
| 52 | 88 | XA | XA | XA | XA | | | | SPLICE, PARALLEL<br>70-4584 | 30554 | EA | 3 | 3 |
| 52 | 89 | PAOZZ | PAOZZ | PAHZZ | PAHZZ | | | 6145-00-556-8850 | WIRE, MAGNET<br>MIL-W-583<br>M1401 | <br>81349<br>14926 | FT | 10 | 10 |
| 52 | 90 | PBFDD | PAFDD | PAHHH | PAHHH | | .007 | 6115-00-182-7162 | MAIN STATOR AND FRAME<br>70-4507 30554 | | EA | 1 | 1 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 09 - POWER GENERATION SYSTEM - CONTINUED | | | | |
| 52 | | | | | | | | | GENERATOR ASSEMBLY - CONTINUED | | | | |
| 52 | 91 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-880-7744 | NUT<br>MS51967-5 | 96906 | EA | 4 | 5 |
| 52 | 92 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-045-4007 | WASHER, LOCK<br>MS35338-45 | 96906 | EA | 4 | 67 |
| 52 | 93 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-177-0978 | WASHER, FLAT<br>MS25440-5 | 96906 | EA | 4 | 4 |
| 52 | 94 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5307-00-218-7504 | STUD<br>70-4579 | 30554 | EA | 4 | 4 |
| 52 | 95 | XB | XB | XB | XB | | | | LEAD, CLAMP<br>70-4546 | 30554 | EA | 1 | 1 |
| 52 | 96 | PBFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5975-01-131-9854 | BUSHING, INSULATOR<br>70-4566<br>PEM 12 | 30554<br>73389 | EA | 1 | 1 |
| 52 | 97 | XA | XA | XA | XA | | | | MAIN STATOR<br>70-4513 | 30554 | EA | 1 | 1 |
| 52 | 98 | PAFZZ | PAFZZ | PHAZZ | PAHZZ | D | .008 | 5305-01-145-7615 | SETSCREW, HEX SKT<br>79-1001-1 | 30554 | EA | 2 | 2 |
| 52 | 99 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 5940-00-804-0502 | LUG, TERMINAL<br>MS25036-134 | 96906 | EA | 12 | 13 |
| 52 | 100 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-1 | 30554 | EA | 2 | 2 |
| 52 | 101 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-2 | 30554 | EA | 2 | 2 |
| 52 | 102 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-3 | 30554 | EA | 2 | 2 |
| 52 | 103 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-4 | 30554 | EA | 2 | 2 |
| 52 | 104 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-5 | 30554 | FA | 2 | 2 |
| 52 | 105 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-6 | 30554 | EA | 2 | 2 |
| 52 | 106 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-7 | 30554 | EA | 2 | 2 |
| 52 | 107 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-8 | 30554 | EA | 2 | 2 |
| 52 | 108 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-9 | 30554 | EA | 2 | 2 |
| 52 | 109 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-10 | 30554 | EA | 2 | 2 |
| 52 | 110 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-11 | 30554 | EA | 2 | 2 |
| 52 | 111 | XB | XB | XB | XB | | | | MARKER, WIRE<br>70-4629-12 | 30554 | EA | 2 | 2 |
| 52 | 112 | XB | XB | XB | XB | | | | EYEBOLT<br>70-4568 | 30554 | EA | 2 | 2 |
| 52 | 113 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-763-8920 | NUT<br>MS51967-20 | 96906 | EA | 2 | 2 |
| 52 | 114 | XA | XA | XA | XA | | | | FRAME, STATOR 100 KW<br>70-4545-1 | 30554 | EA | 1 | 1 |

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 53 | | | | | | | | | AIR CLEANER AND RELATED PARTS | | | | |
| 53 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-225-8507 | SCREW, HEX HEAD<br>MS90725-43 | <br>96906 | EA | 2 | 2 |
| 53 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-245-3424 | NUT, SELF-LOCKING<br>MS17829-5C | <br>96906 | EA | 2 | 167 |
| 53 | 3 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-942-2196 | SCREW, HEX HEAD<br>MS90725-80 | <br>96906 | EA | 2 | 8 |
| 53 | 4 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5310-00-483-8790 | NUT, SELF-LOCKING<br>MS17829-6C | <br>96906 | EA | 2 | 25 |
| 53 | 5 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-080-6004 | WASHER, FLAT<br>MS27183-14 | <br>96906 | EA | 4 | 43 |
| 53 | 6 | XB | XB | XB | XB | | | | BRACKET<br>71-4623 | <br>30554 | EA | 1 | 1 |
| 53 | 7 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-00-440-9323 | PACKING, PREFORMED<br>7L7460 | <br>11083 | EA | 1 | 1 |
| 53 | 8 | XB | XB | XB | XB | | | | COUPLING<br>5L5344 | <br>11083 | EA | 1 | 1 |
| 53 | 9 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-00-440-9325 | PACKING, PREFORMED<br>7L2031 | <br>11083 | EA | 1 | 1 |
| 53 | 10 | AOO | AOO | AOO | AOO | | | | AIR CLEANER ASSY<br>71-4399 | <br>30554 | EA | 1 | 1 |
| 53 | 11 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 6310-00-063-6716 | NUT, PLAIN WING<br>MS35426-14 | <br>96906 | EA | 2 | 2 |
| 53 | 12 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK<br>MS35338-44 | <br>96906 | EA | 2 | 154 |
| 53 | 13 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | <br>96906 | EA | 2 | 252 |
| 53 | 14 | XB | XB | XB | XB | | | | RETAINER, AIR CLEANER<br>70-4398 | <br>30554 | EA | 1 | 1 |
| 53 | 15 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .870 | 2940-00-463-1362 | FILTER, ELEMENT<br>70-1251 | <br>30554 | EA | 2 | 2 |
| 53 | 16 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5310-00-959-7600 | NUT, SELF-LOCKING<br>MS51922-5 | <br>96906 | EA | 4 | 4 |
| 53 | 17 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5307-00-216-8603 | STUD, PLAIN<br>70-4358 | <br>30554 | EA | 2 | 2 |
| 53 | 18 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .060 | 5930-00-430-3532 | SWITCH PRESSURE, FILTER<br>70-1310<br>899-0001 | <br>30554<br>07988 | EA | 1 | 1 |
| 53 | 19 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 4730-00-188-3513 | PLUG, PIPE<br>MS20913-2 | <br>96906 | EA | 2 | 3 |
| 53 | 20 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .006 | 4730-00-177-6166 | TEE, STREET<br>71-4853<br>1/4 MRO-S | <br>30554<br>08752 | EA | 1 | 1 |
| 53 | 21 | XA | XA | XA | XA | | | | FRAME, AIR CLEANER<br>71-4397 | <br>30554 | EA | 1 | 1 |

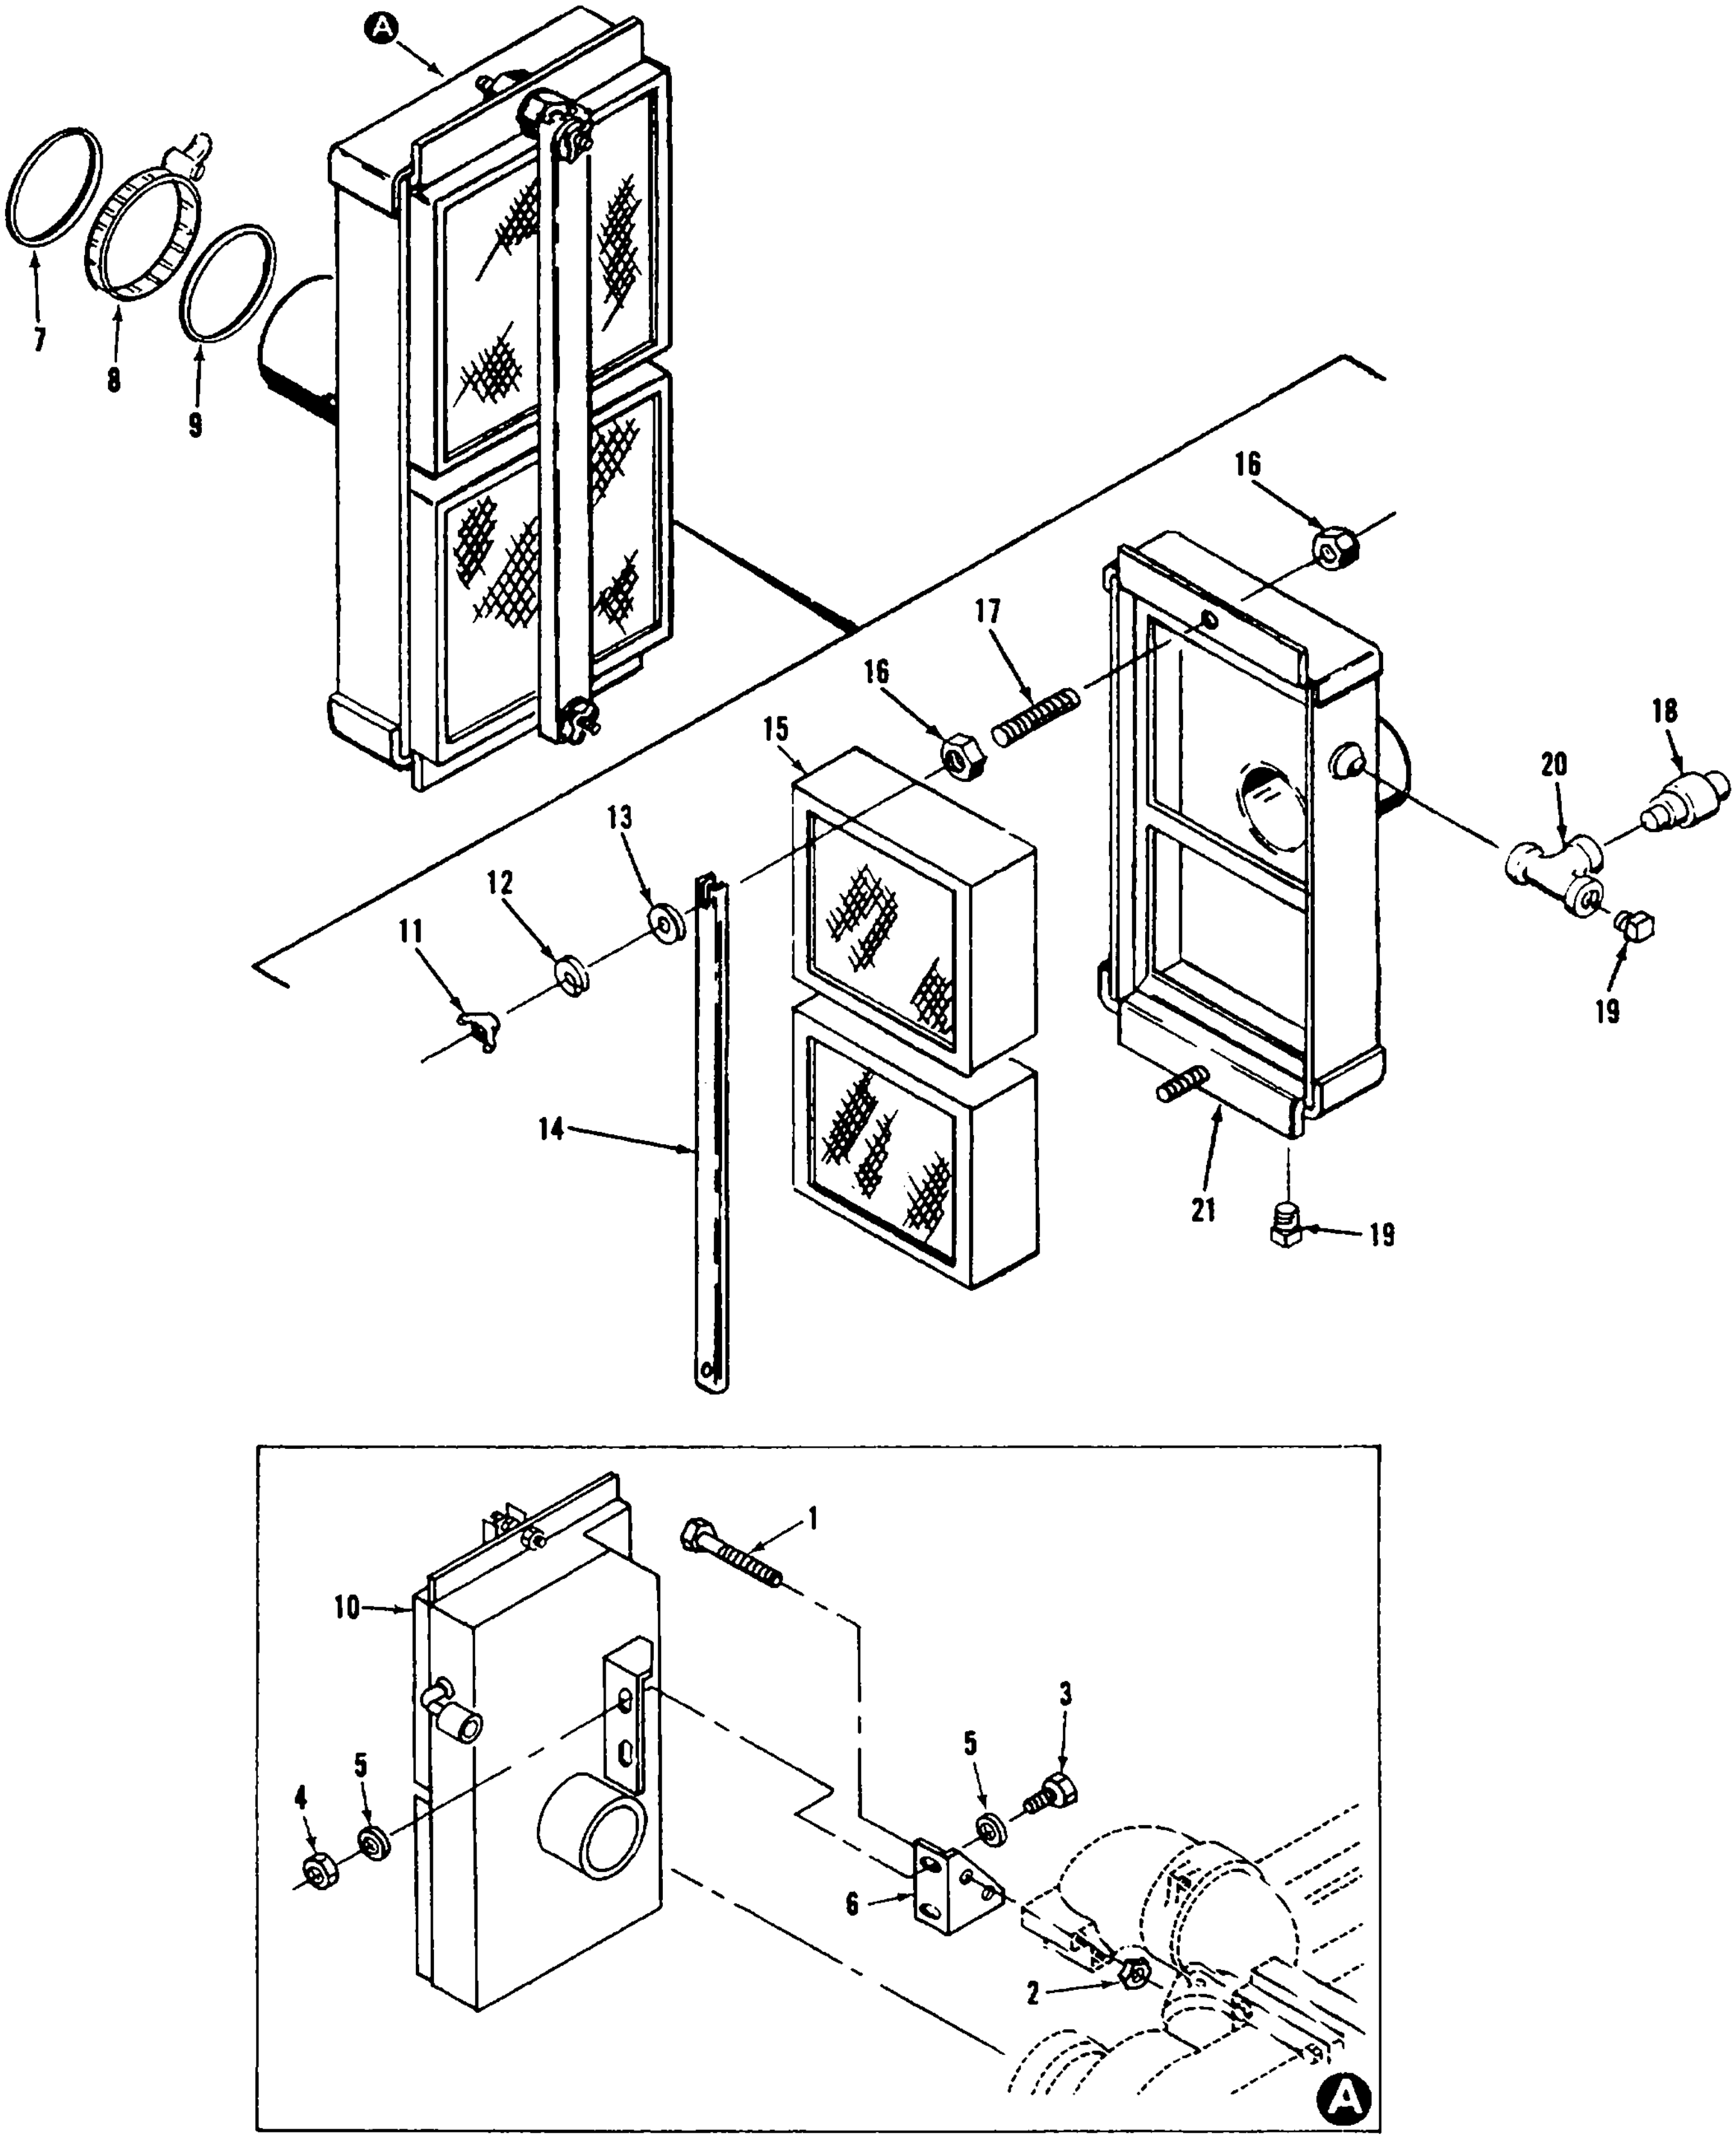
A
7
8
9
16
17
16
15
18
20
13
12
11
14
19
21
19
1
10
3
5
5
4
6
2
A

Figure 53. Air Cleaner and Related Parts

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 54 | | PAFHD | PAFDD | PAFHD | PAFHD | | | 2815-01-040-3662 | ENGINE<br>5R3635 11083<br>(SEE FIGURES 16, 33, 37, 38, 39, 43, 44, 45, AND 52 THROUGH 78 FOR BREAKDOWN) | | EA | 1 | 1 |
| 54 | | | | | | | | | AIR LINES | | | | |
| 54 | 1 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-115-9526 | BOLT<br>MS18154-58 | 96906 | EA | 1 | 9 |
| 54 | 2 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-117-4788 | WASHER<br>5M2894 | 11083 | EA | 5 | 71 |
| 54 | 3 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 5340-00-118-3095 | CLIP<br>7M8322 | 11083 | EA | 1 | 1 |
| 54 | 4 | AOO | AOO | MHH | MHH | | | | TUBE ASSY<br>6N1022 | 11083 | EA | 1 | 1 |
| 54 | 5 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-00-013-7397 | NUT<br>4B8756 | 11083 | EA | 2 | 2 |
| 54 | 6 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .004 | 4730-01-068-7274 | TUBE<br>5P11948 | 11083 | EA | 1 | 1 |
| 54 | 7 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 4730-00-496-7511 | ELBOW<br>9S7720 | 11083 | EA | 1 | 1 |
| 54 | 8 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-01-125-9776 | PLUG<br>9L8492 | 11083 | EA | 1 | 1 |
| 54 | 9 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 4730-01-125-9752 | TEE<br>9L9045 | 11083 | EA | 1 | 1 |
| 54 | 10 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 4731-00-277-9386 | BUSHING<br>895-8D | 80049 | EA | 1 | 1 |
| 54 | 11 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 2990-01-032-7257 | PIPE<br>6L3052 | EA<br>11083 | 1 | 1 | |
| 54 | 12 | PA0ZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-074-3773 | PACKING, PREFORMED<br>P/O KIT P/N 5P9117<br>4L8337 | 11083 | EA | 2 | 8 |
| 54 | 13 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-637-4956 | BOLT<br>S1588 | 11083 | EA | 4 | 21 |
| 54 | 14 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-760-7367 | GASKET<br>5S6735 | 11083 | EA | 1 | 2 |
| 54 | 15 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 2815-01-032-2211 | ELBOW<br>7L496 | 11083 | EA | 1 | 1 |

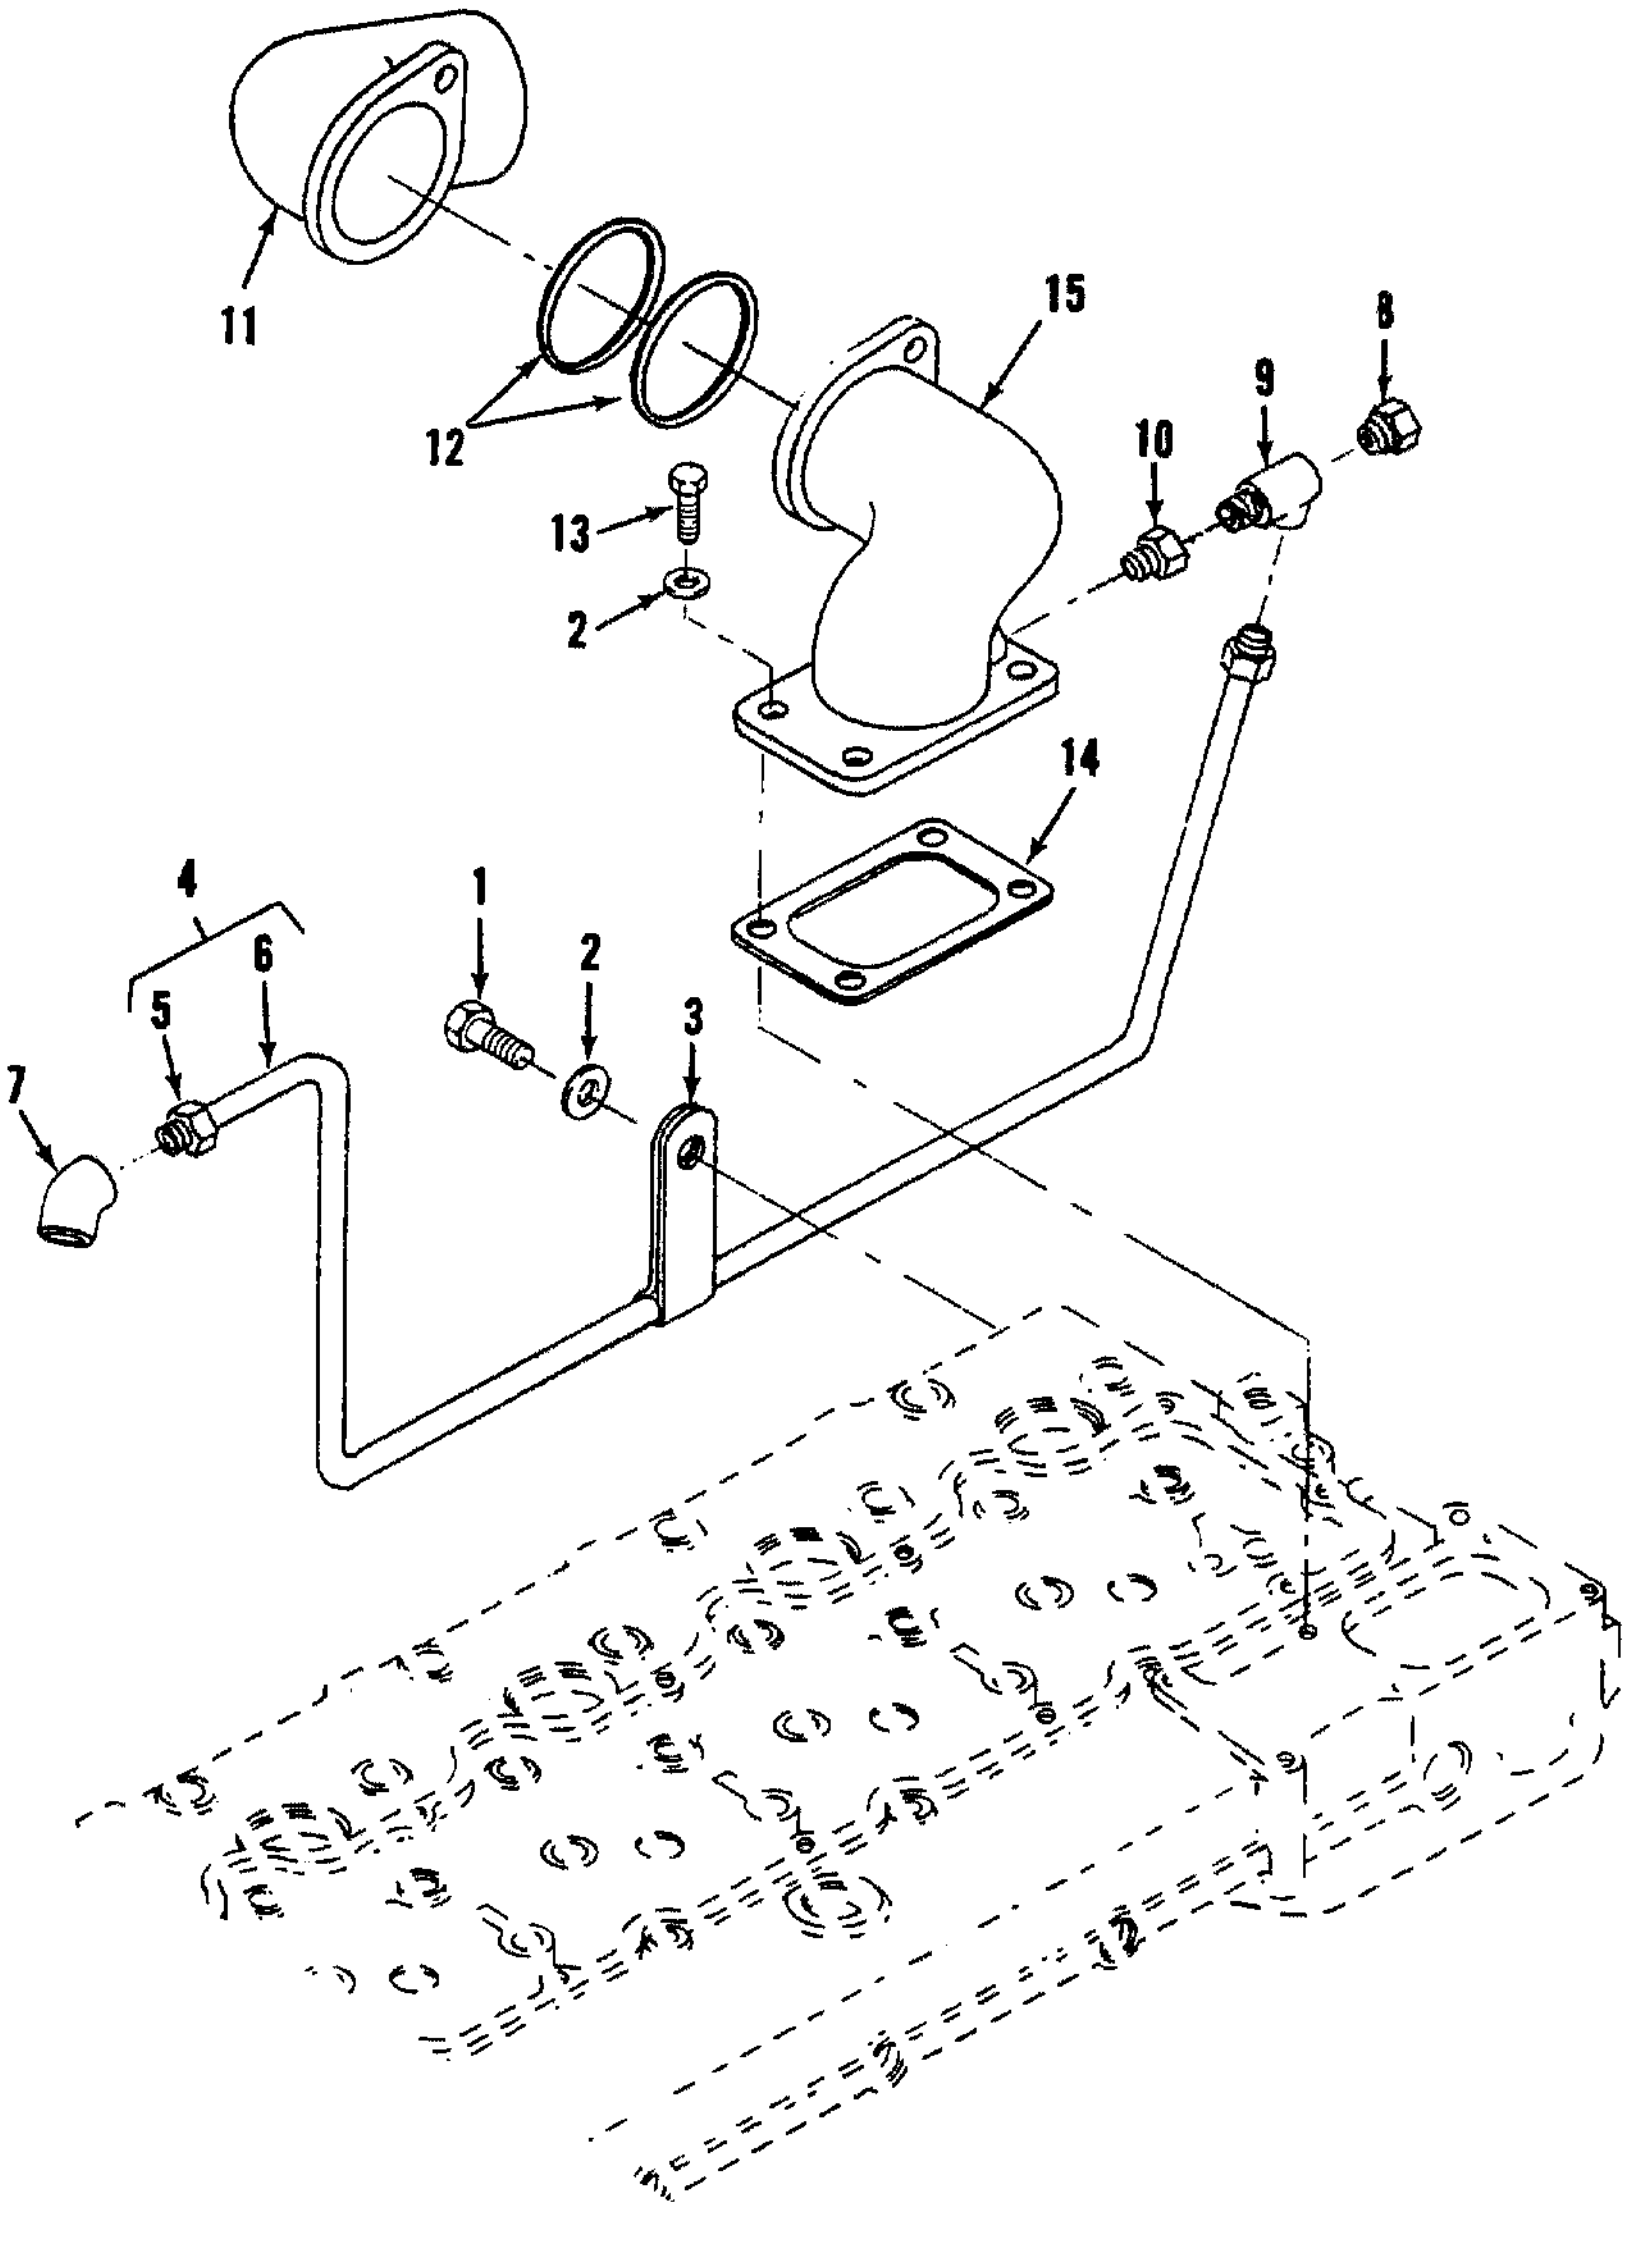
11
12
15
8
9
10
13
2
14
4
1
2
6
5
3
7

Figure 54. Air Lines

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 55 | | | | | | | | | TURBO CHARGER | | | | |
| 55 | 1 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-269-3216 | BOLT<br>S1590 11083 | | EA | 2 | 6 |
| 55 | 2 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 6310-00-243-6947 | NUT<br>8M2296 11083 | | EA | 6 | 10 |
| 55 | 3 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 2815-00-994-7407 | RING<br>5L8854 11083 | | EA | 1 | 1 |
| 55 | 4 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 2990-00-981-1041 | SUPPORT, ENGINE ELBOW<br>5L7632 11083 | | EA | 1 | 1 |
| 55 | 5 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 2910-00-994-7409 | RING<br>5L8855 11083 | | EA | 1 | 1 |
| 55 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 2990-00-177-3449 | COUPLING<br>6L8968 11083 | | EA | 1 | 1 |
| 55 | 7 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-074-3773 | PACKING, PREFORMED,<br>P/O KIT P/N 5P9117<br>4L8337 11083 | | EA | 4 | 8 |
| 55 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 2990-01-032-7257 | PIPE<br>6L3052 11083 | | EA | 1 | 2 |
| 55 | 9 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-269-3215 | BOLT<br>MS90725-65 96906 | | EA | 2 | 2 |
| 55 | 10 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-514-6249 | WASHER, LOCK<br>3B4506 11083 | | EA | 4 | 47 |
| 55 | 11 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-931-8048 | GASKET, P/O KIT P/N 5P9117<br>1S6595 11083 | | EA | 1 | 1 |
| 55 | 12 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-263-7301 | BOLT<br>L1351 11083 | | EA | 2 | 14 |
| 55 | 13 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-989-3295 | GASKET, P/O KIT P/N 5P9117<br>1S4810 11083 | | EA | 1 | 1 |
| 55 | 14 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-255-4877 | BOLT<br>6L8550 11083 | | EA | 2 | 2 |
| 55 | 15 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 6310-00-243-6947 | NUT<br>8M2296 11083 | | EA | 4 | 10 |
| 55 | 16 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-209-4516 | WASHER<br>M5839 28298 | | EA | 4 | 4 |
| 55 | 17 | PAFFF | PAFFF | PAHHH | PAHHH | | .008 | 2950-00-498-3765 | TURBOCHARGER ASSY<br>407640-9 70210<br>8S1918 11083 | | EA | 1 | 1 |
| 55 | 18 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-151-9899 | SCREW<br>2F808 11083 | | EA | 2 | 2 |
| 55 | 19 | MDO | MDO | MOD | MDO | | | 9905-01-053-4809 | PLATE, IDENTIFICATION<br>4069-43 70210<br>8S8097 11083 | | EA | 1 | 1 |
| 55 | 20 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2950-00-950-2470 | CLAMP<br>3S5129 11083 | | EA | 1 | 1 |
| 55 | 21 | XB | XB | XB | XB | | | | HOUSING ASSY<br>407009-73 70210<br>8S5166 11083 | | EA | 1 | 1 |
| 55 | 22 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-191-8284 | BOLT<br>3S5126 11083 | | EA | 7 | 13 |
| 55 | 23 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2950-00-948-1611 | PLATE, LOCKING<br>406064 70210<br>3S5128 11083 | | EA | 3 | 3 |

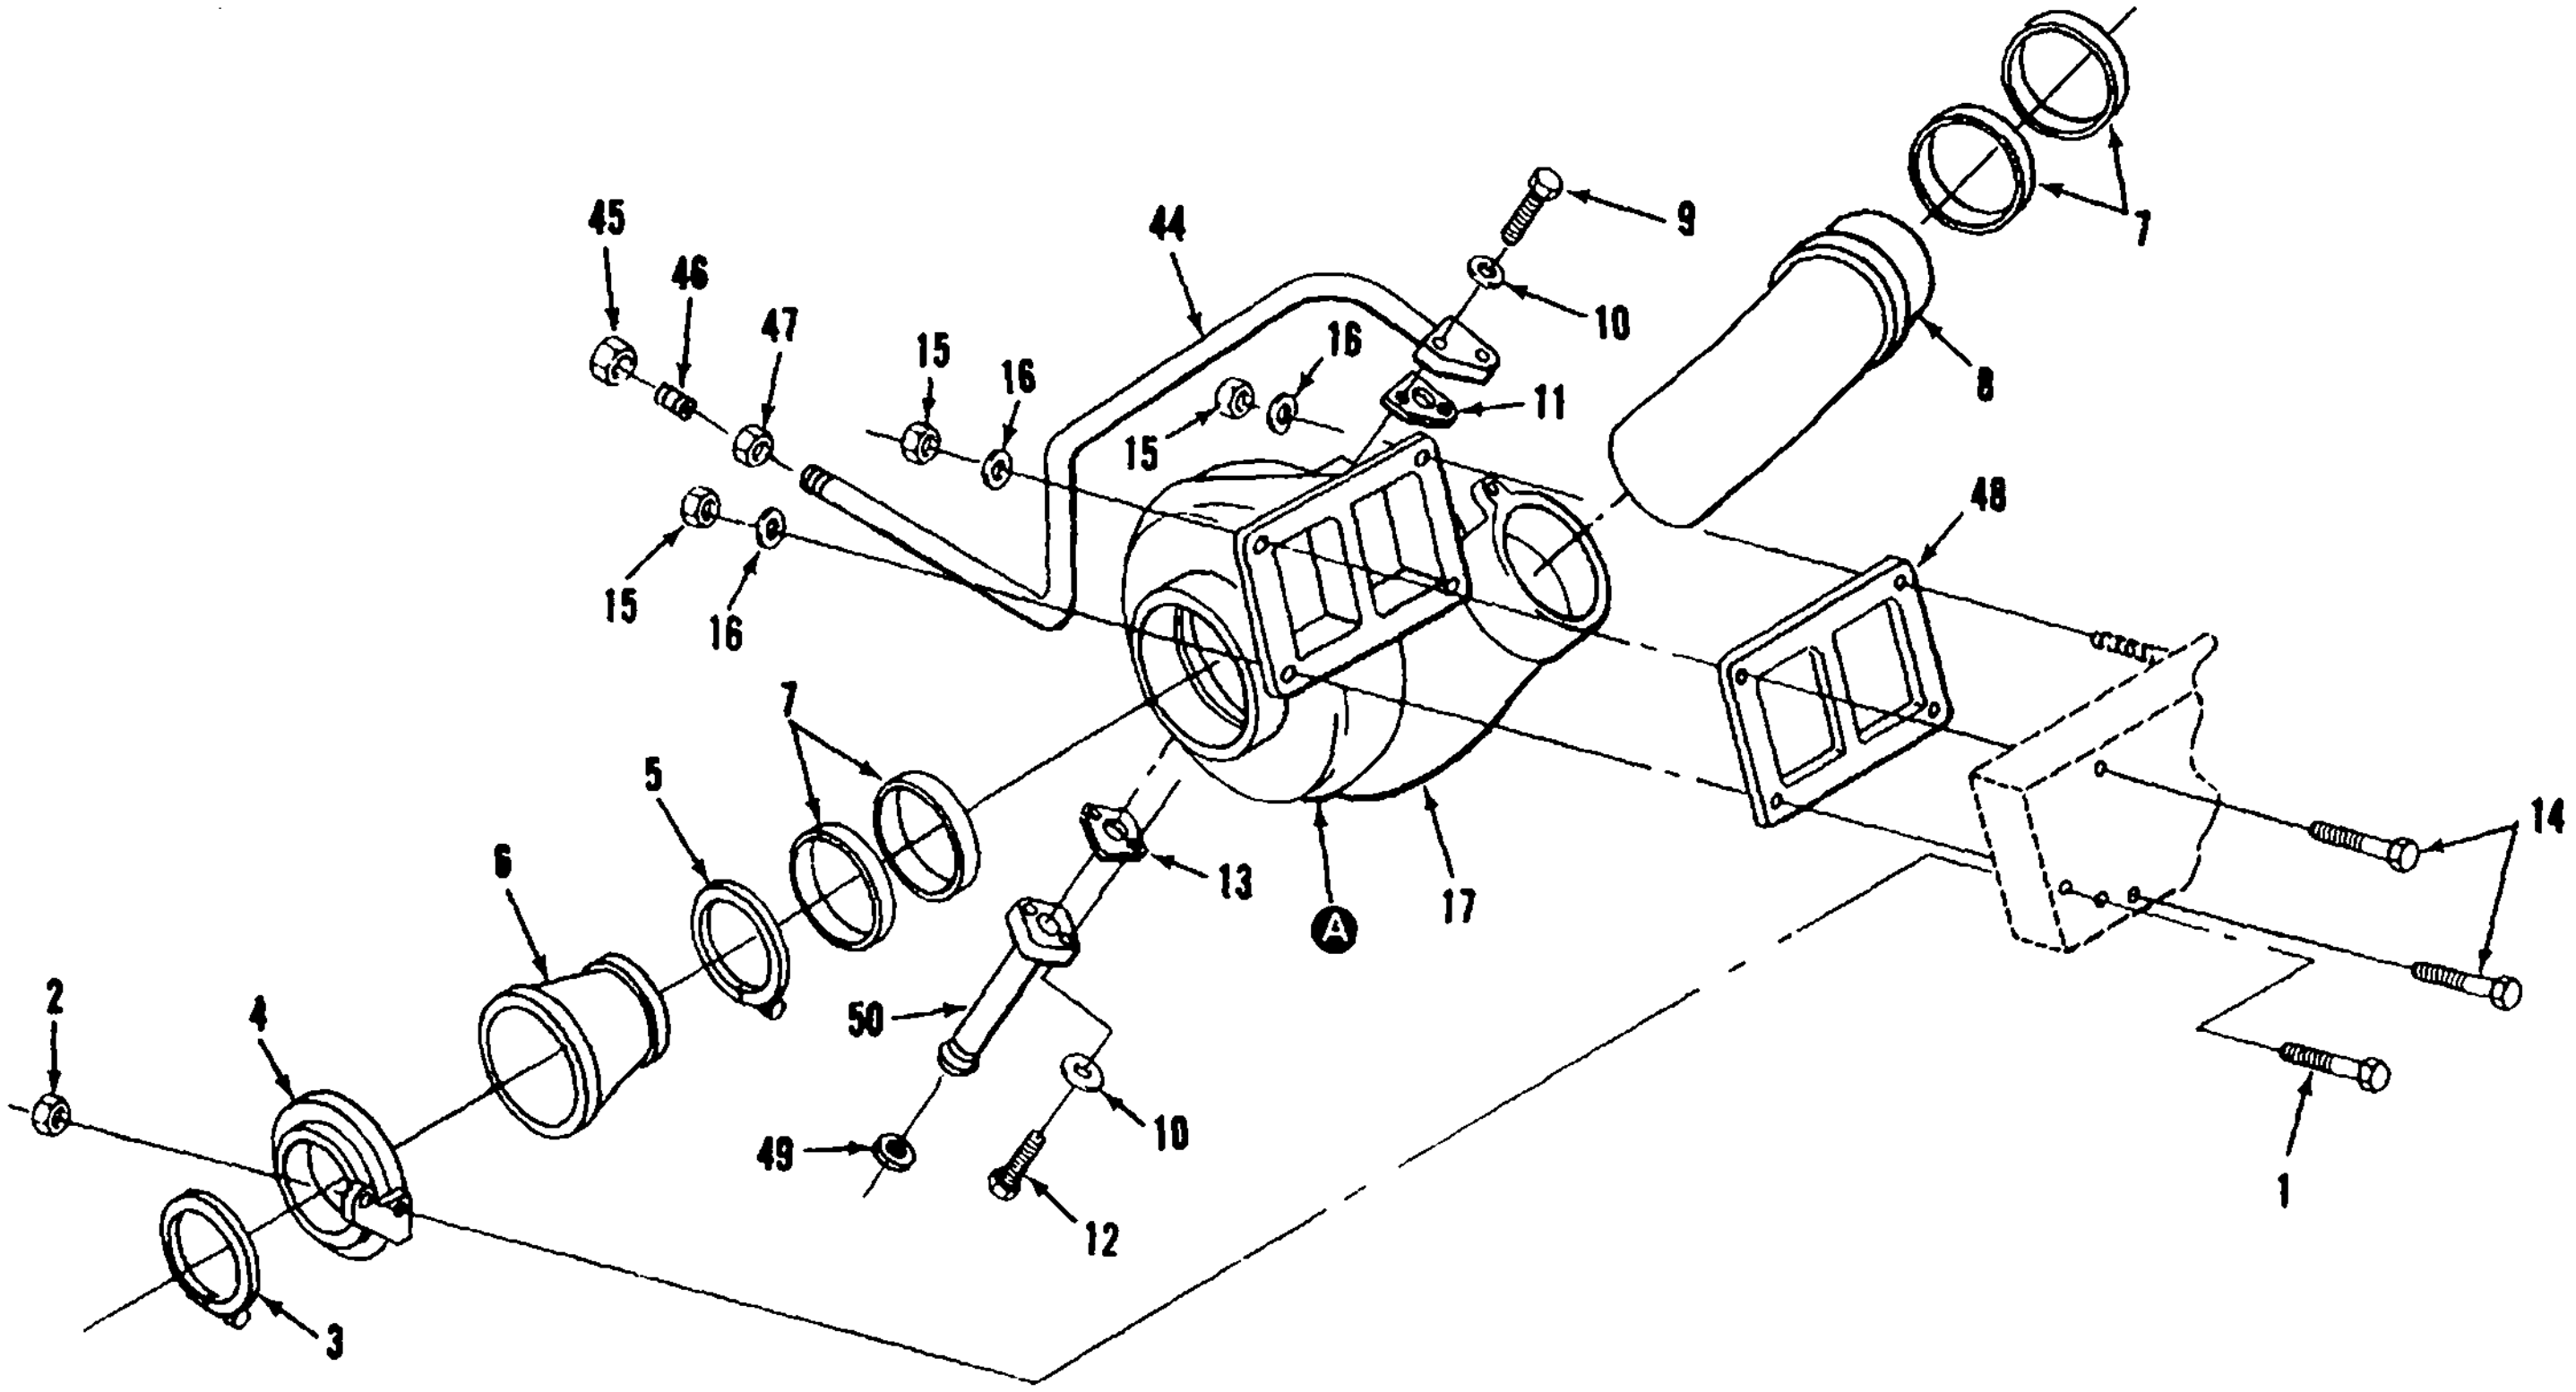
45
46
47
44
15
16
9
10
16
15
11
7
8
15
16
48
7
5
6
13
A
17
14
2
4
50
10
49
12
1
3

Figure 55. Turbocharger (Sheet 1 of 2)

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 55 | | | | | | | | | TURBOCHARGER - CONTINUED | | | | |
| 55 | 24 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2950-00-948-1653 | PLATE, LOCKING<br>406063 70210<br>3S5127 11083 | | EA | 3 | 3 |
| 55 | 25 | XA | XA | XA | XA | | | | HOUSING<br>406482-23 08179<br>8S5165 11083 | | EA | 1 | 1 |
| 55 | 26 | PAFFF | PAFZZ | PAHHH | PAHHH | | .008 | 2815-00-485-9403 | CARTRIDGE, TURBOCHARGER<br>7N7248 11083 | | EA | 1 | 1 |
| 55 | 27 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-269-6797 | NUT, SELF-LOCKING<br>EB054 72962<br>3S4484 11083 | | EA | 1 | 1 |
| 55 | 28 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2950-00-689-3128 | WHEEL, COMPRESSOR<br>408126-6 70210<br>8S5168 11083 | | EA | 1 | 1 |
| 55 | 29 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5365-00-920-0222 | SEAL RING, METAL<br>9M8919 11083 | | EA | 2 | 2 |
| 55 | 30 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5365-00-181-7726 | SPACER, THRUST<br>8S8043 11083 | | EA | 1 | 1 |
| 55 | 31 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-103-3701 | SEAL<br>5P5756 11083 | | EA | 1 | 1 |
| 55 | 32 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 2950-00-552-0197 | COLLAR, THRUST<br>407484-1 70210<br>8S8042 11083 | | EA | 1 | 1 |
| 55 | 33 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2950-00-551-8363 | PLATE ASSY<br>406834-2 70210<br>8S5169 11083 | | EA | 1 | 1 |
| 55 | 34 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3120-01-020-5814 | BEARING, THRUST<br>408593 70210 | | EA | 1 | 1 |
| 55 | 35 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 5365-00-948-3256 | RING, RETAINING<br>9M8915 11083 | | EA | 3 | 3 |
| 55 | 36 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-949 -1451 | PACKING, PREFORMED<br>3S5135 11083 | | EA | 1 | 2 |
| 55 | 37 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-245-6035 | SCREW<br>3S4488 11083 | | EA | 3 | 3 |
| 55 | 38 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2950-00-948-1771 | PLATE, RETAINER<br>40S157 70210<br>3S4487 11083 | | EA | 3 | 3 |
| 55 | 39 | XA | XA | XA | XA | | | | HOUSING ASSY<br>40866-5004 70210<br>7N7252 11083 | | EA | 1 | 1 |
| 55 | 40 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 5315-00-173-8417 | PIN<br>4M6646 11083 | | EA | 2 | 2 |
| 55 | 41 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 6115-01-168-6142 | SHROUD<br>7N3760 11083 | | EA | 1 | 1 |
| 55 | 42 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 2815-01-053-4728 | RING<br>9L6245 11083<br>IDP9L6245. 55883 | | EA | 1 | 1 |
| 55 | 43 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2950-00-551-8685 | SHAFT AND WHEEL ASSY<br>406845-5 70210<br>8S5167 11083 | | EA | 1 | 1 |
| 55 | 44 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .004 | 4710-00-212-8792 | TUBE ASSY<br>5R1226 11083 | | EA | 1 | 1 |
| 55 | 45 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-00-146-0333 | SLEEVE<br>MS51825-7 96906 | | EA | 1 | 1 |

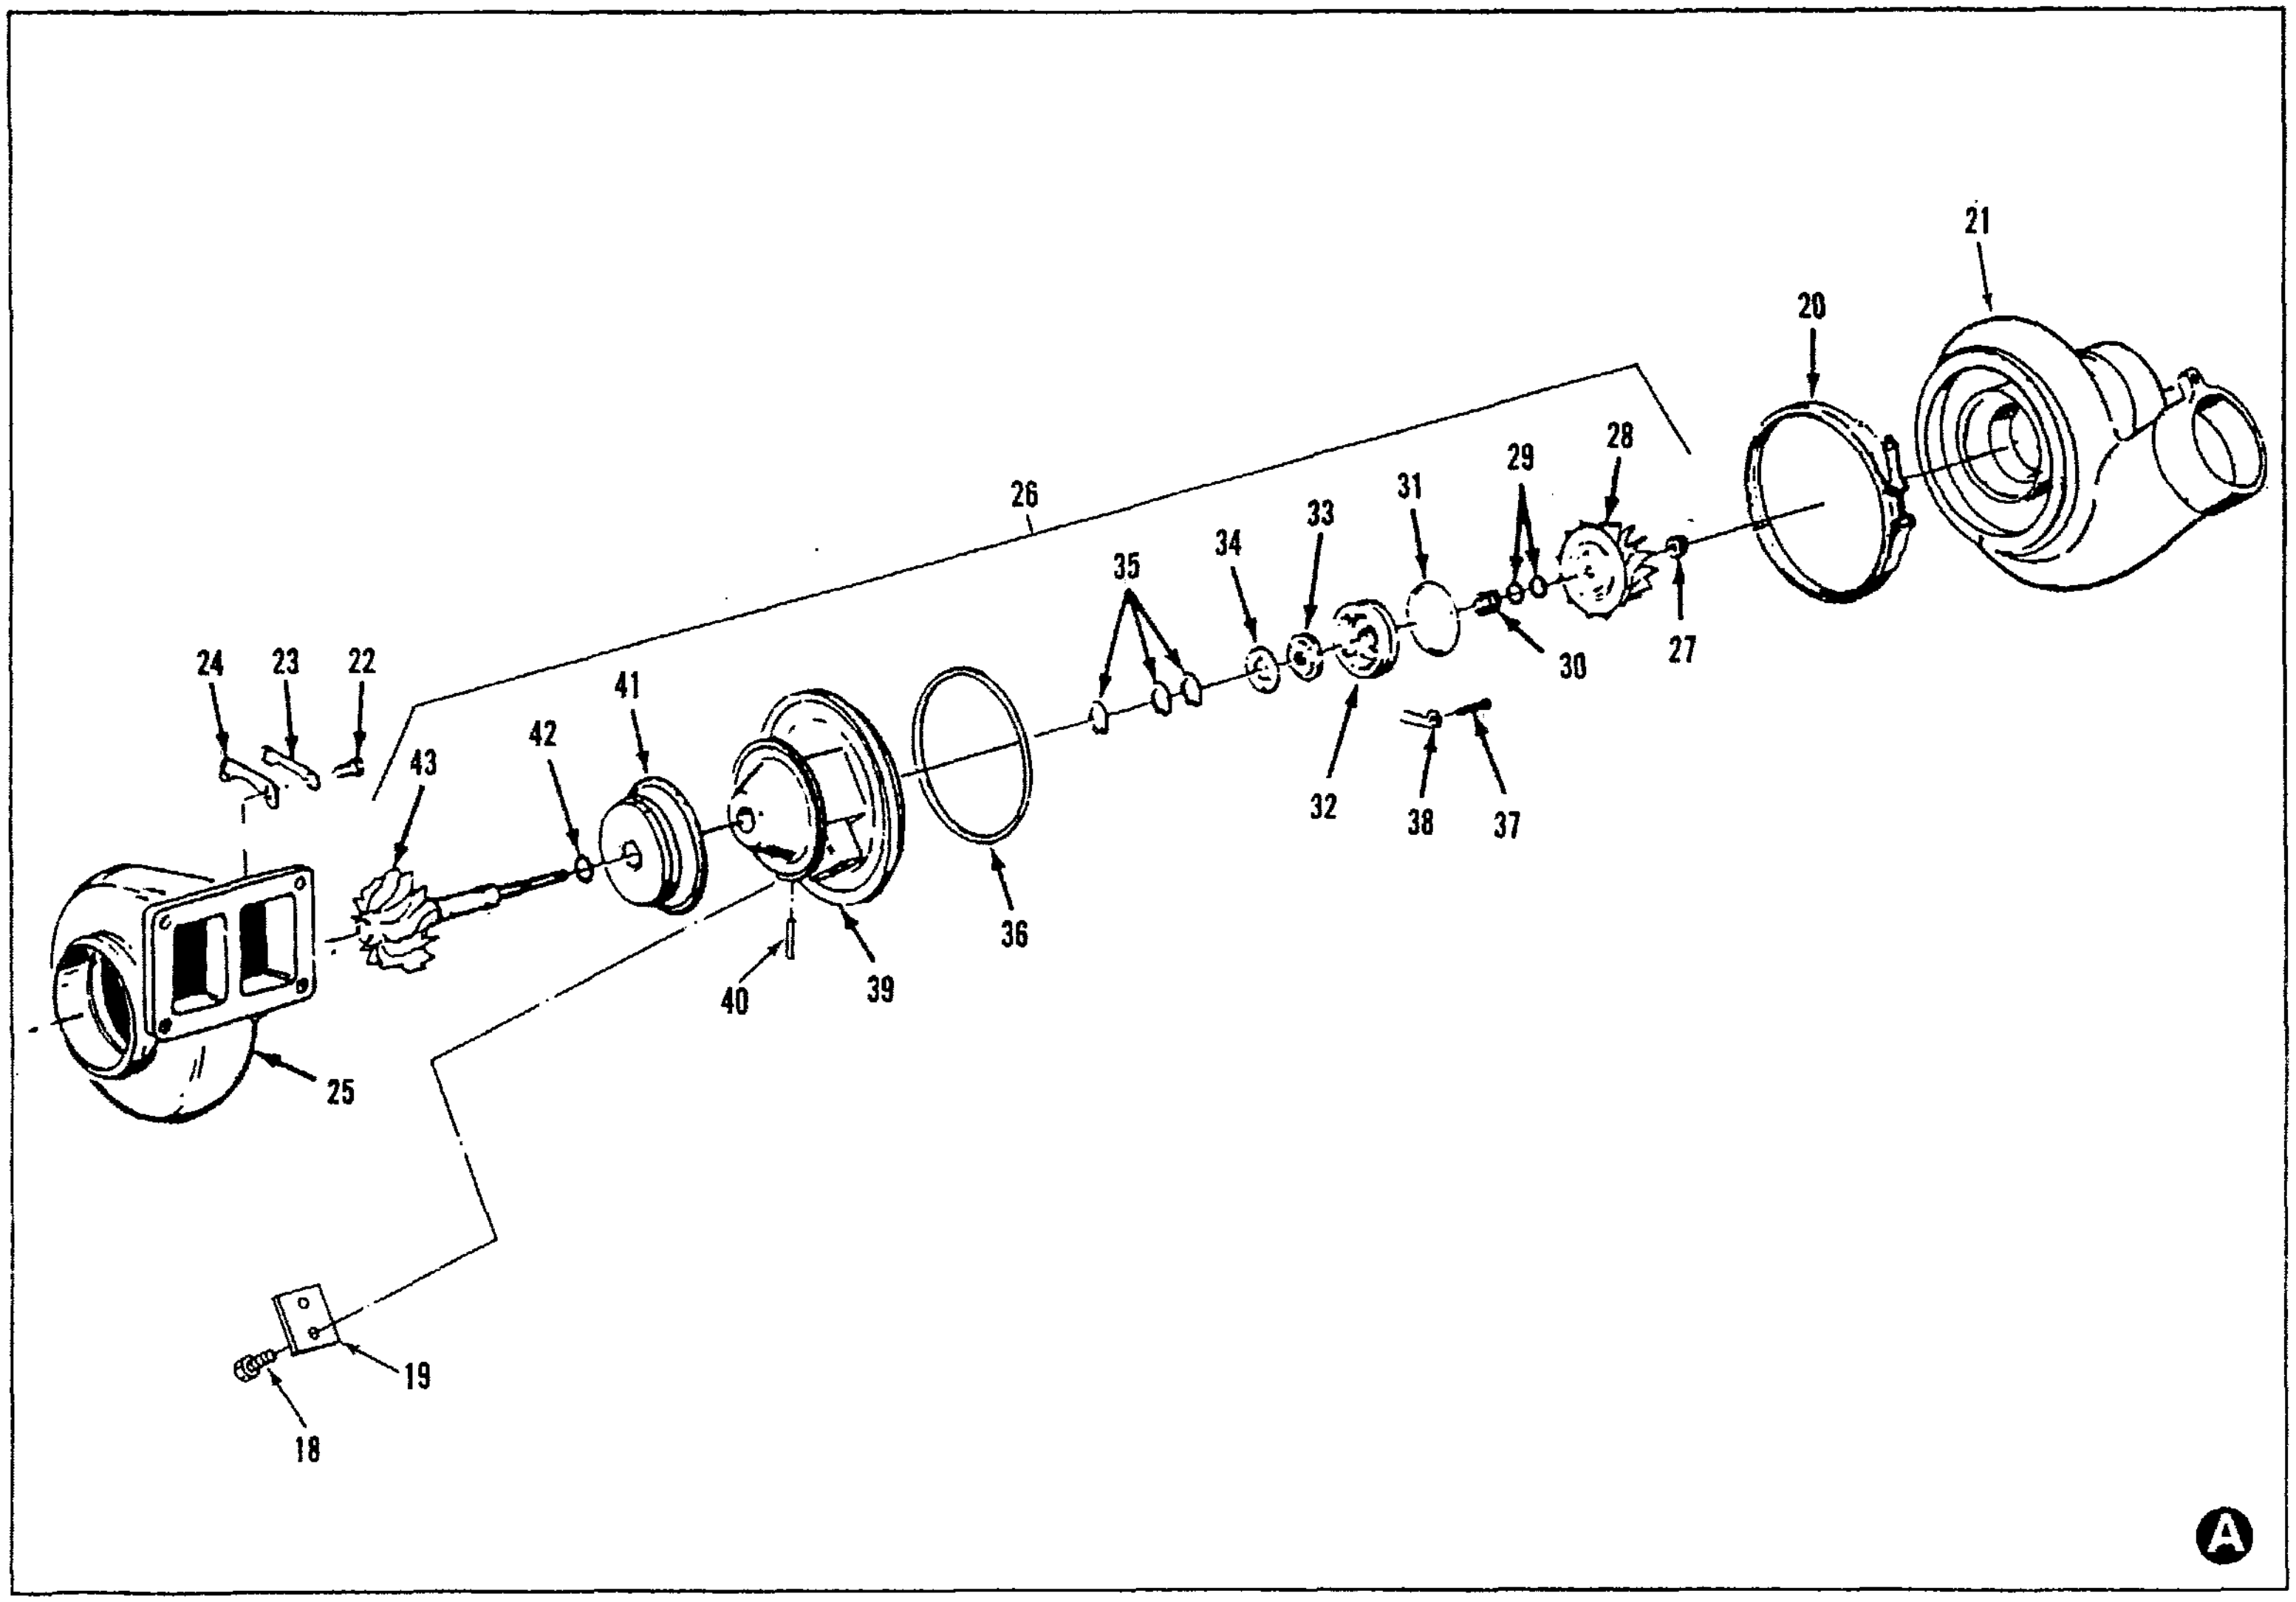
21
20
28
29
31
33
34
35
26
22
23
24
43
42
41
27
30
32
38
37
36
39
40
25
19
18
A

Figure 55. Turbocharger (Sheet 2 of 2)

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 55 | | | | | | | | | TURBOCHARGER - CONTINUED | | | | |
| 55 | 46 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 4730-01-065-2698 | CONNECTOR<br>5P5877 | 11083 | EA | 1 | 1 |
| 55 | 47 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-01-128-4105 | NUT<br>4K1456 | 11083 | EA | 1 | 1 |
| 55 | 48 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-924-0048 | GASKET, P/O KIT P/N 5P9117<br>1S4295 | 11083 | EA | 1 | 1 |
| 55 | 49 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-828-9787 | SEAL<br>9H6067 | 11083 | EA | 1 | 2 |
| 55 | 50 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .004 | 4710-00-212-8793 | TUBE ASSY<br>5R1237 | 11083 | EA | 1 | 1 |
| | | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5310-01-149-7852 | KIT, GASKET<br>5P9117 | 11083 | EA | 1 | 1 |
| 55 | 12 | | | | | | | | PACKING, PREFORMED | | EA | 2 | |
| 55 | 7 | | | | | | | | PACKING, PREFORMED | | EA | 1 | |
| 55 | 11 | | | | | | | | GASKET | | EA | 1 | |
| 55 | 13 | | | | | | | | GASKET | | EA | 1 | |
| 55 | 48 | | | | | | | | GASKET | | EA | 1 | |

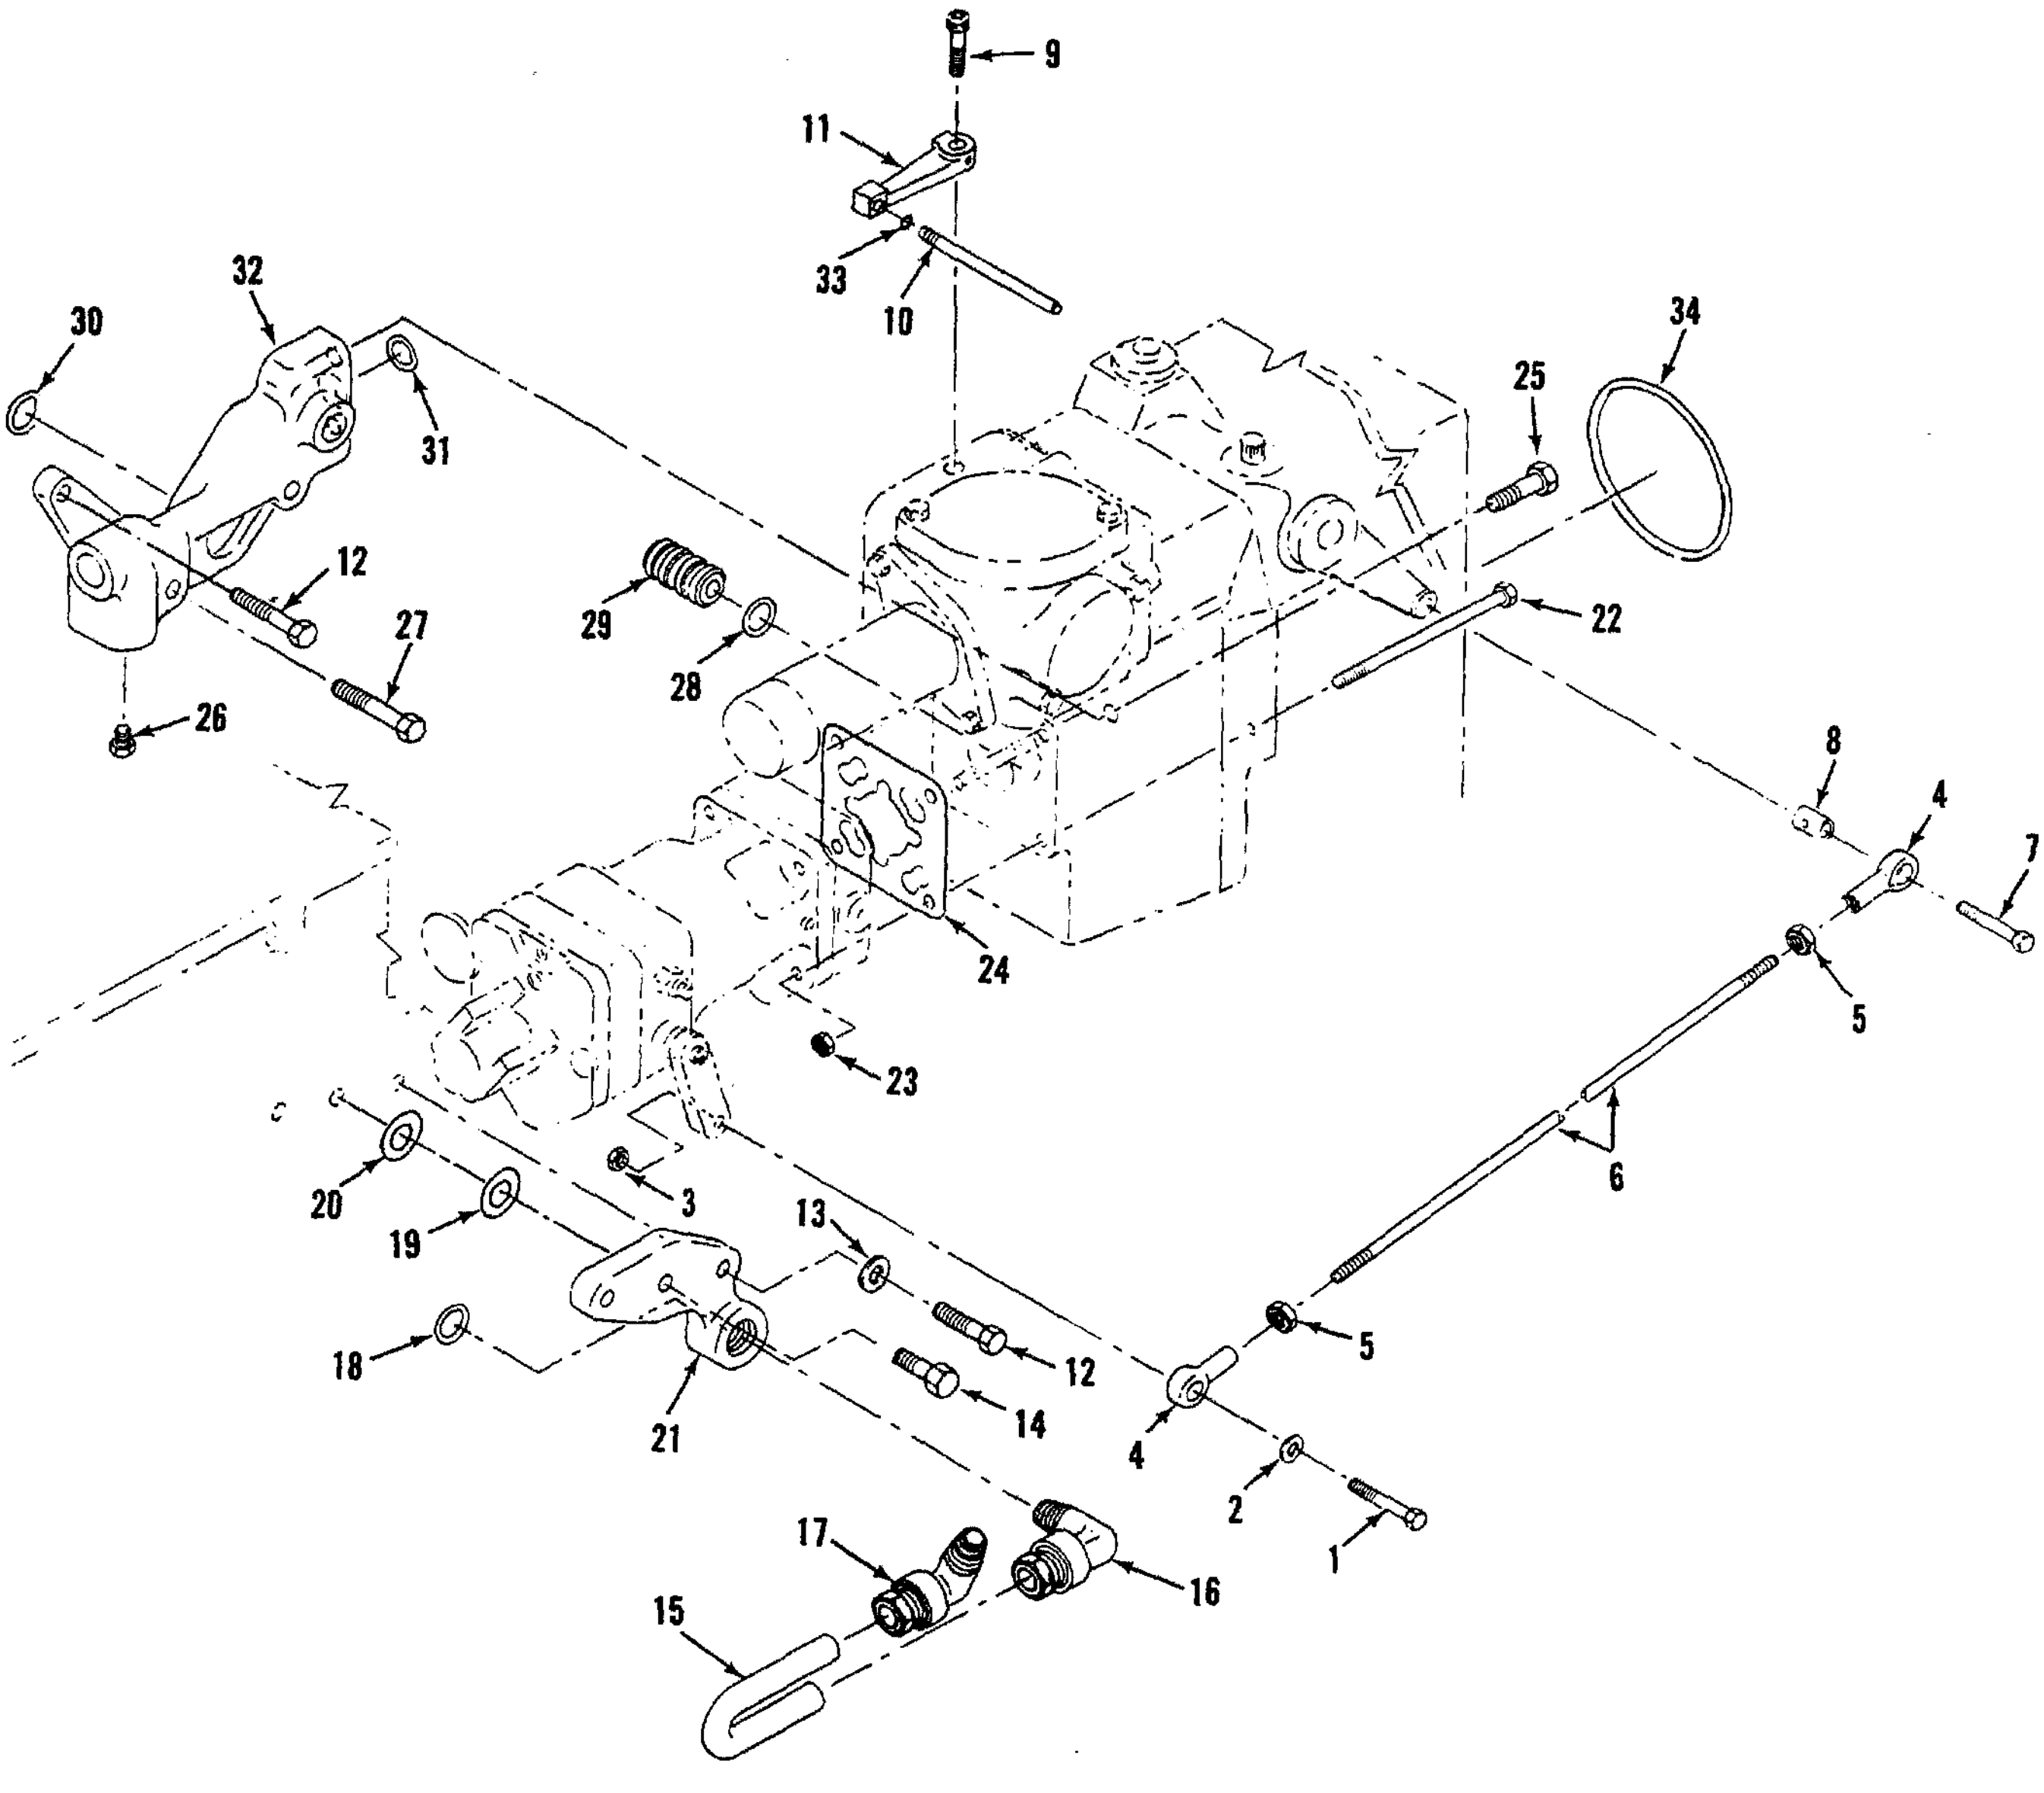
9
11
33
10
32
30
31
34
25
12
27
29
28
22
26
8
4
7
24
5
23
6
20
3
19
13
18
12
21
14
5
4
2
1
17
16
15

Figure 56. Governor Fastener

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 56 | | | | | | | | | GOVERNOR FASTENER | | | | |
| 56 | 1 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-651-2686 | BOLT<br>S1597 | 11083 | EA | 1 | 1 |
| 56 | 2 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5365-01-130-2044 | WASHER<br>4D3088 | 11083 | EA | 1 | 1 |
| 56 | 3 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-903-8282 | NUT, LOCK<br>2L9038 | 11083 | EA | 2 | 3 |
| 56 | 4 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 3120-00-340-5178 | ROD END<br>5R3054 | 11083 | EA | 2 | 3 |
| 56 | 5 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-445-4633 | NUT<br>9M1311 | 11083 | EA | 2 | 3 |
| 56 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 3040-01-125-4505 | ROD<br>5R3625 | 11083 | EA | 1 | 1 |
| 56 | 7 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-008-5942 | BOLT<br>4B2152 | 11083 | EA | 1 | 1 |
| 56 | 8 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 3010-01-125-1665 | COUPLING<br>4N5627 | 11083 | EA | 1 | 1 |
| 56 | 9 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-138-5490 | BOLT<br>7J9018 | 11083 | EA | 1 | 1 |
| 56 | 10 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-01-132-8781 | STUD<br>7L4984 | 11083 | EA | 1 | 1 |
| 56 | 11 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 3040-01-126-1906 | LEVER<br>3N2825 | 11083 | EA | 1 | 1 |
| 56 | 12 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-260-4508 | BOLT<br>S1594 | 11083 | EA | 3 | 24 |
| 56 | 13 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-117-4788 | WASHER<br>5M2894 | 11083 | EA | 2 | 71 |
| 56 | 14 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-00-427-5121 | PLUG<br>P3C | 58553 | EA | 1 | 2 |
| 56 | 15 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 4710-01-129-1580 | TUBE<br>4N6323 | 11083 | EA | 1 | 1 |
| 56 | 16 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 4730-00-882-8622 | FITTING<br>3B9053 | 11083 | EA | 1 | 1 |
| 56 | 17 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 4730-00-871-1288 | FITTING<br>2H9866 | 11083 | EA | 1 | 1 |
| 56 | 18 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-913-8872 | PACKING, PREFORMED<br>P/O KIT P/N 6N1133<br>8M5248 | 11083 | EA | 1 | 2 |
| 56 | 19 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-127-0896 | GASKET<br>4N9642 | 11083 | EA | 1 | 1 |
| 56 | 20 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-591-7543 | PACKING, PREFORMED<br>7F8607 | 11083 | EA | 1 | 2 |
| 56 | 21 | XB | XB | XB | XB | | | | ADAPTER<br>4N6327 | 11083 | EA | 1 | 1 |
| 56 | 22 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-226-4845 | BOLT<br>MS90728-52 | 96906 | EA | 1 | 1 |
| 56 | 23 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-804-4806 | NUT<br>33797S36 | 23040 | EA | 4 | 4 |
| 56 | 24 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-891-0982 | GASKET<br>6L3528 | 11083 | EA | 1 | 1 |

# SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 56 | | | | | | | | | GOVERNOR FASTENER - CONTINUED | | | | |
| 56 | 25 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-423-8194 | BOLT<br>1A2029 | 11083 | EA | 2 | 13 |
| 56 | 26 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-00-924-7886 | PLUG<br>5M6214 | 11083 | EA | 1 | 6 |
| 56 | 27 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-269-3216 | BOLT<br>S1590 | 11083 | EA | 2 | 6 |
| 56 | 28 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-431-7140 | PACKING, PREFORMED<br>8M5260 | 11083 | EA | 2 | 2 |
| 56 | 29 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 4730-01-126-3765 | COUPLING<br>4N6309 | 11083 | EA | 1 | 1 |
| 56 | 30 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 2520-00-890-2235 | PACKING, PREFORMED,<br>P/O KIT P/N 6N1133<br>8M5253 | 11083 | EA | 1 | 2 |
| 56 | 31 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-290-8365 | PACKING, PREFORMED<br>6F4855 | 11083 | EA | 1 | 1 |
| 56 | 32 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5340-01-334-8514 | SUPPORT<br>4N6313 | 11083 | EA | 1 | 1 |
| 56 | 33 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 6115-00-182-7157 | SEAL, ANTI-TAMPER<br>858159 | 11083 | EA | 1 | 1 |
| 56 | 34 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-291-7192 | PACKING, PREFORMED,<br>P/O KIT P/N 6N1133<br>2H3934 | 11083 | EA | 1 | 2 |

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 57 | | | | | | | | | GOVERNOR DRIVE | | | | |
| 57 | 1 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-068-7837 | BOLT, HEX HEAD<br>2A762 | 11083 | EA | 4 | 8 |
| 57 | 2 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 5340-01-157-2034 | COVER<br>4N8507 | 11083 | EA | 2 | 4 |
| 57 | 3 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-024-3360 | GASKET, P/O KIT P/N 6N1133<br>4N117 | 11083 | EA | 2 | 2 |
| 57 | 4 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 2990-00-116-0415 | COVER<br>3L5987 | 11083 | EA | 1 | 1 |
| 57 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-105-0357 | GASKET, P/O KIT P/N 6N1133<br>6L5773 | 11083 | EA | 1 | 1 |
| 57 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-225-3839 | BOLT, HEX HEAD<br>MS90725-8 | 96906 | EA | 2 | 2 |
| 57 | 7 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-064-1494 | WASHER<br>6N7523 | 11083 | EA | 2 | 2 |
| 57 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 2990-01-125-4521 | COVER, SHUT-OFF<br>6N5933 | 11083 | EA | 1 | 1 |
| 57 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-128-5112 | BOLT, HEX HEAD<br>5P5034 | 11083 | EA | 1 | 1 |
| 57 | 10 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-071-2505 | BOLT, HEX HEAD<br>B1821BH025C088N | 80204 | EA | 3 | 7 |
| 57 | 11 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 3040-01-125-5892 | SHAFT<br>3N2815 | 11083 | EA | 1 | 1 |
| 57 | 12 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 2910-01-126-4893 | LEVER ASSY<br>3N9633 | 11083 | EA | 1 | 1 |
| 57 | 13 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .080 | 5315-01-009-0755 | PIN<br>5H8985 | 11083 | EA | 1 | 1 |
| 57 | 14 | XA | XA | XA | XA | | | | LEVER<br>3N9634 | 11083 | EA | 1 | 1 |
| 57 | 15 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-128-8930 | BOLT, HEX HEAD<br>9F1707 | 11083 | EA | 1 | 1 |
| 57 | 16 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 2910-01-127-6157 | LEVER ASSY<br>3N2820 | 11083 | EA | 1 | 1 |
| 57 | 17 | XA | XA | XA | XA | | | | DOWEL<br>7N1338 | 11083 | EA | 1 | 1 |
| 57 | 18 | XA | XA | XA | XA | | | | LEVER<br>3N2819 | 11083 | EA | 1 | 1 |
| 57 | 19 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2990-01-126-9201 | SHAFT ASSY<br>4N5622 | 11083 | EA | 1 | 1 |
| 57 | 20 | XA | XA | XA | XA | | | | LEVER<br>4N5620 | 11083 | EA | 1 | 1 |
| 57 | 21 | XA | XA | XA | XA | | | | SHAFT<br>4N5621 | 11083 | EA | 1 | 1 |
| 57 | 22 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-978-9370 | BOLT, HEX HEAD<br>MS16997-32 | 96906 | EA | 1 | 1 |

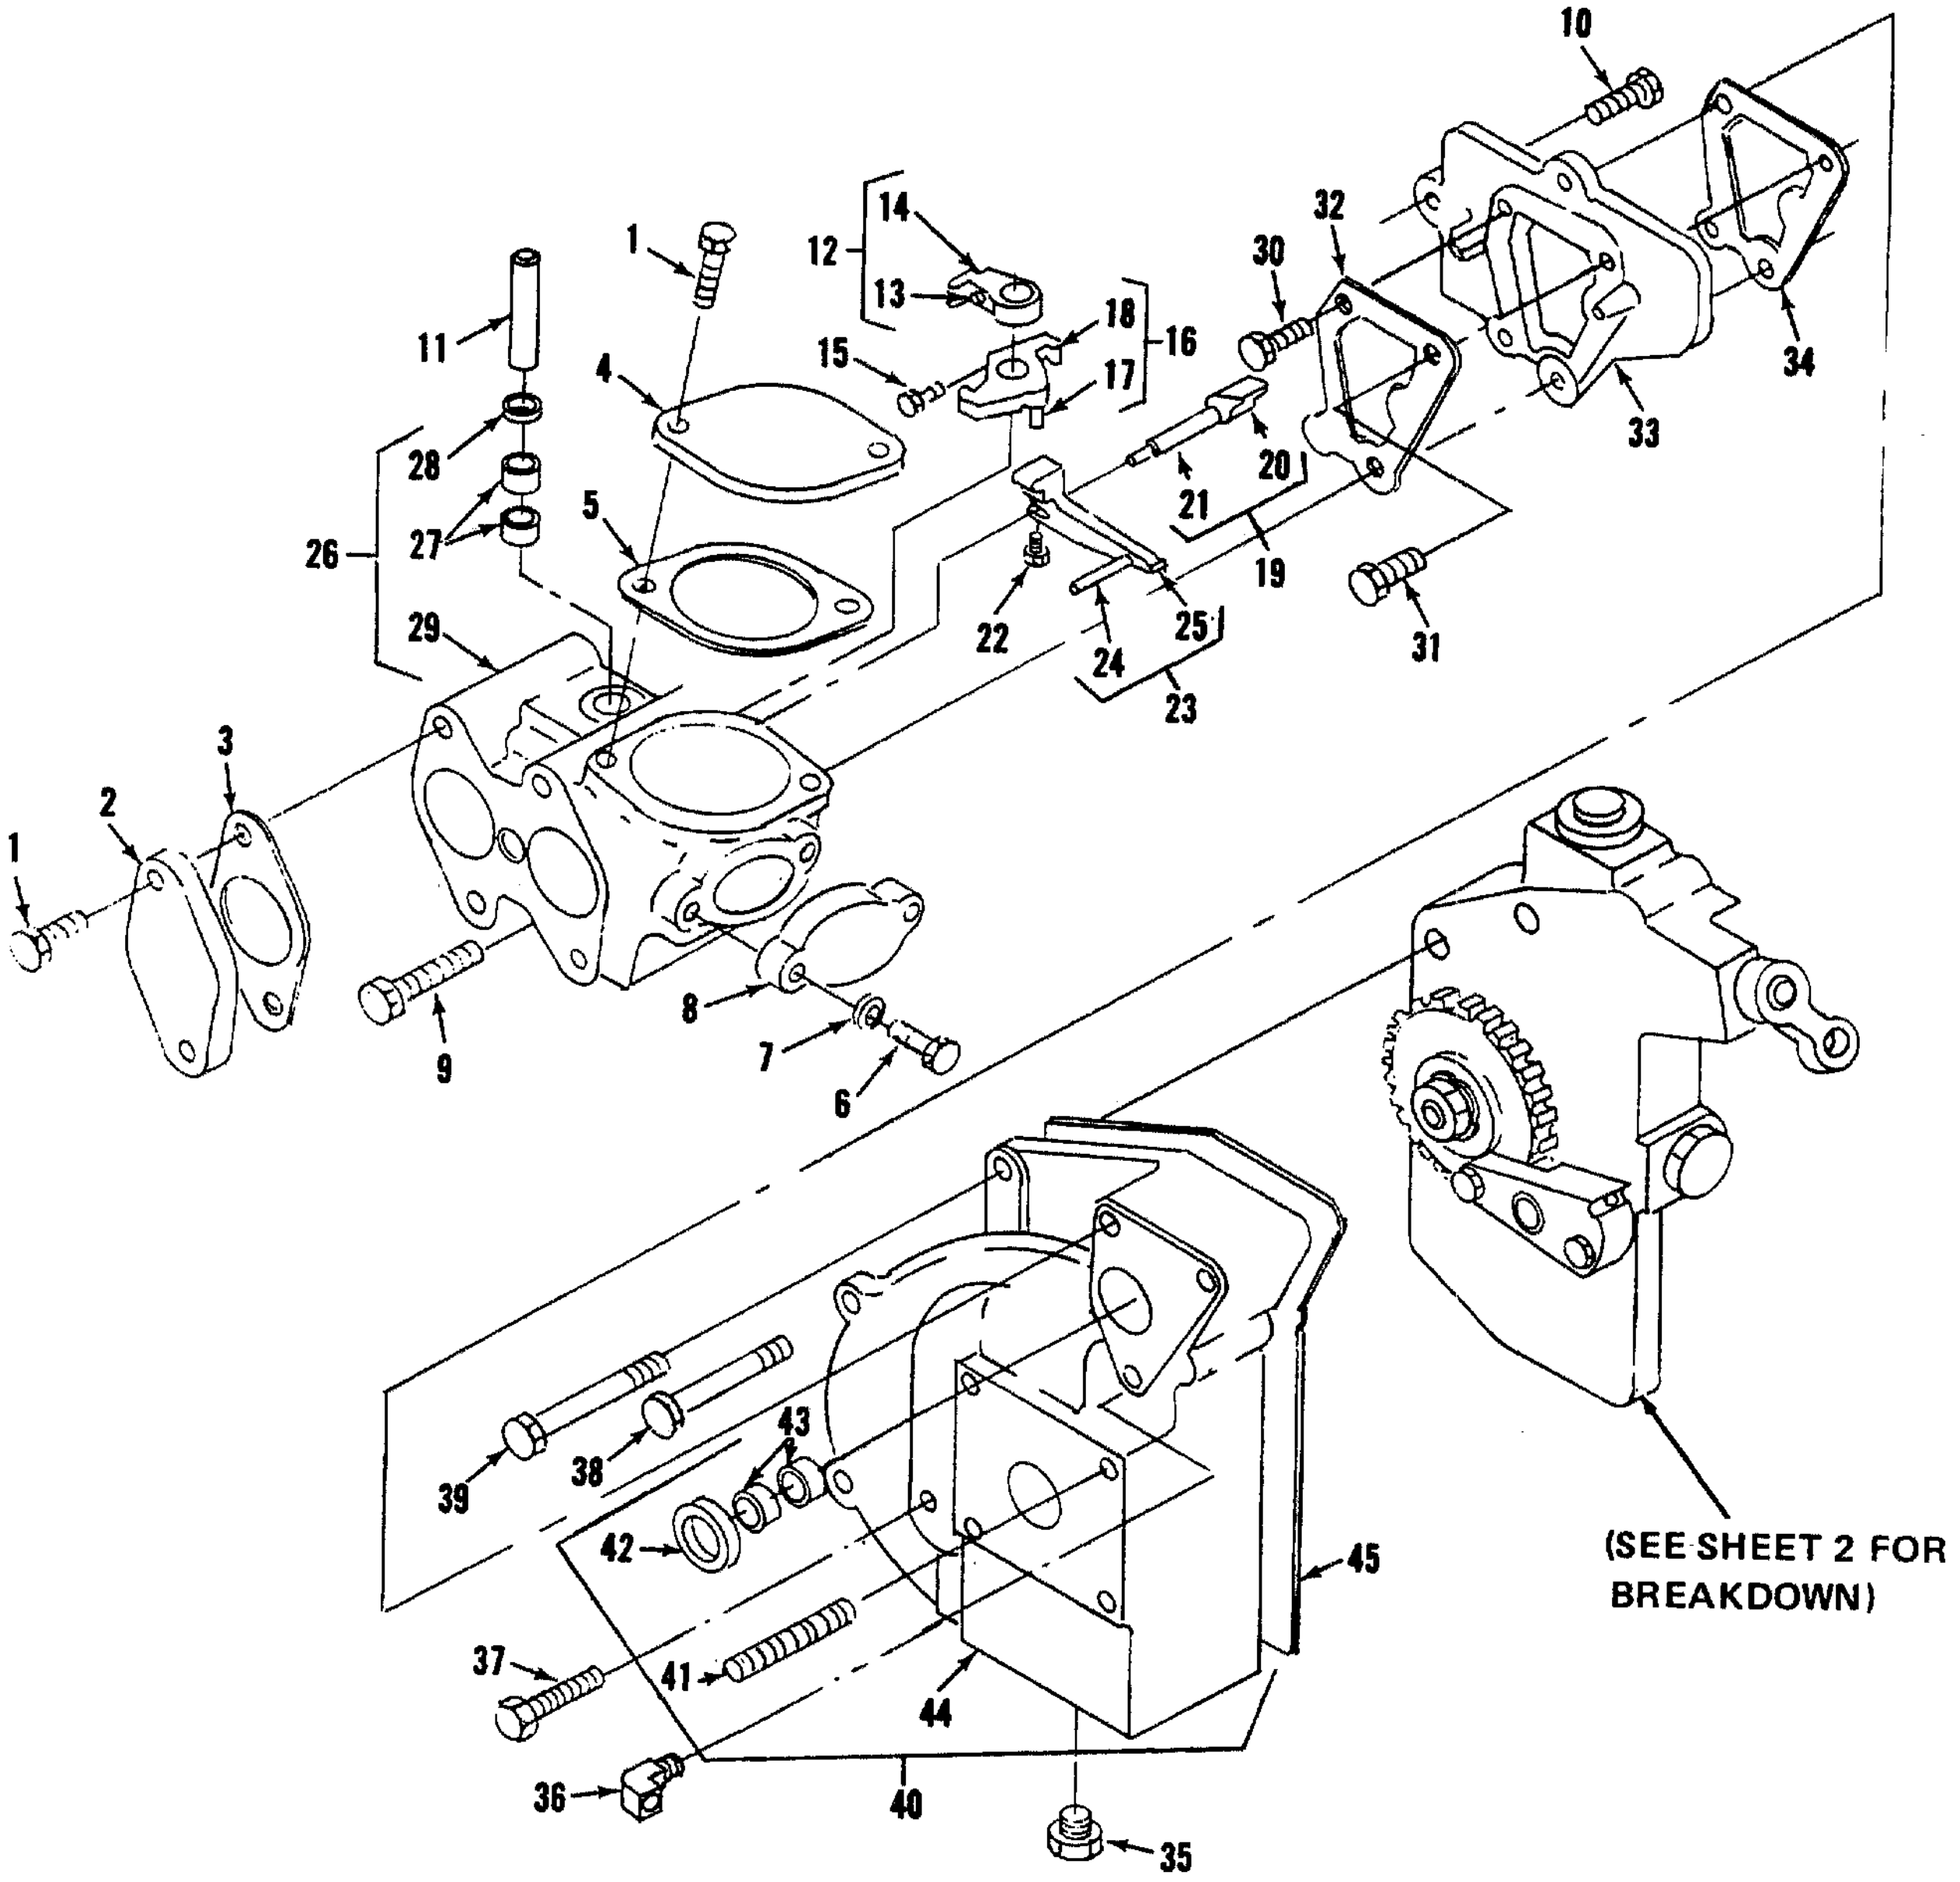
10
14
12
13
18
16
15
17
1
11
4
28
27
26
5
29
32
30
33
34
20
21
19
22
25
24
23
31
3
2
1
9
8
7
6
43
39
38
42
37
41
44
40
36
35
45
(SEE SHEET 2 FOR BREAKDOWN)

Figure 57. Governor Drive (Sheet 1 of 2)

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 57 | | | | | | | | | GOVERNOR DRIVE - CONTINUED | | | | |
| 57 | 23 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 2990-01-125-9798 | LEVER ASSY<br>3N2824 11083 | | EA | 1 | 1 |
| 57 | 24 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .080 | 5315-01-330-2484 | DOWEL<br>6N265 11083 | | EA | 1 | 1 |
| 57 | 25 | XA | XA | XA | XA | D | .080 | | LEVER<br>3N2823 11083 | | EA | 1 | 1 |
| 57 | 26 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 2990-01-126-0261 | ADAPTER ASSY<br>7N3094 11083 | | EA | 1 | 1 |
| 57 | 27 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 3120-01-128-9026 | BEARING<br>4N9467 11083 | | EA | 2 | 2 |
| 57 | 28 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 5330-01-129-0811 | SEAL, P/O KIT P/N 6N1133<br>3N2813 11083 | | EA | 1 | 1 |
| 57 | 29 | XA | XA | XA | XA | | | | ADAPTER<br>7N3095 11083 | | EA | 1 | 1 |
| 57 | 30 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-426-3189 | BOLT, HEX HEAD<br>1B2714 11083 | | EA | 1 | 1 |
| 57 | 31 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-128 -6046 | BOLT, HEX HEAD<br>8F6302 11083 | | EA | 1 | 1 |
| 57 | 32 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-127-6575 | GASKET, P/O KIT P/N 6N1133<br>6N6597 11083 | | EA | 1 | 1 |
| 57 | 33 | XA | XA | XA | XA | | | | BASE<br>7N3096 11083 | | EA | 1 | 1 |
| 57 | 34 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-106-8540 | GASKET, P/O KIT P/N 6N1133<br>4N159 11083 | | EA | 1 | 1 |
| 57 | 35 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5365-00-419-3254 | PLUG<br>2S7905 11083 | | EA | 3 | 3 |
| 57 | 36 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 4730-01-024-0059 | ELBOW<br>9S9332 11083 | | EA | 1 | 1 |
| 57 | 37 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-298-4235 | BOLT, HEX HEAD<br>8F8178 11083 | | EA | 1 | 1 |
| 57 | 38 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-071-2514 | BOLT, HEX HEAD<br>MS90728-17 96906 | | EA | 2 | 2 |
| 57 | 39 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-118-6575 | BOLT, HEX HEAD<br>6L1559 11083 | | EA | 1 | 1 |
| 57 | 40 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2990-01-127-1668 | COVER ASSY<br>7N2404 11083 | | EA | 1 | 1 |
| 57 | 41 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5307-01-136-5388 | STUD<br>4L7547 11083 | | EA | 3 | 3 |
| 57 | 42 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-107-4168 | SEAL, P/O KIT P/N 6N1133<br>4N260 11083 | | EA | 1 | 1 |
| 57 | 43 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3120-00-021-4055 | BEARING<br>9M4252 11083 | | EA | 2 | 2 |
| 57 | 44 | XA | XA | XA | XA | | | | COVER<br>7N2585 11083 | | EA | 1 | 1 |

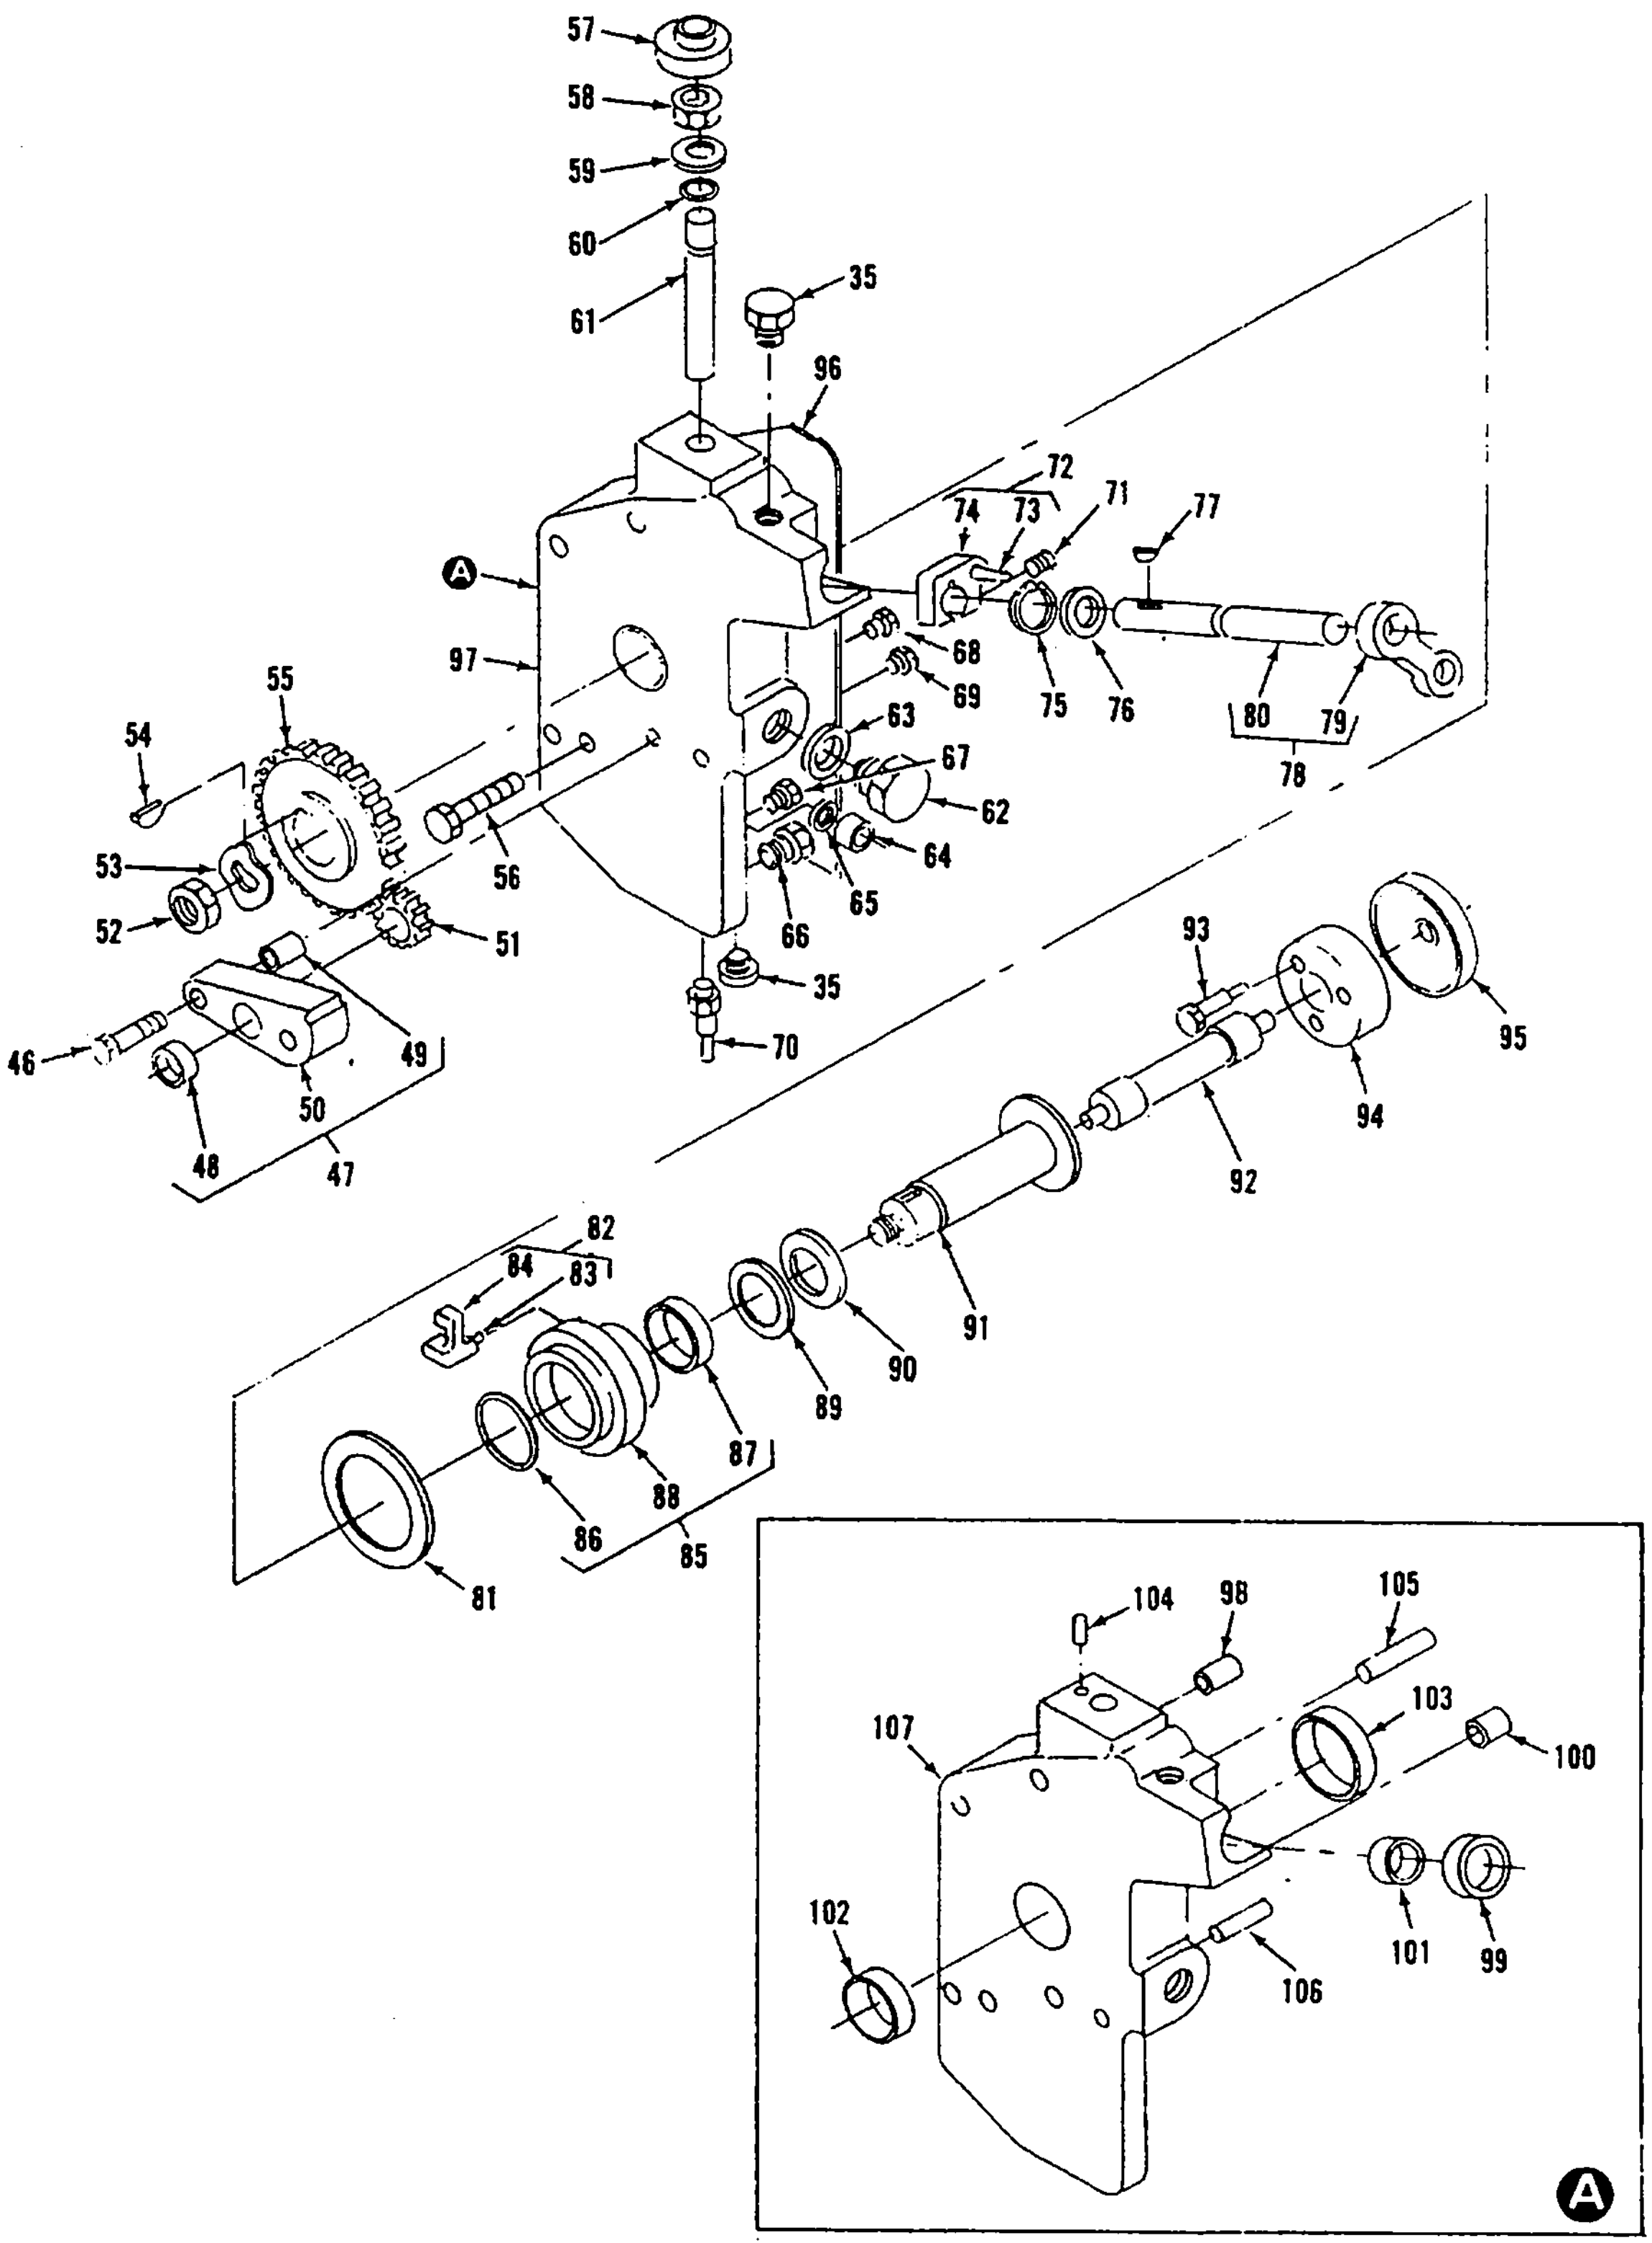
57
58
59
60
61
35
96
72
74
73
71
77
A
97
68
69
75
76
80
79
78
55
54
63
67
62
53
56
64
65
52
51
66
35
70
93
95
46
49
50
48
47
94
92
82
84
83
91
90
89
87
88
86
85
81
104
98
105
103
107
100
102
101
99
106
A

Figure 57. Governor Drive (Sheet 2 of 2)

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 57 | | | | | | | | | GOVERNOR DRIVE - CONTINUED | | | | |
| 57 | 45 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-128-4138 | GASKET<br>4N6317 | 11083 | EA | 1 | 1 |
| 57 | 46 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-404-1417 | BOLT, HEX HEAD<br>9F7022 | 11083 | EA | 2 | 4 |
| 57 | 47 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 2530-01-133-7420 | SUPPORT ASSY<br>5R3526 | 11083 | EA | 1 | 1 |
| 57 | 48 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 3120-00-440-8560 | BEARING<br>7L4975 | 11083 | EA | 1 | 1 |
| 57 | 49 | XA | XA | XA | XA | | | | DOWEL<br>9L9068 | 11083 | EA | 1 | 1 |
| 57 | 50 | XA | XA | XA | XA | | | | SUPPORT<br>5R3522 | 11083 | EA | 1 | 1 |
| 57 | 51 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 3040-01-125-9823 | GEAR<br>5R3524 | 11083 | EA | 1 | 1 |
| 57 | 52 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-347 -4123 | NUT<br>1B4205 | 11083 | EA | 1 | 3 |
| 57 | 53 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 5310-01-128-5171 | SPRING<br>3K9756 | 11083 | EA | 1 | 1 |
| 57 | 54 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-010-6749 | KEY<br>1B8702 | 11083 | EA | 1 | 1 |
| 57 | 55 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 3020-01-204-0162 | GEAR<br>5R3525 | 11083 | EA | 1 | 1 |
| 57 | 56 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-024-4773 | BOLT<br>4L7124 | 11083 | EA | 1 | 1 |
| 57 | 57 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2990-01-125-4535 | COVER<br>6N6958 | 11083 | EA | 1 | 1 |
| 57 | 58 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-205-3461 | NUT<br>2L1331 | 11083 | EA | 1 | 1 |
| 57 | 59 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-425-5712 | LOCK<br>2L1333 | 11083 | EA | 1 | 1 |
| 57 | 60 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-828-9039 | SEAL<br>8F9538 | 11083 | EA | 1 | 1 |
| 57 | 61 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-128-8926 | SCREW<br>4N6326 | 11083 | EA | 1 | 1 |
| 57 | 62 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-01-103-3727 | PLUG<br>3K8460 | 11083 | EA | 1 | 1 |
| 57 | 63 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-613-6500 | SEAL, P/O KIT P/N 6N1133<br>1J9671 | 11083 | EA | 1 | 2 |
| 57 | 64 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-01-069-1410 | DOWEL<br>4N1826 | 11083 | EA | 1 | 2 |
| 57 | 65 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-843-7194 | PACKING, PREFORMED,<br>P/O KIT P/N 6N1133<br>2D6392 | 11083 | EA | 1 | 2 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 57 | | | | | | | | | GOVERNOR DRIVE - CONTINUED | | | | |
| 57 | 66 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-00-924-7886 | PLUG<br>5M6214 | 11083 | EA | 1 | 6 |
| 57 | 67 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-00-044-4683 | PLUG<br>4D514 | 11083 | EA | 1 | 1 |
| 57 | 68 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-261-1153 | BOLT, HEX HEAD<br>S1615 | 11083 | EA | 2 | 26 |
| 57 | 69 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-071-2505 | BOLT, HEX HEAD<br>4F7957 | 11083 | EA | 4 | 7 |
| 57 | 70 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 4730-01-023-8633 | FITTING<br>1P4001 | 11083 | EA | 1 | 2 |
| 57 | 71 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-024-4774 | SCREW, HEX HEAD<br>2N2658 | 11083 | EA | 1 | 7 |
| 57 | 72 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | | LEVER ASSY<br>4N6322 | 11083 | EA | 1 | 1 |
| 57 | 73 | XA | XA | XA | XA | | | | SWIVEL<br>6N3321 | 11083 | EA | 1 | 2 |
| 57 | 74 | XA | XA | XA | XA | | | | LEVER<br>4N5575 | 11083 | EA | 1 | 1 |
| 57 | 75 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 5365-00-584-6620 | RING<br>MS16632-1037 | 96906 | EA | 1 | 1 |
| 57 | 76 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 3120-00-118-3007 | RACE<br>7N7193 | 11083 | EA | 1 | 3 |
| 57 | 77 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-018-9576 | KEY<br>MS35756-33 | 96906 | EA | 1 | 1 |
| 57 | 78 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | | SHAFT ASSY<br>6N8626 | 11083 | EA | 1 | 1 |
| 57 | 79 | XA--- | XA | XA | XA | | | | LEVER<br>6N8627 | 11083 | EA | 1 | 1 |
| 57 | 80 | XA--- | XA | XA | XA | | | | SHAFT<br>6N8625 | 11083 | EA | 1 | 1 |
| 57 | 81 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-048-0983 | SEAL<br>7D9749 | 11083 | EA | 1 | 1 |
| 57 | 82 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 2990-01-125-4002 | LEVER ASSY<br>4N5383 | 11083 | EA | 1 | 1 |
| 57 | 83 | XA--- | XA | XA | XA | | | | SWIVEL<br>6N3321 | 11083 | EA | 1 | 2 |
| 57 | 84 | XA--- | XA | XA | XA | | | | LEVER<br>4N5628 | 11083 | EA | 1 | 1 |
| 57 | 85 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 2910-01-125-2796 | ADAPTER ASSY<br>4N5574 11083 | | EA | 1 | 1 |
| 57 | 86 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-061-9381 | SEAL, P/O KIT P/N 6N1133<br>4N636 | 11083 | EA | 1 | 2 |

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO. | (1) ILLUSTRATION b ITEM NO. | (2) SMR CODE a ARMY | (2) SMR CODE b AIR FORCE | (2) SMR CODE c NAVY | (2) SMR CODE d USMC | (3) USMC a SSI | (3) USMC b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | (5) DESCRIPTION USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 57 | | | | | | | | | GOVERNOR DRIVE - CONTINUED | | | | |
| 57 | 87 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 3120-01-131-2316 | BEARING<br>4N5629 | 11083 | EA | 1 | 2 |
| 57 | 88 | XA | XA | XB | XA | | | | ADAPTER<br>4N6314 | 11083 | EA | 1 | 1 |
| 57 | 89 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3110-01-128-4154 | RACE<br>4N8626 | 11083 | EA | 1 | 1 |
| 57 | 90 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3110-01-031-9372 | BEARING<br>5L1100 | 11083 | EA | 1 | 1 |
| 57 | 91 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 3040-01-125-4522 | SHAFT, GOV<br>4N5623 | 11083 | EA | 1 | 1 |
| 57 | 92 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 3040-01-127-3133 | SHAFT<br>4N5624 | 11083 | EA | 1 | 1 |
| 57 | 93 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-133-1054 | BOLT, HEX HEAD<br>6D9442 | 11083 | EA | 3 | 3 |
| 57 | 94 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 3040-01-126-3919 | ADAPTER<br>4N5626 | 11083 | EA | 1 | 1 |
| 57 | 95 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 2990-01-125-4536 | SLEEVE<br>4N8312 | 11083 | EA | 1 | 1 |
| 57 | 96 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-038-7345 | GASKET, P/O KIT P/N 6N1133<br>4N594 | 11083 | EA | 1 | 1 |
| 57 | 97 | XA | XA | XA | XA | | | | HOUSING ASSY<br>7N2586 | 11083 | EA | 1 | 1 |
| 57 | 98 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-406-7278 | DOWEL<br>8S6814 | 11083 | EA | 2 | 3 |
| 57 | 99 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-129-0618 | SEAL<br>7S6798 | 11083 | EA | 1 | 1 |
| | | | | | | | | 5330-01-209-7996 | 6V5029 | | | | |
| 57 | 100 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 3620-00-440-8594 | BUSHING<br>4H89 | 11083 | EA | 1 | 1 |
| 57 | 101 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3120-01-128-1115 | BEARING<br>9M1179 | 11083 | EA | 2 | 2 |
| 57 | 102 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3120-01-131-2316 | BEARING<br>4N5629 | 11083 | EA | 1 | 2 |
| 57 | 103 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-061-9380 | SEAL, P/O KIT P/N 6N1133<br>4N1584 | 11083 | EA | 1 | 2 |
| 57 | 104 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-240-0997 | PIN<br>7H3639 | 11083 | EA | 1 | 1 |
| 57 | 105 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-01-068-9711 | PIN<br>4N2333 | 11083 | EA | 1 | 2 |
| 57 | 106 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-01-079-6712 | DOWEL<br>5P4346 | 11083 | EA | 2 | 2 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 57 | | | | | | | | | GOVERNOR DRIVE - CONTINUED | | | | |
| 57 | 107 | XA | XA | XA | XA | | | | HOUSING<br>7N2377 | 11083 | EA | 1 | 1 |
| | | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | | KIT, GASKET<br>6N1133 | 11083 | EA | 1 | |
| 57 | 5 | | | | | | | | GASKET | | EA | 2 | |
| 57 | 5 | | | | | | | | GASKET | | EA | 1 | |
| 57 | 3 | | | | | | | | GASKET | | EA | 1 | |
| 57 | 5 | | | | | | | | GASKET | | EA | 1 | |
| 57 | 11 | | | | | | | | GASKET | | EA | 1 | |
| 57 | 13 | | | | | | | | PACKING, PREFORMED | | EA | 1 | |
| 57 | 14 | | | | | | | | GASKET | | EA | 1 | |
| 57 | 20 | | | | | | | | SEAL | | EA | 2 | |
| 57 | 27 | | | | | | | | GASKET | | EA | 1 | |
| 57 | 28 | | | | | | | | PACKING, PREFORMED | | EA | 1 | |
| 57 | 47 | | | | | | | | SEAL | | EA | 6 | |
| 57 | 53 | | | | | | | | PACKING, PREFORMED | | EA | 1 | |
| 57 | 56 | | | | | | | | SEAL | | EA | 1 | |
| 57 | 57 | | | | | | | | SEAL | | EA | 1 | |
| 57 | 70 | | | | | | | | PACKING, PREFORMED | | EA | 2 | |
| 57 | 18 | | | | | | | | PACKING, PREFORMED | | EA | 1 | |
| 57 | 30 | | | | | | | | PACKING, PREFORMED | | EA | 1 | |

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 57 | | | | | | | | | GOVERNOR DRIVE - CONTINUED | | | | |
| 57 | 34 | | | | | | | | PACKING, PREFORMED | | EA | 1 | |
| 57 | 3 | | | | | | | | GASKET | | EA | 2 | |
| 57 | 5 | | | | | | | | GASKET | | EA | 1 | |
| 57 | 28 | | | | | | | | SEAL | | EA | 1 | |
| 57 | 32 | | | | | | | | GASKET | | EA | 1 | |
| 57 | 34 | | | | | | | | GASKET | | EA | 1 | |
| 57 | 42 | | | | | | | | SEAL | | EA | 1 | |
| 57 | 63 | | | | | | | | SEAL | | EA | 1 | |
| 57 | 65 | | | | | | | | PACKING, PREFORMED | | EA | 1 | |
| 57 | 86 | | | | | | | | SEAL | | EA | 1 | |
| 57 | 96 | | | | | | | | GASKET | | EA | 1 | |
| 57 | 103 | | | | | | | | SEAL | | EA | 1 | |

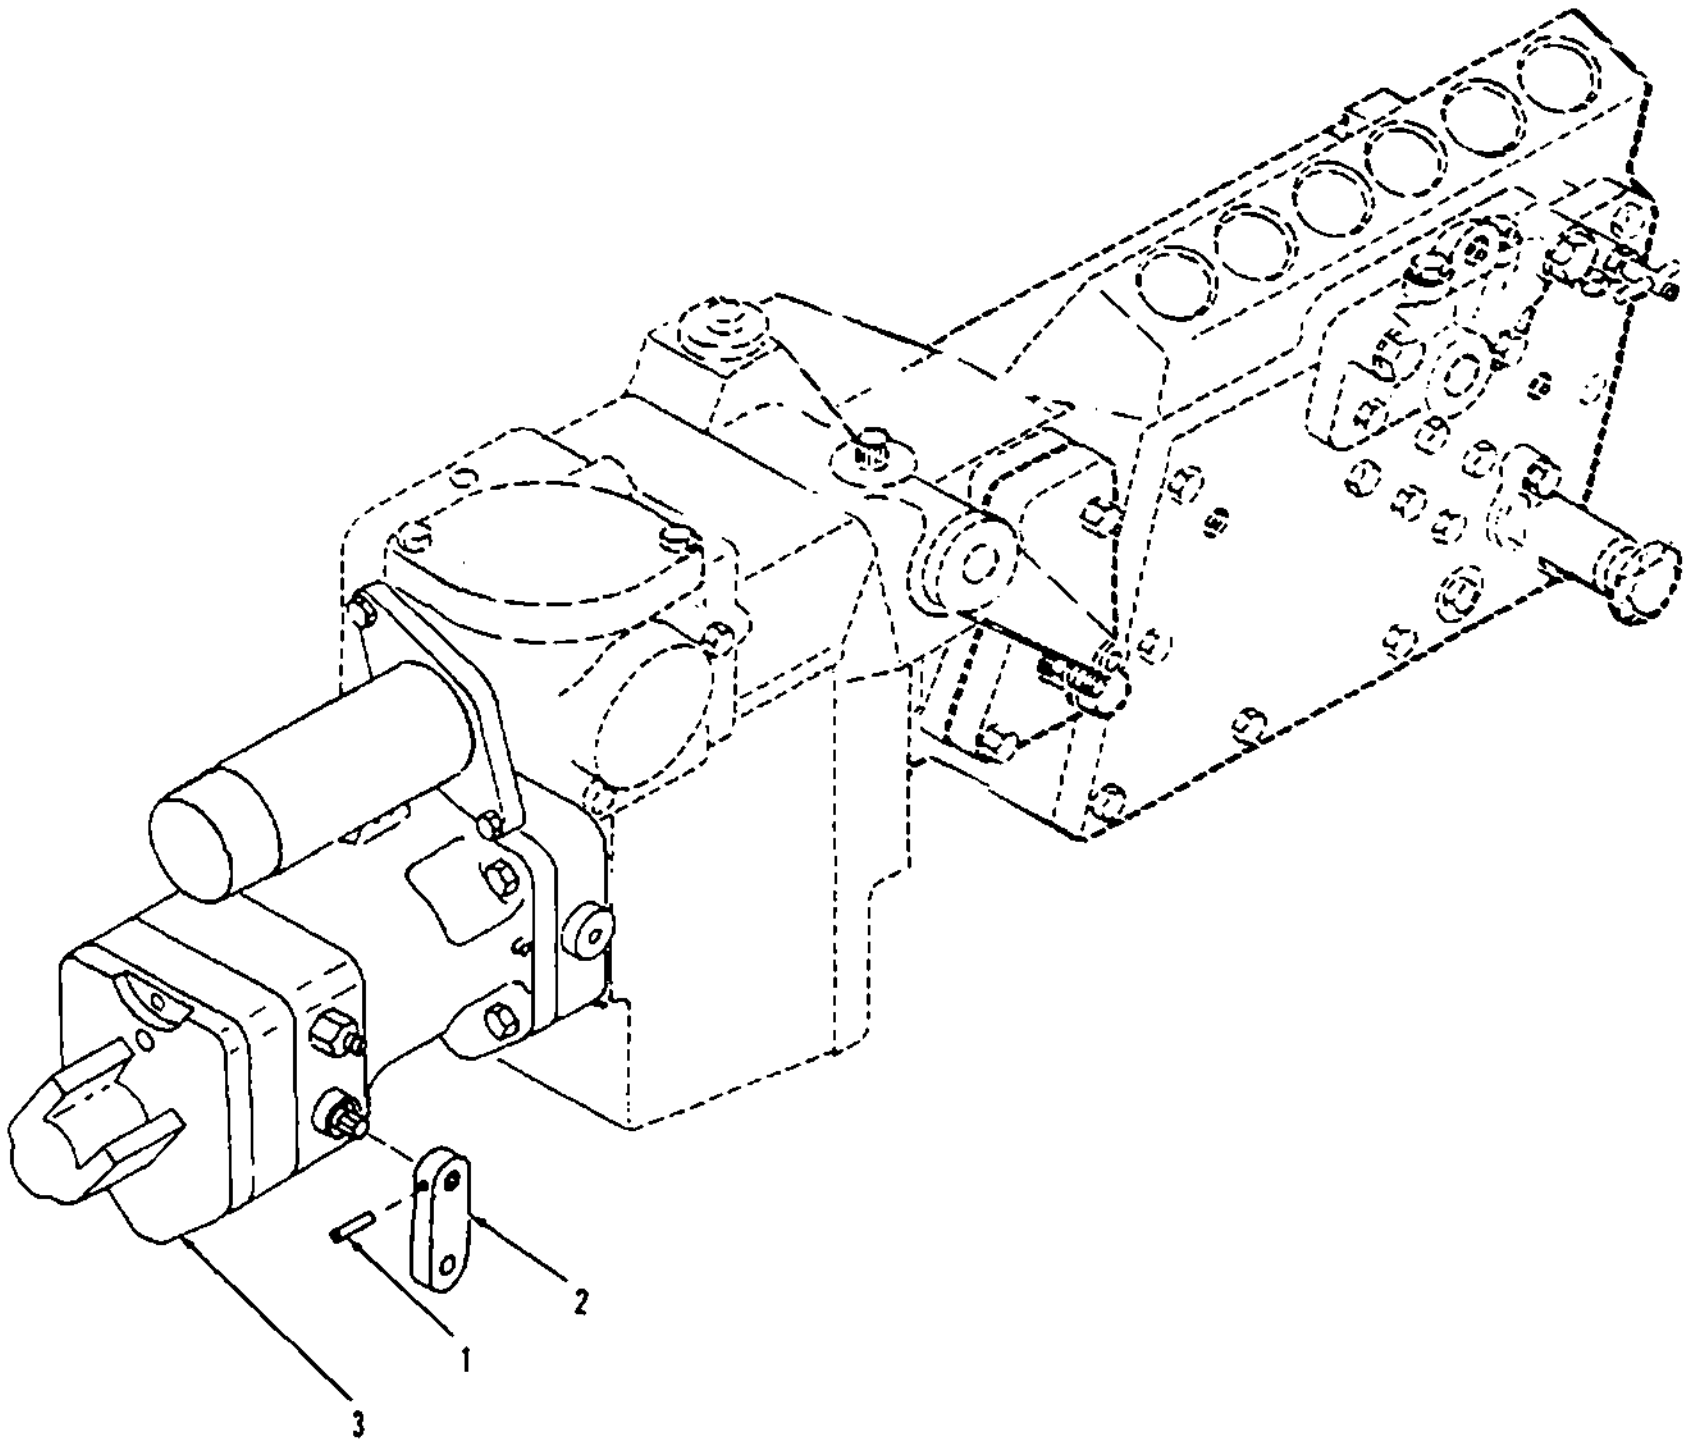

Figure 58. Governor (Sheet 1 of 3)

# SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE)

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER | MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 10 - ENGINE | | | | | |
| 58 | | | | | | | | | GOVERNOR | | | | | |
| 58 | 1 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 5315-00-281-6834 | PIN<br>3L1474 | | 11083 | EA | 1 | 1 |
| 58 | 2 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 3040-01-273-5101 | LEVER<br>7N2299 | | 11083 | EA | 1 | 1 |
| 58 | 3 | PAOFF | PAFFF | PAHHH | PAKHH | | .004 | 2990-01-444-2468 | GOVERNOR<br>8561-295<br>5R3633 | | 31361<br>11083 | EA | 1 | 1 |
| 58 | 4 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-133-0604 | SCREW, CAP<br>8561-295-37013-360 | | 31361 | EA | 1 | 1 |
| 58 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-01-130-1559 | NUT, HEX, ELASTIC<br>8561-295-37013-359 | | 31361 | EA | 1 | 1 |
| 58 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-131-9868 | WASHER, FLAT<br>8561-295-37013-358 | | 31361 | EA | 1 | 1 |
| 58 | 7 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-133-0603 | SCREW, FIL, HEAD<br>8561-295-37013-355 | | 31361 | EA | 3 | 3 |
| 58 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-130-1656 | WASHER, LOCK<br>8561-295-37013-354 | | 31361 | EA | 3 | 3 |
| 58 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-132-2171 | SCREW, HEX<br>8561-295-37013-357 | | 31361 | EA | 1 | 1 |
| 58 | 10 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-131-7574 | WASHER, PLAIN<br>8561-295-37013-356 | | 31361 | EA | 1 | 1 |
| 58 | 11 | XA | XA | XA | XA | | | | COVER<br>8561-295-37013-353 | | 31361 | EA | 1 | 1 |
| 58 | 12 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 5360-01-130-8058 | SPRING, RETURN, VERTICAL<br>8561-295-37013-352 | | 31361 | EA | 1 | 1 |
| 58 | 13 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-129-6809 | GASKET<br>8561-295-37013-341 | | 31361 | EA | 2 | 2 |
| 58 | 14 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-211-1785 | SCREW, SPEED DROOP BRACKET<br>8561-295-37013-233 | | 31361 | EA | 1 | 1 |
| 58 | 15 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-211-1788 | WASHER<br>8561-295-37013-234 | | 31361 | EA | 1 | 1 |
| 58 | 16 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-210-6472 | WASHER<br>8561-295-37013-235 | | 31361 | EA | 1 | 1 |
| 58 | 17 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .080 | 5340-01-211-1786 | BRACKET<br>8561-295-37013-236 | | 31361 | EA | 1 | 1 |
| 58 | 18 | XA | XA | XA | | D | .008 | | SCREW, DROOP ADJUSTING<br>8561-295-37013-232 | | 31361 | EA | 1 | 1 |
| 58 | 19 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-01-210-6473 | NUT, HEX<br>8561-295-37013-231 | | 31361 | EA | 1 | 1 |
| 58 | 20 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-211-1787 | SCREW<br>8561-295-37013-237 | | 31361 | EA | 1 | 1 |
| 58 | 21 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | | WASHER, LOCK<br>8561-295-37013-209 | | 31361 | EA | 1 | 1 |
| 58 | 22 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 2910-01-210-6474 | LEVER ASSY, SPEED DROOP<br>8561-295-37013-238 | | 31361 | EA | 1 | |
| 58 | 23 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-01-129-0304 | NUT, STOP, ELASTIC<br>8561-295-37013-351 | | 31361 | EA | 1 | 1 |
| 58 | 24 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-129-0303 | SEAT, SRPING<br>8501-295-37013-350 | | 31361 | EA | 1 | 1 |

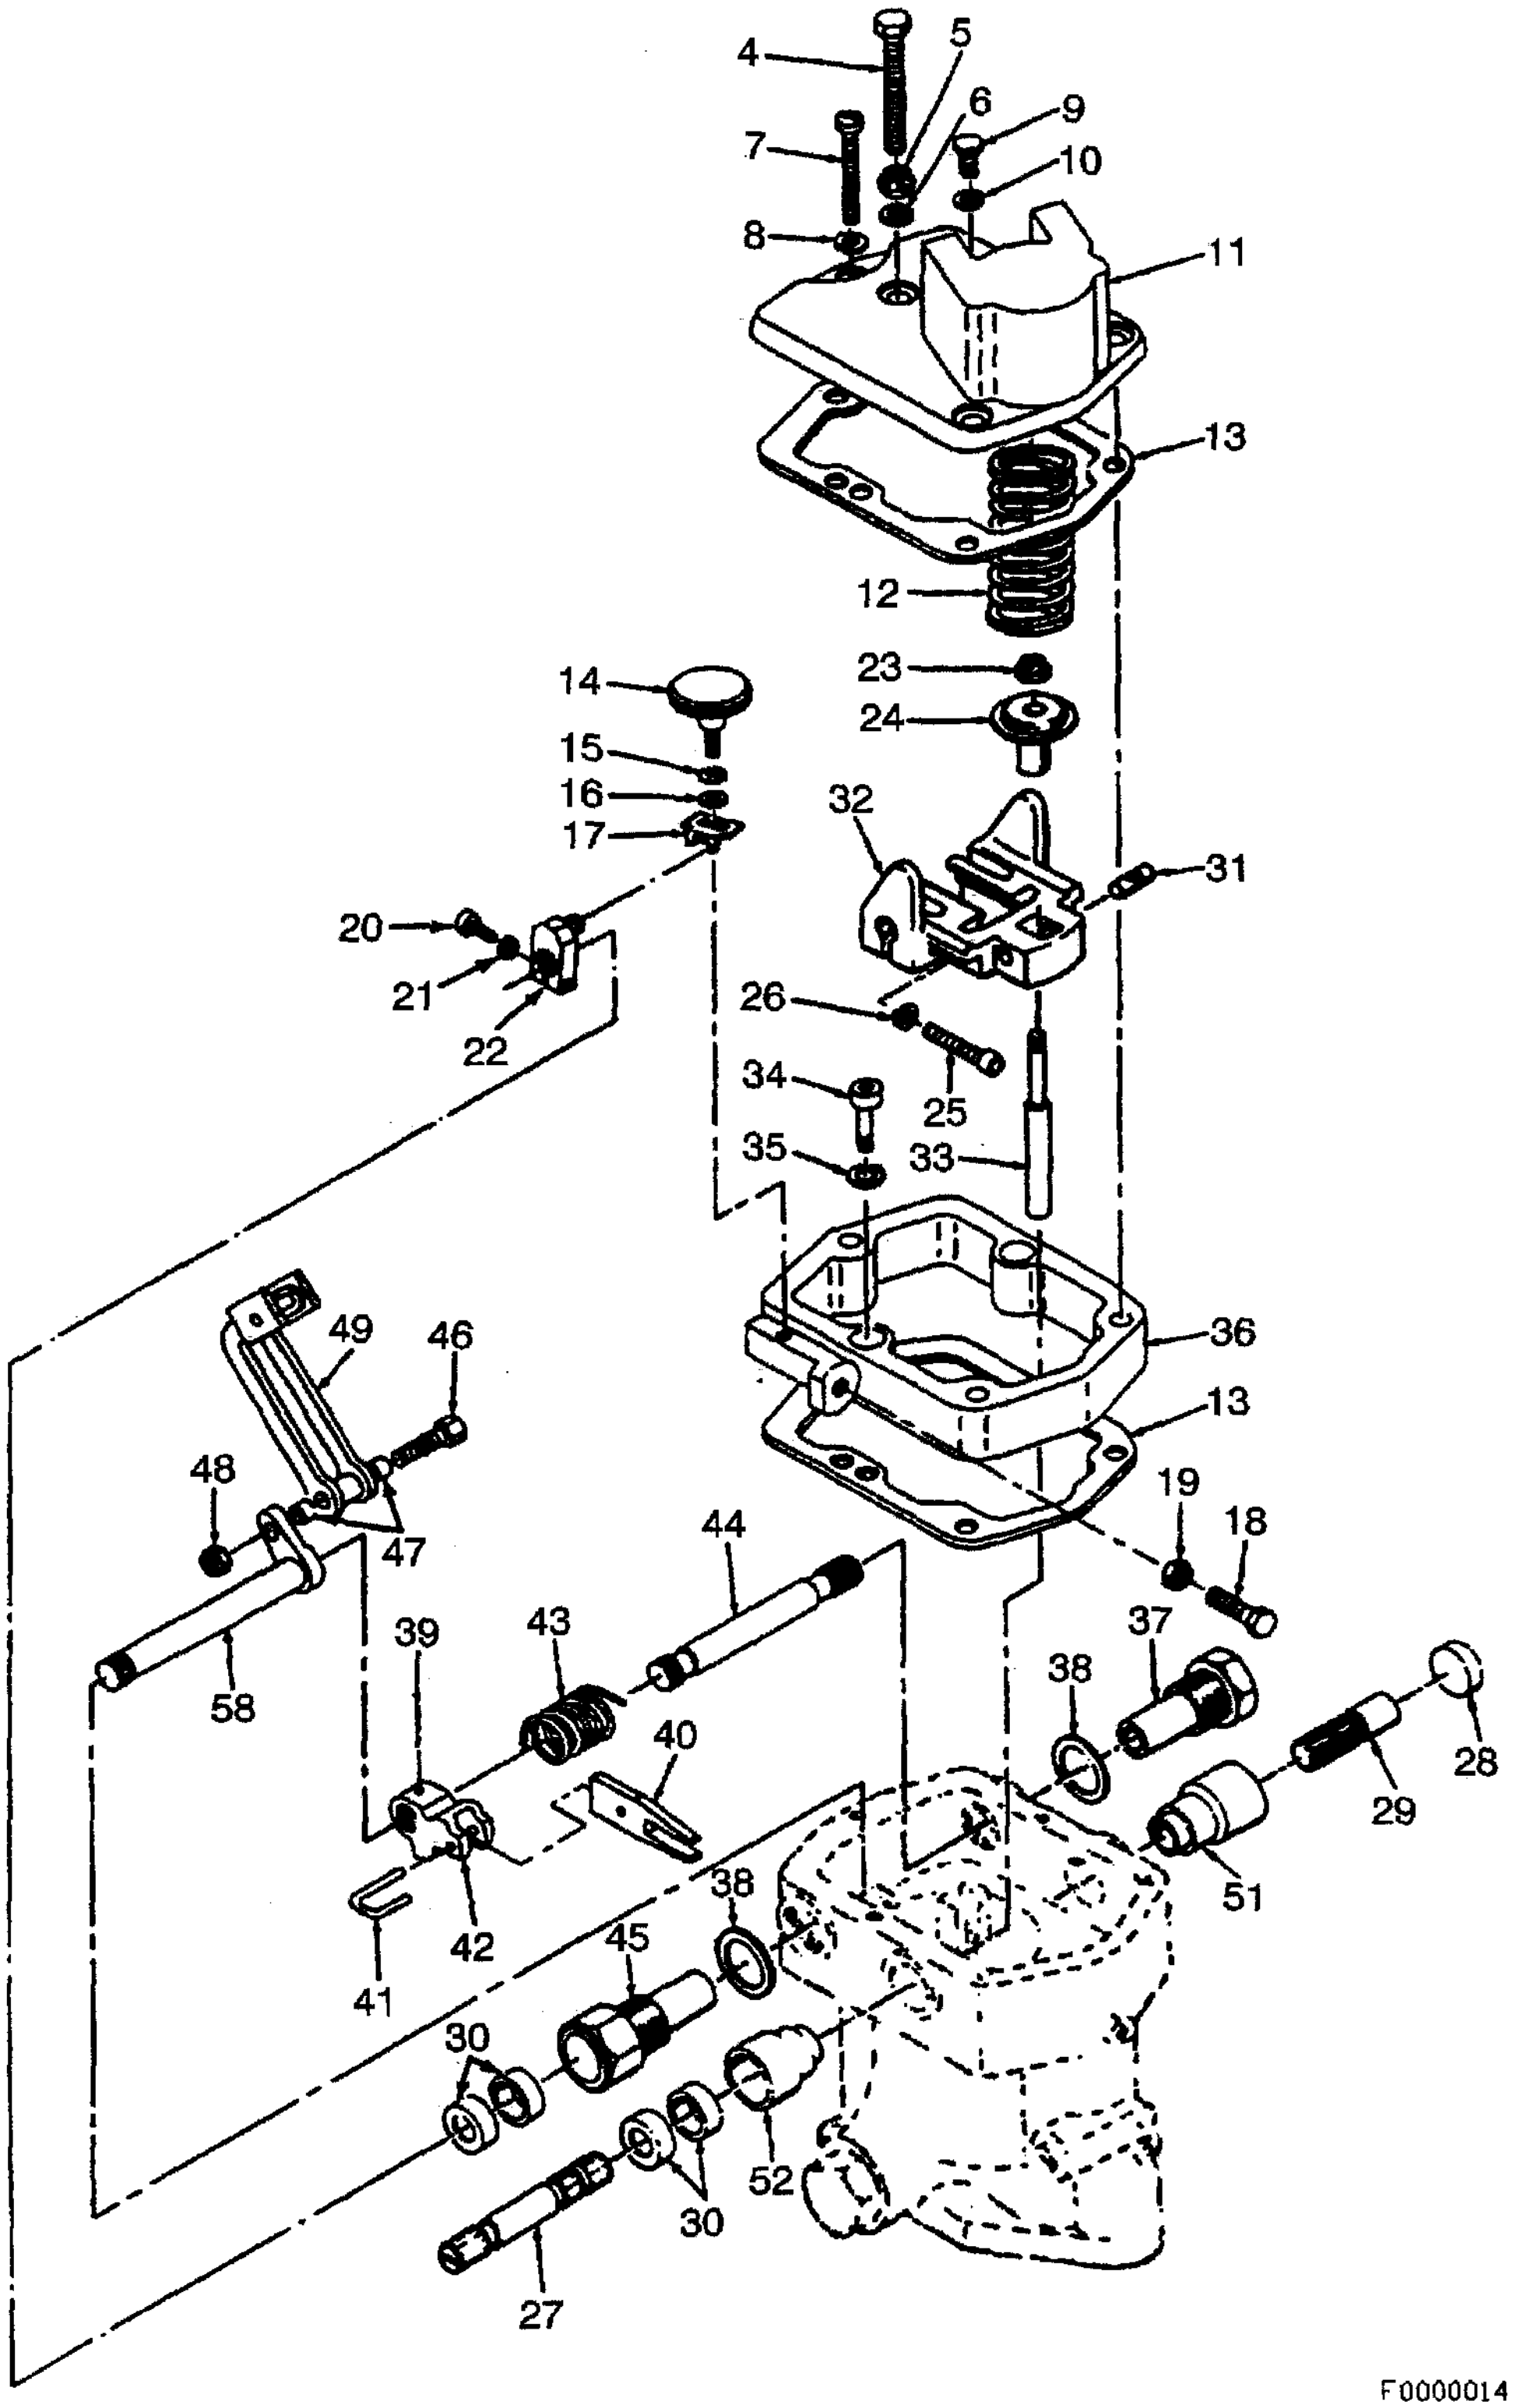
4
5
6
9
7
10
8
11
13
12
23
24
14
15
16
17
32
31
20
21
22
26
25
34
33
35
36
13
49
46
48
47
19
18
44
37
39
43
38
58
40
28
29
51
38
42
41
45
30
52
30
27
F0000014

*Figure 58. Governor (Sheet 2 of 3)*

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 58 | | | | | | | | | GOVERNOR - CONTINUED | | | | |
| 58 | 25 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-133-0971 | SCREW, CAP<br>8561-295-37013-348 | 31361 | EA | 2 | 2 |
| 58 | 26 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-130-1655 | WASHER, LOCK<br>8561-295-37013-349 | 31361 | EA | 2 | 2 |
| 58 | 27 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2990-00-886-5448 | SHAFT, TERMINAL<br>370394 | 66503 | EA | 1 | 1 |
| 58 | 28 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5340-01-132-4700 | PLUG, TAPERED WELCH<br>8561-295-37013-65 | 31361 | EA | 1 | 1 |
| 58 | 29 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 3040-01-218-6218 | SHAFT,STUB<br>8561-295-37013-57 | 31361 | EA | 1 | 1 |
| 58 | 30 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-132-1945 | SEAL, OIL<br>8561-295-3701347 | 31361 | EA | 2 | 2 |
| 58 | 31 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-01-132-2297 | PIN, PIVOT<br>8561-295-37013-346<br>3186-047 | 31361<br>31361 | EA | 1 | 1 |
| 58 | 32 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 2990-01-160-6692 | LEVER, TERMINAL<br>8561-295-37013-347 | 31361 | EA | 1 | 1 |
| 58 | 33 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2990-01-127-7930 | STRUT, POWER PISTON<br>8561-295-37013-345 | 31361 | EA | 1 | 1 |
| 58 | 34 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-133-0970 | SCREW, CAP<br>8561-295-37013-344 | 31361 | EA | 2 | 2 |
| 58 | 35 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-131-7573 | WASHER, PLAIN<br>8561-295-37013-343 | 31361 | EA | 2 | 2 |
| 58 | 36 | XA | XA | XA | XA | | | | SUBCAP<br>8561-295-37013-342 | 31361 | EA | 1 | 1 |
| 58 | 37 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 3120-01-129-6869 | SLEEVE ASSY, SPEED ADJUST<br>8561-295-37013-249 | 31361 | EA | 1 | 1 |
| 58 | 38 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-130-7924 | WASHER, COPPER<br>8561-295-37013-245 | 31361 | EA | 2 | 2 |
| 58 | 39 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-01-094-1990 | PIN,COTTER<br>8561-295-37013-293 | 31361 | EA | 1 | 1 |
| 58 | 40 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .004 | | LEVER, FLOATING<br>8561-295-37013-294 | 31361 | EA | 1 | 1 |
| 58 | 41 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | | PIN<br>8561-295-37013-291 | 31361 | EA | 1 | 1 |
| 58 | 42 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .004 | 2990-01-128-2460 | LEVER, SPEED ADJUST<br>8561-295-37013-292 | 31361 | EA | 1 | 1 |
| 58 | 43 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 5360-01-130-1620 | SPRING, TORSION<br>8561-295-37013-247 | 31361 | EA | 1 | 1 |
| 58 | 44 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 3040-01-166-4461 | SHAFT, DROOP ADJUST<br>8561-295-37013-246 | 31361 | EA | 1 | 1 |
| 58 | 45 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 3120-01-129-6868 | SLEEVE ASSY, DROOP ADJUST, SHORT<br>8561-295-37013-243<br>3612-031 | 31361<br>31361 | EA | 1 | 1 |
| 58 | 46 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | | SCREW, DROOP BRACKET<br>8561-295-37013-289<br>370495 | 31361<br>31361 | EA | 1 | 1 |
| 58 | 47 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5365-01-132-8972 | SPACER<br>8561-295-37013-288<br>370495 | 31361<br>31363 | EA | 1 | 1 |

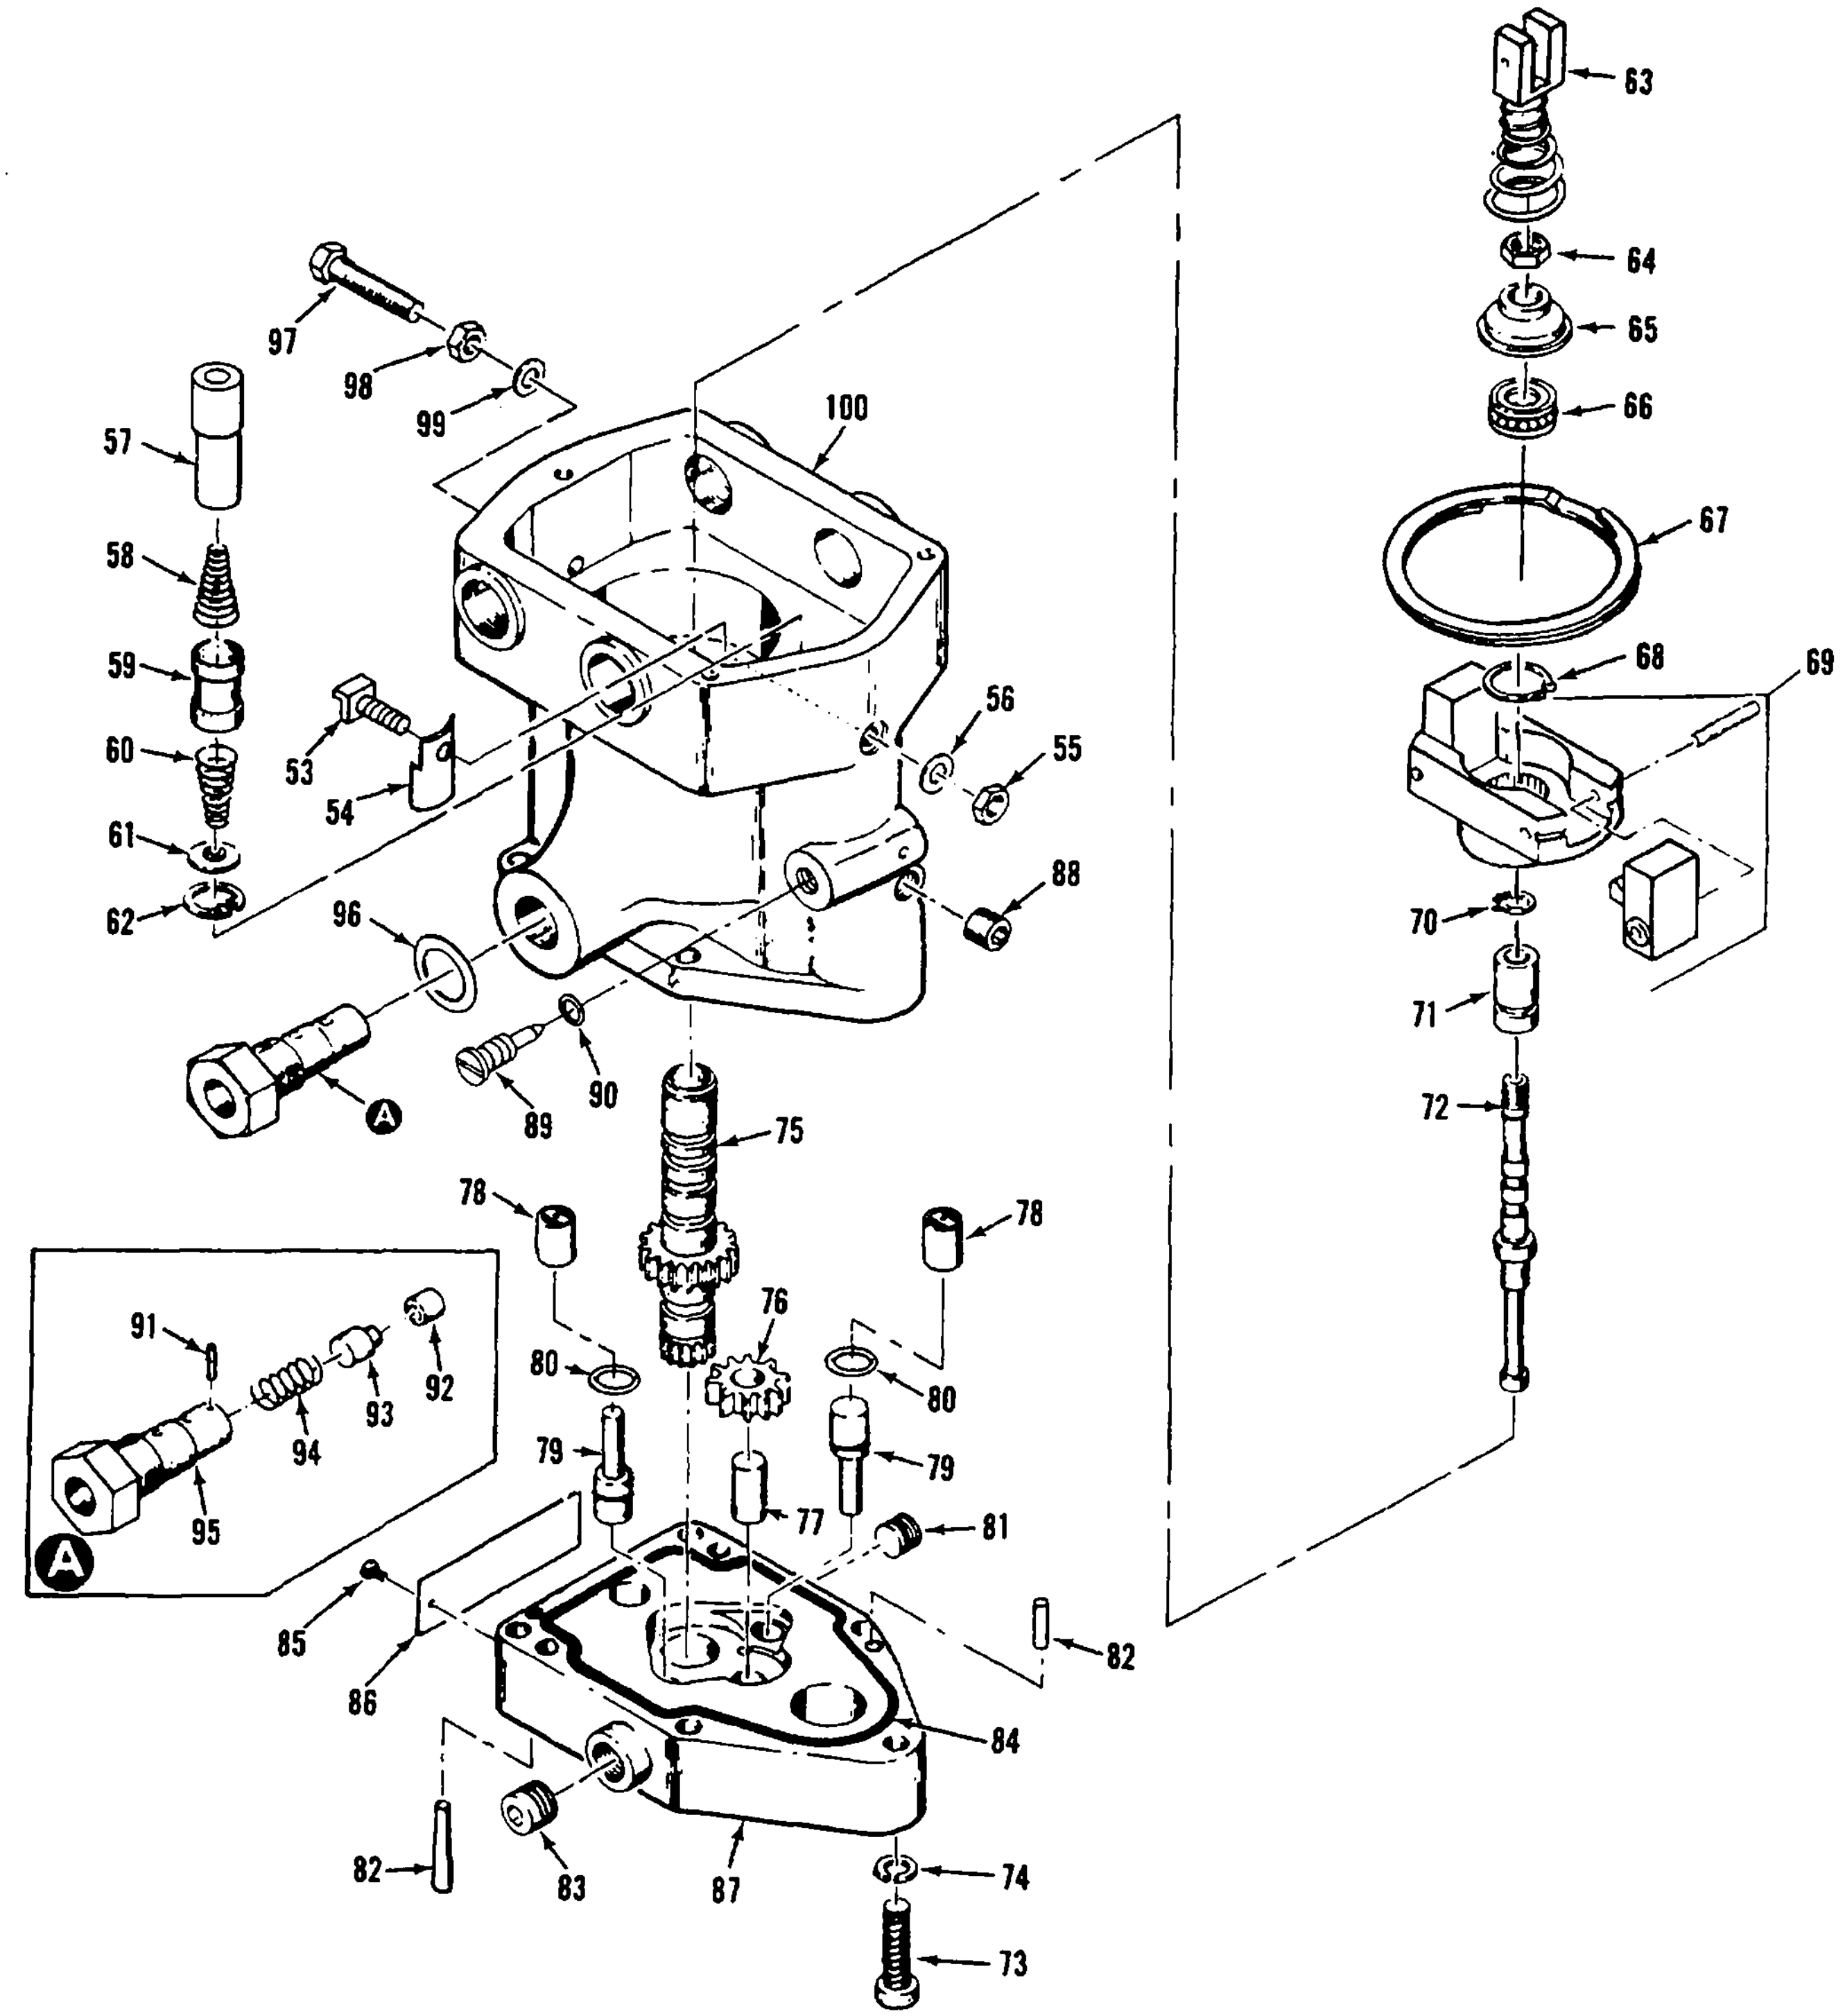
63
64
65
66
67
68
69
70
71
72
97
98
99
100
57
58
59
60
61
62
53
54
56
55
88
96
89
90
A
75
78
78
76
80
80
79
79
77
81
91
92
93
94
95
A
85
86
82
84
82
83
87
74
73

Figure 58. Governor (Sheet 3 of 3)

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 58 | | | | | | | | | GOVERNOR - CONTINUED | | | | |
| 58 | 48 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-01-130-1558 | NUT, STOP, ELASTIC<br>8561-295-37013-283<br>370276 | 31361<br>66503 | EA | 1 | 1 |
| 58 | 49 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .004 | 2990-00-859-0131 | LINK ASSY, DROOP<br>8561-295-37013-284<br>370276 | 31361<br>66503 | EA | 1 | 1 |
| 58 | 50 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2990-01-130-4938 | SHAFT ASSY, SPEED DROOP<br>8561-295-37013-290 | 31361 | EA | 1 | 1 |
| 58 | 51 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 3120-01-129-6640 | SLEEVE, SHAFT<br>8561-295-37013-45 | 31361 | EA | 1 | 1 |
| 58 | 52 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 3120-01-129-6641 | SLEEVE, SHAFT<br>8561-295-37013-46 31361 | | EA | 1 | 1 |
| 58 | 53 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-01-129-6638 | SCREW, POWER PISTON STOP<br>8561-295-37013-3 | 31361 | EA | 1 | 1 |
| 58 | 54 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2990-01-127-6912 | STOP, BUSHING<br>8561-295-37013-3A | 31361 | EA | 1 | 1 |
| 58 | 55 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-01-129-0197 | NUT, ELASTIC<br>8561-295-37013-5 | 31361 | EA | 1 | 1 |
| 58 | 56 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-129-0198 | WASHER, COPPER<br>8561-295-37013-4 | 31361 | EA | 1 | 1 |
| 58 | 57 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2990-01-129-4955 | PISTON, POWER<br>8561-295-37013-361 | 31361 | EA | 1 | 1 |
| 58 | 58 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 5360-01-130-1167 | SPRING, BUFFER<br>8561-295-37013-15 | 31361 | EA | 1 | 1 |
| 58 | 59 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2990-00-085-5619 | PISTON, BUFFER<br>370688 | 66503 | EA | 1 | 1 |
| 58 | 60 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 5360-01-130-1618 | SPRING, BUFFER<br>8561-295-37013-13 | 31361 | EA | 1 | 1 |
| 58 | 61 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2990-01-128-2411 | SEAT, SPRING<br>8561-295-37013-12 | 31361 | EA | 1 | 1 |
| 58 | 62 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 5365-00-019-4854 | RING, RETAINING<br>8561-295-37013-11 | 31361 | EA | 1 | 1 |
| 58 | 63 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 2990-01-128-1528 | SPRING ASSY, SPEEDER<br>8561-295-37013-42 | 31361 | EA | 1 | 1 |
| 58 | 64 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-01-130-1557 | NUT, PILOT VALVE PLUNGER<br>8561-295-37013-41 | 31361 | EA | 1 | 1 |
| 58 | 65 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2990-01-130-1074 | SEAT, SPRING<br>8561-295-37013-40 | 31361 | EA | 1 | 1 |
| 58 | 66 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 3120-01-129-6876 | BEARING, THRUST<br>8561-295-37013-39 | 31361 | EA | 1 | 1 |
| 58 | 67 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 5365-00-200-2550 | RING, SPIROLOX<br>Y1176-2-206 | 08484 | EA | 1 | 1 |
| 58 | 68 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 5365-01-129-9699 | RING, RETAINING<br>8561-295-37013-37 | 31361 | EA | 1 | 1 |
| 58 | 69 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 2990-01-130-6482 | BALLHEAD ASSY<br>8561-295-37013-34 | 31361 | EA | 1 | 1 |
| 58 | 70 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 5365-01-130-9698 | RING, RETAINING<br>8561-295-37013-33 | 31361 | EA | 1 | 1 |
| 58 | 71 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 3120-01-129-6867 | BUSHING, COMPENSATING<br>8561-295-37013-32 | 31361 | EA | 1 | 1 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 58 | | | | | | | | | GOVERNOR - CONTINUED | | | | |
| 58 | 72 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2990-00-346-9032 | PLUNGER, PILOT VALVE<br>370014 | 66503 | EA | 1 | 1 |
| 58 | 73 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5903-00-978-9385 | SCREW<br>MS16997-62 | 96906 | EA | 3 | 3 |
| 58 | 74 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-130-9849 | WASHER, LOCK<br>8561-295-37013-75 | 31361 | EA | 3 | 3 |
| 58 | 75 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 3120-01-129-6639 | BUSHING, PILOT VALVE<br>8561-295-37013-30 | 31361 | EA | 1 | 1 |
| 58 | 76 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .004 | | GEAR, IDLER<br>8561-295-37013-28 | 31361 | EA | 1 | 1 |
| 58 | 77 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-01-133-0602 | STUD, IDLER GEAR<br>8561-295-37013-29 | 31361 | EA | 1 | 1 |
| 58 | 78 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .023 | 4820-01-220-9597 | VALVE, CHECK<br>8561-295-37013-26A | 31361 | EA | 2 | 2 |
| 58 | 79 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .008 | 5340-01-132-4699 | PLUG, DIRECTIONAL<br>8561-295-37013-26 | 31361 | EA | 2 | 2 |
| 58 | 80 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-129-4335 | PACKING, PREFORMED<br>8561-295-37013-27 | 31361 | EA | 2 | 2 |
| 58 | 81 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-00-018-9566 | PLUG, PIPE<br>147-0292 | 44940 | EA | 1 | 1 |
| 58 | 82 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-01-132-3579 | PIN, DOWEL<br>8561-295-37013-25 | 31361 | EA | 2 | 2 |
| 58 | 83 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-01-130-5492 | PLUG, PIPE<br>8561-295-37013-24 | 31361 | EA | 1 | 1 |
| 58 | 84 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-305-9734 | RING, OIL SEAL<br>206282 | 31361 | EA | 1 | 1 |
| 58 | 85 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | | SCREW<br>8561-295-37013-43 | 31361 | EA | 2 | 2 |
| 58 | 86 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION<br>8561-295-37013-44 | 31361 | EA | 1 | 1 |
| 58 | 87 | XA | XA | XA | XA | | | | BASE<br>8561-295-37013-23 | 31361 | EA | 1 | 1 |
| 58 | 88 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-01-125-9775 | PLUG, SOCKET HEAD<br>8561-295-37013-2 | 31361 | EA | 1 | 1 |
| 58 | 89 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .023 | 2990-01-125-9665 | VALVE, NEEDLE<br>8561-295-37013-6 | 31361 | EA | 1 | 1 |
| 58 | 90 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-127-2875 | PACKING, PREFORMED<br>8561-295-37013-7 | 31361 | EA | 1 | 1 |
| 58 | 91 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | | PIN<br>8561-295-37013-18 | 31361 | EA | 1 | 1 |
| 58 | 92 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 3120-00-661-9407 | SLEEVE, STOP<br>040714 | 66503 | EA | 1 | 1 |
| 58 | 93 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2990-01-130-4937 | PLUNGER, RELIEF VALVE<br>8561-295-37013-20 | 31361 | EA | 1 | 1 |
| 58 | 94 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 5360-01-130-1168 | SPRING<br>8561-295-37013-19 | 31361 | EA | 1 | 1 |
| 58 | 95 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 3120-01-129-6866 | SLEEVE, RELIEF VALVE<br>8561-295-37013-17 | 31361 | EA | 1 | 1 |
| 58 | 96 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-130-1014 | GASKET, RELIEF VALVE<br>8561-295-37013-22 | 31361 | EA | 1 | 1 |

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION a FIG NO. | (1) ILLUS-TRATION b ITEM NO. | (2) SMR CODE a ARMY | (2) SMR CODE b AIR FORCE | (2) SMR CODE c NAVY | (2) SMR CODE d USMC | (3) USMC a SSI | (3) USMC b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | (5) DESCRIPTION USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 58 | | | | | | | | | GOVERNOR - CONTINUED | | | | |
| 58 | 97 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | | STOP SCREW, HIGH SPEED<br>8561-295-37013-10 31361 | | EA | 1 | 1 |
| 58 | 98 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-01-129-0199 | NUT, ELASTIC<br>8561-295-37013-9 31361 | | EA | 1 | 1 |
| 58 | 99 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 5 | 5310-01-129-0200 | WASHER, COPPER<br>8561-295-37013-8 31361 | | EA | 1 | 1 |
| 58 | 100 | XA | XA | XA | XA | | | | CASE<br>8561-295-37013-1 31361 | | EA | 1 | 1 |
| 58 | 101 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .080 | 5945-01-142-1053 | SOLENOID, SHUTOFF<br>4N3890 78388 | | EA | 1 | 1 |

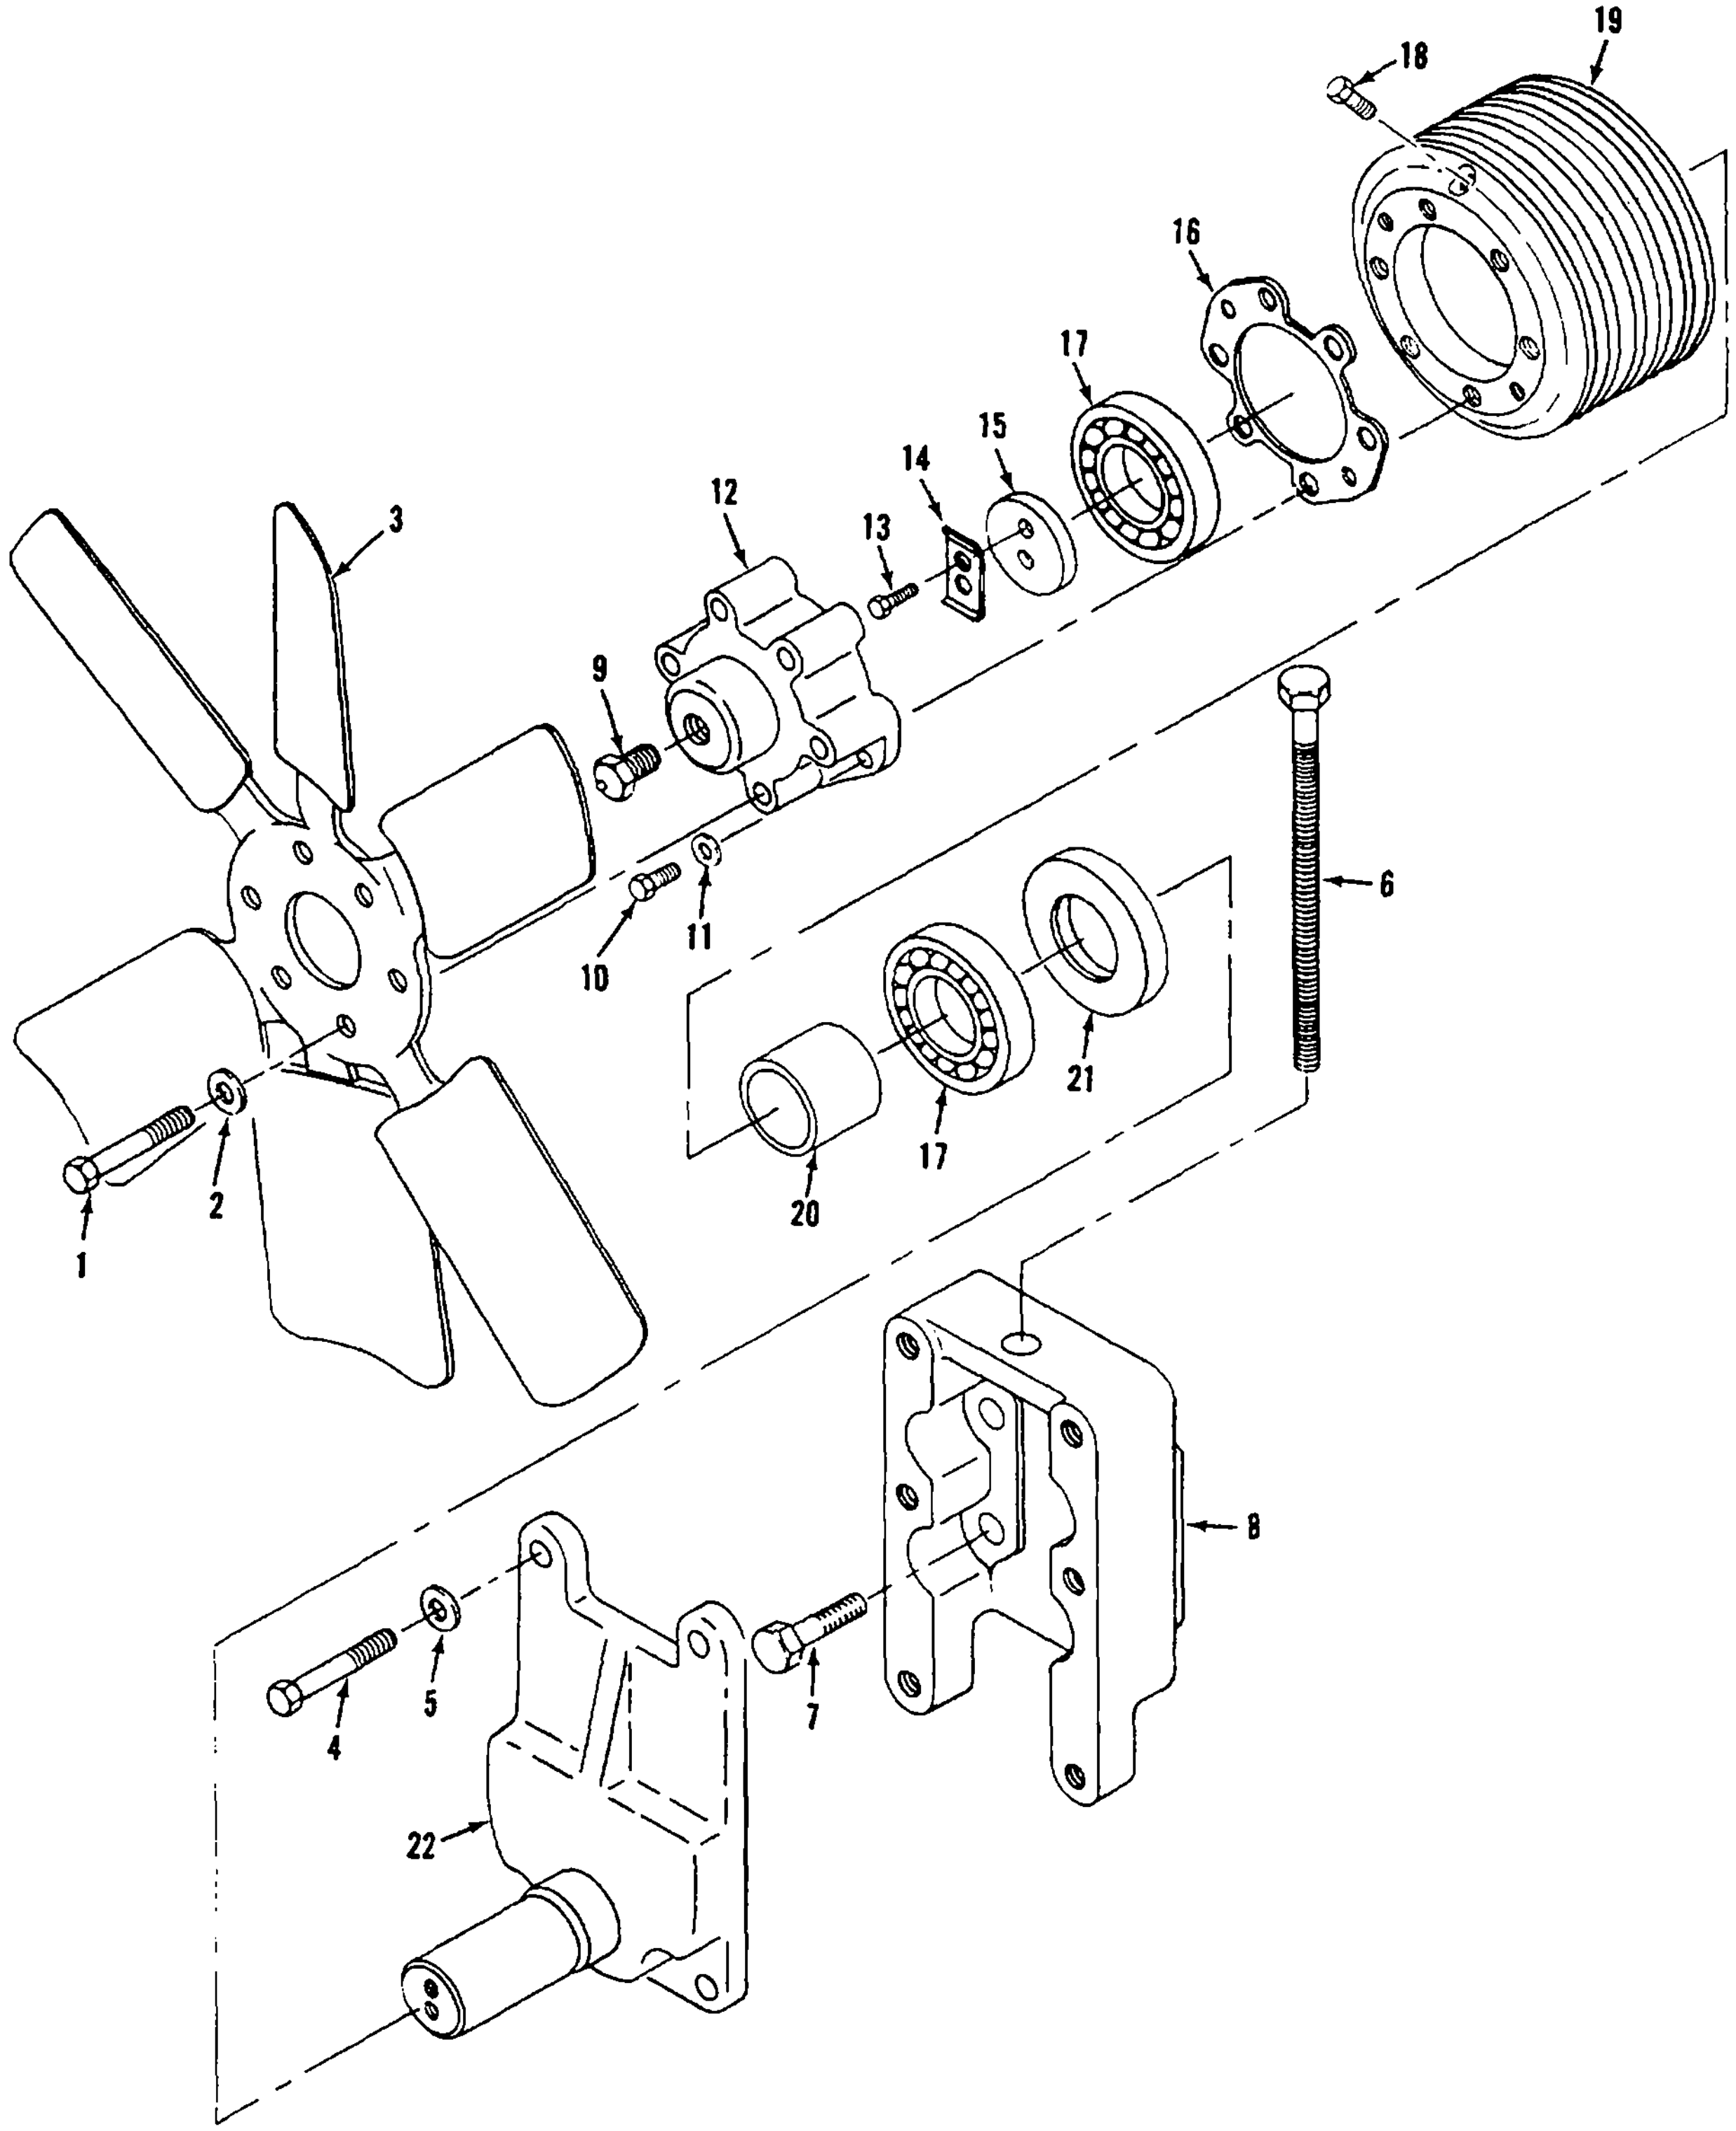
19
18
16
17
15
14
12
13
3
9
6
10
11
21
17
20
2
1
8
5
7
4
22

Figure 59. Engine Fan and Related Parts

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION |  | (2) SMR CODE |  |  |  | (3) USMC |  | (4) | (5) DESCRIPTION |  | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
|  |  |  |  |  |  |  |  |  | GROUP 10 - ENGINE |  |  |  |  |
| 59 |  |  |  |  |  |  |  |  | ENGINE FAN AND RELATED PARTS |  |  |  |  |
| 59 | 1 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-269-3220 | SCREW, HEX HEAD<br>MS90725-70 | 96906 | EA | 6 | 6 |
| 59 | 2 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-637-9541 | WASHER, LOCKSPRING<br>MS35338-46 | 96906 | EA | 6 | 40 |
| 59 | 3 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 2970-00-209-1788 | FAN, CIRCULATING<br>70-4094<br>460426 | 30554<br>22038 | EA | 1 | 1 |
| 59 | 4 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-916-1493 | BOLT, HEX HEAD<br>3H5368 | 11083 | EA | 4 | 4 |
| 59 | 5 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-01-132-4807 | WASHER<br>2S932 | 11083 | EA | 4 | 4 |
| 59 | 6 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-01-069-2669 | BOLT, HEX HEAD<br>6L7283 | 11083 | EA | 1 | 1 |
| 59 | 7 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-263-8978 | BOLT, HEX HEAD<br>S1587 | 11083 | EA | 4 | 10 |
| 59 | 8 | XA | XA | XA | XA |  |  |  | ADAPTER<br>9L5613 | 11083 | EA | 1 | 1 |
| 59 | 9 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .013 | 4820-00-826-6465 | FITTING, GREASE<br>MS35670-2A | 96906 | EA | 1 | 1 |
| 59 | 10 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-226-4827 | BOLT, HEX HEAD<br>MS90728-34 | 96906 | EA | 2 | 6 |
| 59 | 11 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-432-4064 | WASHER<br>9M1974 | 11083 | EA | 2 | 8 |
| 59 | 12 | PBFZZ | PAFZZ | PBHZZ | PBHZZ |  |  |  | HUB<br>9L5615 | 11083 | EA | 1 | 1 |
| 59 | 13 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-226-4826 | BOLT, HEX HEAD<br>MS90728-33 | 96906 | EA | 2 | 6 |
| 59 | 14 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-361-2522 | LOCK<br>5B3390 | 11083 | EA | 1 | 1 |
| 59 | 15 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5365-00-191-3623 | WASHER<br>6L2324 | 11083 | EA | 1 | 1 |
| 59 | 16 | PAOZZ | PAFZZ | PAFZZ | PAFZZ |  | .030 | 5330-00-340-4731 | GASKET<br>9L2006 | 11083 | EA | 1 | 1 |
| 59 | 17 | PAOZZ | PAFZZ | PAFZZ | PAFZZ |  | .050 | 3110-00-516-5490 | BEARING<br>8H9789<br>1269 | 11083<br>21960 | EA | 2 | 3 |
| 59 | 18 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-924-7886 | PLUG<br>5M6214 | 11083 | EA | 1 | 6 |
| 59 | 19 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 3020-01-125-9844 | PULLEY<br>9L5614 | 11083 | EA | 1 | 1 |
| 59 | 20 | PAOZZ | PAFZZ | PAFZZ | PAFZZ |  |  | 5365-00-173-8193 | SPACER<br>6L4704 | 11083 | EA | 1 | 1 |
| 59 | 21 | PAOZZ | PAFZZ | PAFZZ | PAFZZ |  | .030 | 5330-00-105-2660 | SEAL, LIP-TYPE<br>1B2257 | 11083 | EA | 1 | 1 |
| 59 | 22 | PBOZZ | PBOZZ | PBOZZ | PBOZZ |  |  | 4210-00-125-9445 | BRACKET ASSY<br>9L5617 | 11083 | EA | 1 | 1 |

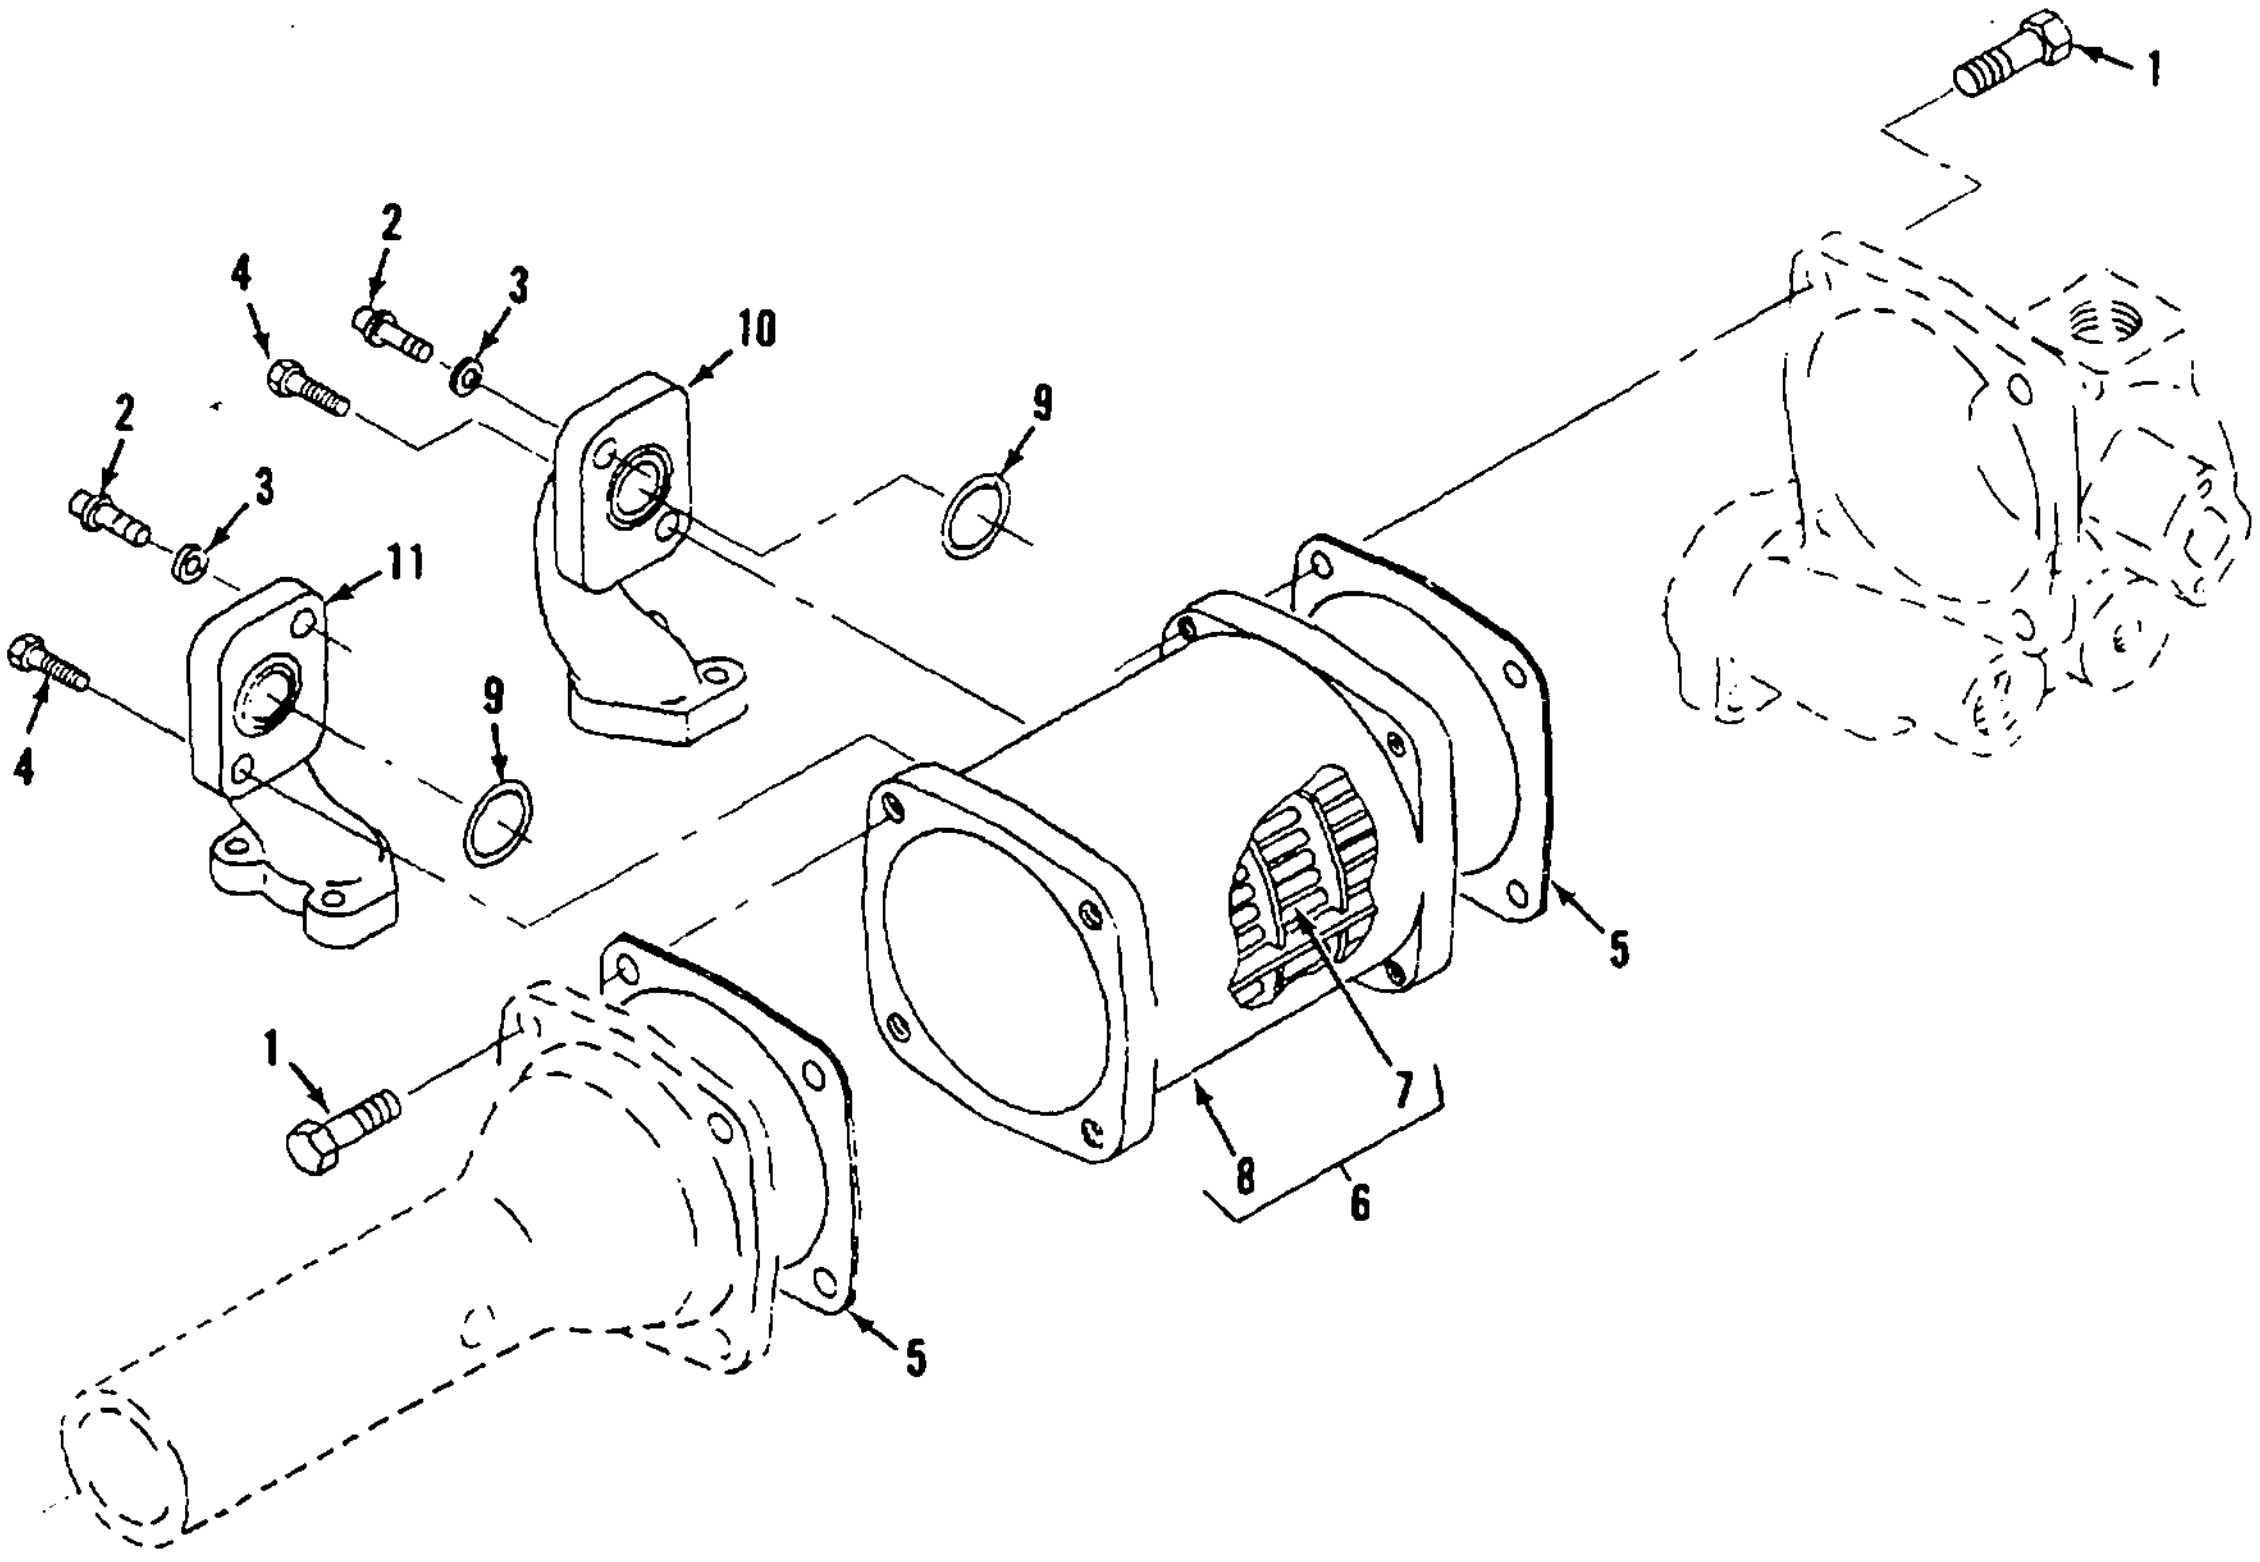
1
2
4
3
10
9
2
3
11
4
9
5
7
1
8
6
5

Figure 60. Engine Oil Cooler

## SCTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 60 | | | | | | | | | ENGINE OIL COOLER | | | | |
| 60 | 1 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-432-8194 | BOLT, HEX HEAD<br>1A2029 | 11083 | EA | 8 | 13 |
| 60 | 2 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-01-106-5213 | BOLT, HEX HEAD<br>1T765 | 11083 | EA | 2 | 2 |
| 60 | 3 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-117-4788 | WASHER, LOCK<br>5M2894 | 11083 | EA | 2 | 71 |
| 60 | 4 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-269-3214 | BOLT, HEX HEAD<br>S1591 | 11083 | EA | 2 | 24 |
| 60 | 5 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-00-401-6569 | GASKET, P/O KIT P/N 5P9116<br>8S5409 | 11083 | EA | 2 | 2 |
| 60 | 6 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .007 | 2910-01-011-2674 | CORE ASSY<br>7N110 | 11083 | EA | 1 | 1 |
| 60 | 7 | XA | XA | XA | XA | | | | BUNDLE ASSY<br>7N109 | 11083 | EA | 1 | 1 |
| 60 | 8 | XA | XA | XA | XA | | | | SHELL<br>2P8797 | 11083 | EA | 1 | 1 |
| 60 | 9 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-00-914-5819 | SEAL, P/O KIT P/N 5P9116<br>8M4988 | 11083 | EA | 2 | 4 |
| 60 | 10 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 4730-01-255-5537 | ELBOW<br>2P7734 | 11083 | EA | 1 | 1 |
| 60 | 11 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 4730-01-125-2149 | ELBOW<br>2P7732 | 11083 | EA | 1 | 1 |

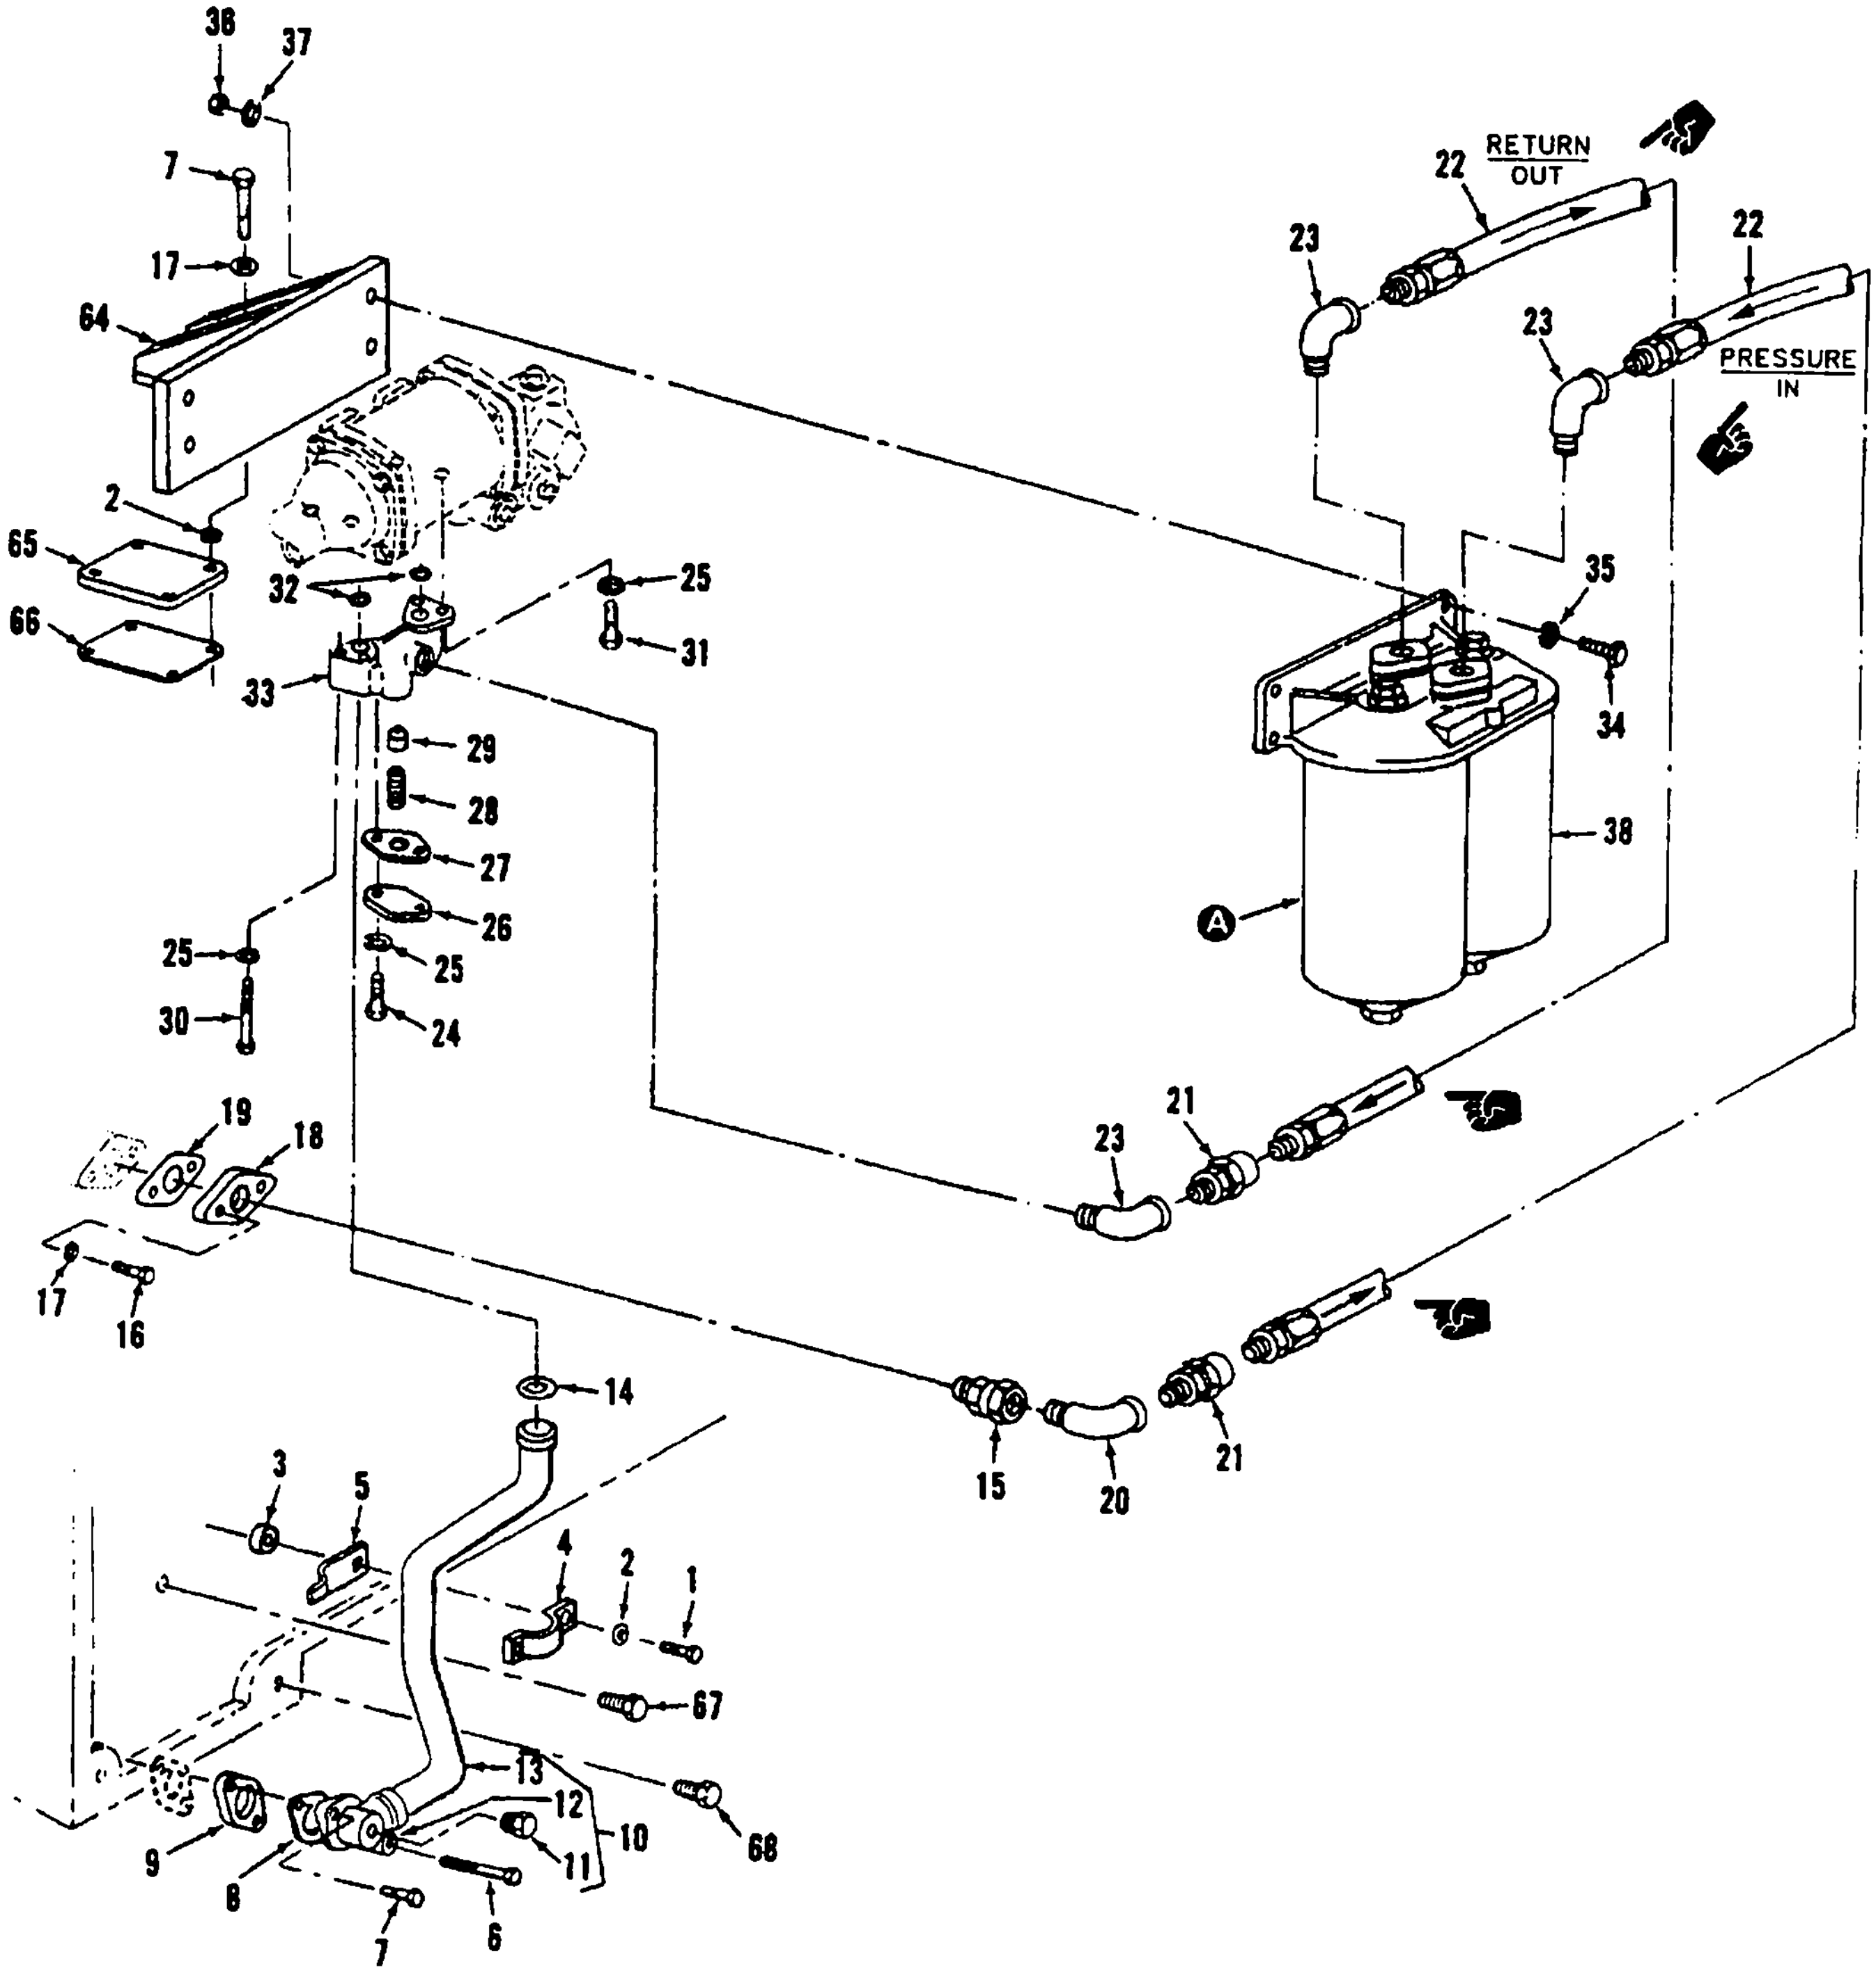
36
37
7
17
64
2
65
66
32
33
25
31
29
28
27
26
25
24
25
30
22
RETURN
OUT
23
22
23
PRESSURE
IN
35
34
38
A
19
18
17
16
21
23
14
15
20
21
3
5
4
2
1
67
13
12
10
11
68
9
8
7
6
F9400851

*Figure 61. Oil Filter (sheet 1 of 2)*

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 61 | | | | | | | | | OIL FILTER | | | | |
| 61 | 1 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5306-00-637-4956 | BOLT, HEX HEAD<br>S1588 | 11083 | EA | 3 | 21 |
| 61 | 2 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-080-6004 | WASHER<br>MS27183-14 | 96906 | EA | 9 | 41 |
| 61 | 3 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .010 | 5365-00-424-0479 | SPACER<br>8B8679 | 11083 | EA | 1 | 1 |
| 61 | 4 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .015 | 5340-01-069-0905 | CLIP<br>7S3919 | 11083 | EA | 1 | 1 |
| 61 | 5 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .015 | 5340-01-069-0904 | CLIP<br>7S3916 | 11083 | EA | 1 | 1 |
| 61 | 6 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5306-00-285-1368 | BOLT, HEX HEAD<br>L1143 | 11083 | EA | 1 | 7 |
| 61 | 7 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-688-2111 | BOLT, HEX HEAD<br>B1821BH038C138N | 80204 | EA | 5 | 20 |
| 61 | 8 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | .030 | 5330-00-920-6922 | GASKET, P/O KIT P/N 5P9116<br>2M5407 | 11083 | EA | 2 | 3 |
| 61 | 9 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | | 4730-00-074-3559 | SPACER<br>7M7027 | 11083 | EA | 1 | 1 |
| 61 | 10 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .005 | 4710-01-131-2117 | TUBE ASSY,OIL FILTER<br>5R3119 | 11083 | EA | 1 | 1 |
| 61 | 11 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 4730-00-287-3279 | PLUG<br>5M6213 | 11083 | EA | 1 | 9 |
| 61 | 12 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 4710-01-129-5674 | ELBOW<br>8N7318 | 11083 | EA | 1 | 2 |
| 61 | 13 | XA | XA | XA | XA | | | | TUBE<br>5R3122 | 11083 | EA | 1 | 1 |
| 61 | 14 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | .030 | 5330-00-828-9787 | PACKING, PREFORMED<br>9H6067 | 11083 | EA | 1 | 2 |
| 61 | 15 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .006 | 4730-00-188-1893 | NIPPLE<br>3B7270 | 11083 | EA | 2 | 1 |
| 61 | 16 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5306-00-637-4956 | BOLT, HEX HEAD<br>S1588 | 11083 | EA | 2 | 21 |
| 61 | 17 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-514-6849 | WASHER, LOCK<br>3B4506 | 11083 | EA | 6 | 47 |
| 61 | 18 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 4730-00-202-7706 | FLANGE<br>2H5759 | 11083 | EA | 1 | 1 |
| 61 | 19 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | .030 | 5340-00-083-8455 | GASKET, P/O KIT P/N 5P9116<br>7F7590 | 11083 | EA | 1 | 2 |
| 61 | 20 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .006 | 4730-00-199-2104 | ELBOW<br>4B5984 | 11083 | EA | 1 | 1 |
| 61 | 21 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .006 | 5330-00-782-4363 | CONNECTOR, 30 DEGREE<br>5F6371 | 11083 | EA | 2 | 2 |
| 61 | 22 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .070 | 4720-01-129-5582 | HOSE ASSY<br>3N4906 | 11083 | EA | 2 | 2 |
| 61 | 23 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .006 | 4730-00-253-4415 | ELBOW<br>3B6554 | 11083 | EA | 3 | 4 |
| 61 | 24 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-226-4826 | BOLT, HEX HEAD<br>2B2695 | 11083 | EA | 2 | 6 |
| 61 | 25 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-407-9566 | WASHER, LOCK<br>MS35338-45 | 96906 | EA | 6 | 23 |

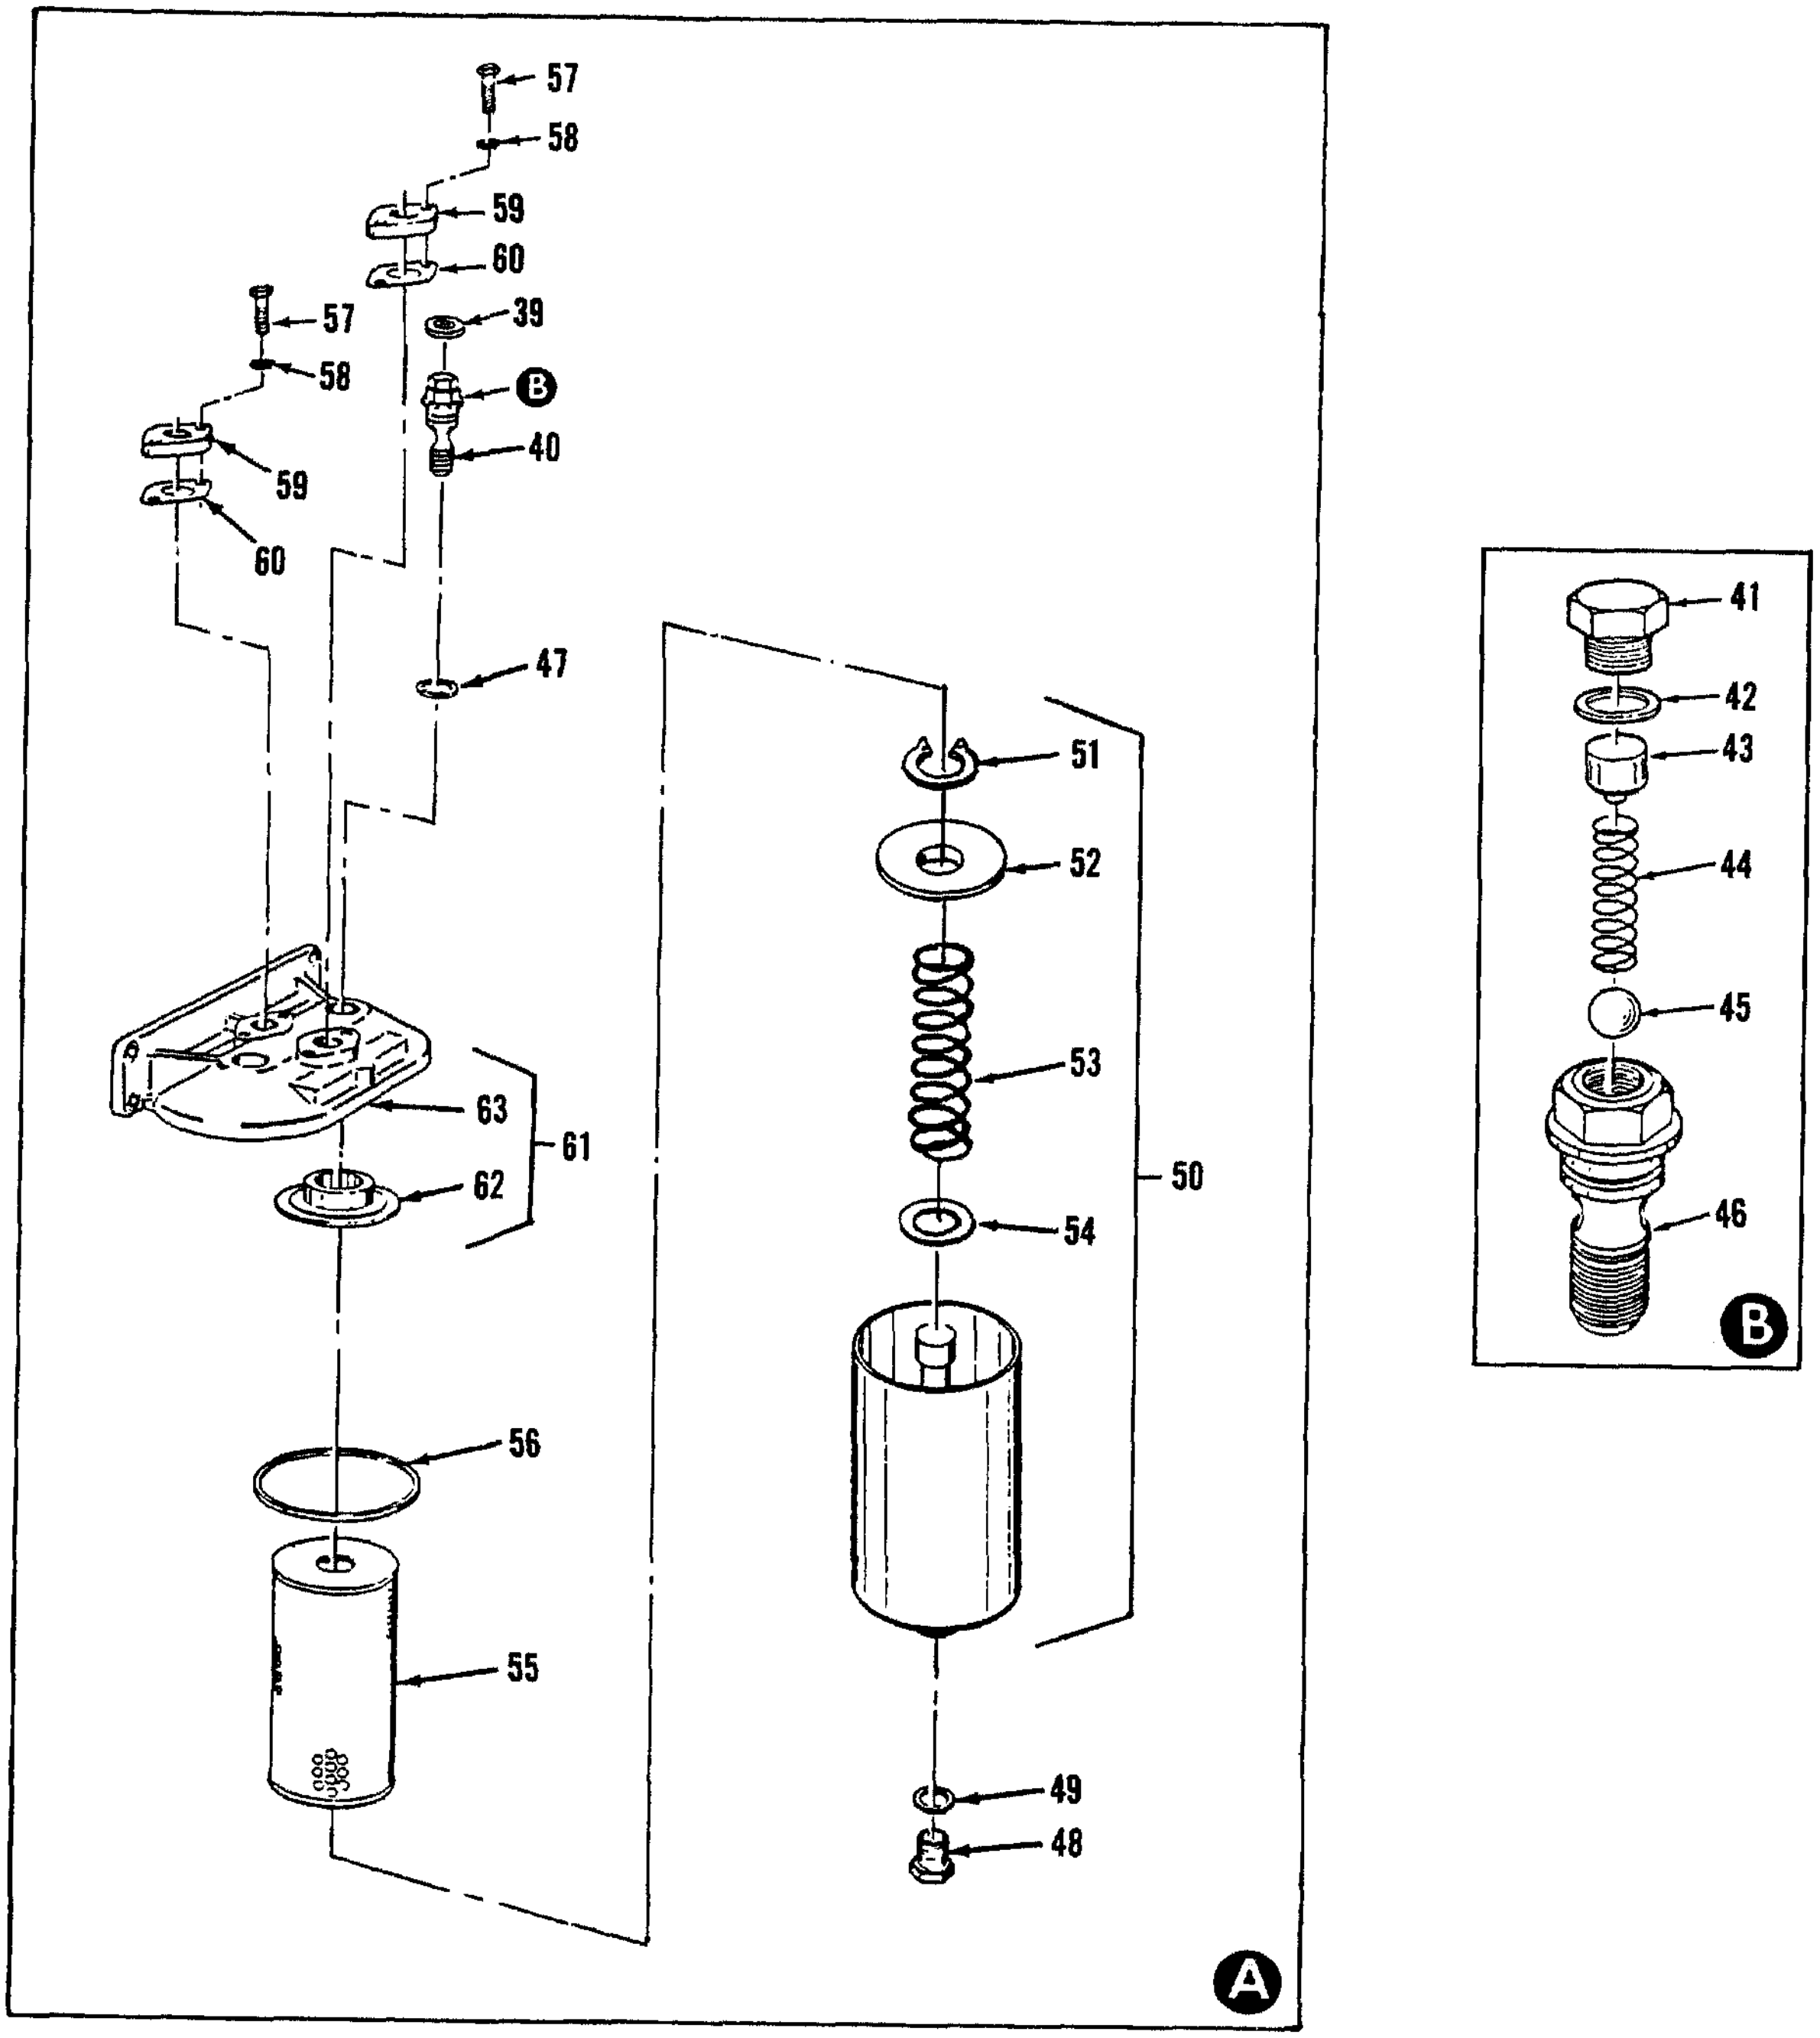
57
58
59
60
57
58
39
B
40
59
60
47
51
52
53
63
61
62
50
54
56
55
49
48
A
41
42
43
44
45
46
B

Figure 61. Oil Filter (Sheet 2 of 2)

# SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 61 | | | | | | | | | OIL FILTER - CONTINUED | | | | |
| 61 | 26 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-423-9937 | COVER<br>6B830 | 11083 | EA | 1 | 1 |
| 61 | 27 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-00-557-8514 | GASKET<br>7S6744 | 11083 | EA | 1 | 1 |
| 61 | 28 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .015 | 5360-00-249-2203 | SPRING<br>6F8007 | 11083 | EA | 1 | 1 |
| 61 | 29 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 2940-00-911-9942 | PLUNGER<br>9M853 | 11083 | EA | 1 | 1 |
| 61 | 30 | PAOZZ | PAFZZ | PAOZZ | PAFZZ | D | .008 | 5306-00-801-9785 | BOLT, HEX HEAD<br>1D4541 | 11083 | EA | 2 | 2 |
| 61 | 31 | PAOZZ | PAFZZ | PAOZZ | PAFZZ | D | .010 | 5306-00-226-4827 | BOLT, HEX HEAD<br>S1618 | 11083 | EA | 2 | 6 |
| 61 | 32 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-00-914-5819 | PACKING, PREFORMED,<br>P/O KIT P/N 5P9116<br>8M4988 | 11083 | EA | 2 | 4 |
| 61 | 33 | PAOZZ | PAFFF | PAOZZ | PAFZZ | D | .008 | 2930-00-251-3811 | BYPASS, OIL COOLER<br>3R9266 | 11083 | EA | 1 | 1 |
| 61 | 34 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-688-2111 | BOLT, HEX HEAD<br>3B1915 | 11083 | EA | 4 | 20 |
| 61 | 35 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-514-6849 | WASHER, LOCK<br>3B4506 | 11083 | EA | 4 | 47 |
| 61 | 36 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5310-01-030-3355 | NUT<br>1D4717 | 11083 | EA | 4 | 17 |
| 61 | 37 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-930-7014 | WASHER<br>4B4278 | 11083 | EA | 4 | 41 |
| 61 | 38 | PAOOO | PAFFP | PAOOO | PAOOO | | .010 | 2940-00-484-3204 | OIL FILTER ASSY<br>5R2167 | 11083 | EA | 1 | 1 |
| 61 | 39 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .010 | 5365-00-262-9786 | WASHER<br>1H4147 | 11083 | EA | 2 | 2 |
| 61 | 40 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | .007 | 4820-00-237-4298 | VALVE ASSY, RELIEF<br>5R679 | 11083 | EA | 2 | 2 |
| 61 | 41 | XA— | XA | XA | XA | | | 5365-00-108-9788 | BOLT, HEX HEAD<br>3R3952 | 11083 | EA | 1 | 2 |
| 61 | 42 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | | 5365-00-141-1595 | GASKET<br>2A1913 | 11083 | EA | 1 | 2 |
| 61 | 43 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | | 5340-00-389-6137 | RETAINER<br>1H4143 | 11083 | EA | 1 | 2 |
| 61 | 44 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | | 5360-00-664-4194 | SPRING<br>9F6705 | 11083 | EA | 1 | 2 |
| 61 | 45 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | | 3110-00-100-6160 | BALL<br>6B8208 | 11083 | EA | 1 | 2 |
| 61 | 46 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | | | BODY<br>5R678 | 11083 | EA | 1 | 2 |
| 61 | 47 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | .030 | 5330-00-914-5821 | SEAL<br>8M4445 | 11083 | EA | 2 | 2 |
| 61 | 48 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5365-00-119-0627 | PLUG<br>9L572 | 11083 | EA | 2 | 2 |
| 61 | 49 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | .030 | 5330-00-921-7128 | GASKET<br>9F4522 | 11083 | EA | 2 | 2 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 61 | | | | | | | | | OIL FILTER - CONTINUED | | | | |
| 61 | 50 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .003 | 2940-01-126-7475 | CASE ASSY<br>5R1106 | 11083 | EA | 2 | 2 |
| 61 | 51 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .013 | 5365-00-920-8279 | RING, LOCKING<br>7M9107 | 11083 | EA | 1 | 2 |
| 61 | 52 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | | 5340-01-130-1070 | RETAINER ASSY<br>3R36 | 11083 | EA | 1 | 2 |
| 61 | 53 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .015 | 5360-00-137-3464 | SPRING<br>9H7553 | 11083 | EA | 1 | 2 |
| 61 | 54 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-209-4771 | WASHER<br>6H411 | 11083 | EA | 1 | 2 |
| 61 | 55 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | 2.000 | 2940-00-580-6283 | ELEMENT<br>MS35802-3<br>3M198 | 96906<br>11083 | EA | 2 | 2 |
| 61 | 56 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | 2.000 | 5330-00-291-6881 | GASKET<br>6F9163 | 11083 | EA | 2 | 2 |
| 61 | 57 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-688-2111 | BOLT, HEX HEAD<br>3B1915 | 11083 | EA | 4 | 20 |
| 61 | 58 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-514-6849 | WASHER, LOCK<br>3B4506 | 11083 | EA | 4 | 47 |
| 61 | 59 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 4730-01-321-4491 | FLANGE<br>3R1059 | 11083 | EA | 2 | 2 |
| 61 | 60 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | .030 | 5330-00-429-3727 | GASKET<br>9L1480 | 11083 | EA | 2 | 2 |
| 61 | 61 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .080 | 2940-01-125-4101 | BASE ASSY<br>5R1077 | 11083 | EA | 1 | 1 |
| 61 | 62 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .003 | 2940-01-129-0822 | ADAPTER<br>5R1076 | 11083 | EA | 2 | 2 |
| 61 | 63 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .003 | 2940-01-126-4896 | BASE<br>9L1680 | 11083 | EA | 1 | 1 |
| 61 | 64 | XB | XB | XB | XB | | | | SUPPORT ASSY<br>5R3668 | 11083 | EA | 1 | 1 |
| 61 | 65 | PBOZZ | PAFZZ | PAFZZ | PAFZZ | | | 2815-00-407-8369 | COVER<br>1P6367 | 11083 | EA | 1 | 1 |
| 61 | 66 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | .030 | 5330-00-760-7367 | GASKET, P/O KIT P/N 5P8766<br>5S6735 | 11083 | EA | 1 | 2 |
| 61 | 67 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 4730-00-042-8988 | PLUG<br>7H3171 | 11083 | EA | 1 | 1 |
| 61 | 68 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 4/30-00-044-4688 | PLUG<br>444688 | 24617 | EA | 1 | 7 |
| | | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | .030 | 5330-01-150-5781 | KIT, GASKET<br>5P9116 | 11083 | EA | 1 | 1 |
| 61 | 19 | | | | | | | | GASKET | | EA | 1 | |
| 61 | 5 | | | | | | | | GASKET | | EA | 2 | |
| 61 | 9 | | | | | | | | SEAL | | EA | 2 | |
| 61 | 8 | | | | | | | | GASKET | | EA | 1 | |
| 61 | 19 | | | | | | | | GASKET | | EA | 1 | |
| 61 | 32 | | | | | | | | PACKING, PREFORMED | | EA | 2 | |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE / USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 10 - ENGINE | | | |
| 62 | | | | | | | | | DAMPER, CRANKSHAFT PULLEY, TRUNNION AND TRUNNION SUPPORT | | | |
| 62 | 1 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-263-8978 | BOLT, HEX HEAD<br>S1587 11083 | EA | 6 | 10 |
| 62 | 2 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-098-0624 | WASHER<br>5P8245 11083 | EA | 6 | 6 |
| 62 | 3 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 2815-01-125-9797 | ADAPTER<br>9L6261 11083 | EA | 1 | 1 |
| 62 | 4 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 2815-01-126-0275 | DAMPER ASSY<br>2P3912 11083 | EA | 1 | 1 |
| 62 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-116-1531 | BOLT, HEX HEAD<br>9S1364 11083 | EA | 1 | 1 |
| 62 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-129-0614 | WASHER<br>8N794 11083 | EA | 1 | 1 |
| 62 | 7 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 3020-01-126-0614 | PULLEY<br>9L6257 11083 | EA | 1 | 1 |
| 62 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-724-5911 | SCREW<br>MS90725-63 96906 | EA | 2 | 6 |
| 62 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-820-6653 | WASHER, LOCK<br>MS35338-50 96906 | EA | 2 | 11 |
| 62 | 10 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-426-3209 | BOLT, HEX HEAD<br>1B4367 11083 | EA | 2 | 3 |
| 62 | 11 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-551-0433 | WASHER<br>853562 11083 | EA | 2 | 2 |
| 62 | 12 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .004 | 2920-00-116-5287 | CAP, TRUNNION<br>9L875 11083 | EA | 1 | 1 |
| 62 | 13 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 5365-00-118-3000 | SHIM<br>9L901 11083 | EA | 12 | 12 |
| 62 | 14 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 5365-00-846-9841 | SHIM<br>5S773725 11083 | EA | 2 | 2 |
| 62 | 15 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .006 | 2990-00-116-3239 | BUSHING<br>9L865 11083 | EA | 1 | 1 |
| 62 | 16 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2990-00-116-3240 | SUPPORT, TRUNNION<br>9L878 11083 | EA | 1 | 1 |
| 62 | 17 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-268-5798 | BOLT, HEX HEAD<br>L1329 11083 | EA | 3 | 3 |
| 62 | 18 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .009 | 2815-01-125-9998 | TRUNNION<br>8N81 11083 | EA | 1 | 1 |
| 62 | 19 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-068-6104 | SEAL, P/O KIT P/N 5P9568<br>2P1692 11083 | EA | 1 | 1 |
| 62 | 20 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-036-6825 | SEAL, P/O KIT P/N 5P9568<br>5S6296 11083 | EA | 1 | 2 |
| 62 | 21 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-685-2384 | BOLT, HEX HEAD<br>5B213 11083 | EA | 3 | 3 |
| 62 | 22 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-117-4788 | WASHER, LOCK<br>5M2894 11083 | EA | 1 | 71 |
| 62 | 23 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-01-030-3355 | NUT<br>1D4717 11083 | EA | 1 | 17 |

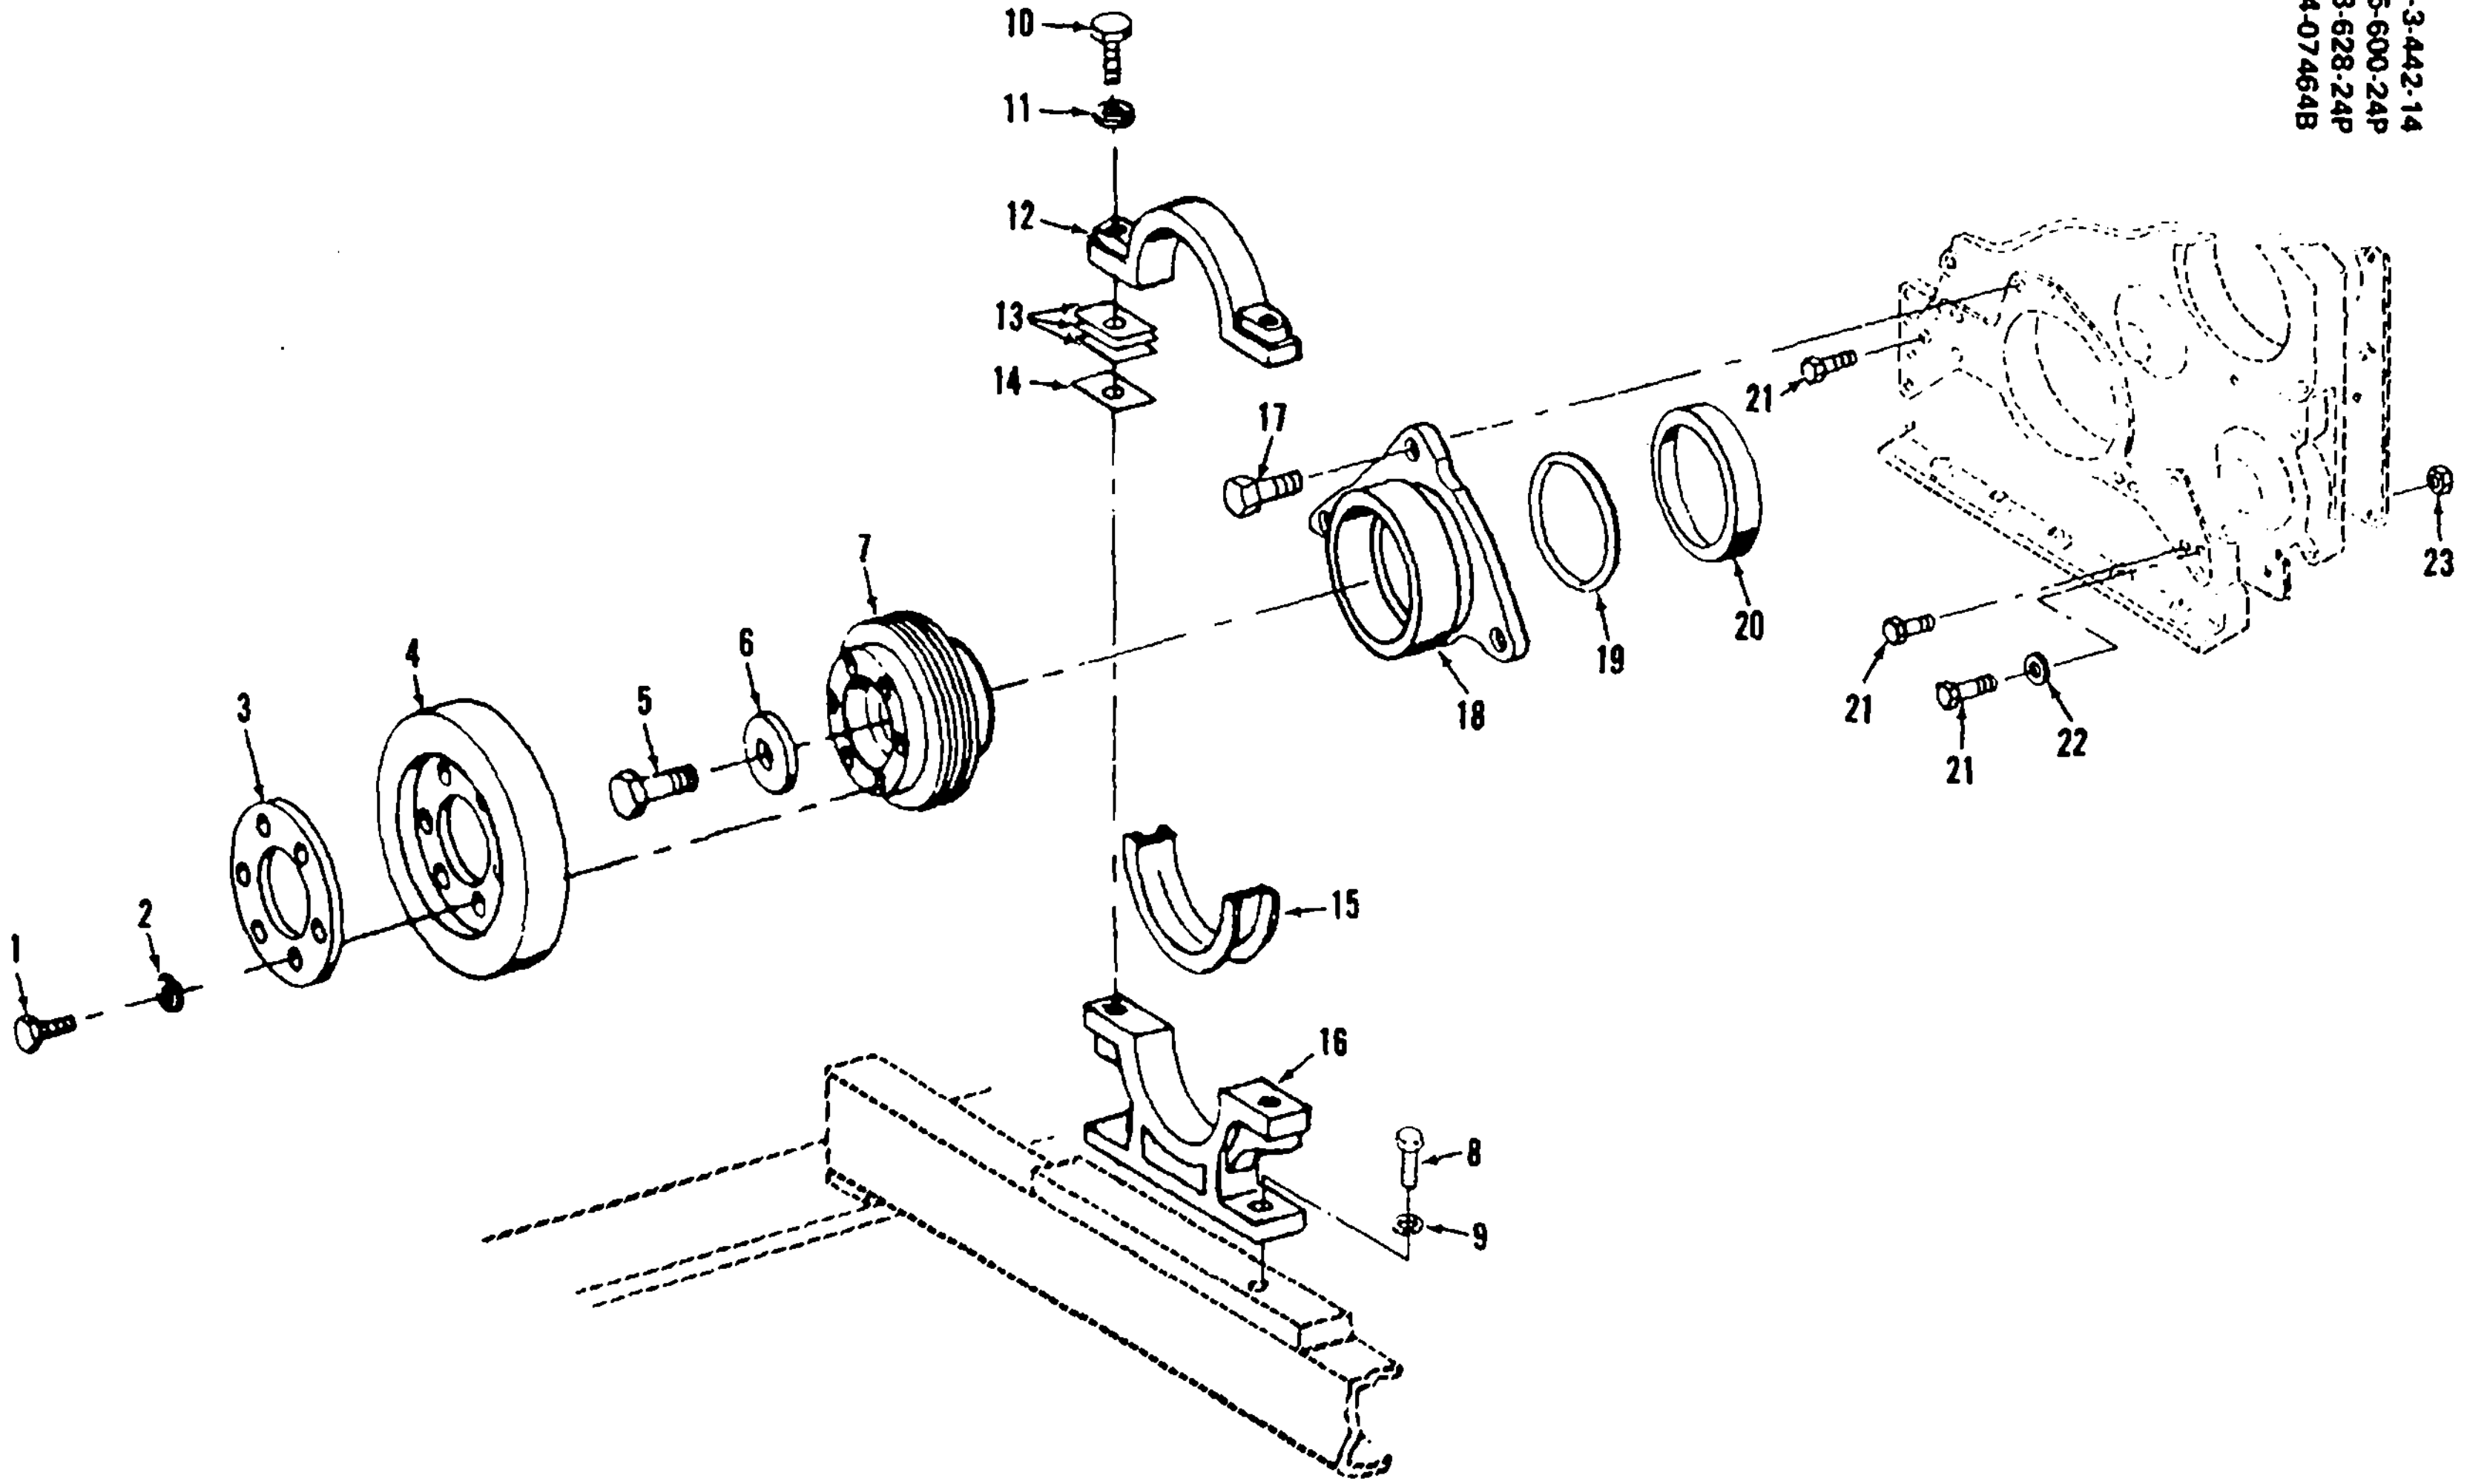
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
21
21
21
22
23

Figure 62. Damper, Crankshaft Pulley, Trunnion, and Trunnion Support

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 63 | | | | | | | | | EXHAUST MANIFOLD | | | | |
| 63 | 1 | PAOZZ | PAFZZ | PAOZZ | PAFZZ | D | .008 | 5305-00-115-9526 | BOLT, HEX HEAD<br>MS18154-58 | 96906 | EA | 2 | 9 |
| 63 | 2 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-117-4788 | WASHER, LOCK<br>5M2894 | 11083 | EA | 2 | 71 |
| 63 | 3 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 2815-01-126-1861 | SHIELD<br>7N2970 | 11083 | EA | 1 | 1 |
| 63 | 4 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-081-5663 | NUT<br>7L4346 | 11083 | EA | 2 | 2 |
| 63 | 5 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-01-020-5126 | NUT<br>2N2766 | 11083 | EA | 10 | 12 |
| 63 | 6 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-999-8285 | WASHER<br>8M7145 | 11083 | EA | 11 | 12 |
| 63 | 7 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-470-5567 | WASHER<br>8M9024 | 11083 | EA | 1 | 1 |
| 63 | 8 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .009 | 2815-00-470-6353 | MANIFOLD<br>7L383 | 11083 | EA | 1 | 1 |
| 63 | 9 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5307-00-471-0420 | STUD<br>7L520 | 11083 | EA | 12 | 12 |
| 63 | 10 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .030 | 5330-00-440-9791 | GASKET, P/O KIT P/N 5P8766<br>8S6410 | 11083 | EA | 3 | 3 |
| 63 | 11 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-011-2578 | PLUG<br>5B7890 | 11083 | EA | 2 | 3 |
| 63 | 12 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 2815-00-421-3846 | MANIFOLD ASSY<br>7L384 | 11083 | EA | 1 | 1 |
| 63 | 13 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5307-00-053-9023 | STUD<br>6L8562 | 11083 | EA | 2 | 2 |
| 63 | 14 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .009 | 2990-00-490-5542 | MANIFOLD<br>7L382 | 11083 | EA | 1 | 1 |

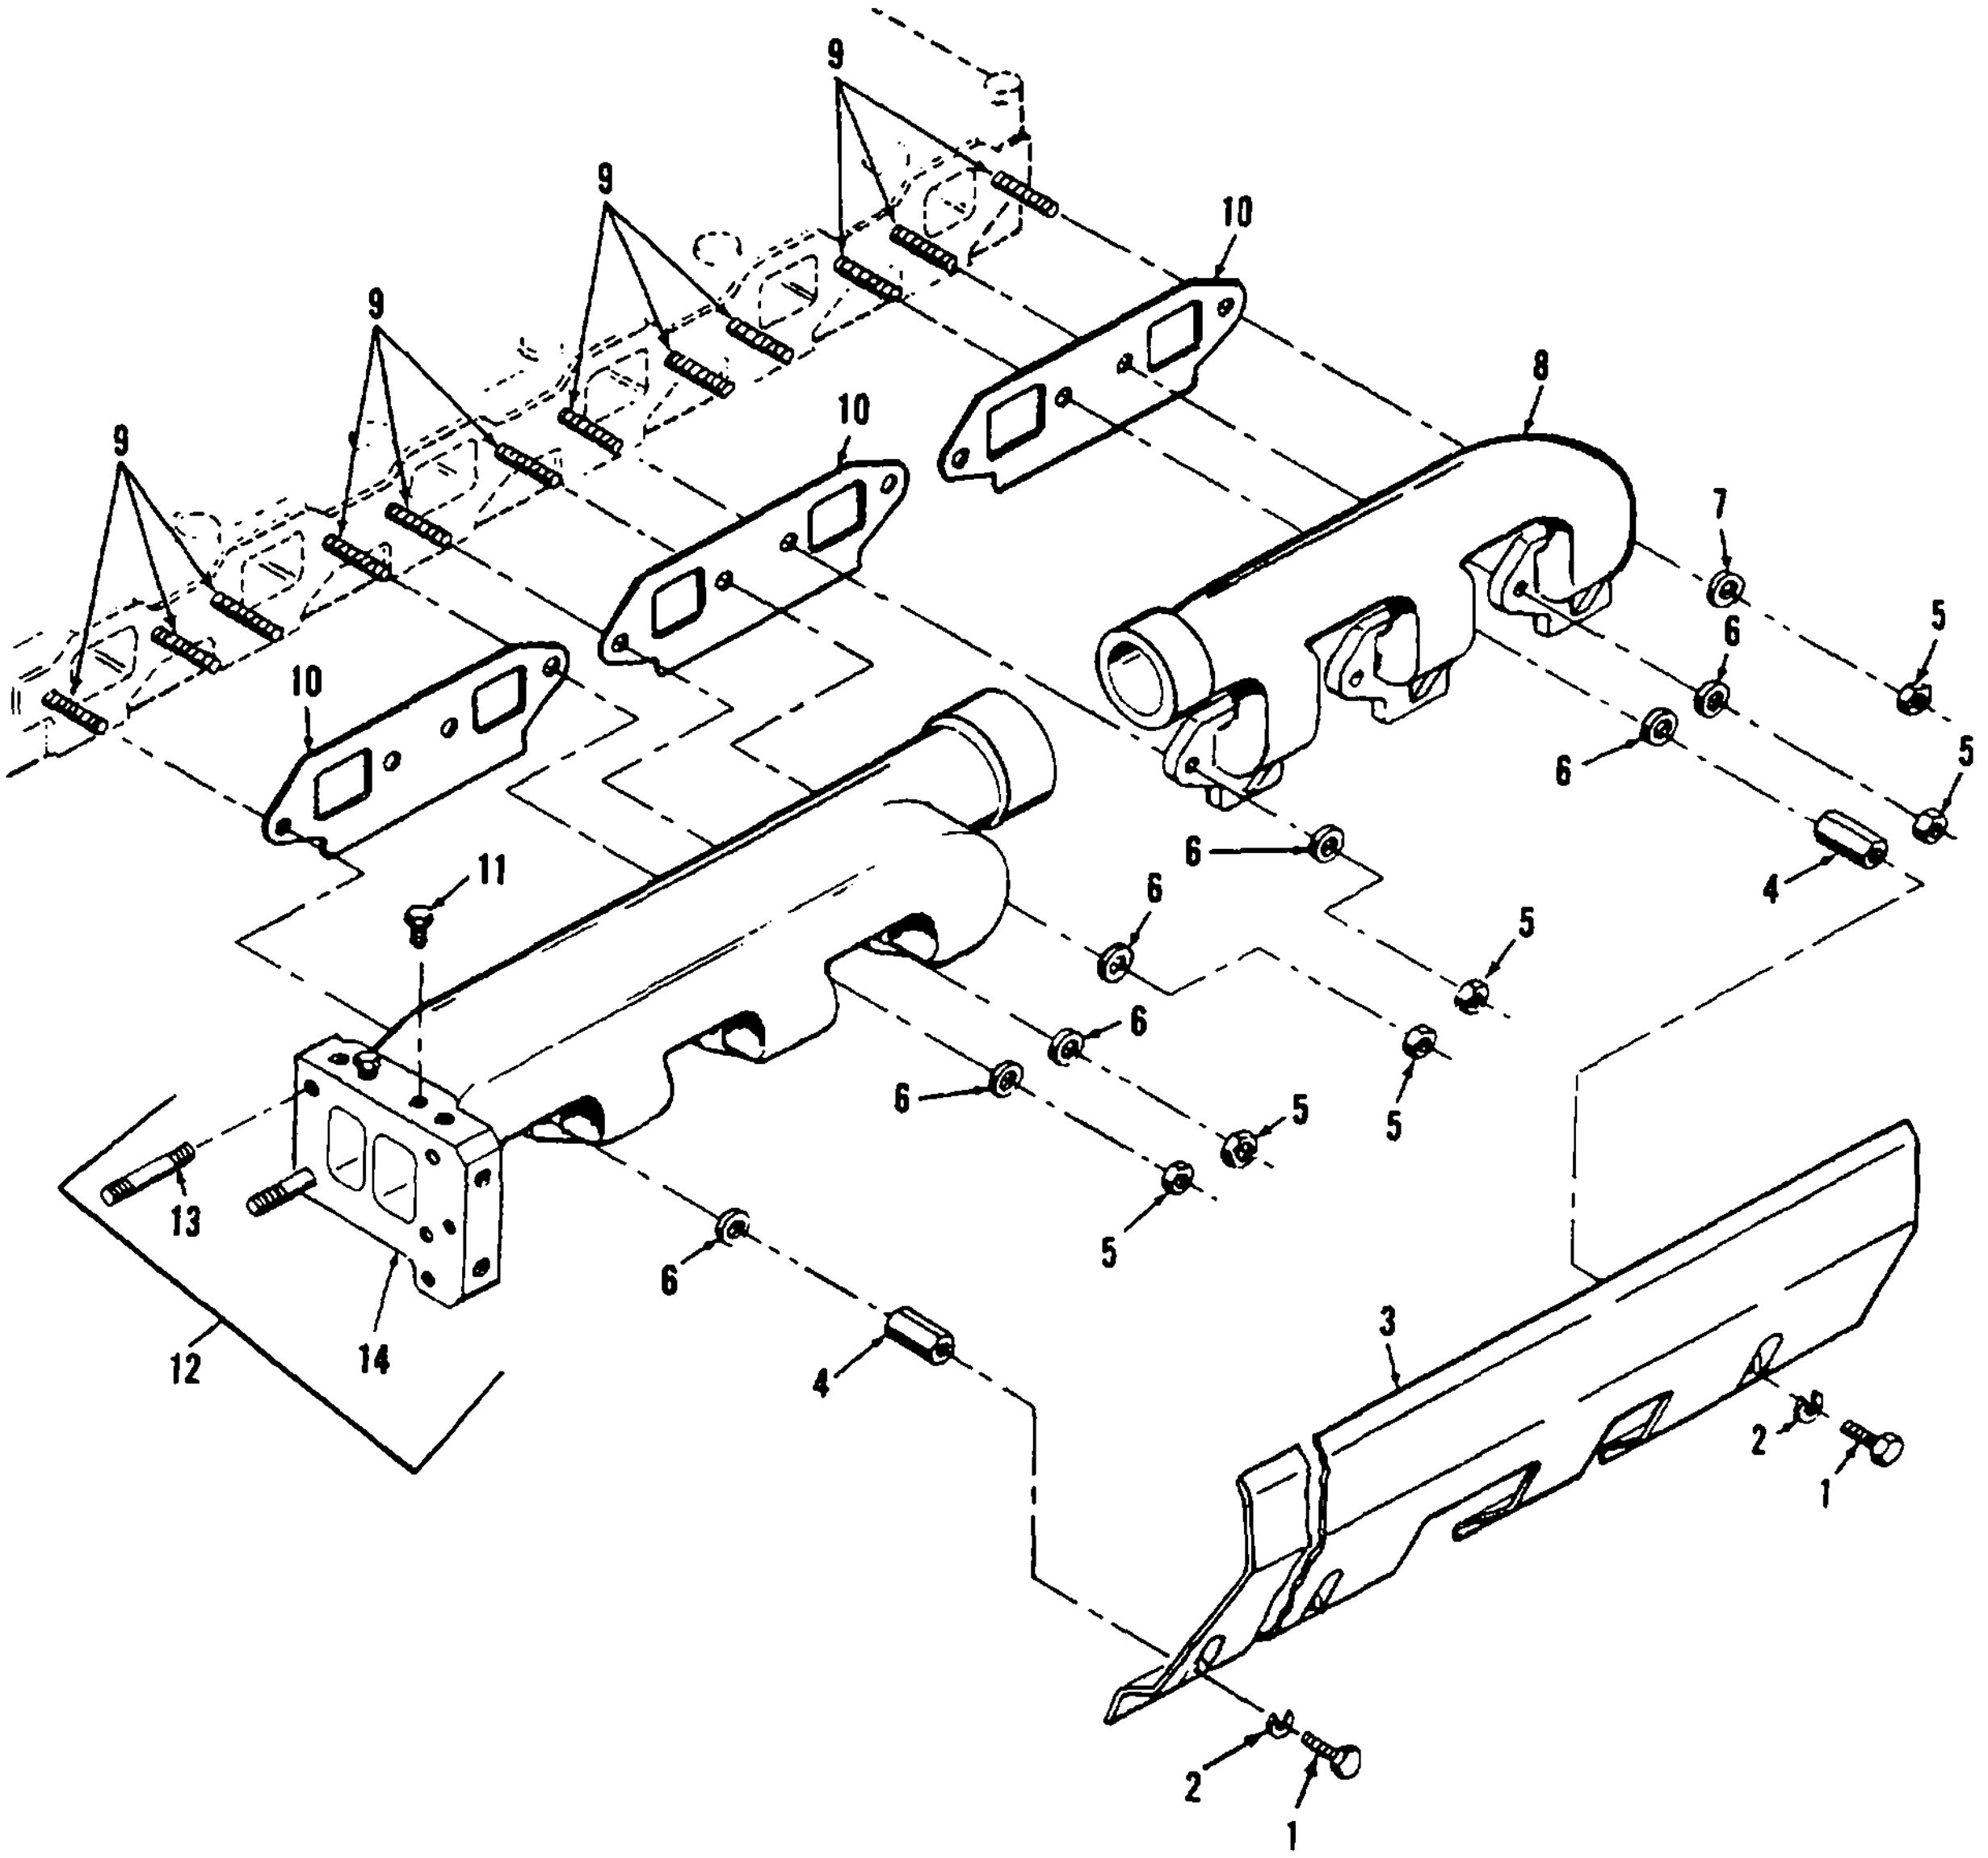
9
9
9
9
10
10
10
8
7
6
6
5
5
6
4
11
6
5
6
6
5
5
5
13
12
14
6
4
3
2
1
2
1

Figure 63. Exhaust Manifold

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 64 | | | | | | | | | VALVE MECHANISM COVER | | | | |
| 64 | 1 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5306-00-226-4825 | BOLT, HEX HEAD<br>S1617 | 11083 | EA | 15 | 17 |
| 64 | 2 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-407-9566 | WASHER, LOCK<br>3B4505 | 11083 | EA | 15 | 23 |
| 64 | 3 | PAOZZ | PAFZZ | PAFZZ | PAOZZ | D | .003 | 2815-00-237-3756 | COVER ASSY<br>2N3872 | 11083 | EA | 1 | 1 |
| 64 | 4 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | .030 | 5330-00-520-1552 | GASKET, P/O KIT P/N 5P8766<br>8S1605 | 11083 | EA | 1 | 1 |

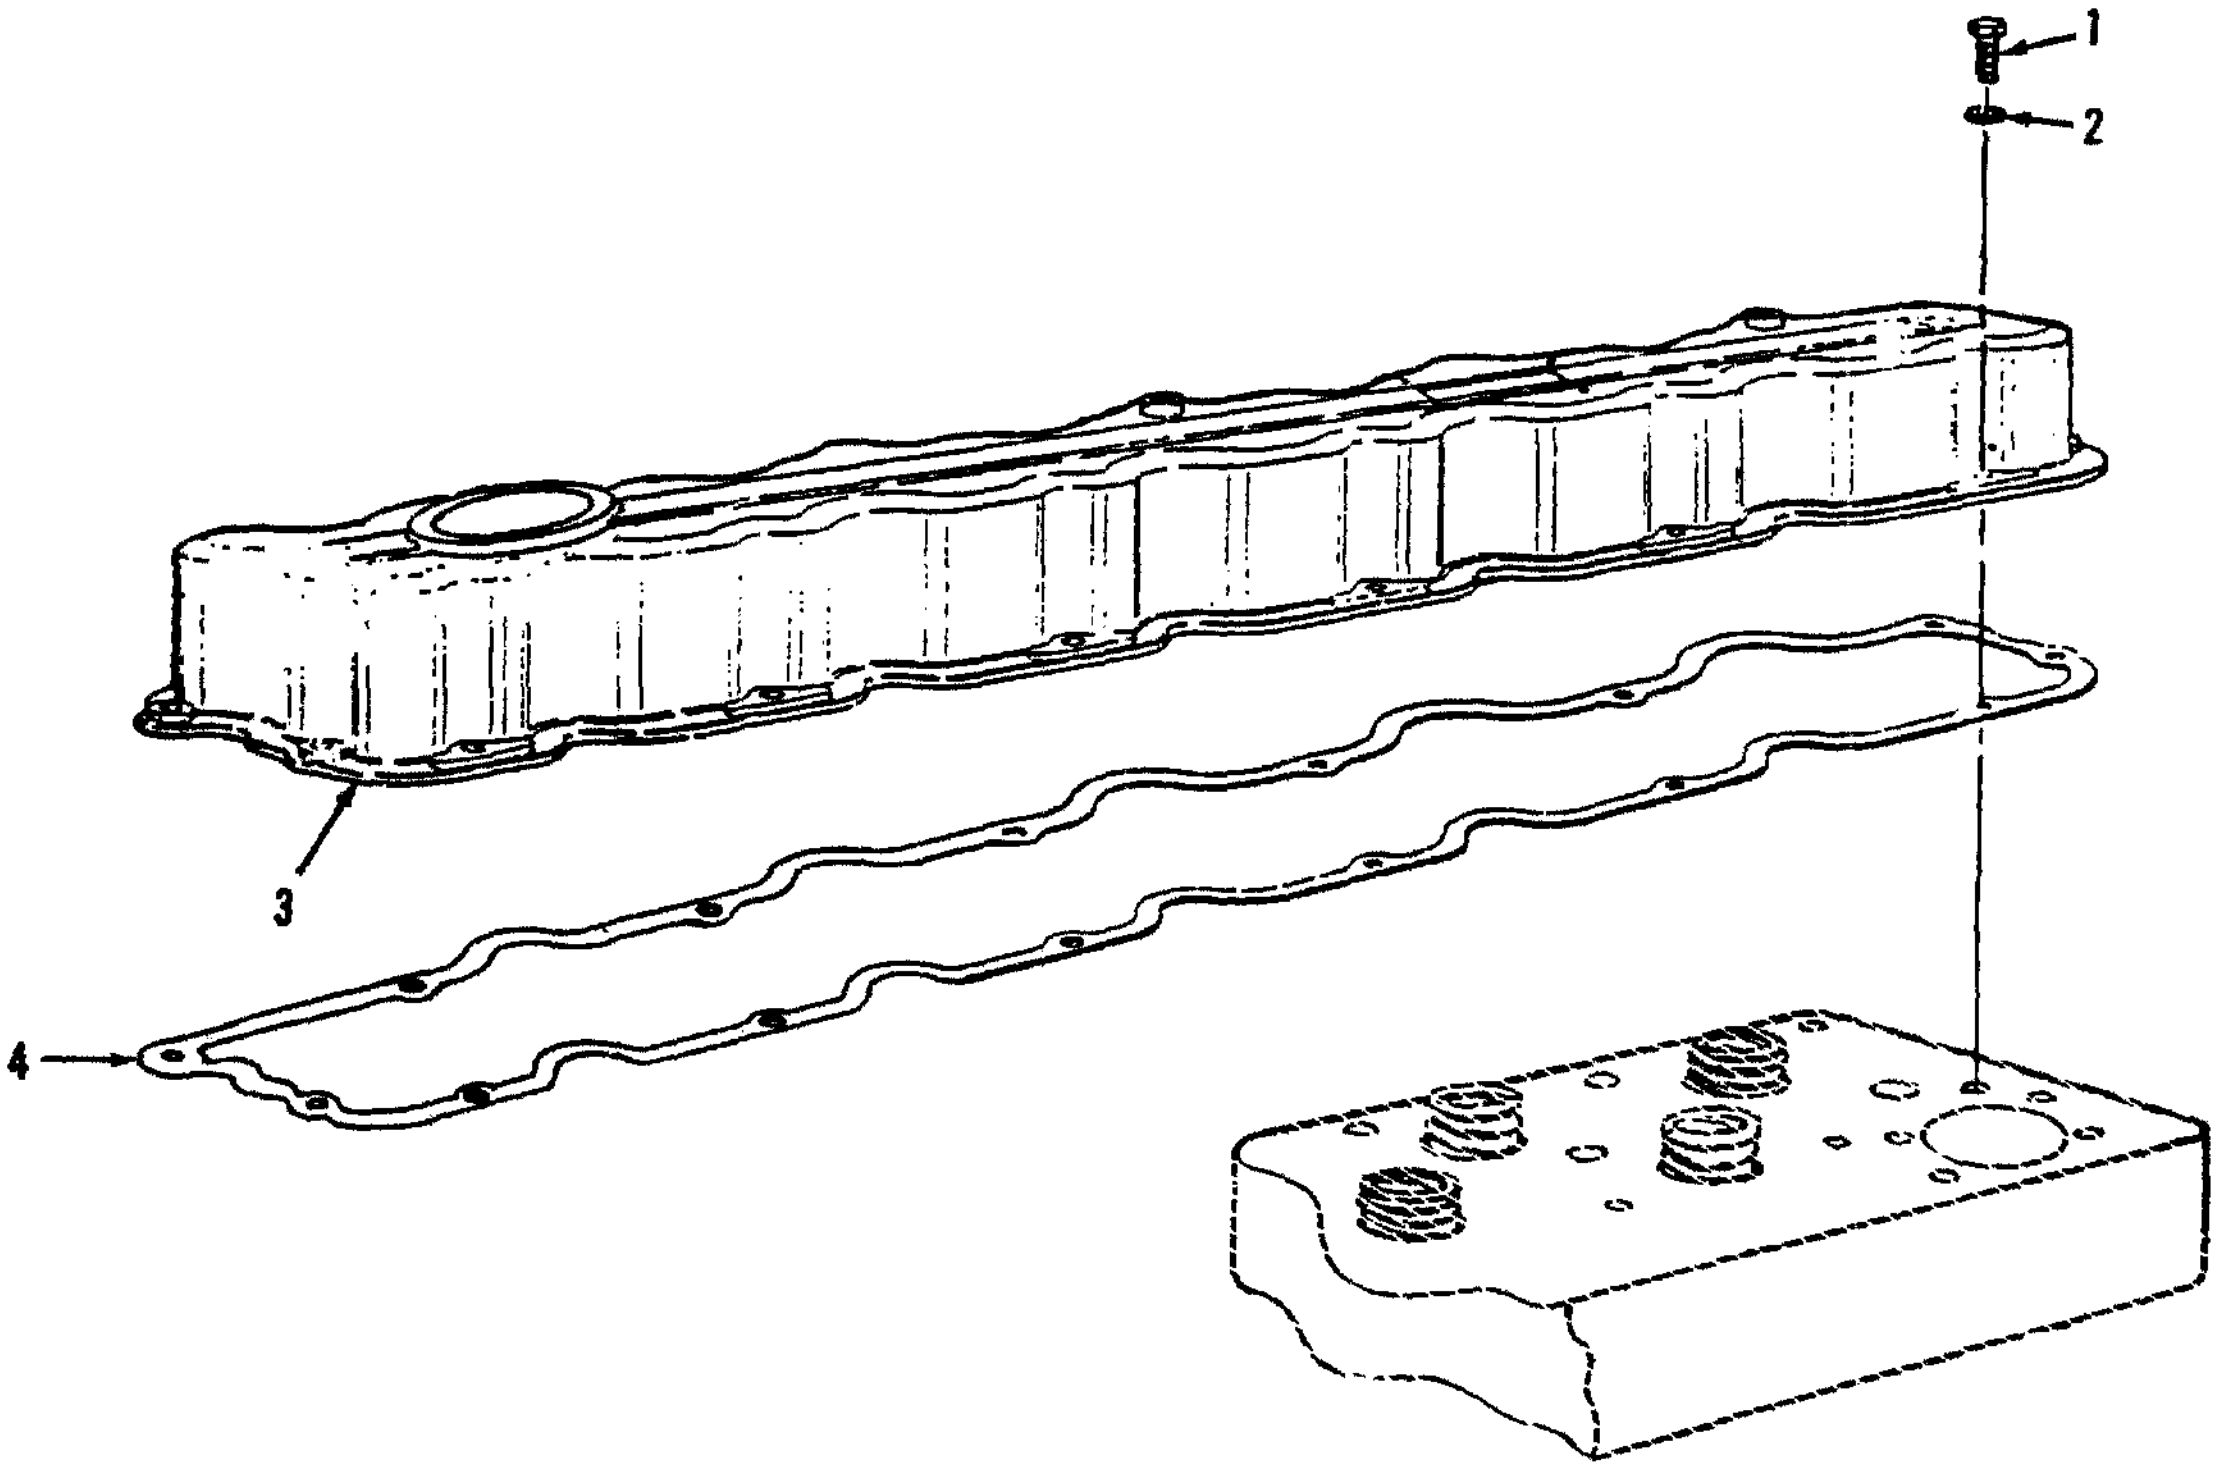

Figure 62. Valve Mechanism Cover

Figure 64. Valve Mechanism Cover

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 65 | | | | | | | | | VALVE MECHANISM AND ATTACHING PARTS | | | | |
| 65 | 1 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-401-5270 | BOLT, HEX HEAD<br>8F1635 | 11083 | EA | 1 | 2 |
| 65 | 2 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-401-5261 | BOLT, HEX HEAD<br>1B7709 | 11083 | EA | 6 | 6 |
| 65 | 3 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-814-6559 | BOLT, HEX HEAD<br>1D4595 | 11083 | EA | 18 | 18 |
| 65 | 4 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-432-4324 | WASHER<br>2S736 | 11083 | EA | 26 | 26 |
| 65 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-971-8093 | BOLT, HEX HEAD<br>MS35303-78 | 96906 | EA | 7 | 7 |
| 65 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5330-01-128-5187 | SEAL<br>5P5598 | 11083 | EA | 1 | 1 |
| 65 | 7 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 5365-00-921-3208 | RING, RETAINING<br>9H1113 | 11083 | EA | 2 | 2 |
| 65 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-999-8286 | WASHER<br>9H1110 | 11083 | EA | 12 | 22 |
| 65 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 5310-00-999-8287 | SPRING<br>9H1112 | 11083 | EA | 2 | 2 |
| 65 | 10 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-678-2152 | WASHER<br>9093668 | 19207 | EA | 2 | 2 |
| 65 | 11 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .080 | 2815-01-126-9995 | ROCKER ARM, EXHAUST<br>8N3325 | 11083 | EA | 6 | 6 |
| 65 | 12 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-725-7382 | NUT<br>1B4203 | 11083 | EA | 1 | 12 |
| 65 | 13 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2815-00-457-1615 | SCREW<br>5S5917 | 11083 | EA | 1 | 12 |
| 65 | 14 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2815-01-125-5947 | ARM ASSY<br>8N3324 | 11083 | EA | 1 | 6 |
| 65 | 15 | AFF | AFF | AFF | AFF | D | .080 | 2815-01-125-5947 | ROCKER ARM, INTAKE<br>8N3327 | 11083 | EA | 6 | 6 |
| 65 | 16 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-725-7382 | NUT<br>1B4203 | 11083 | EA | 1 | 21 |
| 65 | 17 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2815-00-457-1615 | SCREW<br>5S5917 | 11083 | EA | 1 | 12 |
| 65 | 18 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2815-01-125-4580 | ARM ASSY<br>8N3326 | 11083 | EA | 1 | 6 |
| 65 | 19 | PAFZZ | PAFZZ | PAFZZ | PAHZZ | D | .005 | 3040-01-165-5714 | SHAFT ASSY<br>8N3252 | 11083 | EA | 1 | 1 |
| 65 | 20 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-760-7421 | DOWEL<br>5M4606 | 11083 | EA | 1 | 1 |
| 65 | 21 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5340-01-129-5917 | BRACKET, ROCKER<br>7N8015 | 11083 | EA | 1 | 1 |
| 65 | 22 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5340-00-229-9287 | PLUG<br>L1026 | 11083 | EA | 2 | 2 |
| 65 | 23 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 3040-01-132-4761 | SHAFT<br>8N3251 | 11083 | EA | 1 | 1 |
| 65 | 24 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .008 | 2815-01-126-7494 | BRACKET<br>5S5878 | 11083 | EA | 4 | 4 |

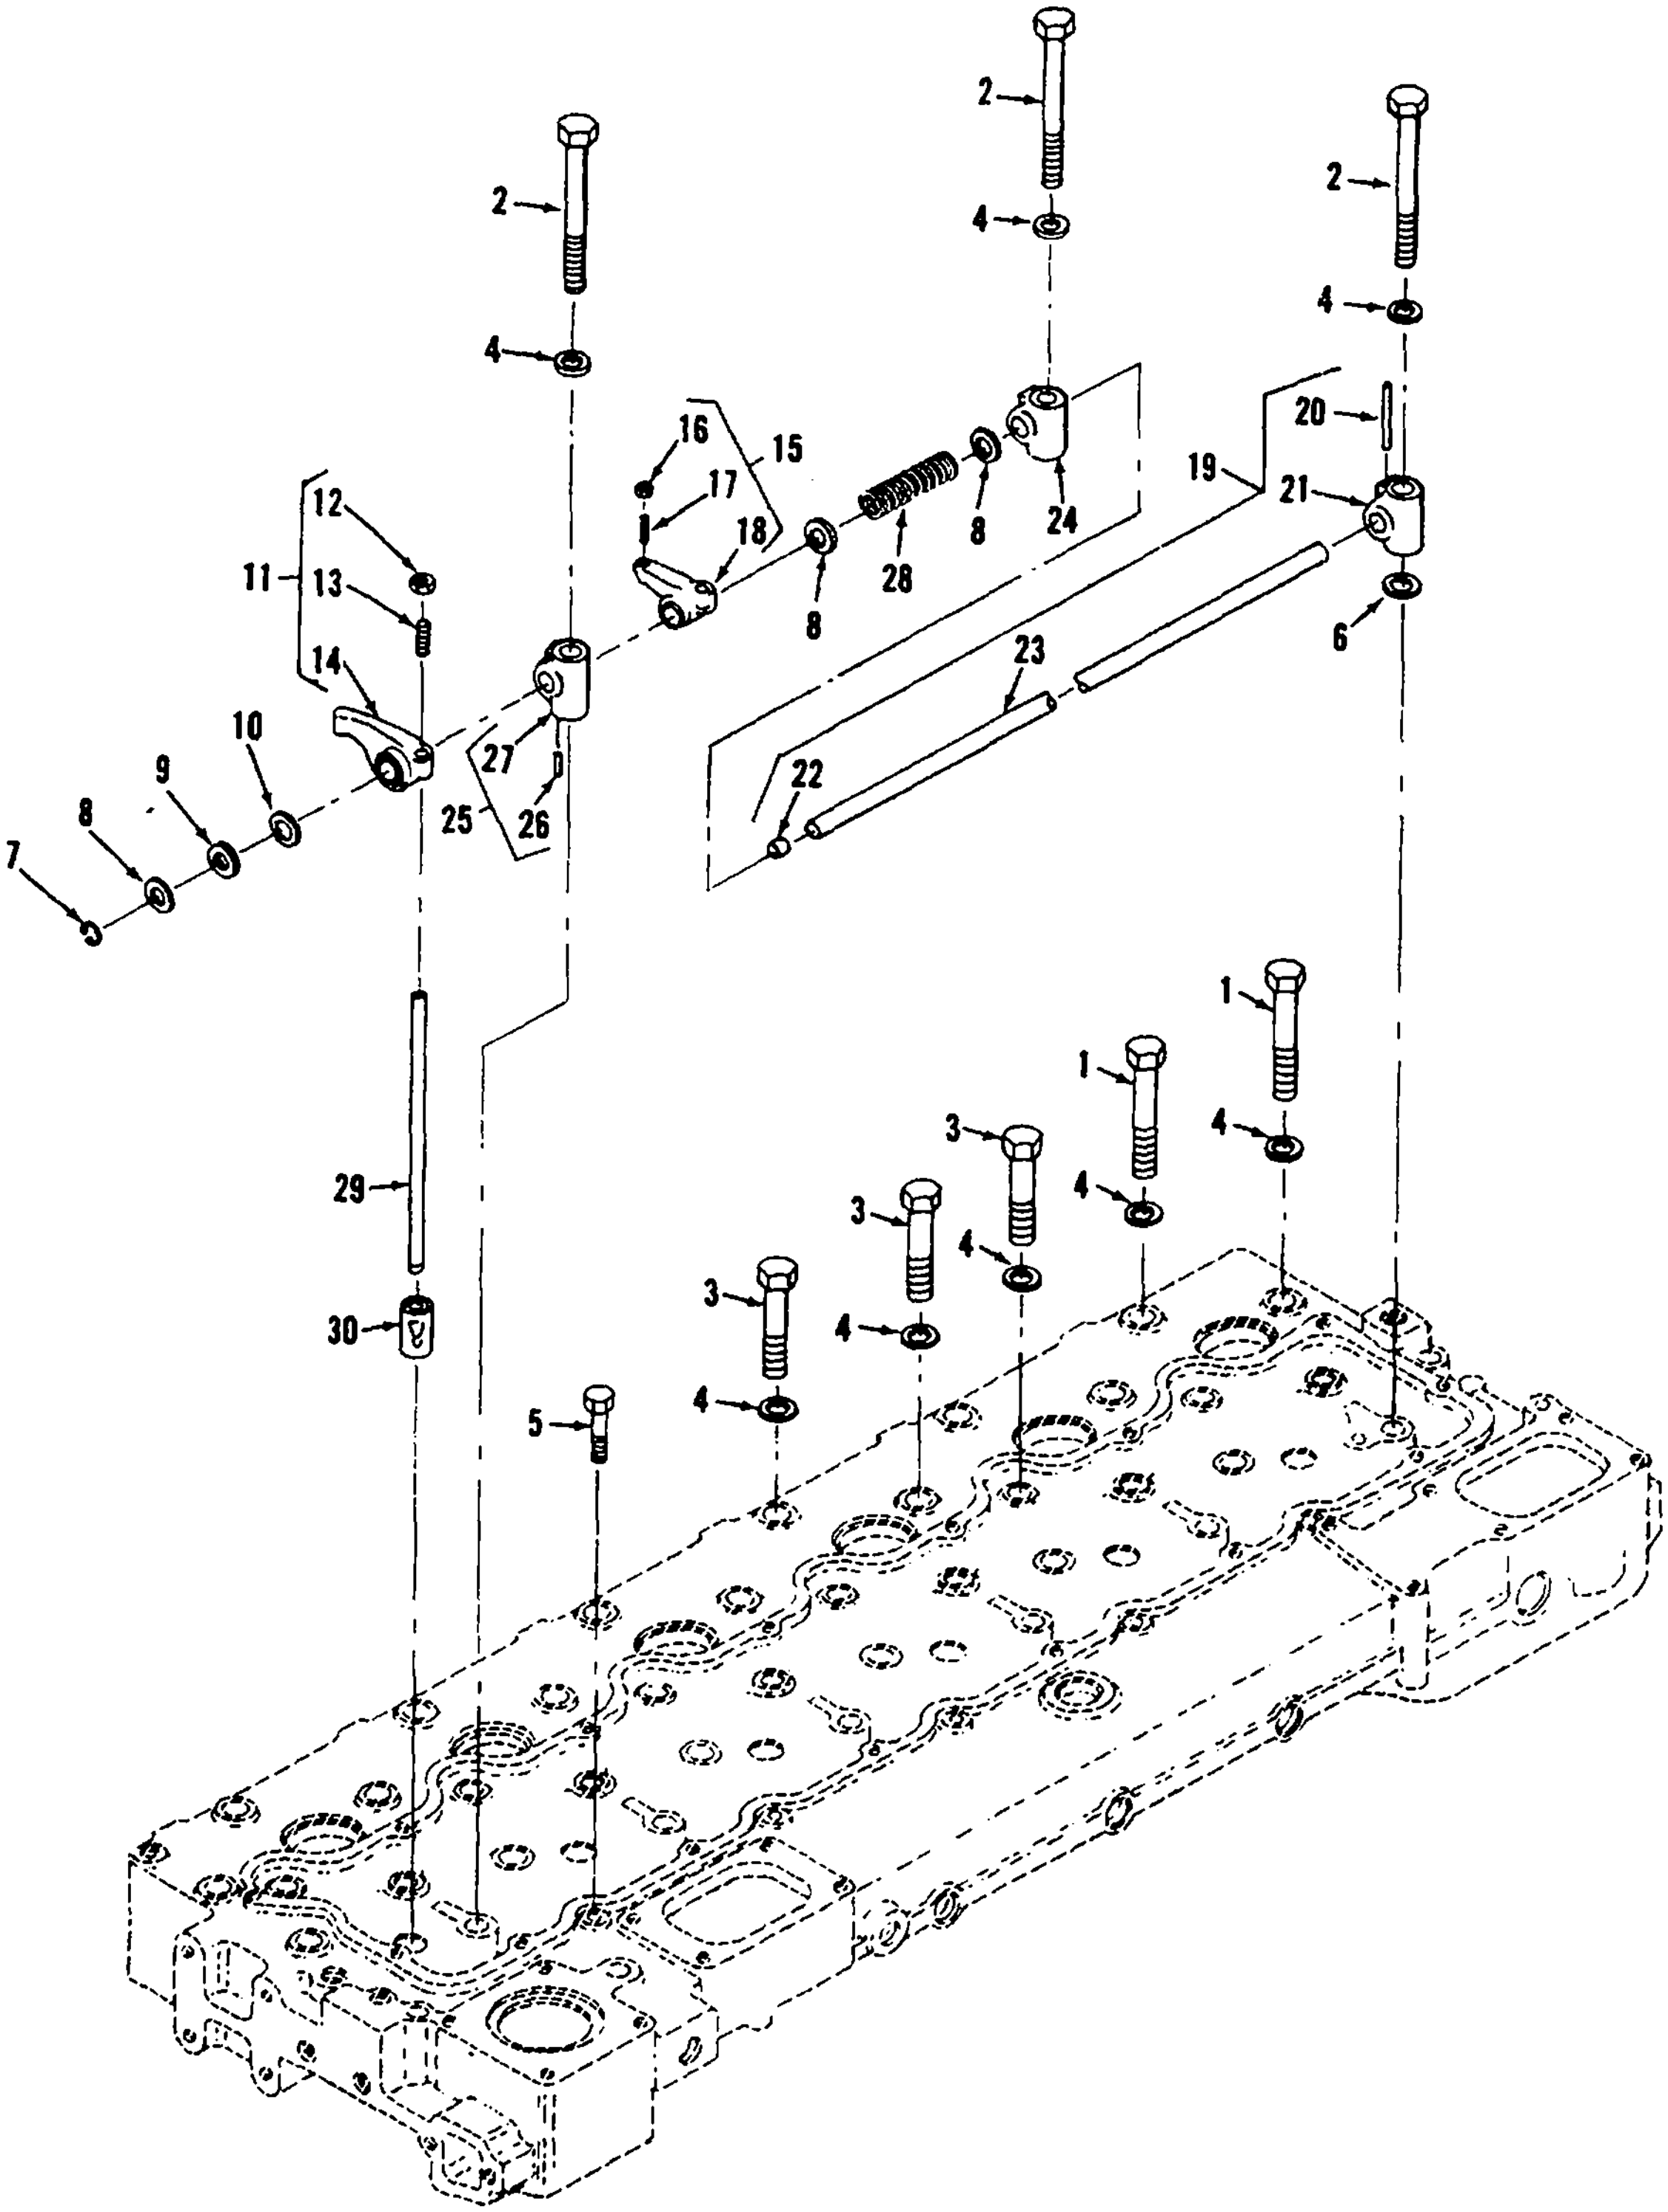
2
2
2
4
4
4
16
15
17
18
12
11
13
14
10
9
8
7
27
25
26
8
28
8
24
20
19
21
23
6
22
1
1
3
4
3
4
4
3
4
4
29
30
5

Figure 65. Valve Mechanism and Attaching Parts

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION a FIG NO. | (1) ILLUS-TRATION b ITEM NO. | (2) SMR CODE a ARMY | (2) SMR CODE b AIR FORCE | (2) SMR CODE c NAVY | (2) SMR CODE d USMC | (3) USMC a SSI | (3) USMC b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | (5) DESCRIPTION USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 65 | | | | | | | | | VALVE MECHANISM AND ATTACHING PARTS - CONTINUED | | | | |
| 65 | 25 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2815-00-211-4462 | BRACKET ASSY, FRONT<br>8S1499 | 11083 | EA | 1 | 1 |
| 65 | 26 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-532-5746 | DOWEL<br>1L5072 | 11083 | EA | 1 | 1 |
| 65 | 27 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2815-01-165-9635 | BRACKET<br>8S1498 | 11083 | EA | 1 | 1 |
| 65 | 28 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 5360-00-249-3504 | SPRING<br>4B4910 | 11083 | EA | 5 | 5 |
| 65 | 29 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2815-00-487-3123 | ROD<br>5S5918 | 11083 | EA | 12 | 12 |
| 65 | 30 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2815-00-150-9341 | LIFTER<br>7S3161 | 11083 | EA | 12 | 12 |

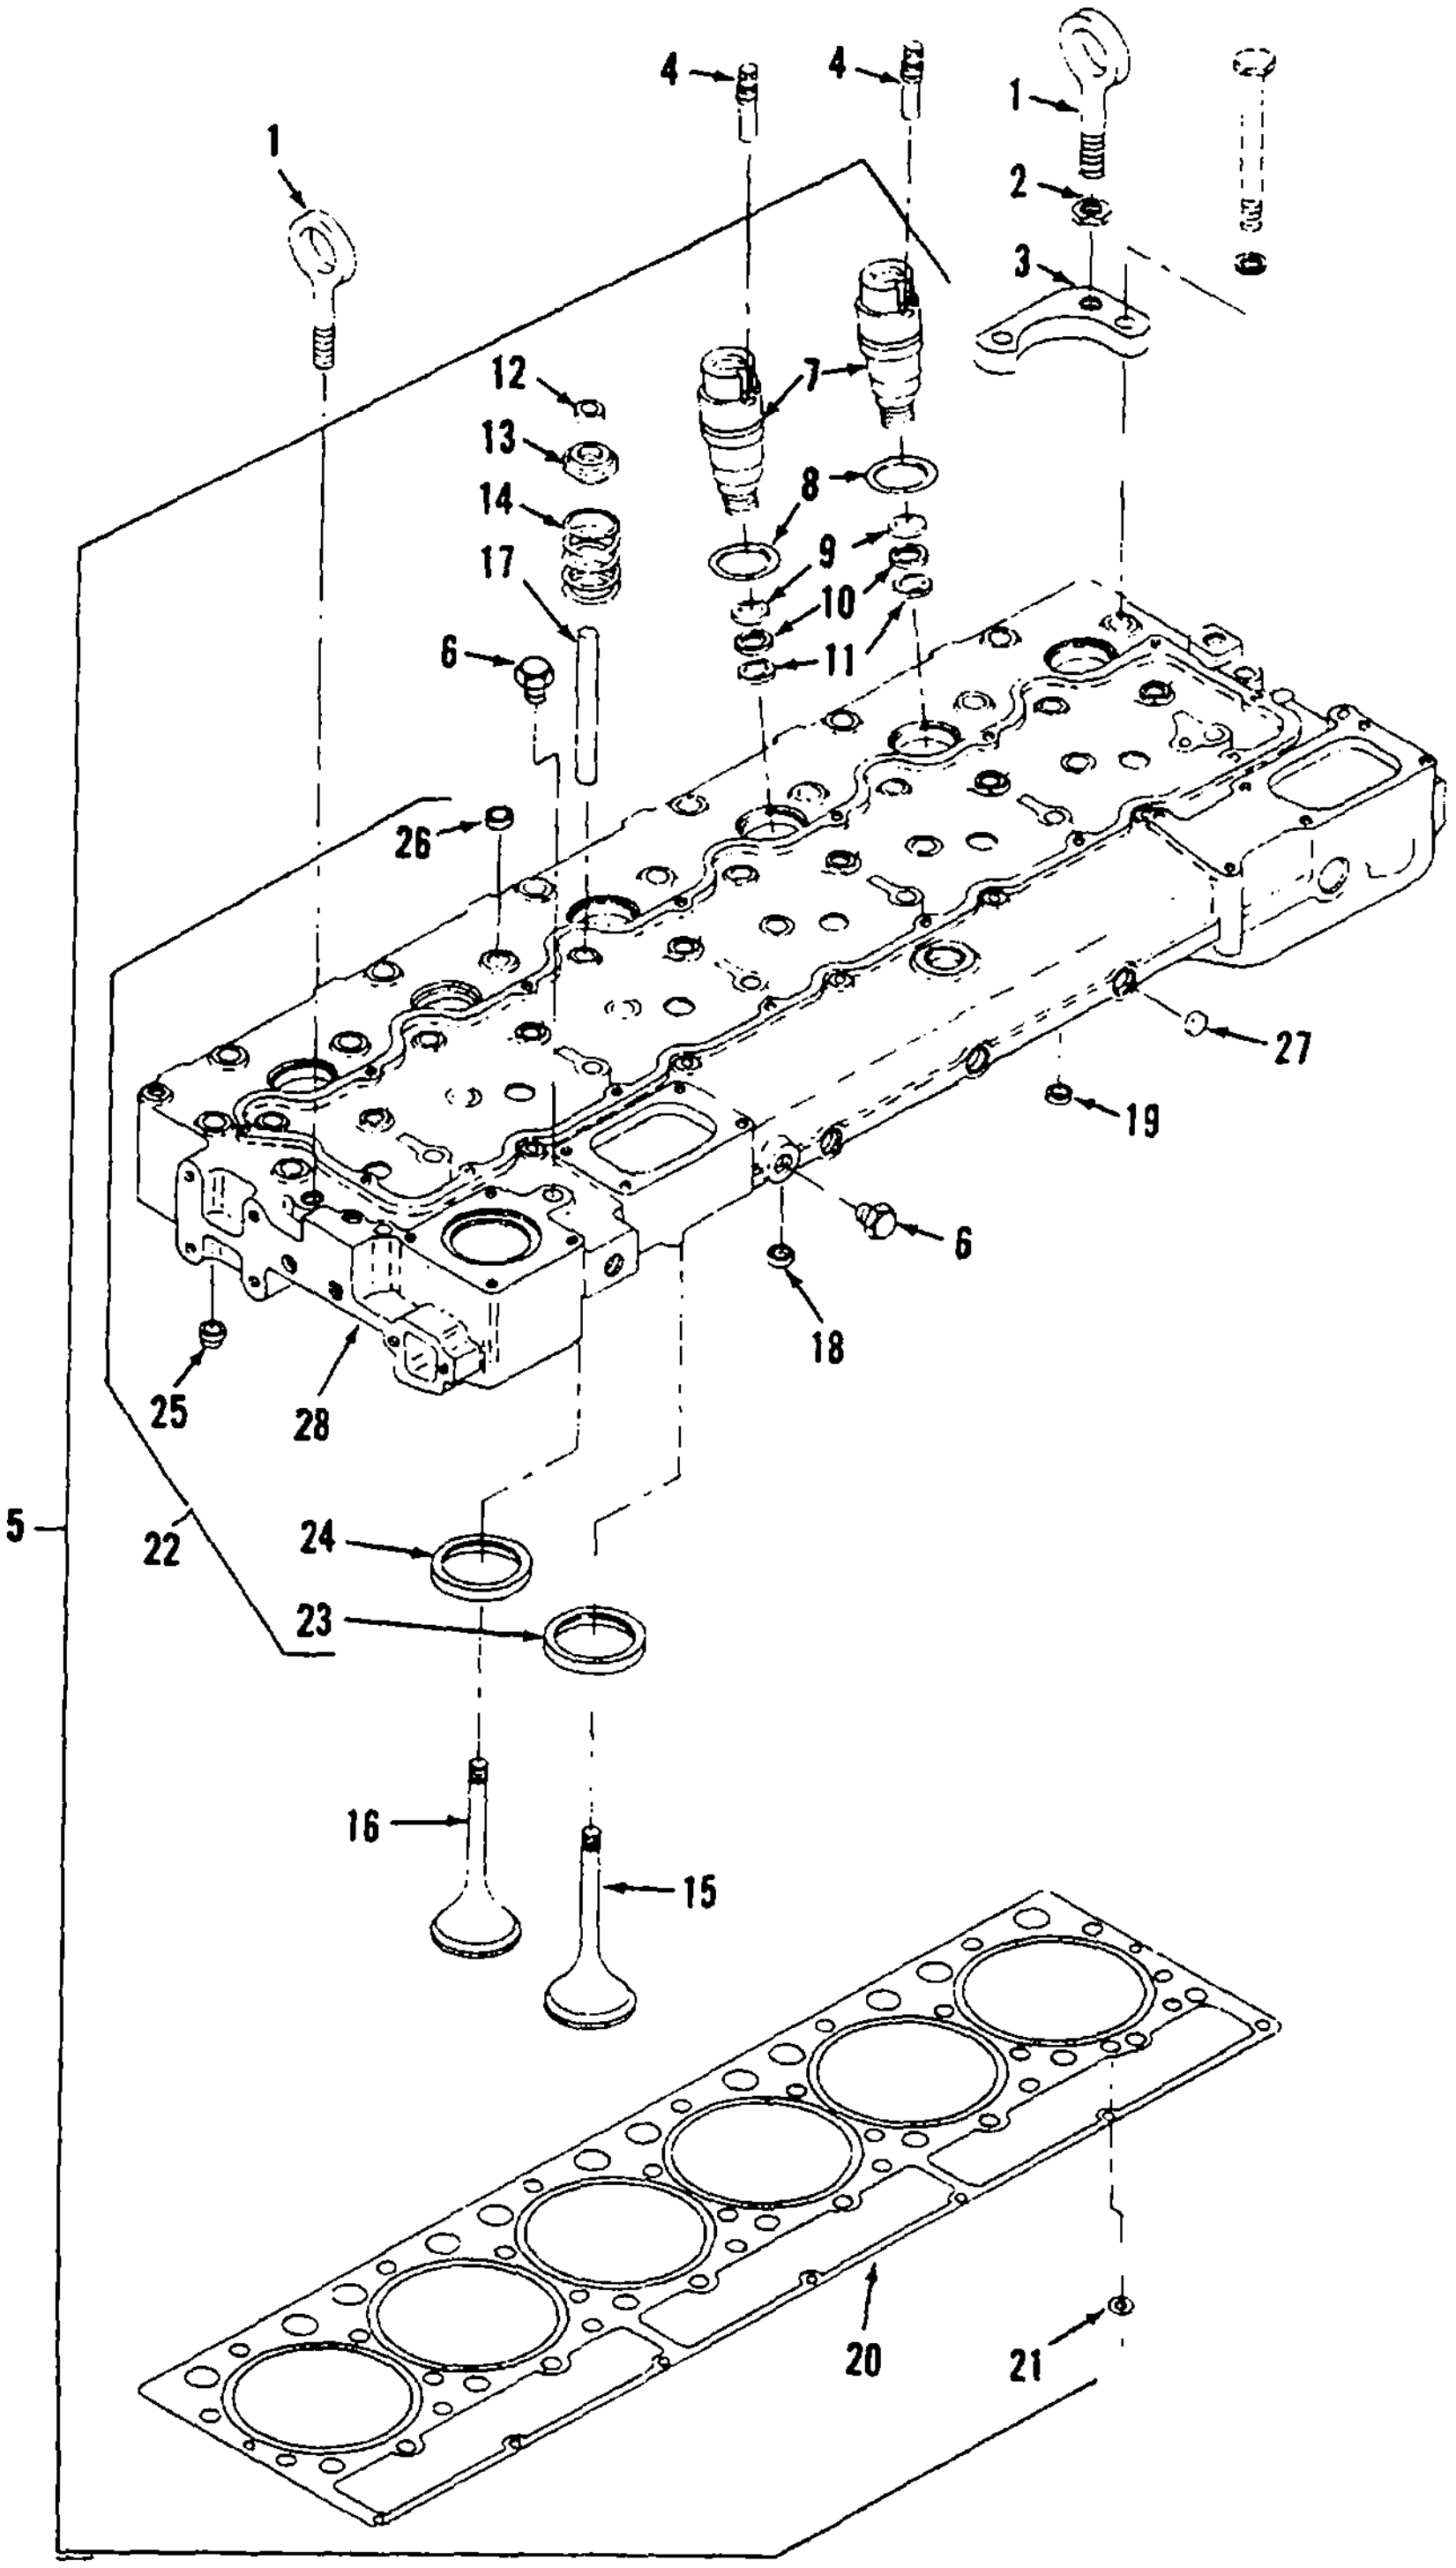
4
4
1
1
2
3
12
13
7
14
8
17
9
10
6
11
26
27
19
6
18
25
28
5
22
24
23
16
15
20
21

Figure 66. Cylinder Head Assembly and Related Parts

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | a REF NUMBER & MFR CODE | b USABLE ON CODE | U/M | QTY INC IN UNITS | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 66 | | | | | | | | | CYLINDER HEAD ASSEMBLY AND RELATED PARTS | | | | |
| 66 | 1 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-140-1975 | EYE BOLT<br>5LA544 | 11083 | EA | 2 | 2 |
| 66 | 2 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-763-8921 | NUT<br>MS51967-23 | 96906 | EA | 1 | 1 |
| 66 | 3 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 2815-01-035-0109 | PLATE<br>MS51967 | 11083 | EA | 1 | 1 |
| 66 | 4 | PAFZZ | PAFZZ | PAOZZ | PAHZZ | D | .008 | 2920-01-040-0309 | PLUG, DUMMY GLOW<br>4N4122 | 11083 | EA | 6 | 6 |
| 66 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2815-01-160-0851 | HEAD,CYLINDER<br>6N8103 | 11083 | EA | 1 | 1 |
| 66 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .009 | 4730-00-010-3874 | PLUG<br>2B858 | 11083 | EA | 2 | 4 |
| 66 | 7 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2815-00-450-9342 | CHAMBER ASSY<br>8S3970 | 11083 | EA | 6 | 6 |
| 66 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5330-00-494-2765 | SEAL<br>7S3206 | 11083 | EA | 6 | 6 |
| 66 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5310-00-074-3833 | GASKET<br>5M2667 | 11083 | EA | 6 | 6 |
| 66 | 10 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5330-00-125-3343 | GASKET<br>2S8959 | 11083 | EA | 6 | 6 |
| 66 | 11 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5330-00-118-5267 | GASKET<br>2S8960 | 11083 | EA | 6 | 6 |
| 66 | 12 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 2990-00-3650 | LOCK NUT,VALVE<br>2A4429 | 11083 | EA | 24 | 24 |
| 66 | 13 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 2815-01-125-1675 | ROTOCOIL,ASSY, BASIC<br>8N7782 | 11083 | EA | 12 | 12 |
| 66 | 13A | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 2815-01-183-4649 | VALVE GUIDE SEAL<br>6N7174 | 11083 | EA | 12 | 12 |
| 66 | 13B | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 2815.01-146-4256 | ROTOCOIL AND VALVE GUIDE ASSY<br>1W5300 | 11083 | EA | 12 | 12 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 66 | | | | | | | | | CYLINDER HEAD ASSEMBLY AND RELATED PARTS - CONTINUED | | | | |
| 66 | 25 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2815-00-411-3925 | DIRECTOR<br>1S3062 | 11083 | EA | 18 | 18 |
| 66 | 26 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5340-00-229-9294 | PLUG<br>3B623 | 11083 | EA | 6 | 6 |
| 66 | 27 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5365-00-449-2597 | PLUG<br>3S8313 | 11083 | EA | 7 | 7 |
| 66 | 28 | XA | XA | XA | XA | | | | HEAD, CYLINDER<br>7N8516 | 11083 | EA | 1 | 1 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 67 | | | | | | | | | OIL PAN | | | | |
| 67 | 1 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-231-3018 | ELBOW<br>MS20822-16-12 | 96906 | EA | 1 | 1 |
| 67 | 2 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-196-1505 | NIPPLE, PIPE<br>MS51953-101 | 96906 | EA | 1 | 1 |
| 67 | 3 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4820-00-090-0554 | COCK, SHUT OFF<br>71-1859<br>A-400-4 | 30554<br>16024 | EA | 1 | 1 |
| 67 | 4 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .003 | 6680-01-125-0064 | GAGE ASSY, OIL LEVEL<br>5R2204 | 11083 | EA | 1 | 1 |
| 67 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .023 | 4730-00-401-8098 | CONNECTOR ASSY<br>8S1326 | 11083 | EA | 1 | 1 |
| 67 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .023 | 4730-01-253-8588 | CONNECTOR<br>5P4908 | 11083 | EA | 1 | 1 |
| 67 | 7 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-01-178-0773 | SLEEVE<br>5P4443 | 11083 | EA | 1 | 1 |
| 67 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .023 | 4730-01-048-7874 | NUT<br>5P4448 | 11083 | EA | 1 | 1 |
| 67 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4710-01-130-2131 | TUBE<br>7L494 | 11083 | EA | 1 | 1 |
| 67 | 10 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-00-010-3874 | PLUG<br>2B858 | 11083 | EA | 1 | 4 |
| 67 | 11 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-426-2865 | BOLT, HEX HEAD<br>L1352 | 11083 | EA | 3 | 6 |
| 67 | 12 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-514-6849 | WASHER, LOCK<br>3B4506 | 11083 | EA | 40 | 47 |
| 67 | 13 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-930-7014 | WASHER<br>4B4278 | 11083 | EA | 28 | 41 |
| 67 | 14 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-269-3214 | BOLT, HEX HEAD<br>S1591 | 11083 | EA | 20 | 24 |
| 67 | 15 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-426-2932 | BOLT, HEX HEAD<br>S1619 | 11083 | EA | 5 | 11 |
| 67 | 16 | PBFZZ | PBFZZ | PAHZZ | PAHZZ | D | .003 | 2815-00-195-8276 | PAN<br>5R1130 | 11083 | EA | 1 | 1 |
| 67 | 17 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5330-00-613-7468 | GASKET, P/O KIT P/N 5P8767<br>8S1965 11083 | | EA | 1 | 1 |
| 67 | 18 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-071-2069 | BOLT, HEX HEAD<br>MS90728-113 | 96906 | EA | 6 | 9 |
| 67 | 19 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-584-5272 | WASHER, LOCK<br>MS35338-48 | 96906 | EA | 6 | 12 |
| 67 | 20 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-637-4956 | BOLT, HEX HEAD<br>S1588 | 11083 | EA | 8 | 21 |
| 67 | 21 | MOO | MOO | MOO | MOO | | | | PLATE,LH<br>5R2976 | 11083 | EA | 1 | 1 |
| 67 | 22 | MOO | MOO | MOO | MOO | | | | PLATE,RH<br>5R2794 | 11083 | EA | 1 | 1 |
| 67 | 23 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-263-7301 | BOLT, HEX HEAD<br>L1351 | 11083 | EA | 4 | 14 |
| 67 | 24 | XB | XB | XB | XB | | | | PLATE ASSY, WELDED<br>5R3512 | 11083 | EA | 1 | 1 |
| 67 | 25 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-279-9205 | GASKET<br>5R2814 | 11083 | EA | 1 | 1 |

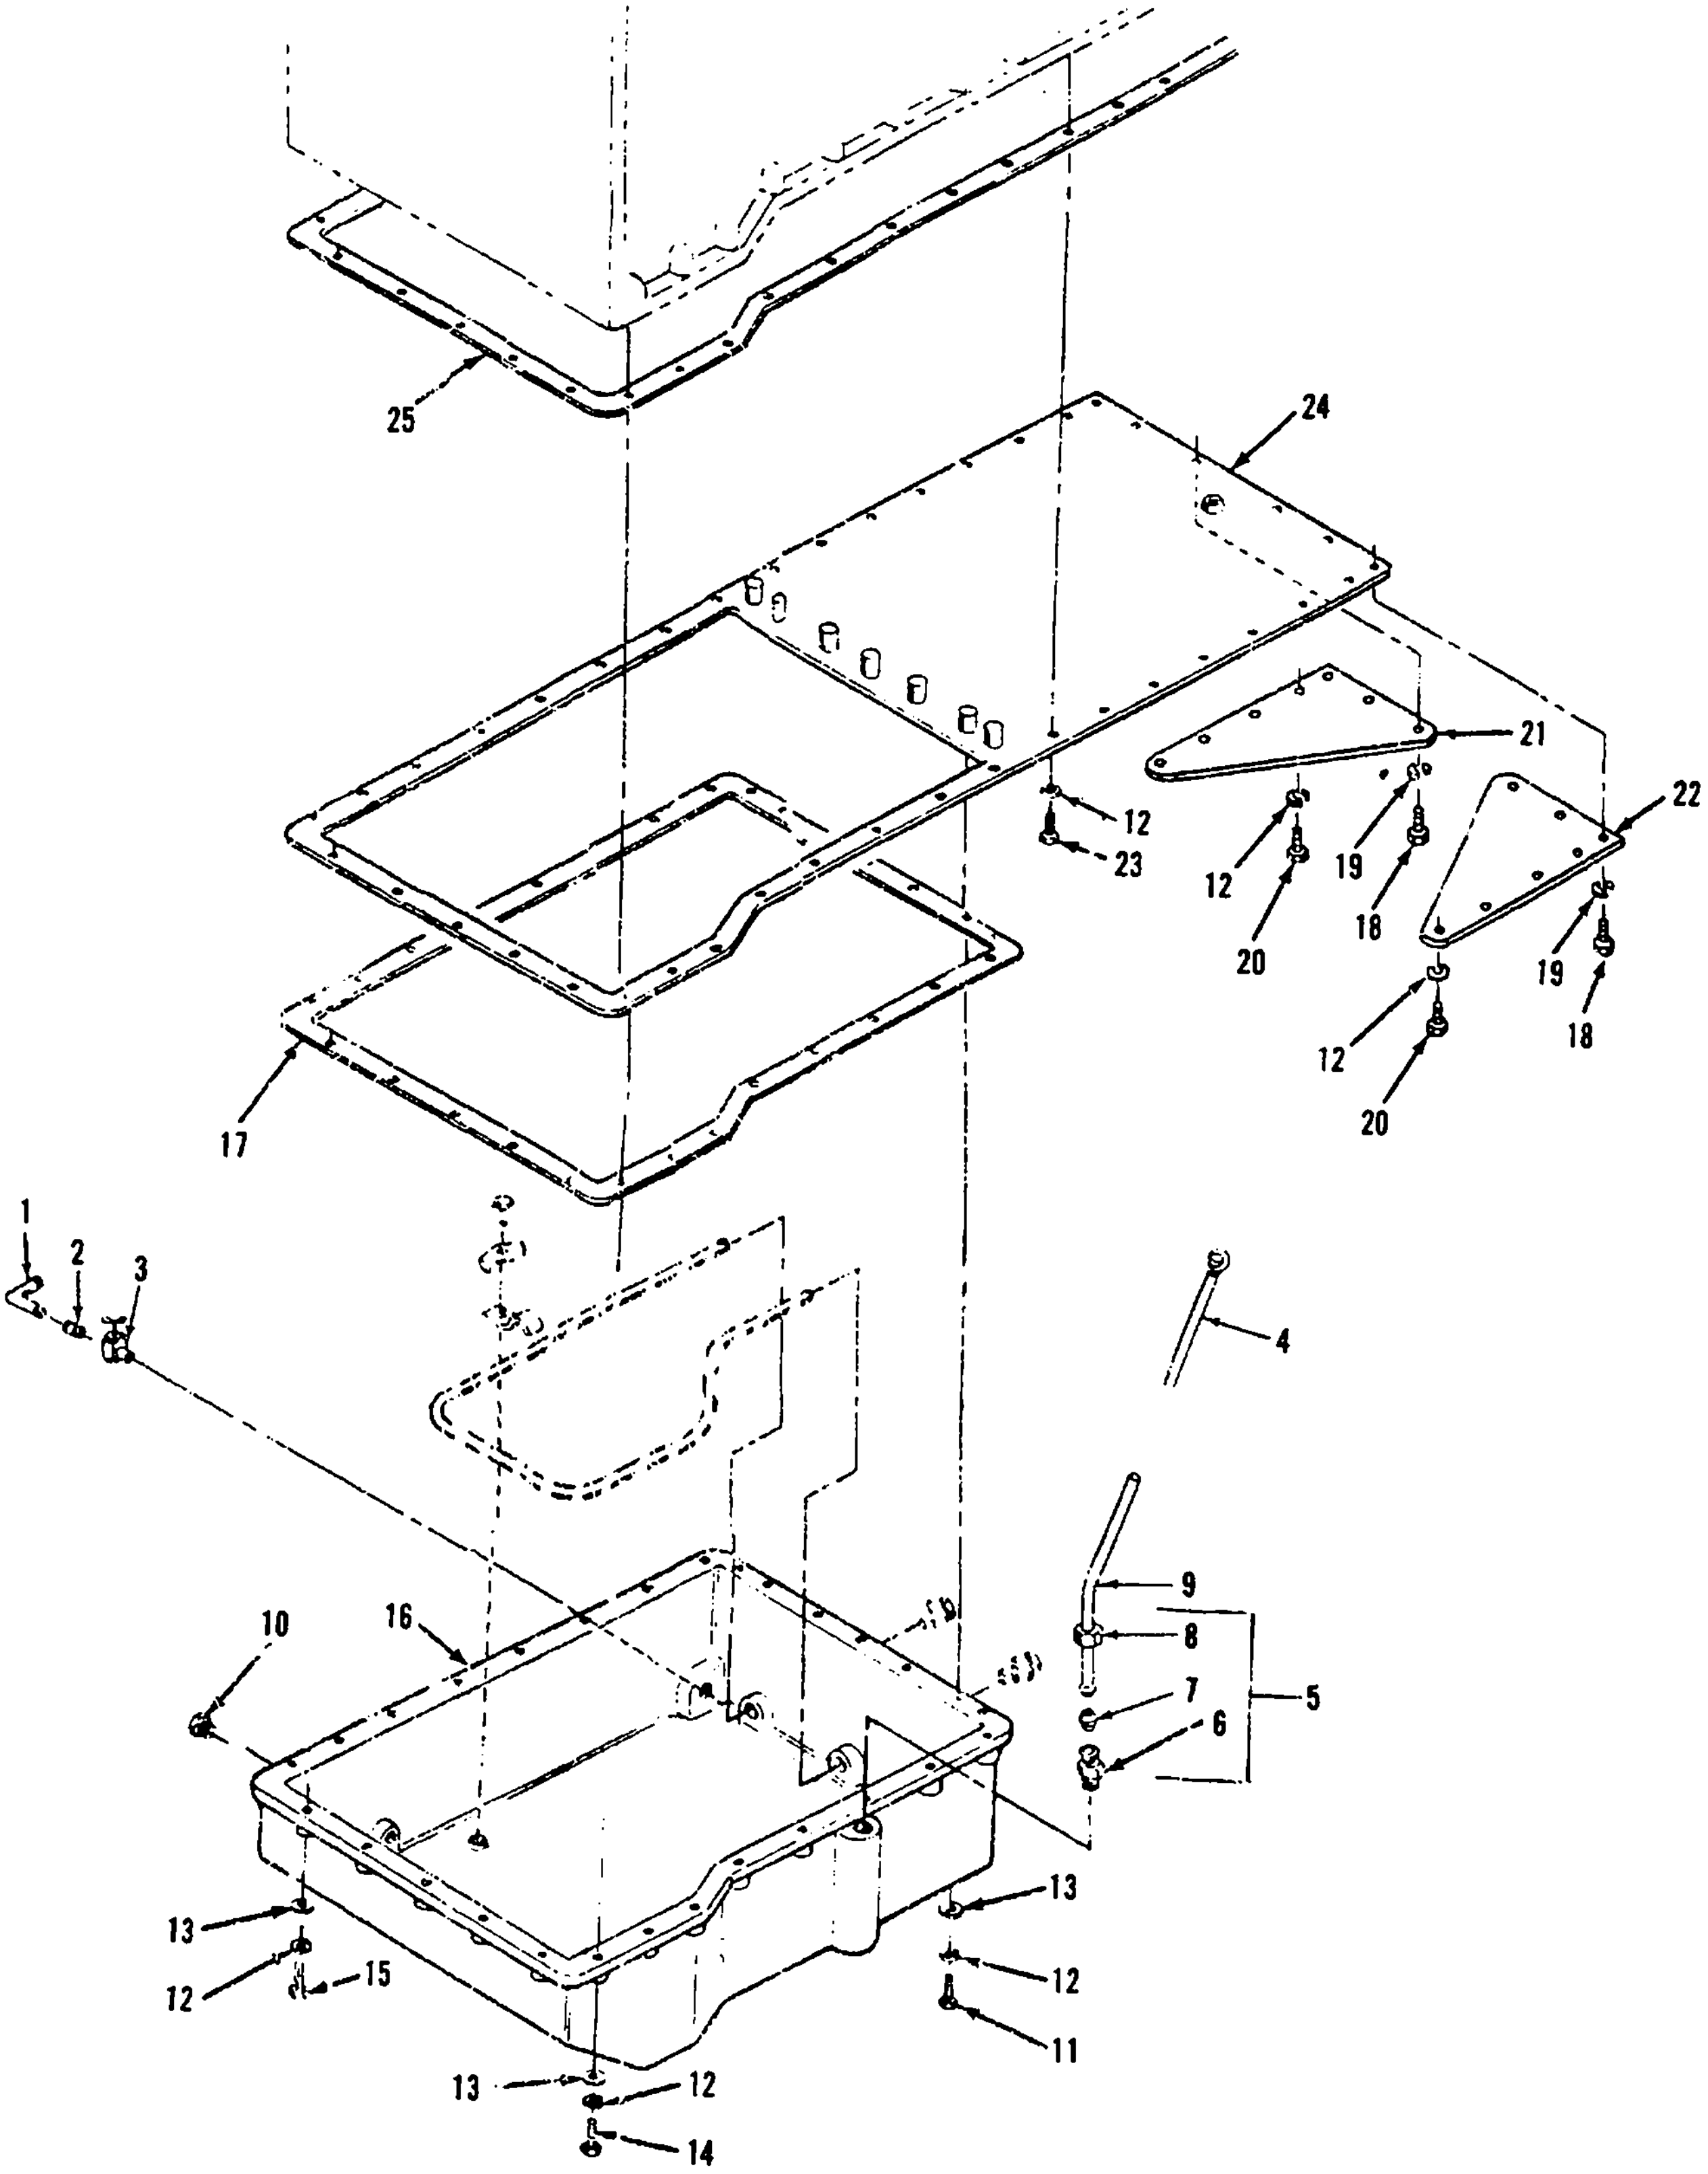
25
24
21
22
12
23
12
19
20
18
19
18
12
20
17
1
2
3
4
9
8
7
6
5
10
16
13
12
15
13
12
11
13
12
14

Figure 67. Oil Pan

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 68 | | | | | | | | | ENGINE OIL LINES | | | | |
| 68 | 1 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-721-5492 | BOLT, HEX HEAD<br>T102 | 11083 | EA | 2 | 5 |
| 68 | 2 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 2930-00-365-2152 | LOCK, P/O KIT P/N 5P8767<br>L364 | 11083 | EA | 2 | 2 |
| 68 | 3 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-260-4508 | BOLT, HEX HEAD<br>S1594 | 11083 | EA | 2 | .24 |
| 68 | 4 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5340-00-494-1996 | LOCK, P/O KIT P/N 5P8767<br>8S8874 | 11083 | EA | 1 | 1 |
| 68 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | . 008 | 2815-01-068-8565 | BELL ASSY<br>2P1751 | 11083 | EA | 1 | 1 |
| 68 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5330-00-074-3547 | GASKET, P/O KIT P/N 5P8767<br>8M904 | 11083 | EA | 1 | 1 |
| 68 | 7 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 2520-00-847-4351 | SEAL, P/O KIT P/N 5P8766<br>9M4849 | 11083 | EA | 1 | 1 |
| 68 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 4720-01-068-3420 | TUBE ASSY<br>2P1739 | 11083 | EA | 1 | 1 |
| 68 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2940-01-207-2541 | SCREEN ASSY<br>9M7021 | 11083 | EA | 1 | 1 |
| 68 | 10 | XA | XA | XA | XA | | | | CLAMP<br>1P7988 | 11083 | EA | 1 | 1 |
| 68 | 11 | XA | XA | XA | XA | | | | TUBE<br>2P1732 | 11083 | EA | 1 | 1 |
| 68 | 12 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-00-850-3812 | ORIFICE, P/O KIT P/N 6N7727<br>2S1541 | 11083 | EA | 6 | 6 |

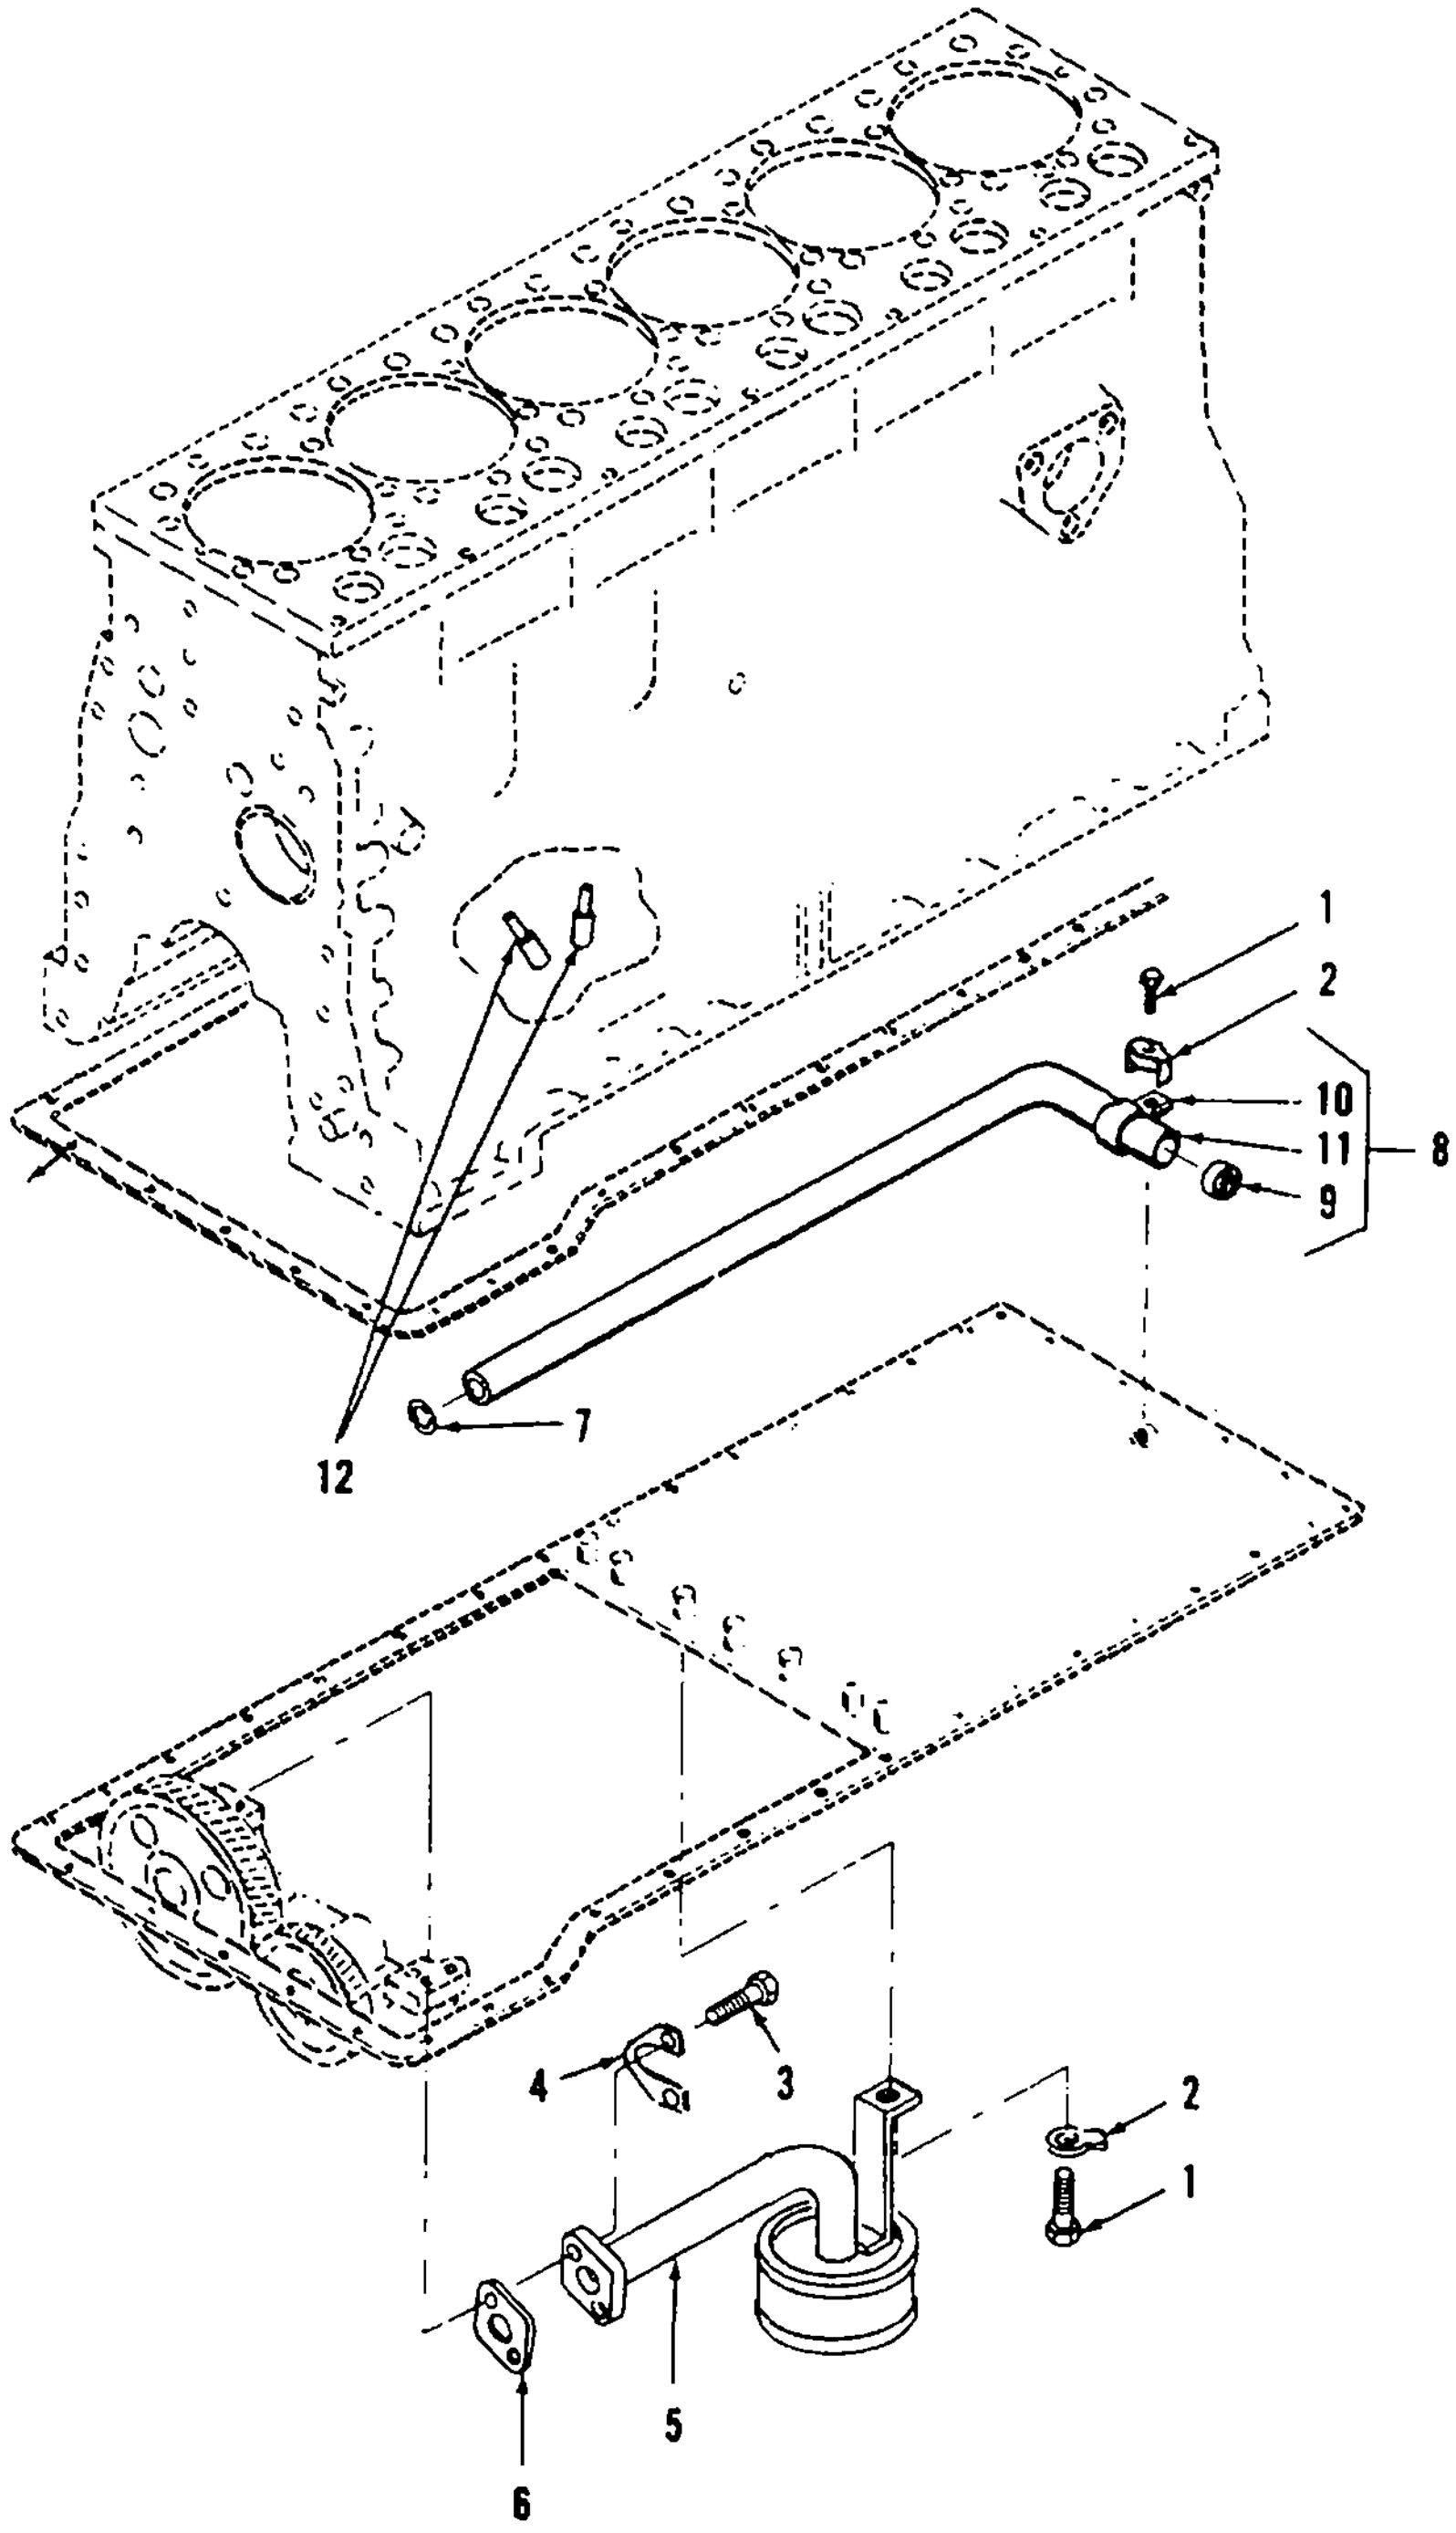
1
2
10
11
8
9
7
12
4
3
2
1
5
6

Figure 68. Engine Oil Lines

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 69 | | | | | | | | | ENGINE OIL PUMP | | | | |
| 69 | 1 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-269-3216 | BOLT, HEX HEAD<br>S1590 11083 | | EA | 4 | 9 |
| 69 | 2 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-117-4788 | WASHER, LOCK<br>5M2894 11083 | | EA | 3 | 71 |
| 69 | 3 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-688-2111 | BOLT, HEX HEAD<br>3B1915 11083 | | EA | 2 | 20 |
| 69 | 4 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-922-8691 | LOCK, P/O KIT P/N 5P8767<br>8M7587 11083 | | EA | 2 | 2 |
| 69 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-426-2932 | BOLT, HEX HEAD<br>S1619 11083 | | EA | 1 | 11 |
| 69 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-01-126-4892 | ELBOW<br>4N5353 11083 | | EA | 1 | 1 |
| 69 | 7 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5330-01-002-5729 | GASKET, P/O KIT P/N 5P8767<br>2P8746 11083 | | EA | 1 | 1 |
| 69 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-051-2300 | WASHER<br>1P7346 11083 | | EA | 1 | 1 |
| 69 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .004 | 3020-01-126-7417 | GEAR<br>7N4534 11083 | | EA | 1 | 1 |
| 69 | 10 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-944-7035 | KEY<br>8M5599 11083 | | EA | 1 | 1 |
| 69 | 11 | PAFZZ | PAFZZ | PAHHH | PAHHH | | .050 | 2815-01-011-2686 | PUMP, OIL<br>2P1785 11083 | | EA | 1 | 1 |
| 69 | 12 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-118-3054 | BOLT, HEX HEAD<br>2M3403 11083 | | EA | 1 | 1 |
| 69 | 13 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-426-2974 | BOLT, HEX HEAD<br>T65 11083 | | EA | 2 | 2 |
| 69 | 14 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4320-01-141-1385 | BODY ASSY<br>4N4055 11083 | | EA | 1 | 1 |
| 69 | 15 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3120-00-440-8463 | BEARING<br>8S6511 11083 | | EA | 2 | 3 |
| 69 | 16 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4320-01-204-8062 | BODY<br>4N4054 11083 | | EA | 1 | 1 |
| 69 | 17 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .004 | 4320-01-068-7131 | GEAR<br>6N1036 11083 | | EA | 2 | 2 |
| 69 | 18 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-616-5521 | KEY<br>MS35756-13 96906 | | EA | 1 | 1 |
| 69 | 19 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5365-01-069-0882 | SPACER<br>2P1781 11083 | | EA | 1 | 1 |
| 69 | 20 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2530-01-067-5675 | SHAFT ASSY<br>2P6245 11083 | | EA | 1 | 1 |
| 69 | 21 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 3020-01-253-9284 | GEAR<br>6N1035 11083 | | EA | 1 | 2 |
| 69 | 22 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 3040-01-253-1995 | SHAFT<br>2P691 11083 | | EA | 1 | 1 |
| 69 | 23 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 2815-00-470-6352 | SHAFT ASSY<br>8S493 11083 | | EA | 1 | 1 |
| 69 | 24 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 3020-01-253-9284 | GEAR, SPUR<br>6N1035 11083 | | EA | 1 | 2 |
| 69 | 25 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 3040-01-253-1996 | SHAFT, STRAIGHT<br>8S490 11083 | | EA | 1 | 1 |

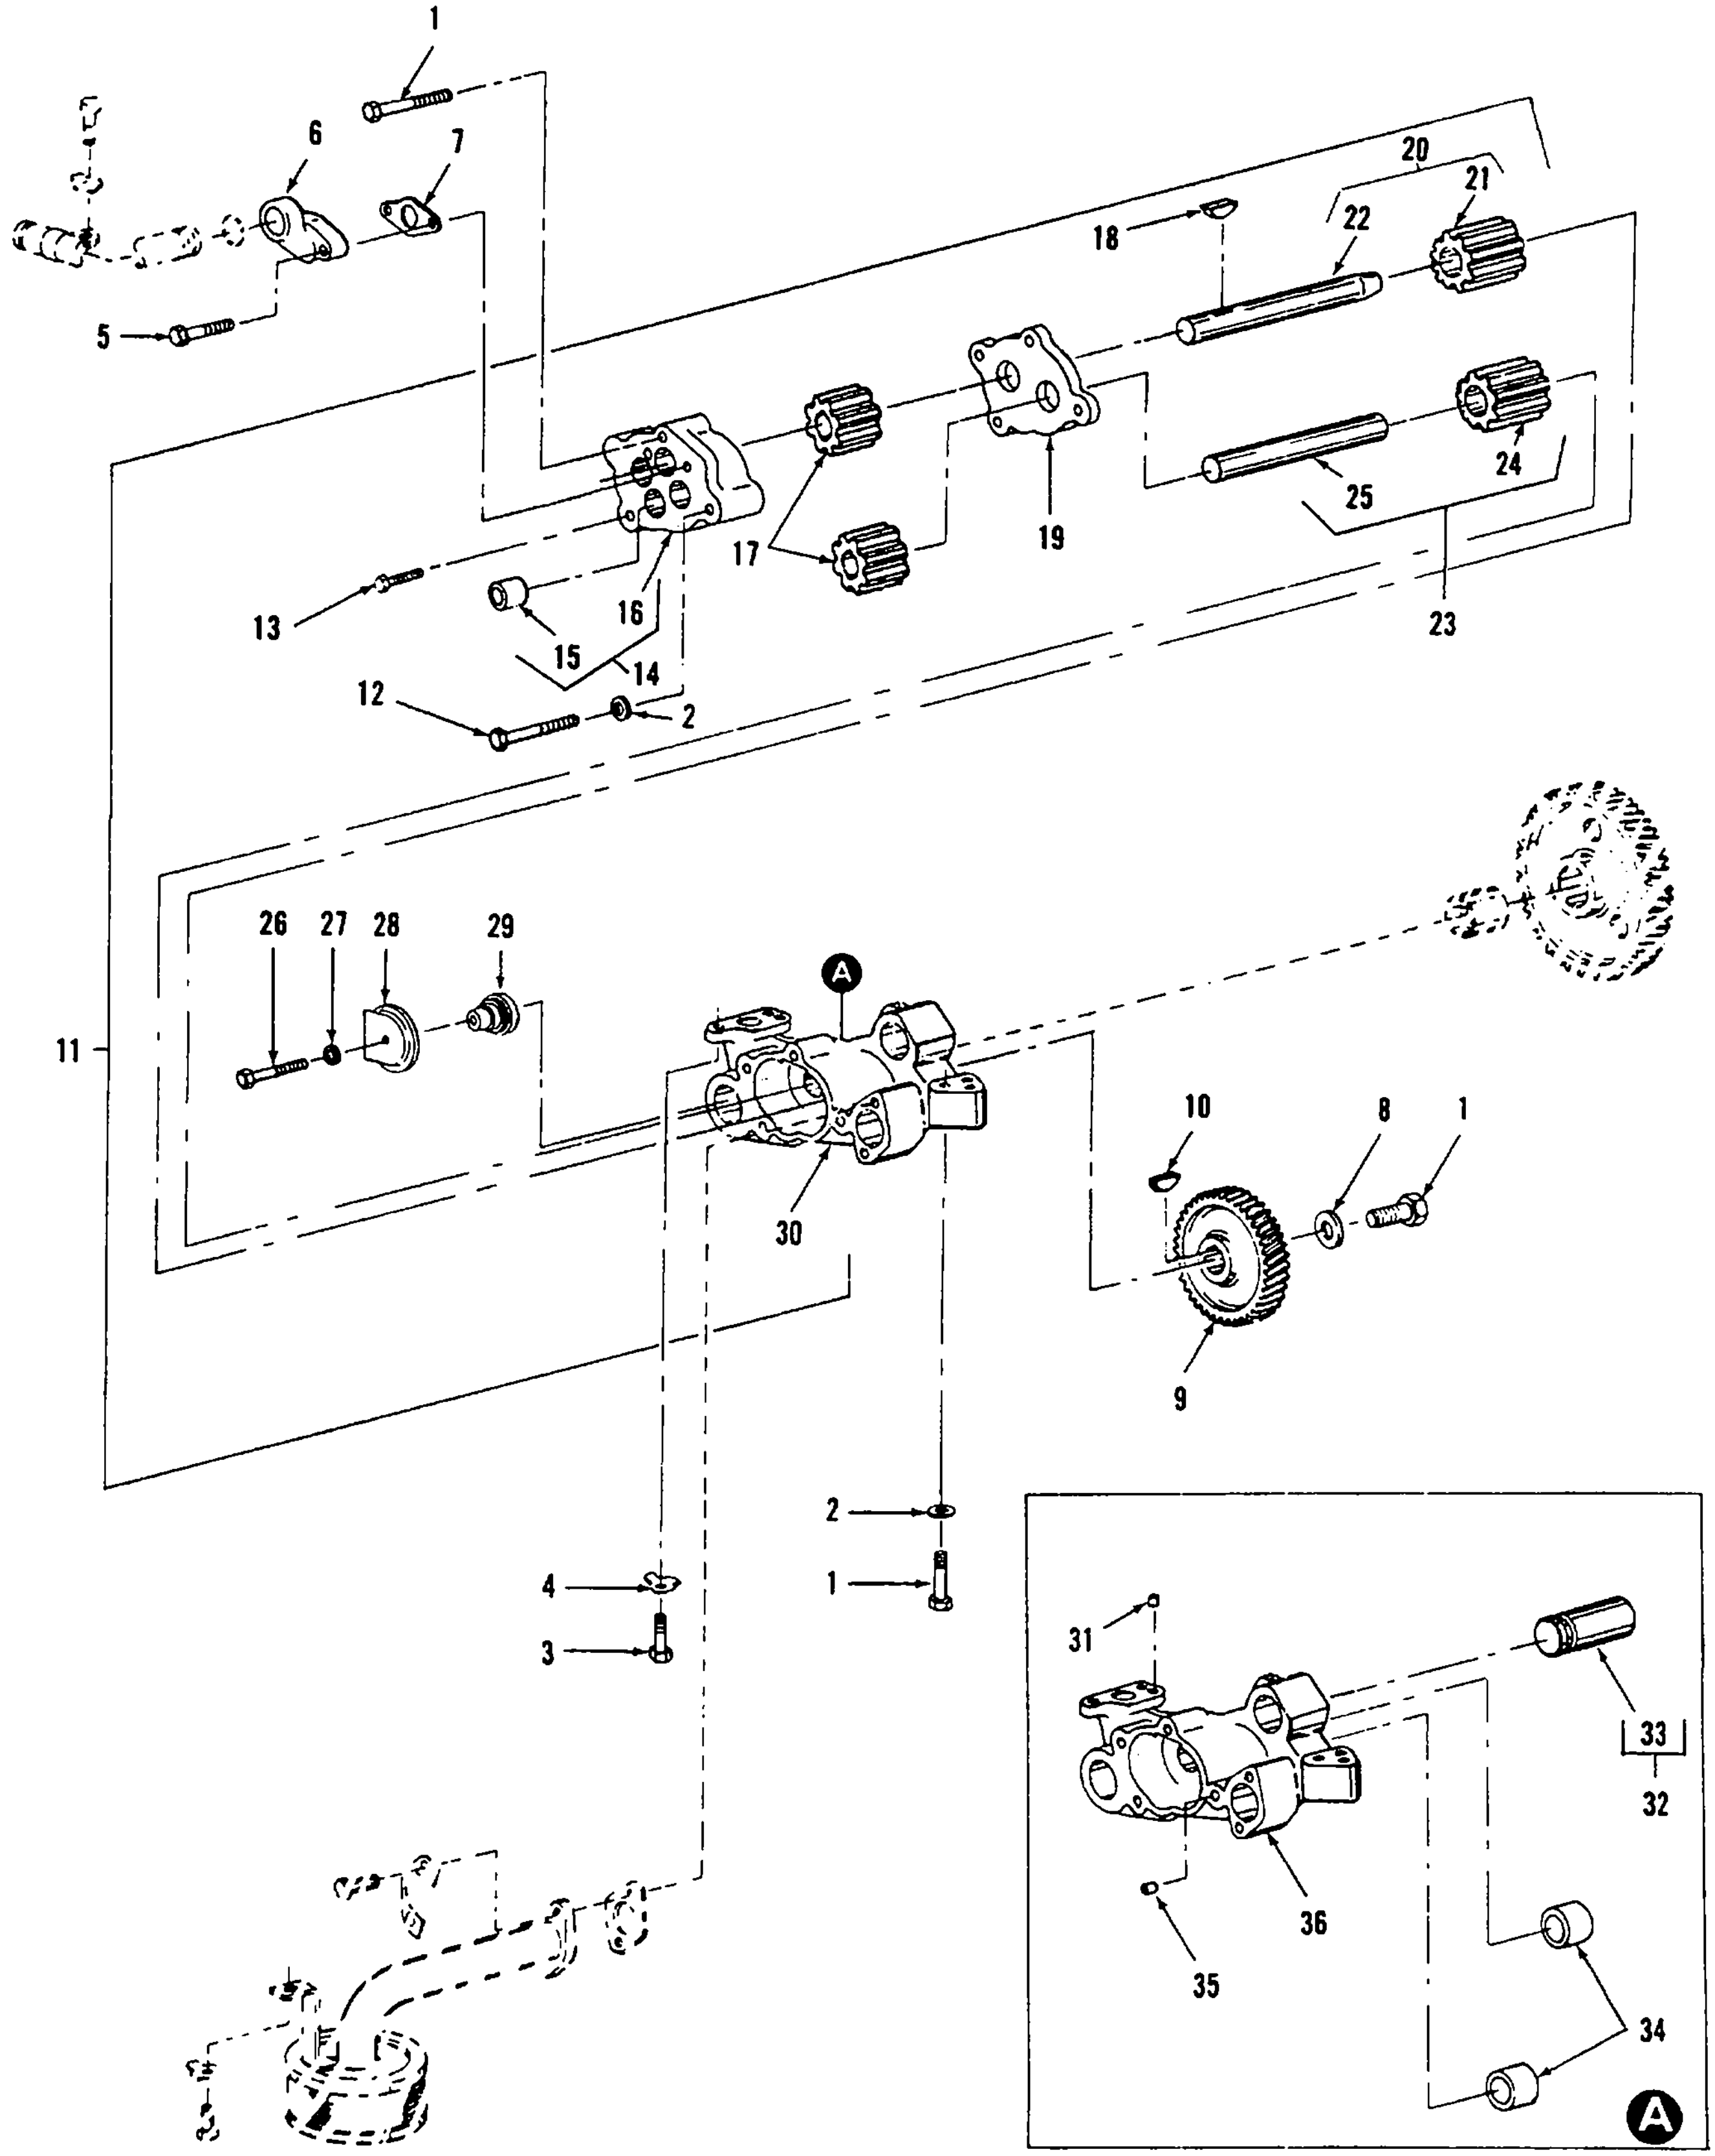
1
6
7
20
21
18
22
5
17
19
25
24
23
13
16
15
14
12
2
26
27
28
29
A
11
10
8
1
30
9
2
1
4
3
31
33
32
36
35
34
A

Figure 69. Engine Oil Pump

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | |
| 69 | | | | | | | | | ENGINE OIL PUMP - CONTINUED | | | |
| 69 | 26 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-226-4833 | BOLT, HEX HEAD<br>MS90728-40 96906 | EA | 1 | 1 |
| 69 | 27 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-432-4064 | WASHER<br>9M1974 11083 | EA | 1 | 8 |
| 69 | 28 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 5340-01-148-7396 | COVER<br>4N3732 11083 | EA | 1 | 1 |
| 69 | 29 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .007 | 2815-01-068-1729 | VALVE ASSY<br>4N8385 11083 | EA | 1 | 1 |
| 69 | 30 | | | | | | | | BODY ASSY, OIL PUMP<br>8N8636 11083 | EA | 1 | 1 |
| 69 | 31 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-363-8794 | DOWEL<br>1F1006 11083 | EA | 1 | 1 |
| 69 | 32 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2530-01-067-5649 | SHAFT ASSY<br>2P1170 11083 | EA | 1 | 1 |
| 69 | 33 | XA | XA | XA | XA | | | | SHAFT<br>2P1169 11083 | EA | 1 | 1 |
| 69 | 34 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3120-00-760-7417 | BEARING<br>8S6511 11083 | EA | 1 | 3 |
| 69 | 35 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-760-7417 | DOWEL<br>1M3735 11083 | EA | 1 | 1 |
| 69 | 36 | XA | XA | XA | XA | | | | BODY<br>8N8635 11083 | EA | 1 | 1 |

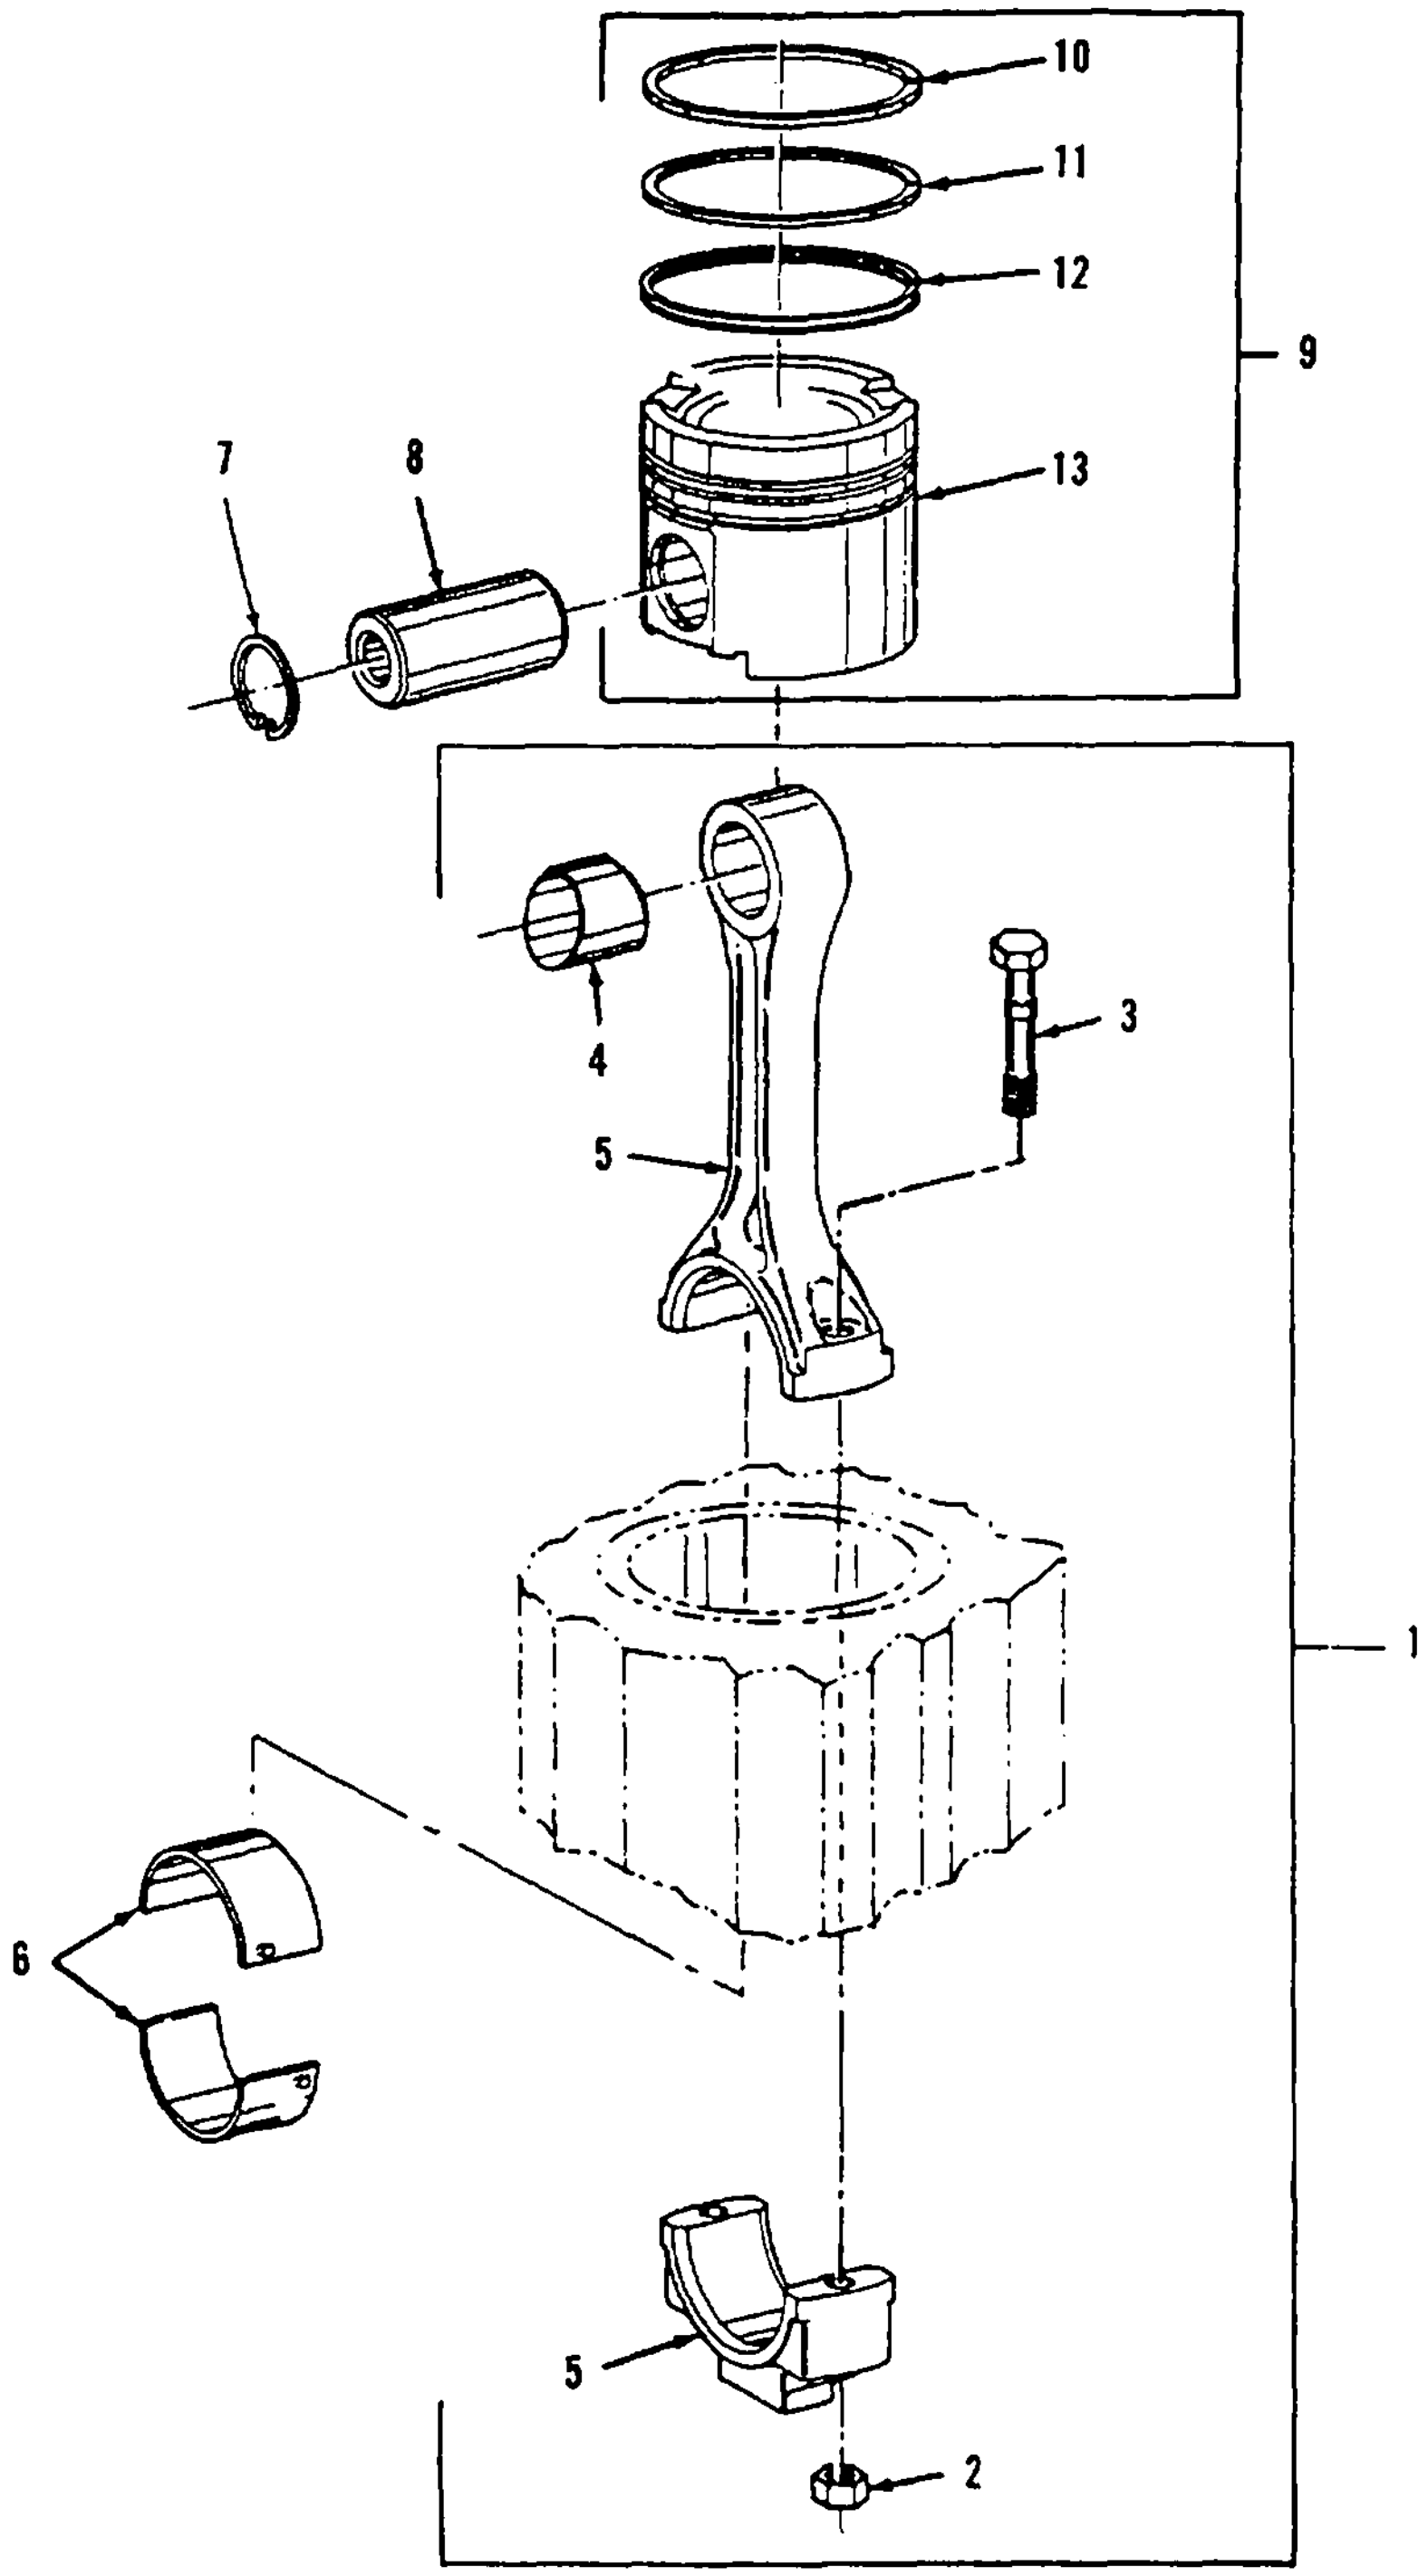
10
11
12
9
7
8
13
4
3
5
1
6
5
2

Figure 70. Connecting Rod and Piston

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 70 | | | | | | | | | CONNECTING ROD AND PISTON | | | | |
| 70 | 1 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .006 | | CONNECTING ROD ASSY<br>8N1721 | 11083 | EA | 6 | 6 |
| 70 | 2 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-557-9389 | NUT<br>5S6348 | 11083 | EA | 2 | 12 |
| 70 | 3 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-497-0342 | BOLT, SHOULDER<br>1P9956 | 11083 | EA | 2 | 12 |
| 70 | 4 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3120-01-130-9116 | BEARING<br>8N1849 | 11083 | EA | 1 | 1 |
| 70 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2815-01-253-9116 | ROD<br>8N1720 | 11083 | EA | 1 | 6 |
| 70 | 6 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3120-01-128-9027 | BEARING<br>8N8219 | 11083 | EA | 1 | 6 |
| 70 | 7 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 6365-00-118-3656 | RETAINER<br>1S9543 | 11083 | EA | 12 | 12 |
| 70 | 8 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-983-5982 | PIN<br>7N9805 | 11083 | EA | 1 | 6 |
| 70 | 9 | AHH | AFF | AHH | AHH | | | | PISTON GROUP, BASIC<br>9N5251 | 11083 | EA | 6 | 6 |
| 70 | 10 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 2815-01-148-5982 | RING<br>9S3029 | 11083 | EA | 1 | 6 |
| 70 | 11 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 2815-00-518-3561 | RING<br>5S6750 | 11083 | EA | 1 | 6 |
| 70 | 12 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .015 | 2815-00-351-7401 | RING<br>9S7788 | 11083 | EA | 1 | 6 |
| 70 | 13 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .006 | 2815-01-125-9841 | BODY ASSY, PISTON<br>9N5250 | 11083 | EA | 1 | 6 |

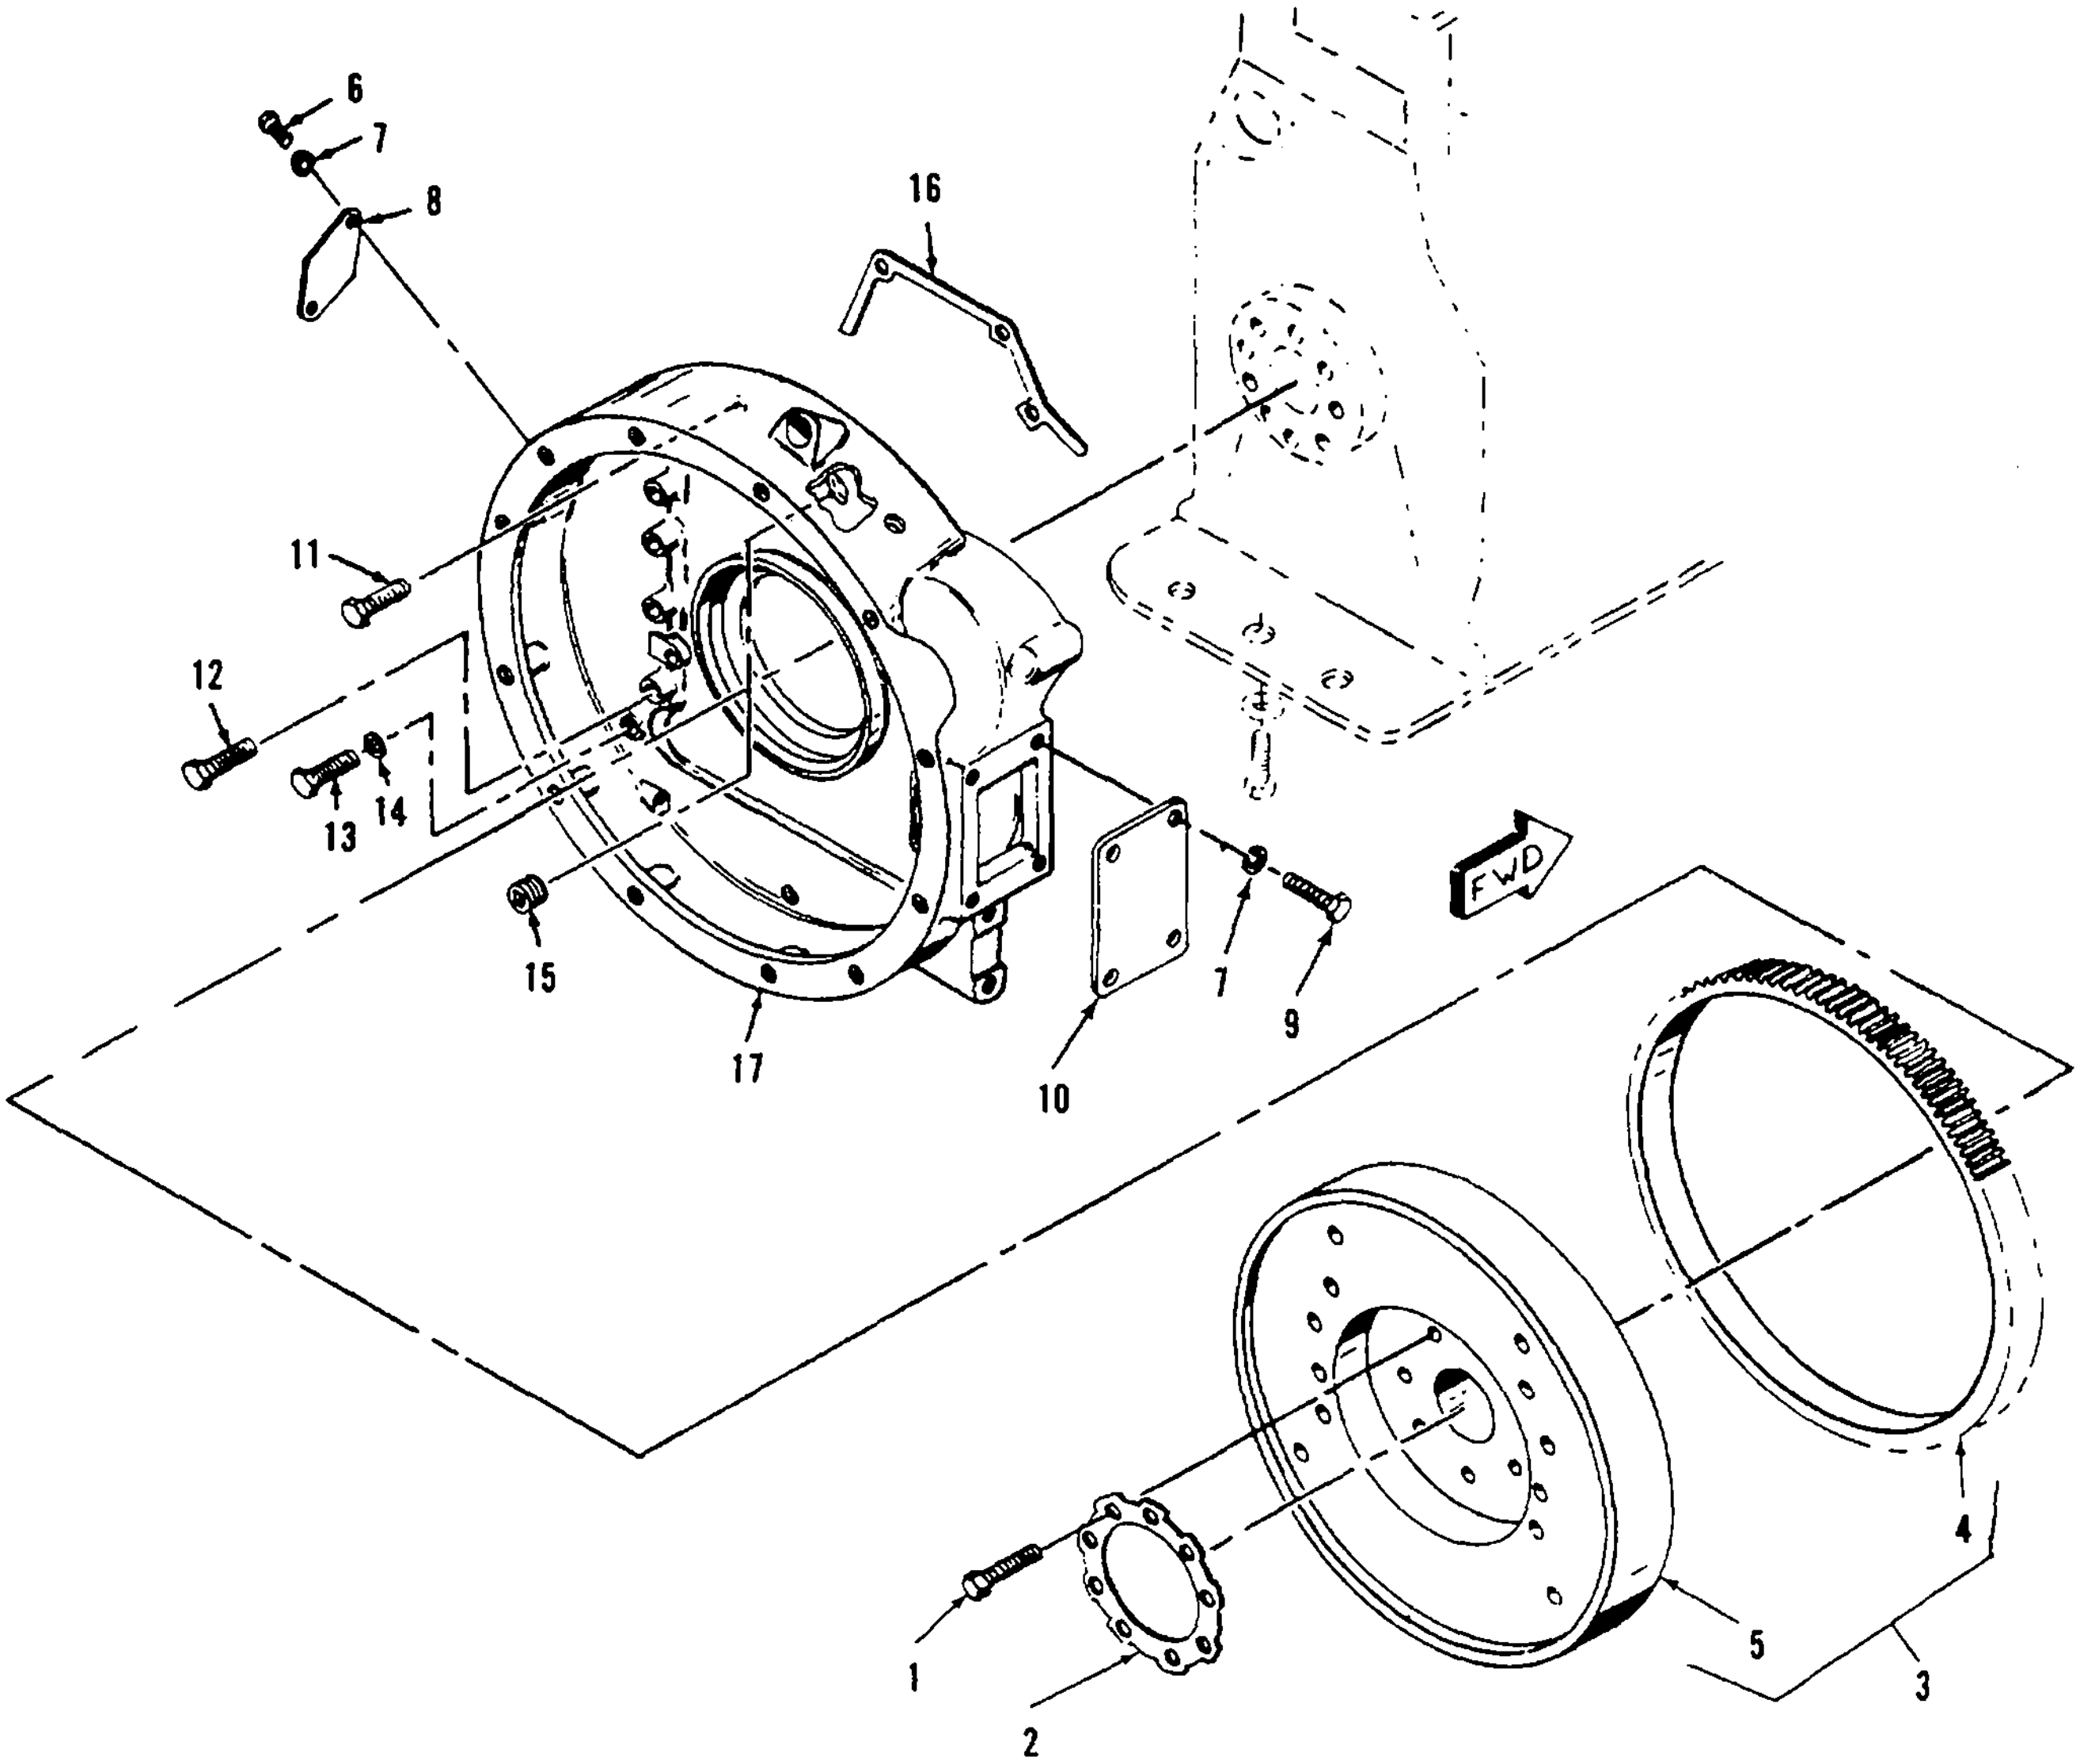
6
7
8
16
11
12
13
14
15
17
10
7
9
FWD
4
5
3
1
2

Figure 71. Flywheel and Flywheel Housing

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO. | (1) ILLUSTRATION b ITEM NO. | (2) SMR CODE a ARMY | (2) SMR CODE b AIR FORCE | (2) SMR CODE c NAVY | (2) SMR CODE d USMC | (3) USMC a SSI | (3) USMC b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | (5) DESCRIPTION USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | *GROUP 10 - ENGINE* | | | | |
| 71 | | | | | | | | | FLYWHEEL AND FLYWHEEL HOUSING | | | | |
| 71 | 1 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-260-4511 | BOLT, HEX HEAD<br>S1601 | 11083 | EA | 9 | 9 |
| 71 | 2 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5340-00-920-6755 | LOCK<br>1M7341 | 11083 | EA | 1 | 1 |
| 71 | 3 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 2815-00-188-1925 | FLYWHEEL ASSY<br>5R1191 | 11083 | EA | 1 | 1 |
| 71 | 4 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 3020-00-192-8738 | GEAR<br>5R1190 | 11083 | EA | 1 | 1 |
| 71 | 5 | XA | XA | XA | XA | | | | FLYWHEEL<br>5R1183 | 11083 | EA | 1 | 1 |
| 71 | 6 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-263-7301 | BOLT,HEX HEAD<br>L1351 | 11083 | EA | 2 | 14 |
| 71 | 7 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-117-4788 | WASHER, LOCK<br>5M2894 | 11083 | EA | 6 | 71 |
| 71 | 8 | PBOZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 2805-00-423-9151 | COVER<br>3B817 | 11083 | EA | 1 | 1 |
| 71 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-115-9526 | BOLT, HEX HEAD<br>MS18154-58 | 96906 | EA | 4 | 9 |
| 71 | 10 | MOO | MOO | MOO | MOO | | | | PLATE<br>5L2908 | 11083 | EA | 1 | 1 |
| 71 | 11 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-455-0459 | BOLT, HEX HEAD<br>9S1366 | 11083 | EA | 2 | 2 |
| 71 | 12 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-273-6357 | BOLT, HEX HEAD<br>1A1460 | 11083 | EA | 9 | 9 |
| 71 | 13 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-310-5804 | BOLT, HEX HEAD<br>5R2793 | 11083 | EA | 2 | 2 |
| 71 | 14 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-584-5272 | WASHER, LOCK<br>3B4508 | 11083 | EA | 2 | 12 |
| 71 | 15 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-00-263-3122 | PLUG<br>3B551 | 11083 | EA | 1 | 1 |
| 71 | 16 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5330-00-074-3600 | GASKET, P/O KIT P/N 5P9571<br>9H5921 | 11083 | EA | 1 | 1 |
| 71 | 17 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 2815-01-125-4078 | HOUSING<br>5R1260 | 11083 | EA | 1 | 1 |

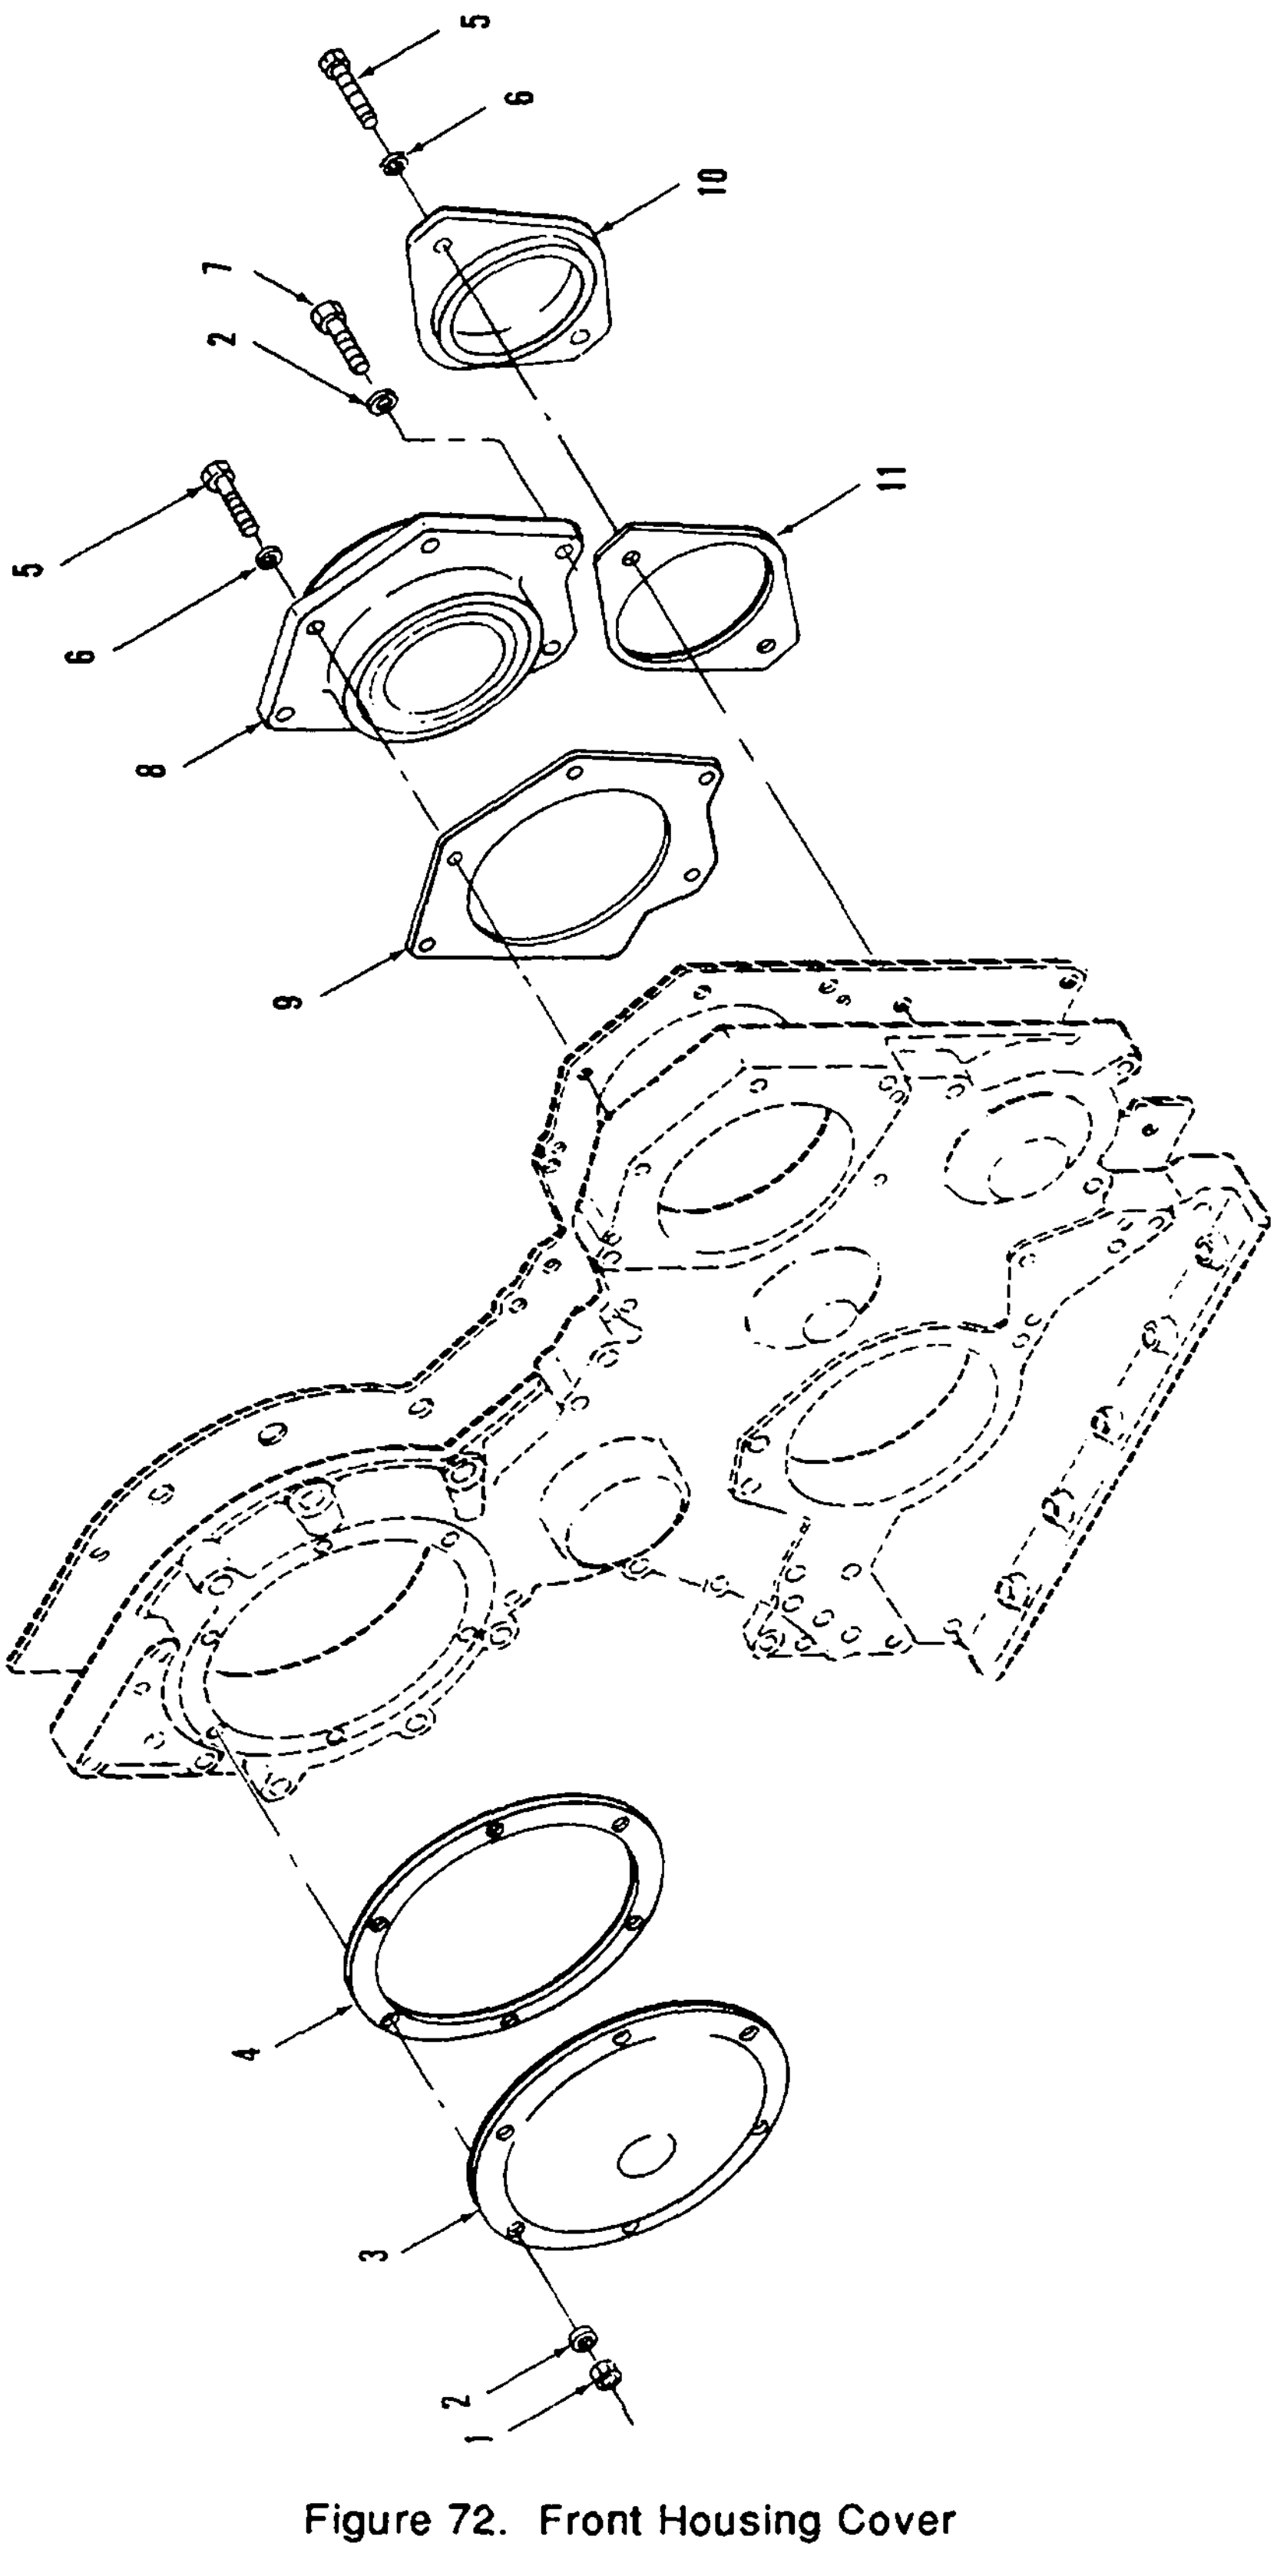
5
6
10
7
2
11
5
6
8
9
4
3
2
1

Figure 72. Front Housing Cover

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 72 | | | | | | | | | FRONT HOUSING COVER | | | | |
| 72 | 1 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-725-7382 | NUT<br>1B4203 11083 | | EA | 6 | 21 |
| 72 | 2 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-117-4788 | WASHER, LOCK<br>5M2894 11083 | | EA | 9 | 71 |
| 72 | 3 | XB | XB | XBXB | | | | | COVER<br>2P8701 11083 | | EA | 1 | 1 |
| 72 | 4 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-093-7888 | GASKET, P/O KIT P/N 5P9568<br>6N7887 11083 | | EA | 1 | 1 |
| 72 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-275-5012 | BOLT, HEX HEAD<br>S1566 11083 | | EA | 4 | 6 |
| 72 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-095-4631 | WASHER<br>5P8247 11083 | | EA | 4 | 6 |
| 72 | 7 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-688-2111 | BOLT, HEX HEAD<br>3B1915 11083 | | EA | 3 | 20 |
| 72 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5340-01-278-0440 | COVER<br>2P218 11083 | | EA | 1 | 1 |
| 72 | 9 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-069-4869 | GASKET, P/O KIT P/N 5P9568<br>2P220 11083 | | EA | 1 | 1 |
| 72 | 10 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5340-01-150-9807 | COVER<br>7N8374 11083 | | EA | 1 | 1 |
| 72 | 11 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-663-5709 | SEAL, P/O KIT P/N 5P9568<br>5F3106 11083 | | EA | 1 | 2 |

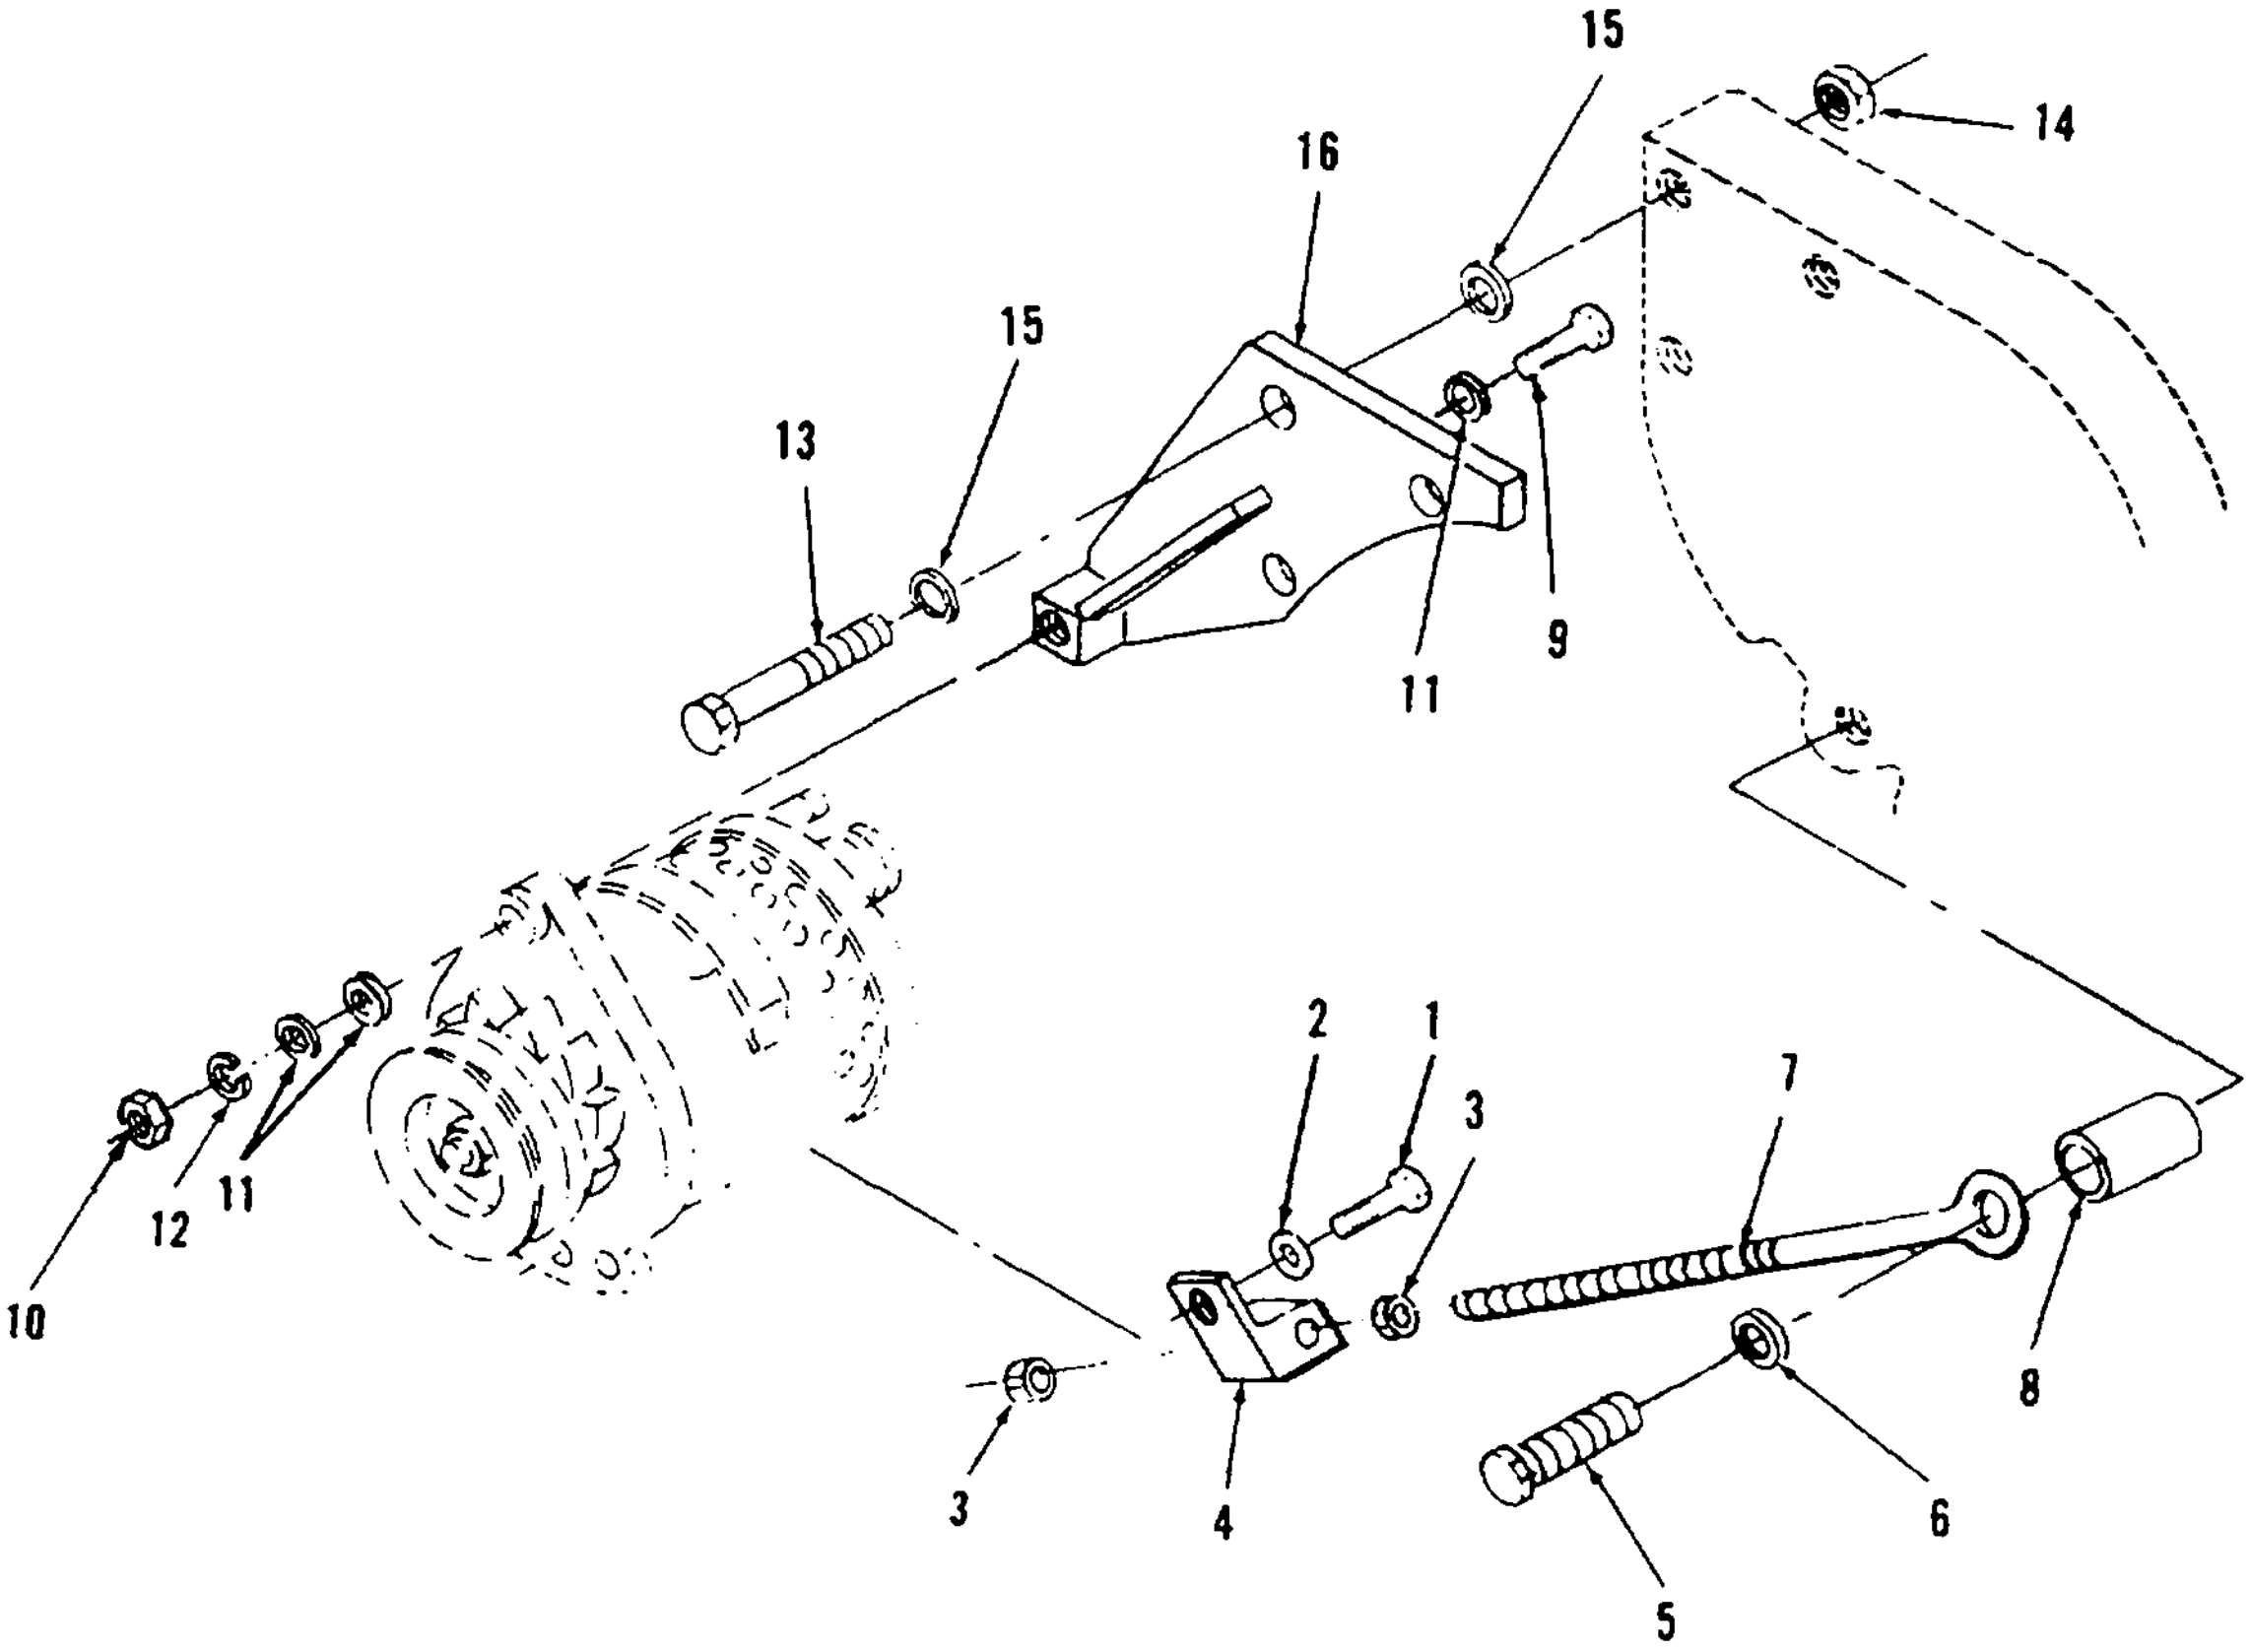
15
14
16
15
13
11
9
2
1
3
7
11
12
10
3
4
6
8
5

Figure 73. Battery Charging Alternator Mounting

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 73 | | | | | | | | | BATTERY CHARGING ALTERNATOR MOUNTING | | | | |
| 73 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-225-8500 | SCREW<br>MS90725-35 | 96906 | EA | 1 | 17 |
| 73 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-407-9566 | WASHER, LOCK<br>MS35338-45 | 96906 | EA | 1 | 67 |
| 73 | 3 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-347-4123 | NUT<br>1B4205 | 11083 | EA | 2 | 3 |
| 73 | 4 | MFO | MFO | MFO | MFO | | | | BLOCK<br>5R1815 | 11083 | EA | 1 | 1 |
| 73 | 5 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-426-3080 | BOLT<br>1A5822 | 11083 | EA | 1 | 1 |
| 73 | 6 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-01-128-8967 | WASHER<br>5H4276 | 11083 | EA | 1 | 1 |
| 73 | 7 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-216-8355 | ROD<br>6L5874 | 11083 | EA | 1 | 1 |
| 73 | 8 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5365-01-129-0958 | SPACER<br>9L1366 | 11083 | EA | 1 | 1 |
| 73 | 9 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-814-8957 | BOLT, HEX HEAD<br>8F8804 | 11083 | EA | 1 | 1 |
| 73 | 10 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-01-236-9899 | NUT<br>1D4719 | 11083 | EA | 1 | 1 |
| 73 | 11 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-930-7013 | WASHER<br>4B4280 | 11083 | EA | 2 | 2 |
| 73 | 12 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-584-5272 | WASHER,LOCK<br>3B4508 | 11083 | EA | 1 | 12 |
| 73 | 13 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5300-00-426-2865 | BOLT, HEX HEAD<br>L1352 | 11083 | EA | 3 | 6 |
| 73 | 14 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-01-030-3355 | NUT<br>1D4717 | 11083 | EA | 3 | 17 |
| 73 | 15 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-117-4788 | WASHER, LOCK<br>5M2894 | 11083 | EA | 6 | 71 |
| 73 | 16 | XB | XB | XB | XB | | | | BRACKET ASSY<br>5R3630 | 11083 | EA | 1 | 1 |

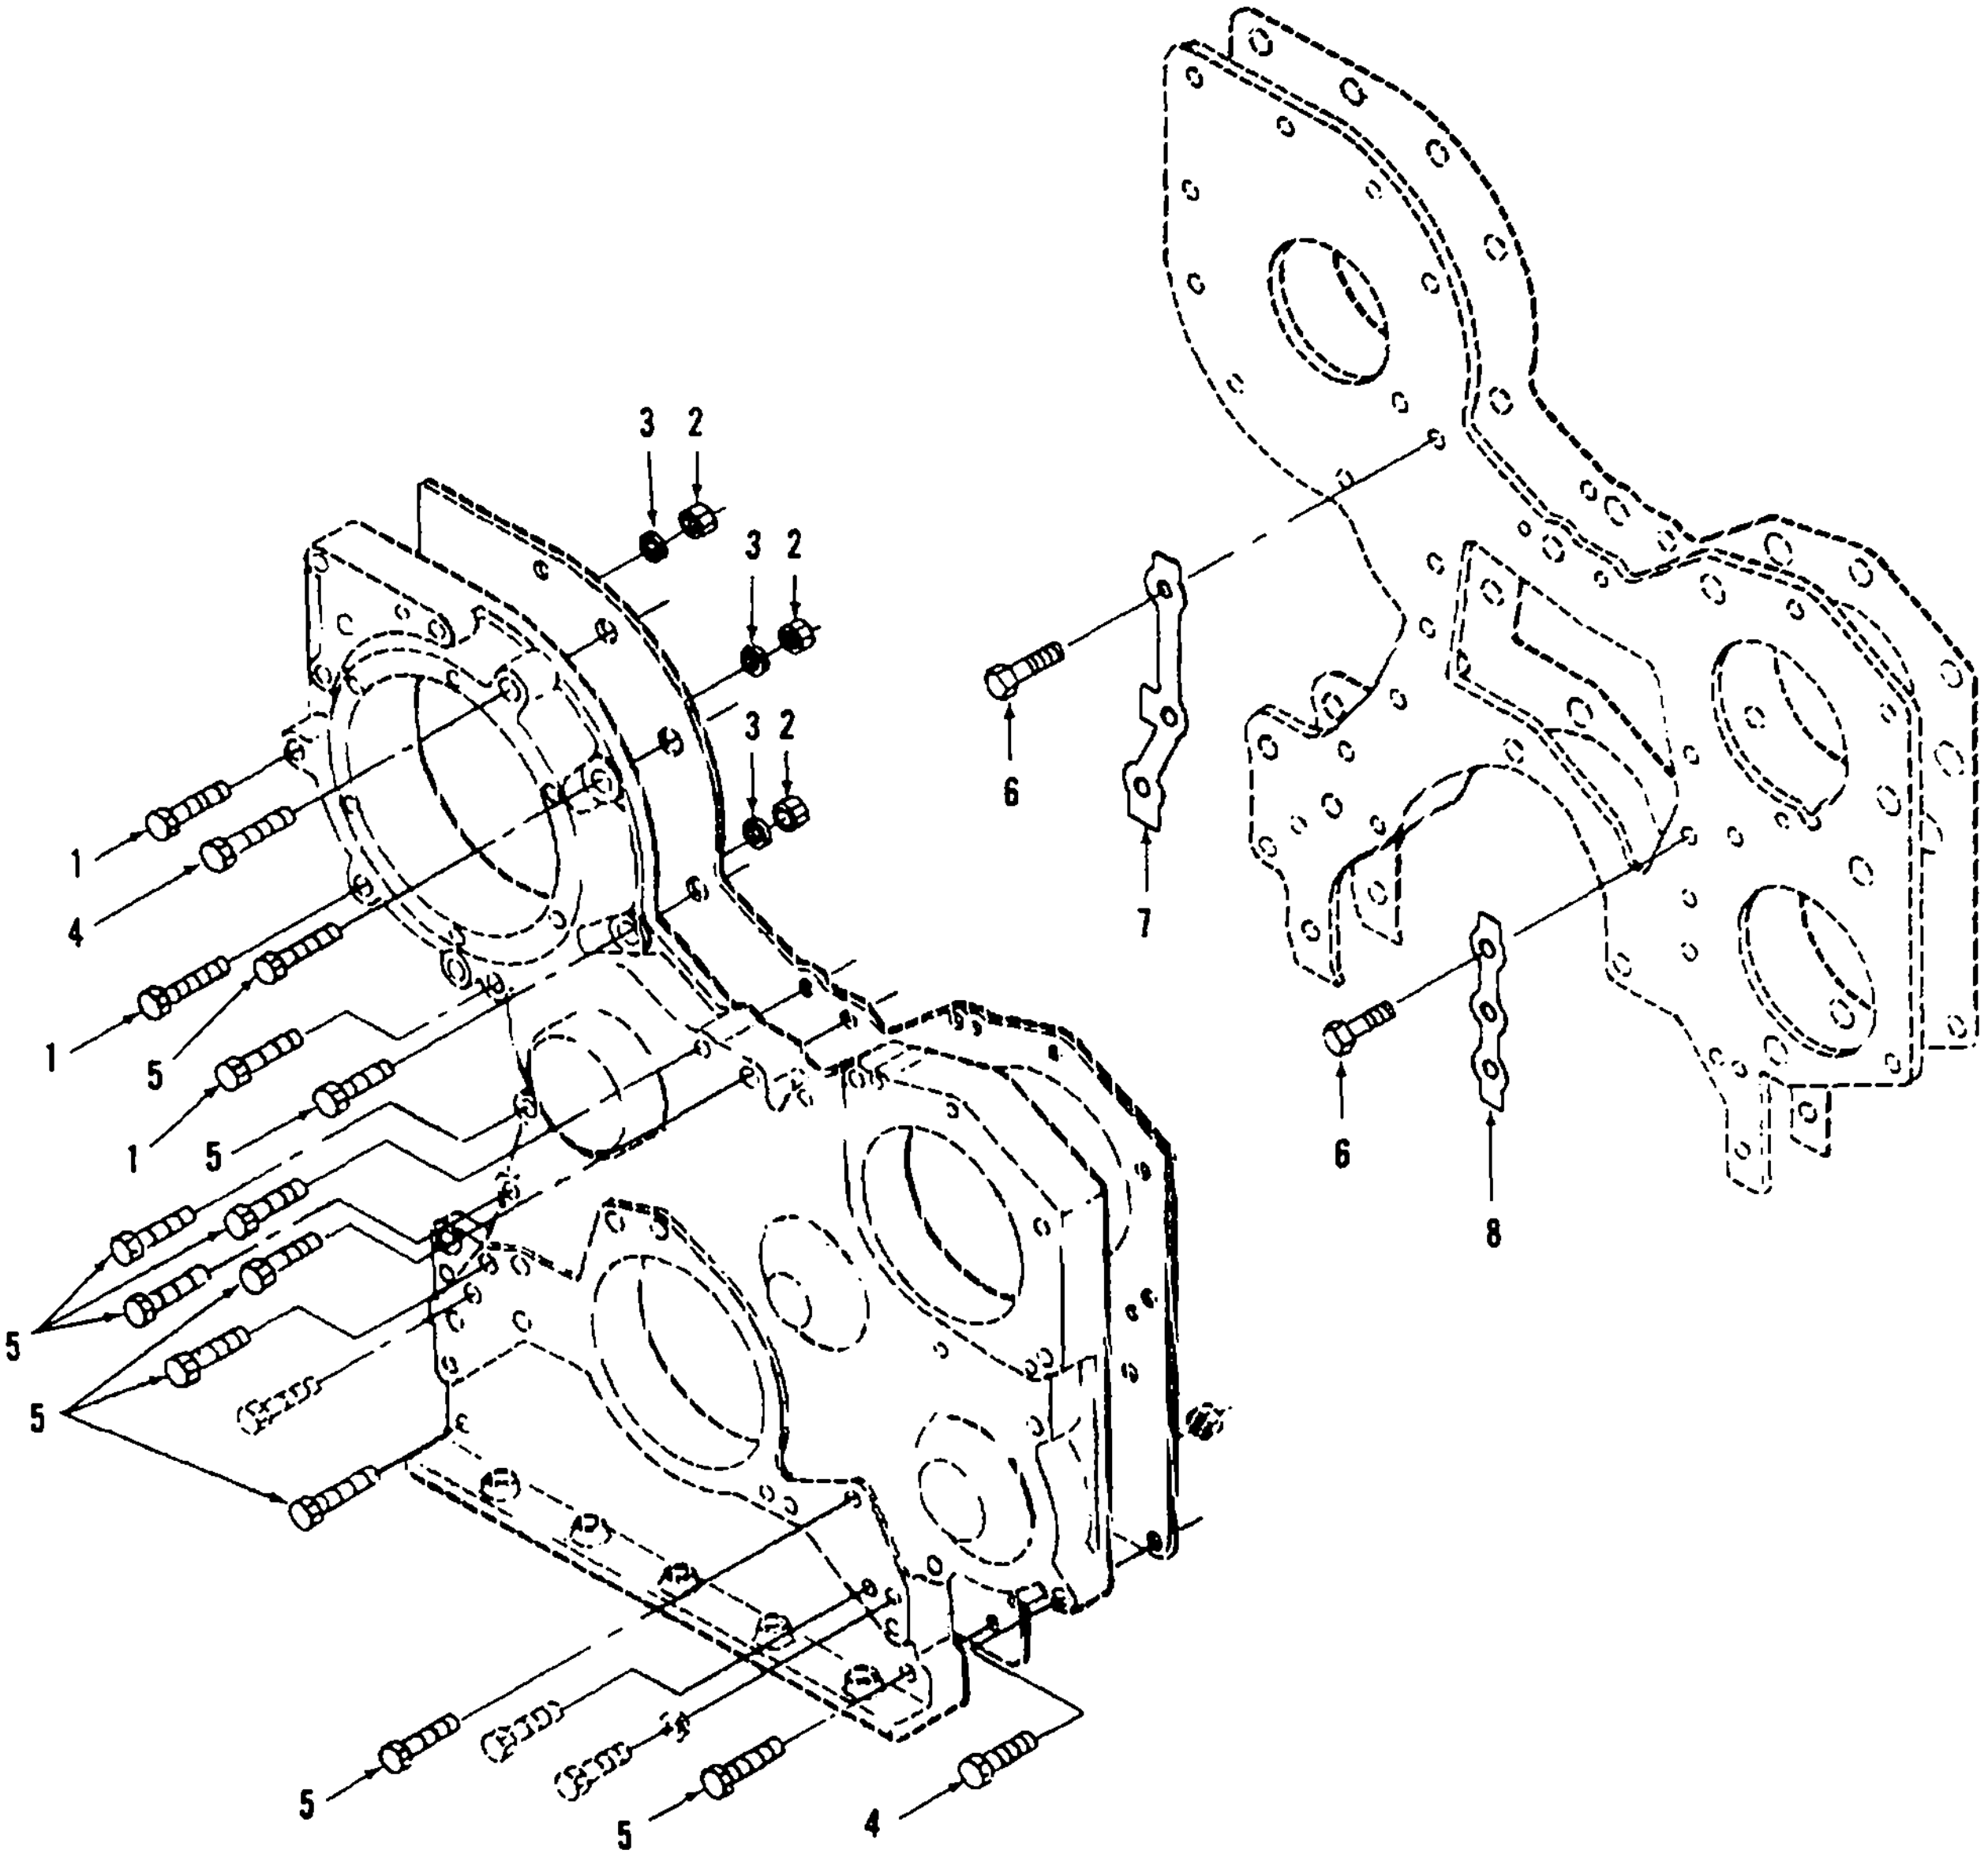
3
2
3
2
3
2
1
4
1
5
1
5
5
5
5
5
4
6
7
6
8

Figure 74. Front Housing Fastener

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 74 | | | | | | | | | FRONT HOUSING FASTENER | | | | |
| 74 | 1 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-285-1368 | BOLT, HEX HEAD<br>L1143 | 11083 | EA | 6 | 7 |
| 74 | 2 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-01-030-3355 | NUT<br>1D4717 | 11083 | EA | 6 | 17 |
| 74 | 3 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-514-6849 | WASHER, LOCK<br>5M2894 | 11083 | EA | 6 | 71 |
| 74 | 4 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-423-8393 | BOLT, HEX HEAD<br>1C2251 | 11083 | EA | 2 | 4 |
| 74 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-698-2150 | BOLT, HEX HEAD<br>L2070 | 11083 | EA | 10 | 11 |
| 74 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-260-4508 | BOLT, HEX HEAD<br>S1594 | 11083 | EA | 6 | 24 |
| 74 | 7 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2815-00-476-5433 | LOCK, P/O KIT P/N SP9568<br>9S3187 | 11083 | EA | 1 | 1 |
| 74 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 2815-00-477-1811 | LOCK, P/O KIT P/N SP9568<br>9S3188 | 11083 | EA | 1 | 1 |

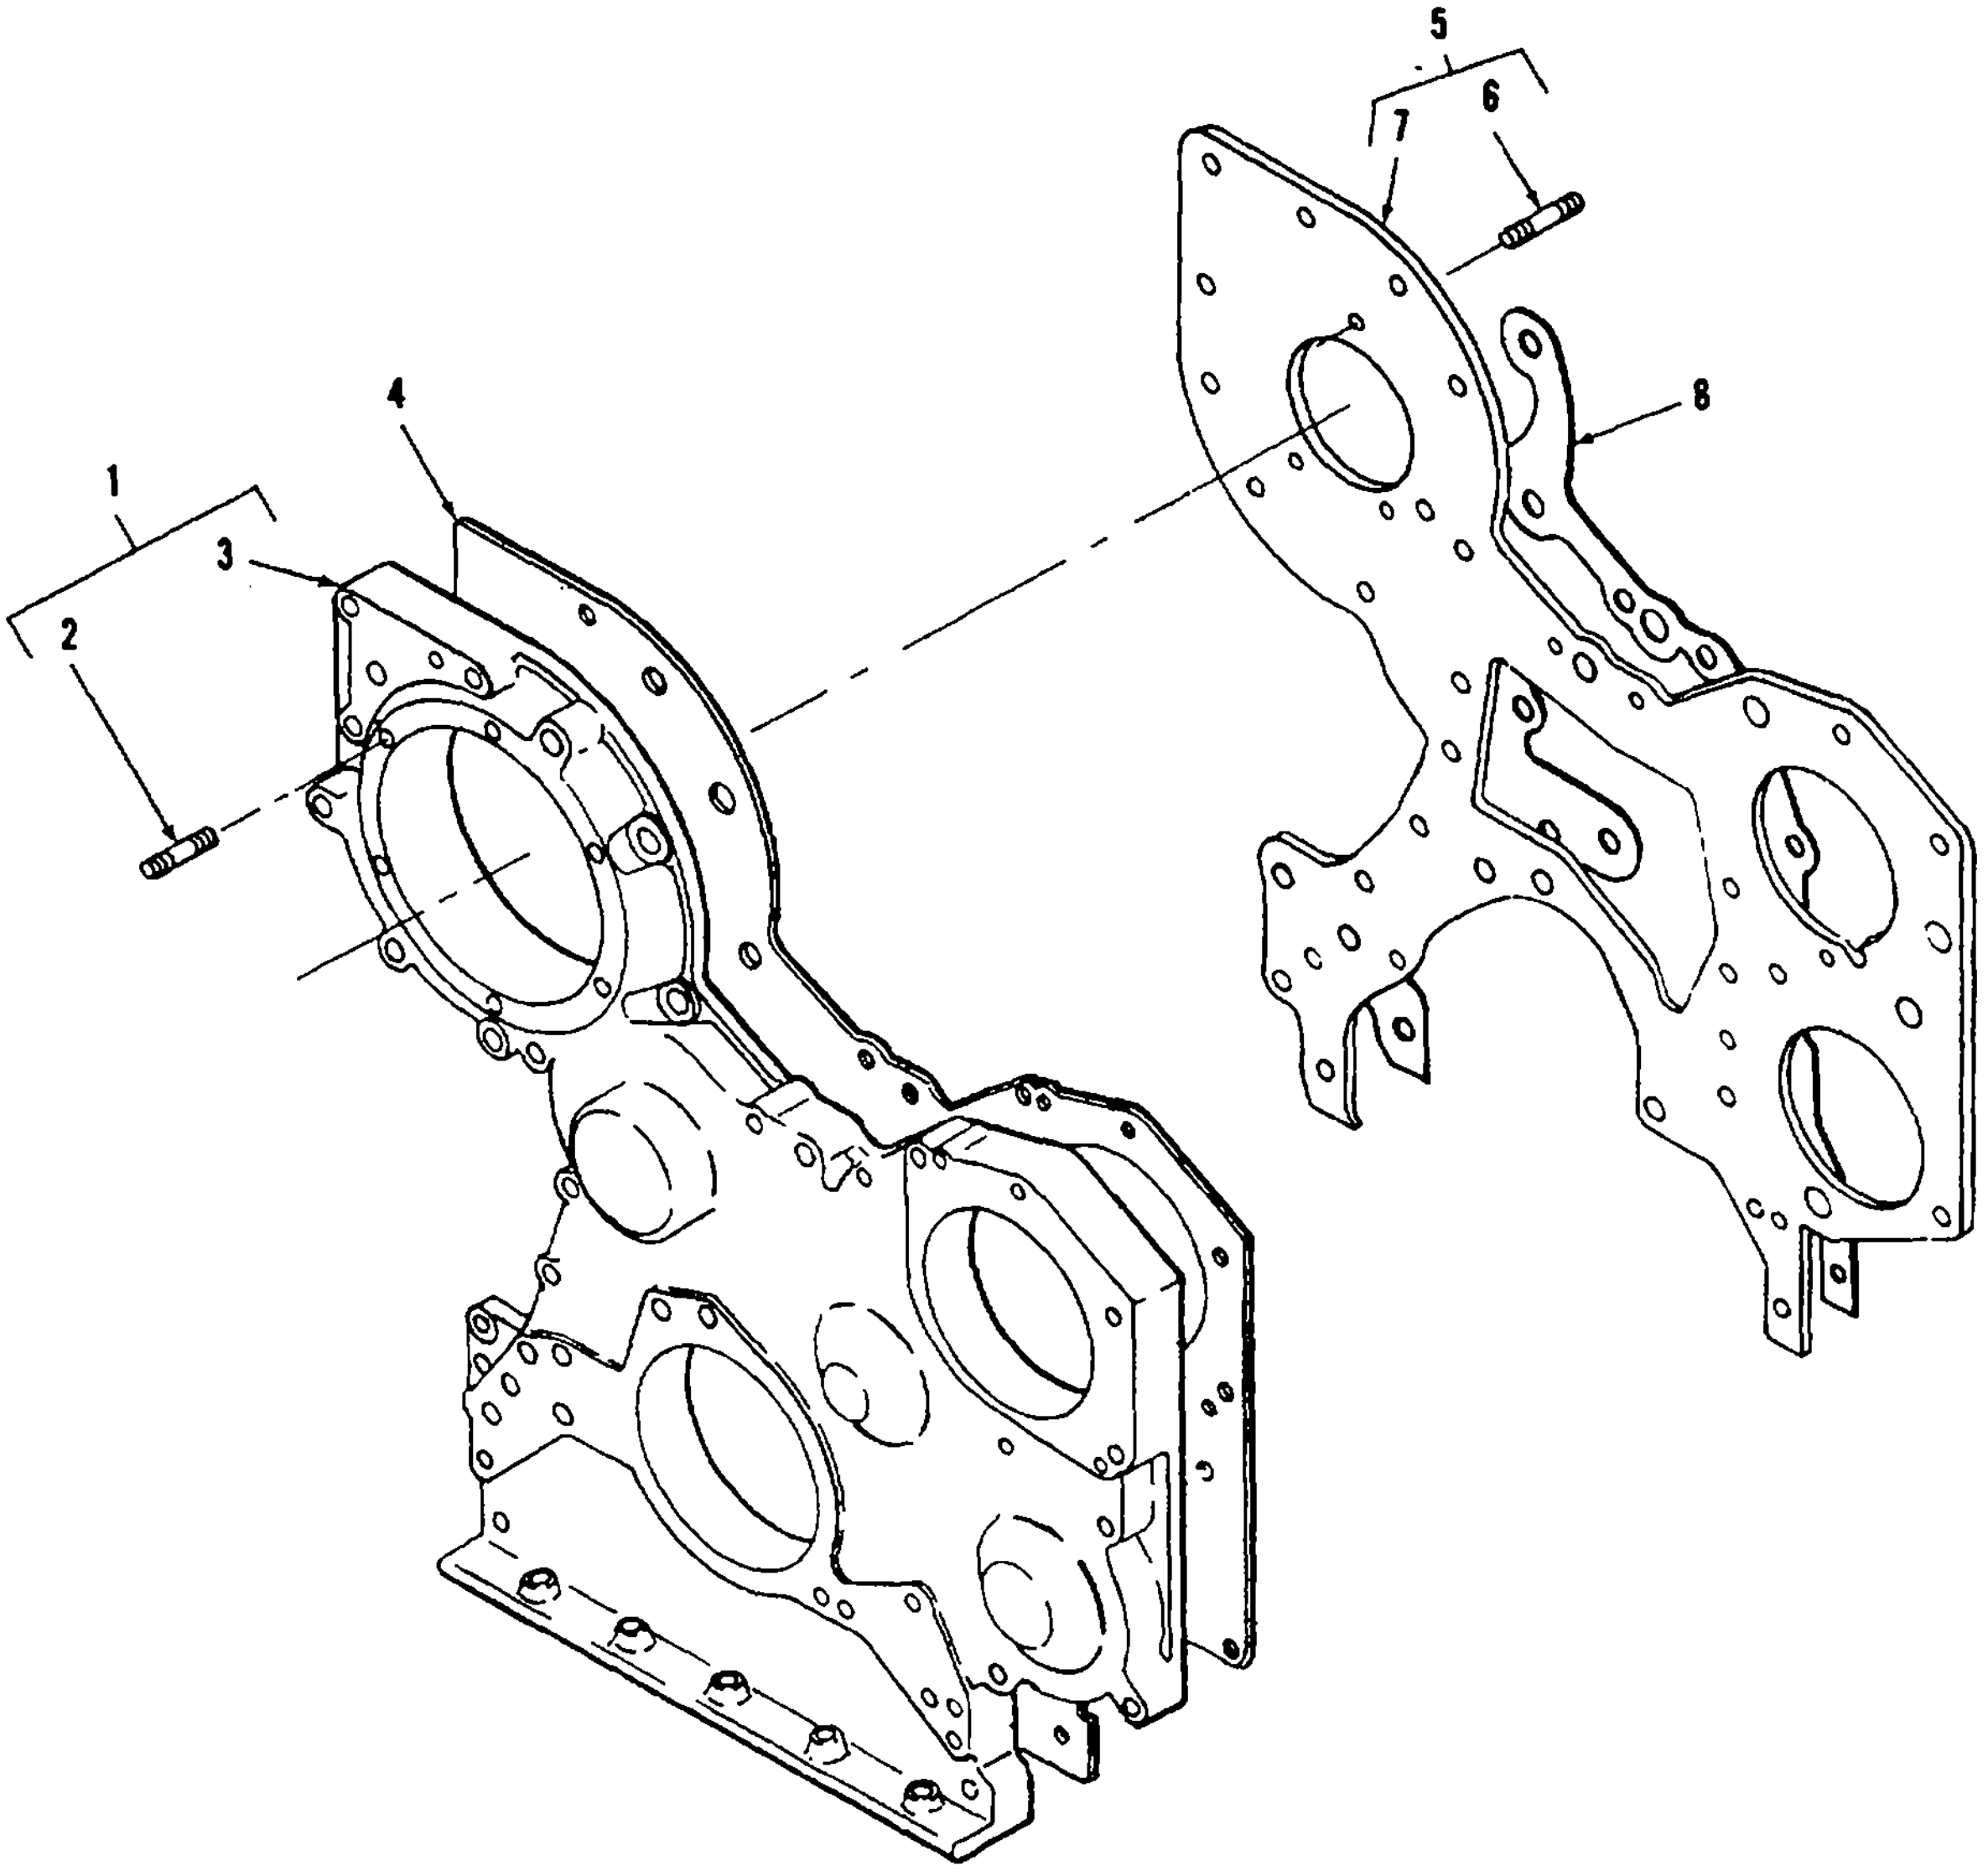

Figure 75. Front Housing

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 75 | | | | | | | | | FRONT HOUSING | | | | |
| 75 | 1 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 2815-01-125-9819 | HOUSING ASSY<br>8N109 | 11083 | EA | 1 | 1 |
| 75 | 2 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .004 | 5307-01-070-2014 | STUD<br>2S42 | 11083 | EA | 6 | 6 |
| 75 | 3 | XA | XA | XA | XA | | | | HOUSING<br>8N535 | 11083 | EA | 1 | 1 |
| 75 | 4 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5330-01-132-8577 | GASKET, P/O KIT P/N 5P9568<br>8N533 | 11083 | EA | 1 | 1 |
| 75 | 5 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 2815-01-125- 5544 | PLATE ASSY<br>6N9060 | 11083 | EA | 1 | 1 |
| 75 | 6 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5307-01-107-4197 | STUD<br>4M8743 | 11083 | EA | 3 | 3 |
| 75 | 7 | XA | XA | XA | XA | | | | PLATE<br>6N9061 | 11083 | EA | 1 | 1 |
| 75 | 8 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-128-4137 | GASKET, P/O KIT P/N 5P9568<br>8N110 | 11083 | EA | 1 | 1 |

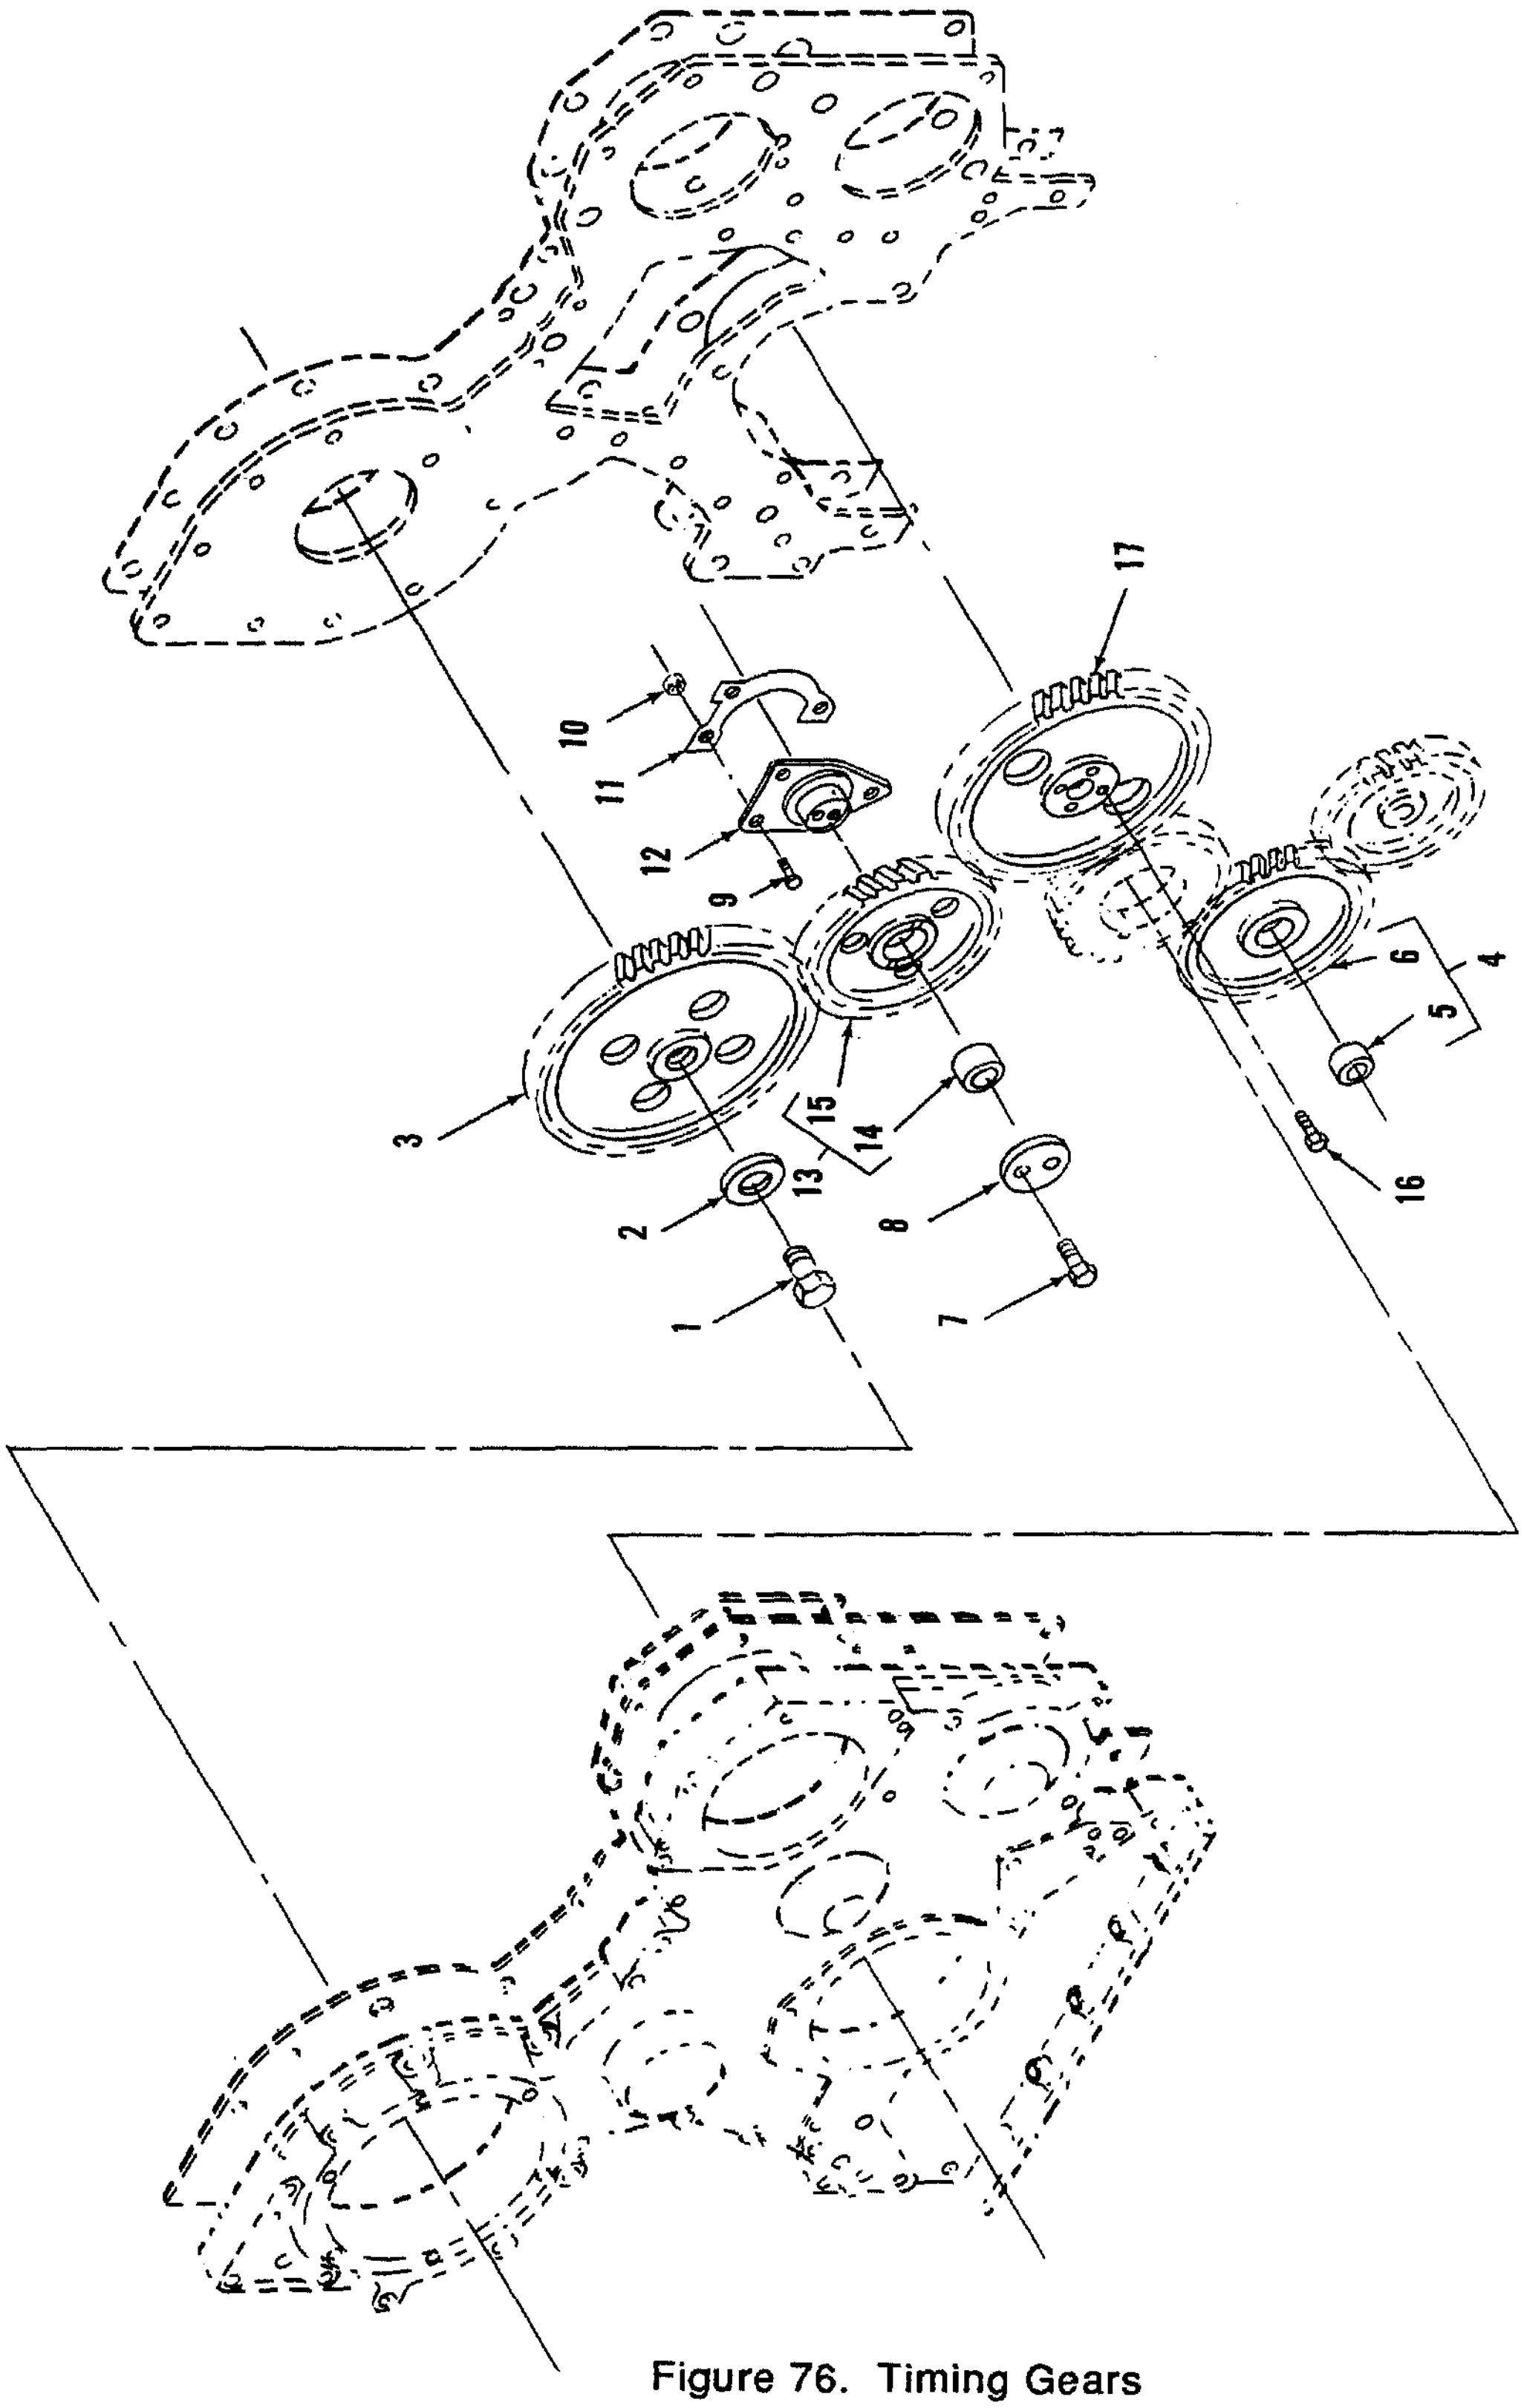
17
10
11
12
9
3
15
14
13
2
8
1
7
16
6
4
5

Figure 76. Timing Gears

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 76 | | | | | | | | | TIMING GEARS | | | | |
| 76 | 1 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-263-7303 | BOLT, HEX HEAD<br>S1603 | 11083 | EA | 1 | 1 |
| 76 | 2 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-01-023-9757 | WASHER<br>4N3371 | 11083 | EA | 1 | 1 |
| 76 | 3 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 3020-01-126-8956 | GEAR<br>7N3536 | 11083 | EA | 1 | 1 |
| 76 | 4 | AHH | AFF | AHH | AHH | | | | GEAR ASSY<br>7N4722 | 11083 | EA | 1 | 1 |
| 76 | 5 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 3120-01-166-2505 | BEARING<br>2P1168 | 11083 | EA | 1 | 1 |
| 76 | 6 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 3020-01-126-0375 | GEAR<br>7N4716 | 11083 | | EA | 1 1 |
| 76 | 7 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-226-4827 | BOLT, HEX HEAD<br>S1618 | 11083 | EA | 2 | 6 |
| 76 | 8 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 2815-01-125-5535 | PLATE<br>8N4960 | 11083 | EA | 1 | 1 |
| 76 | 9 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-263-7301 | BOLT, HEX HEAD<br>L1351 | 11083 | EA | 2 | 14 |
| 76 | 10 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-975-2075 | NUT<br>5B9079 | 11083 | EA | 1 | 1 |
| 76 | 11 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5340-00-449-2612 | LOCK, P/O KIT P/N 5P9568<br>5S7611 | 11083 | EA | 1 | 1 |
| 76 | 12 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .005 | 3040-01-125-5536 | SHAFT<br>8N4959 | 11083 | EA | 1 | 1 |
| 76 | 13 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 3020-01-127-5195 | GEAR ASSY<br>7N4791 | 11083 | EA | 1 | 1 |
| 76 | 14 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 3120-00-439-4878 | BEARING<br>5S7630 | 11083 | EA | 1 | 1 |
| 76 | 15 | XA | XA | XA | XA | | | | GEAR<br>7N3524 | 11083 | EA | 1 | 1 |
| 76 | 16 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-426-2939 | BOLT, HEX HEAD<br>S1748 | 11083 | EA | 4 | 4 |
| 76 | 17 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 3020-01-126-5409 | GEAR<br>7N3515 | 11083 | EA | 1 | 1 |

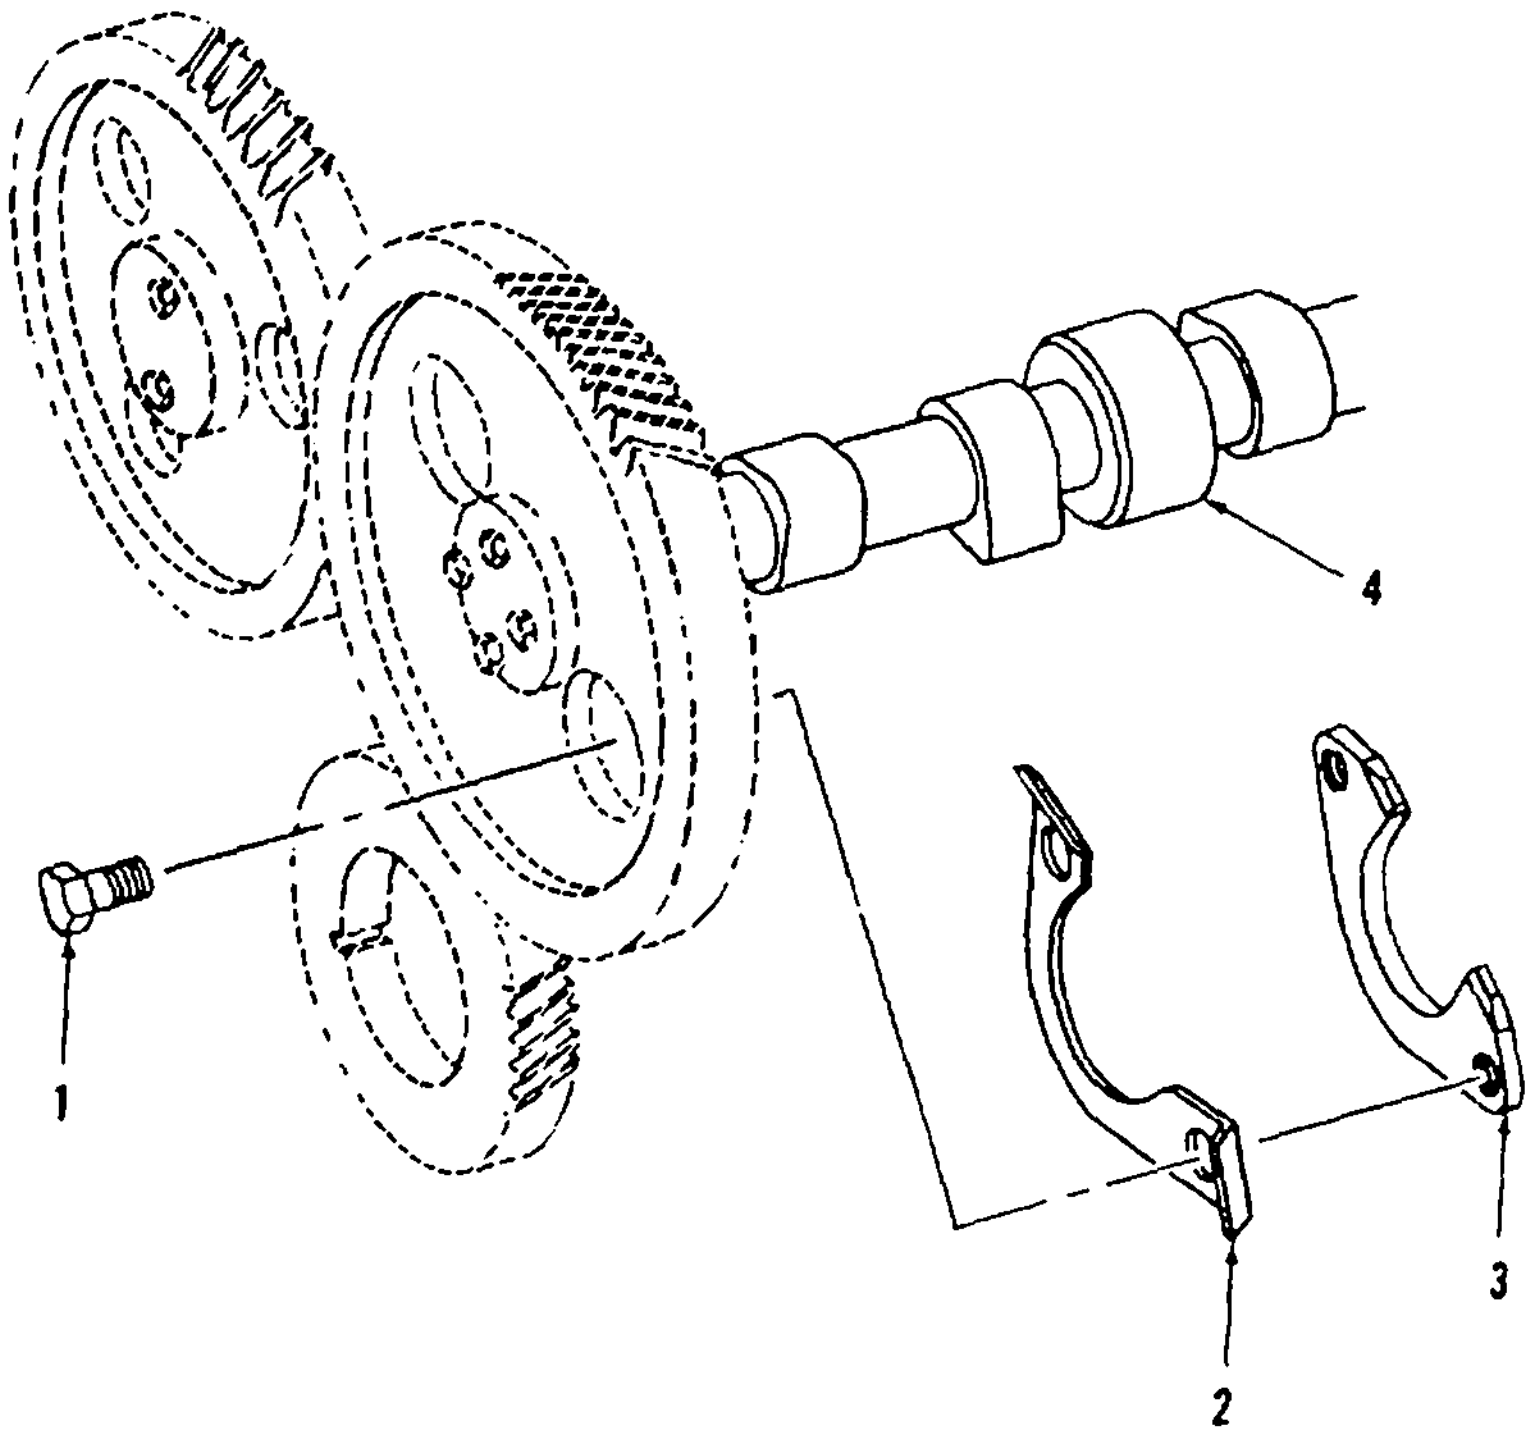

Figure 77. Camshaft

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO. | (1) ILLUSTRATION b ITEM NO. | (2) SMR CODE a ARMY | (2) SMR CODE b AIR FORCE | (2) SMR CODE c NAVY | (2) SMR CODE d USMC | (3) USMC a SSI | (3) USMC b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | (5) DESCRIPTION USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 77 | | | | | | | | | CAMSHAFT | | | | |
| 77 | 1 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-115-9526 | SCREW, CAP<br>MS18154-58 | 96906 | EA | 2 | 9 |
| 77 | 2 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5310-00-557-9391 | LOCK, P/O KIT P/N 519568<br>8S1491 | 11083 | EA | 1 | 1 |
| 77 | 3 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-498-2967 | WASHER, THRUST<br>7S2204 | 11083 | EA | 1 | 1 |
| 77 | 4 | PBHZZ | PAFFF | PAHZZ | PAHZZ | D | .009 | 2815-00-450-9344 | CAMSHAFT<br>8N3981 | 11083 | EA | 1 | 1 |

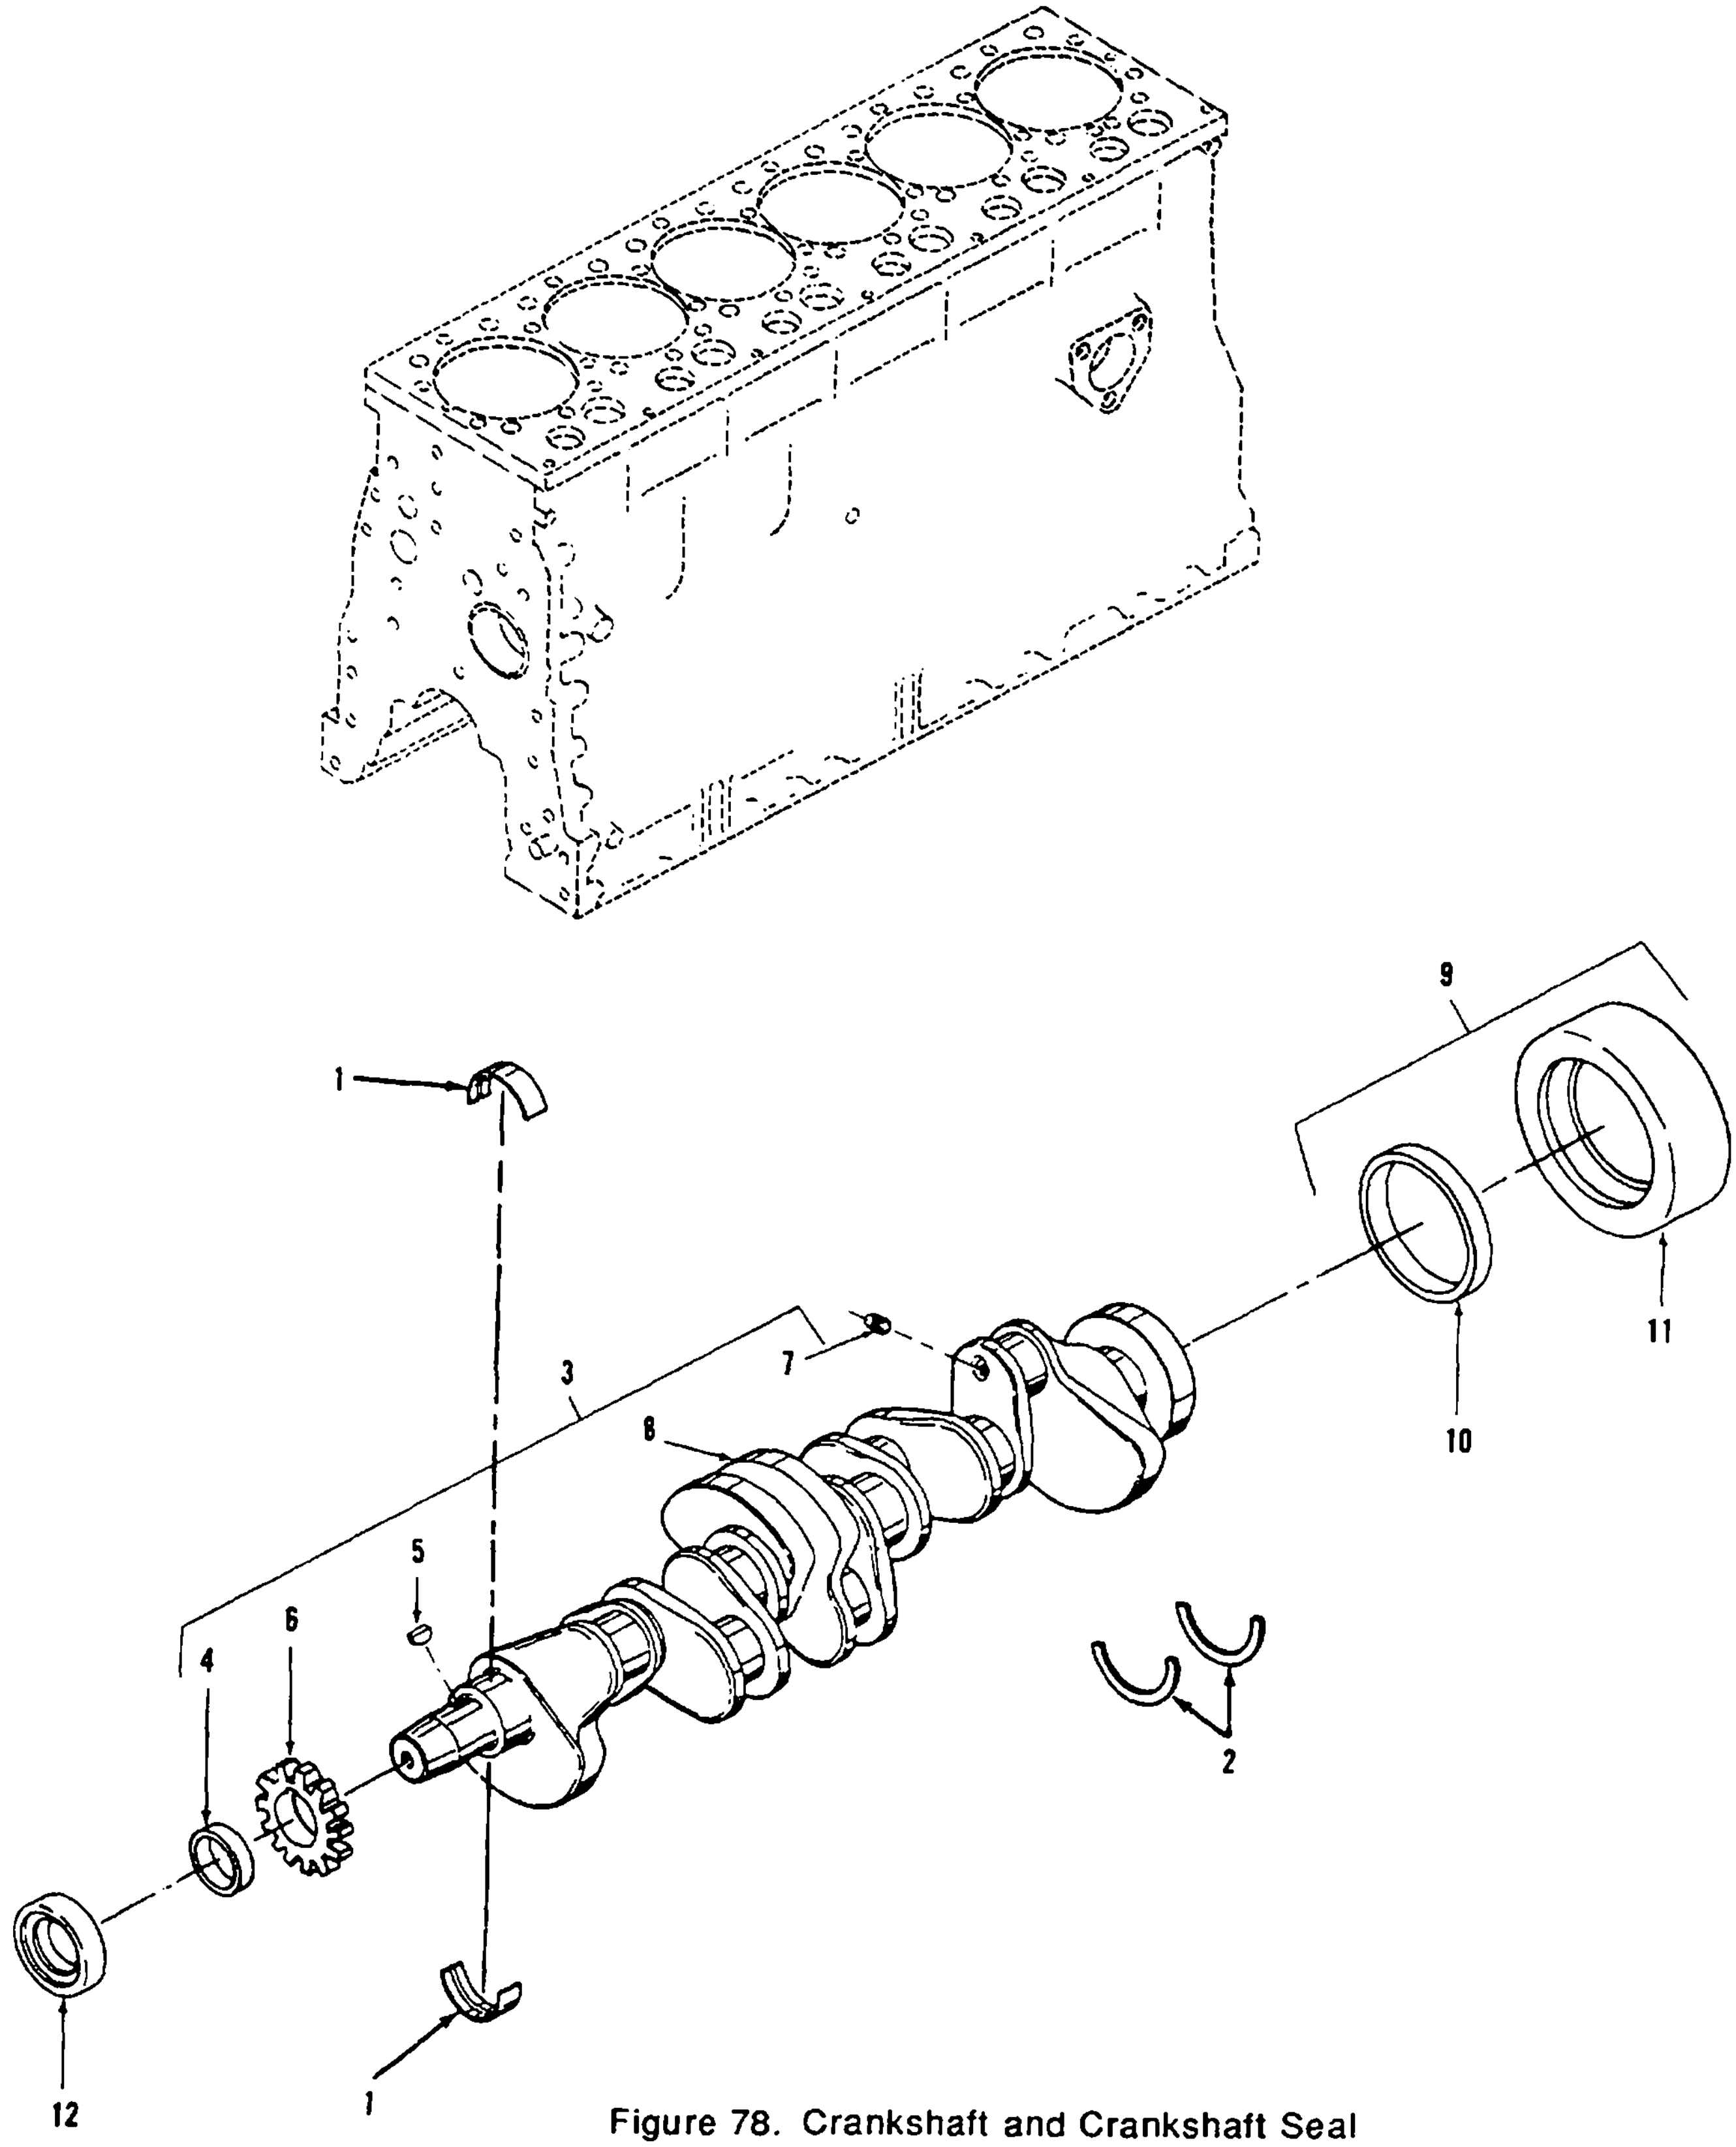
1
9
11
10
3
7
8
5
6
4
2
12
1

Figure 78. Crankshaft and Crankshaft Seal

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 78 | | | | | | | | | CRANKSHAFT AND CRANKSHAFT SEAL | | | | |
| 78 | 1 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 3120-01-130-6158 | BEARING<br>8N8224 11083 | | EA | 7 | 7 |
| 78 | 2 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 2815-01-119-2241 | PLATE<br>7N9342 11083 | | EA | 2 | 2 |
| 78 | 3 | PAHHH | PAFFF | PAHZZ | PAHZZ | D | .007 | 2815-00-148-6705 | CRANKSHAFT ASSY<br>4N7693 11083 | | EA | 1 | 1 |
| 78 | 4 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 3120-00-394-4276 | SLEEVE<br>2P3859 11083 | | EA | 1 | 2 |
| 78 | 5 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5315-00-921-7156 | KEY<br>5H2671 11083 | | EA | 1 | 2 |
| 78 | 6 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 3020-01-126-9232 | GEAR<br>7N4525 11083 | | EA | 1 | 2 |
| 78 | 7 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 4730-00-044-4688 | PLUG<br>9F2247 11083 | | EA | 6 | 7 |
| 78 | 8 | XA | XA | XA | XA | | | | CRANKSHAFT<br>4N7696 11083 | | EA | 1 | 1 |
| 78 | 9 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5330-01-128-6854 | SEAL CRANKSHAFT<br>1N3216 11083 | | EA | 1 | 1 |
| 78 | 10 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 3120-00-397-4451 | SLEEVE<br>2P3858 11083 | | EA | 1 | 1 |
| 78 | 11 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5330-00-034-1908 | SEAL, P/O KIT P/N 519571<br>9S3111 11083 | | EA | 1 | 1 |
| 78 | 12 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .030 | 5330-00-036-6825 | SEAL, P/O KIT P/N 519568<br>5S6296 11083 | | EA | 1 | 1 |

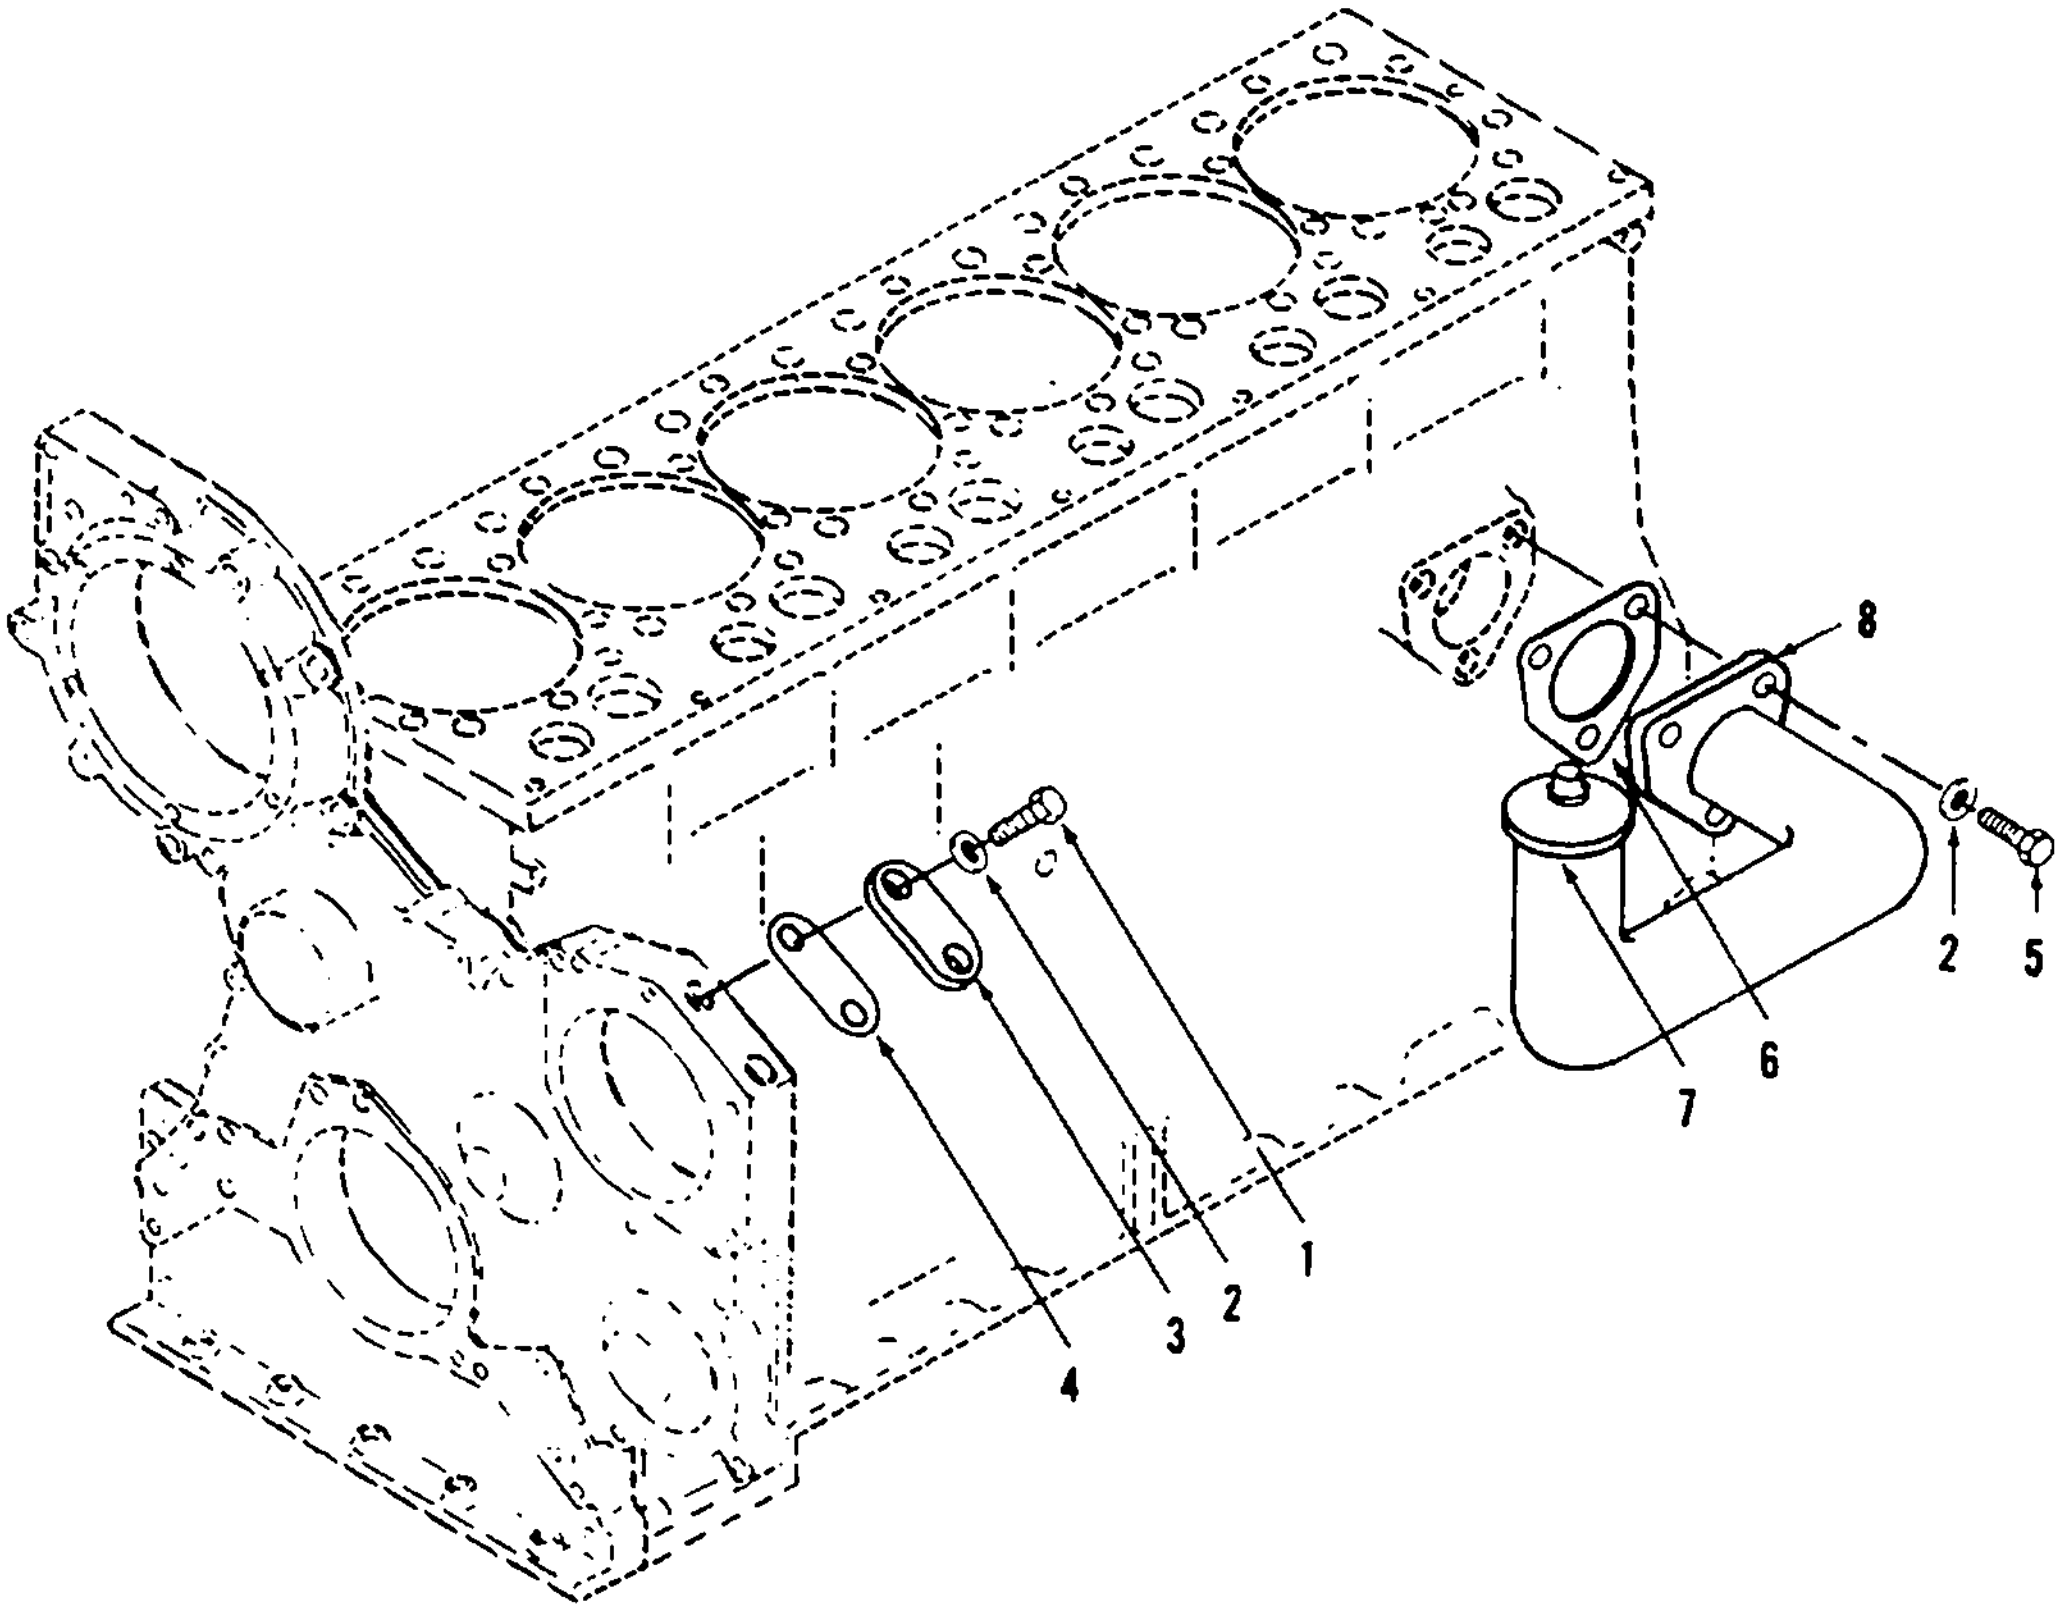

Figure 79. Oil Filler and Related Parts

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 79 | | | | | | | | | OIL FILLER AND RELATED PARTS | | | | |
| 79 | 1 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-263-7301 | BOLT, HEX HEAD<br>L1351 11083 | | EA | 2 | 14 |
| 79 | 2 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-117-4788 | WASHER, LOCK<br>5M2894 11083 | | EA | 5 | 71 |
| 79 | 3 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 5340-01-150-9810 | COVER<br>4N4526 11083 | | EA | 1 | 1 |
| 79 | 4 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-01-067-5727 | GASKET, P/O KIT P/N 519568<br>2P2720 11083 | | EA | 1 | 1 |
| 79 | 5 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-260-4508 | BOLT, HEX HEAD<br>S1594 11083 | | EA | 3 | 24 |
| 79 | 6 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-00-613-7263 | GASKET, P/O KIT P/N 5P8767<br>5S8055 11083 | | EA | 1 | 1 |
| 79 | 7 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .005 | 2940-00-725-3360 | CAP ASSY<br>5L2952 11083<br>4165-3 08244 | | EA | 1 | 1 |
| 79 | 8 | XB | XB | XB | XB | | | | FILLER NECK ASSY<br>71-4442 30554 | | EA | 1 | 1 |
| | | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-117-4893 | KIT, GASKET<br>5P9568 11083 | | EA | 1 | |
| 62 | 19 | | | | | | | | SEAL | | EA | 1 | |
| 62 | 20 | | | | | | | | SEAL | | EA | 1 | |
| 72 | 4 | | | | | | | | GASKET | | EA | 1 | |
| 72 | 9 | | | | | | | | GASKET | | EA | 1 | |
| 72 | 11 | | | | | | | | SEAL | | EA | 1 | |
| 74 | 7 | | | | | | | | LOCKPLATE AND NUT | | EA | 1 | |
| 74 | 8 | | | | | | | | LOCKPLATE AND NUT | | EA | 1 | |
| 75 | 4 | | | | | | | | GASKET | | EA | 1 | |
| 75 | 8 | | | | | | | | GASKET | | EA | 1 | |
| 76 | 11 | | | | | | | | LOCKPLATE AND NUT | | EA | 1 | |
| 77 | 2 | | | | | | | | LOCKPLATE AND NUT | | EA | 1 | |
| 78 | 12 | | | | | | | | SEAL | | EA | 1 | |
| 79 | 4 | | | | | | | | GASKET | | EA | 1 | |
| | | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-112-7347 | KIT, GASKET<br>5P8767 11083 | | EA | 1 | |
| 67 | 17 | | | | | | | | GASKET | | EA | 1 | |
| 68 | 2 | | | | | | | | LOCK | | EA | 2 | |
| 68 | 4 | | | | | | | | LOCKING PLATE | | EA | 1 | |
| 68 | 6 | | | | | | | | GASKET | | EA | 1 | |
| 69 | 4 | | | | | | | | LOCKING PLATE | | EA | 2 | |
| 69 | 7 | | | | | | | | GASKET | | EA | 1 | |
| 79 | 6 | | | | | | | | GASKET | | EA | 1 | |

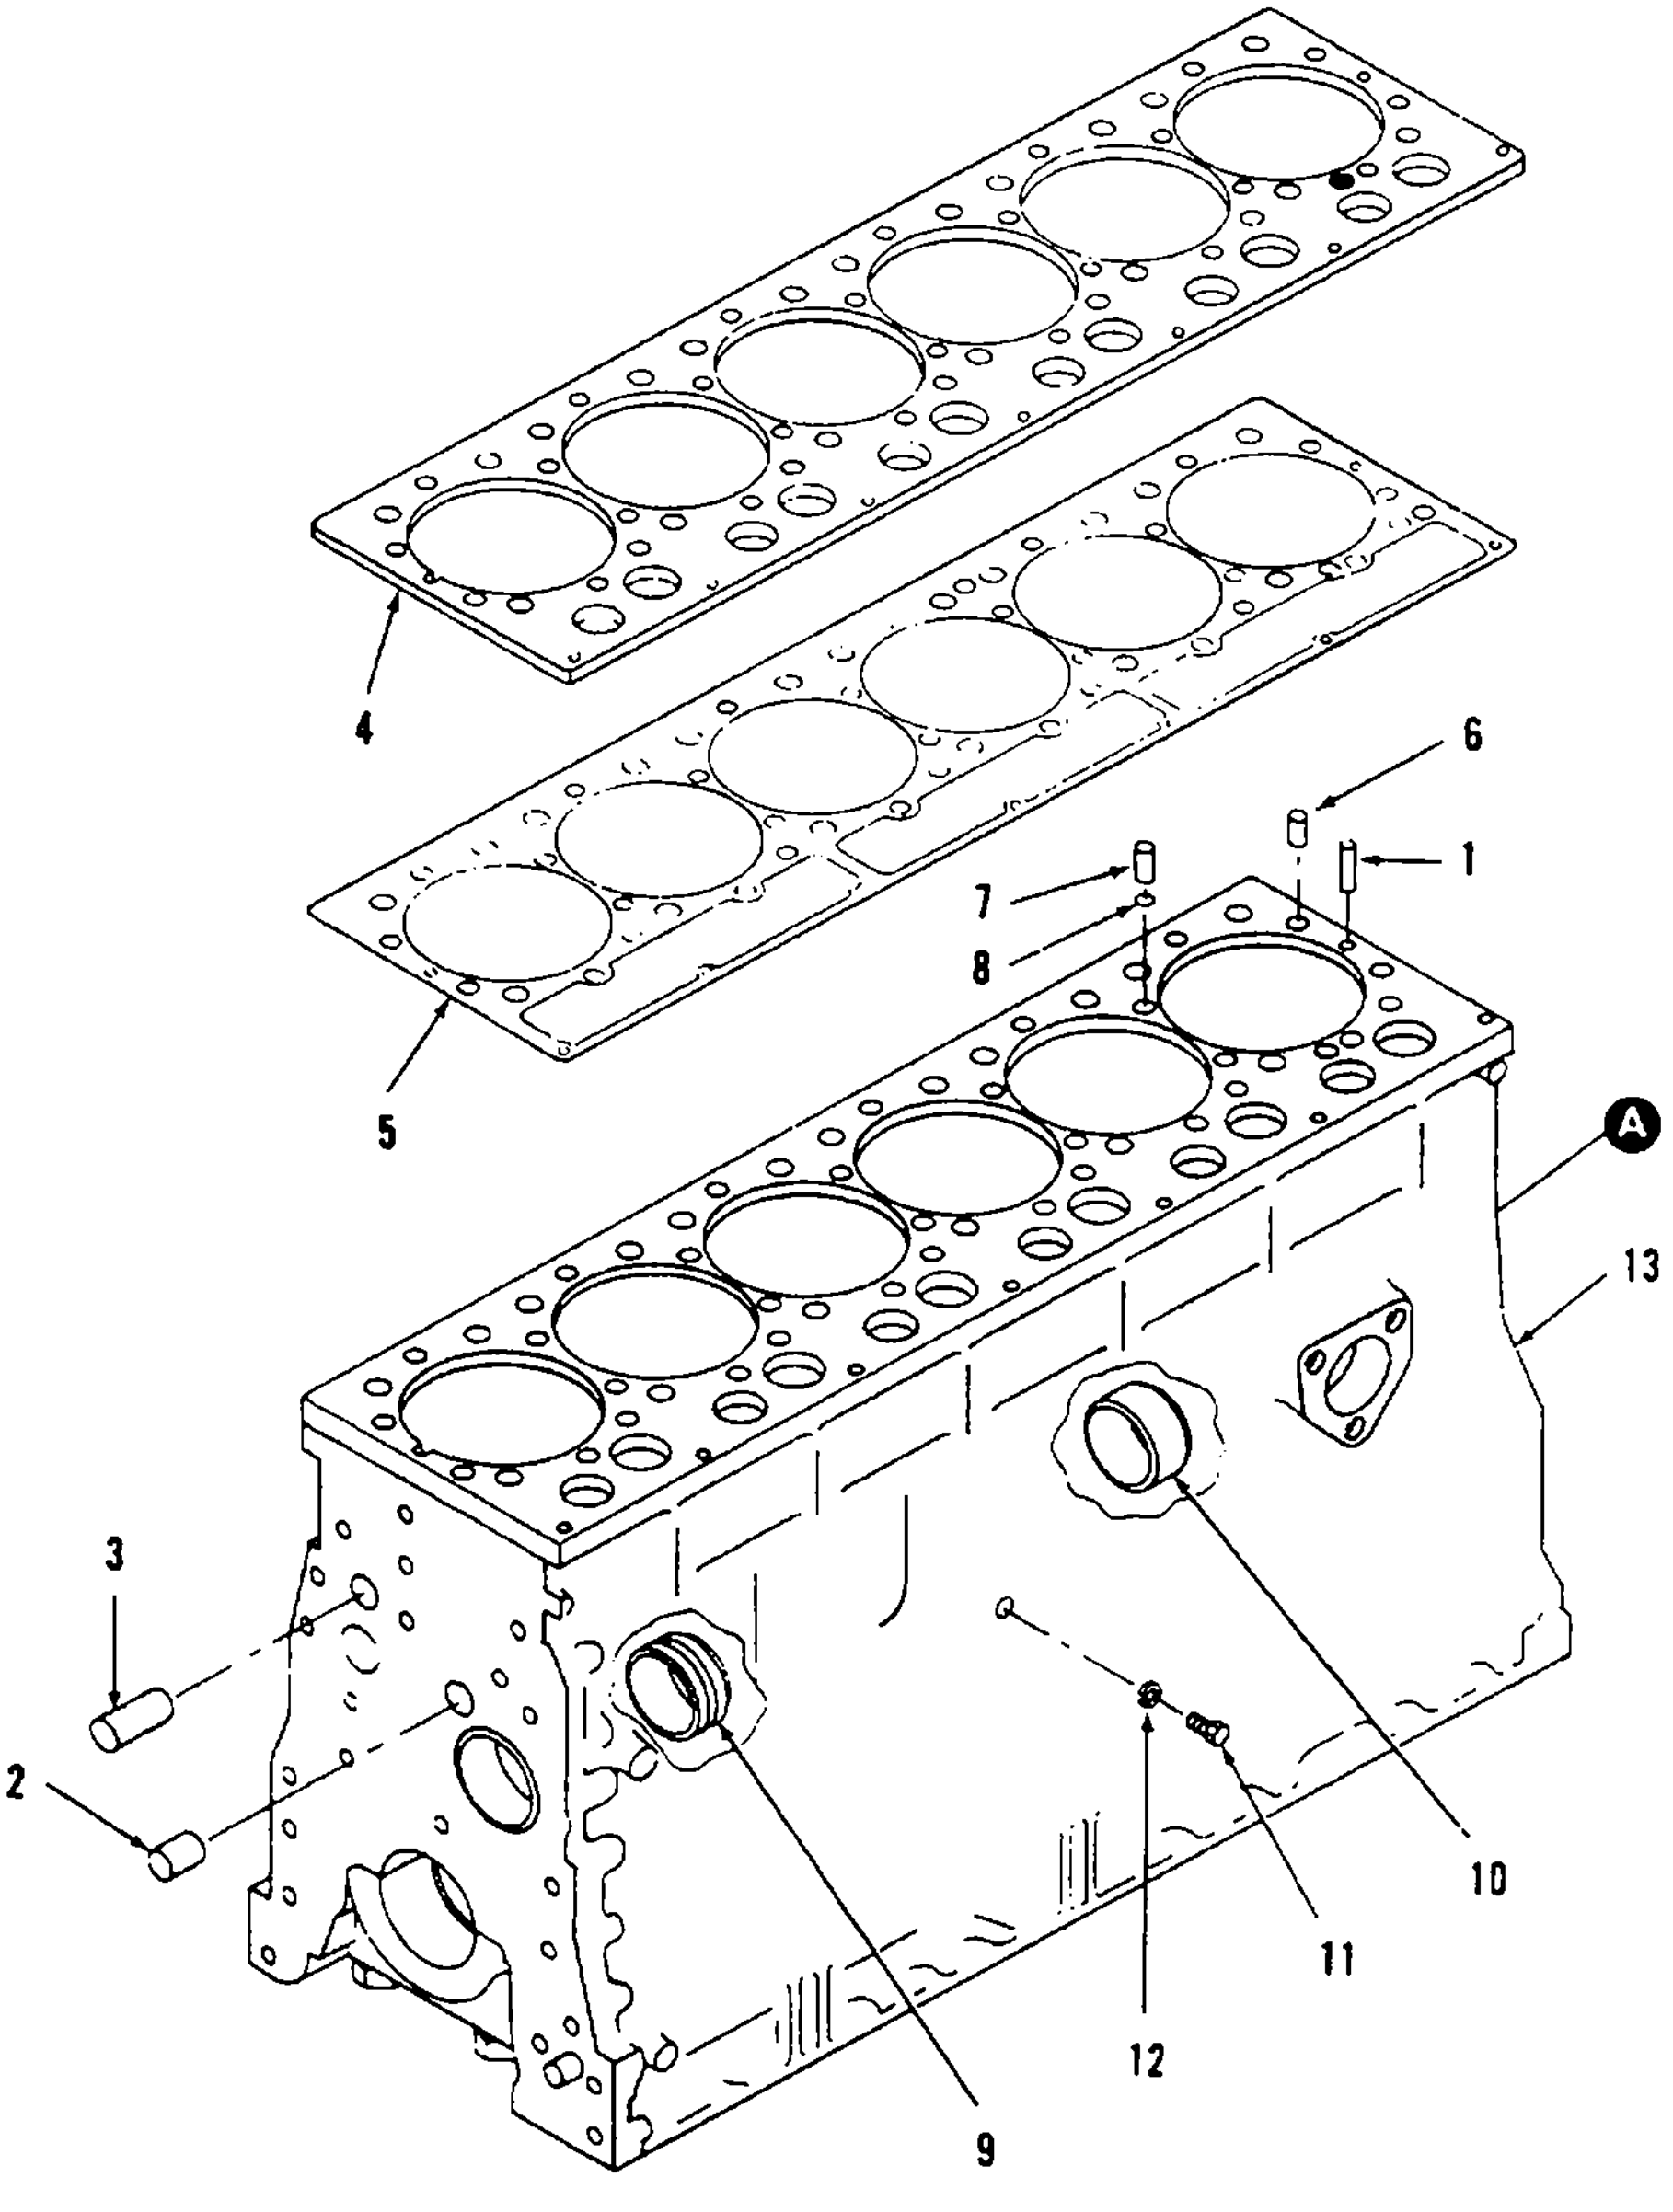
6
1
7
8
4
5
A
13
3
2
10
11
12
9

Figure 80. Cylinder Block (Sheet 1 of 2)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 10 - ENGINE | | | | |
| 80 | | | | | | | | | CYLINDER BLOCK | | | | |
| 80 | 1 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | | 5315-01-132-1188 | DOWEL<br>8K1207 11083 | | EA | 2 | 2 |
| 80 | 2 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | | 5315-00-457-6897 | DOWEL<br>8B6349 11083 | | EA | 2 | 2 |
| 80 | 3 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5307-00-419-4067 | STUD<br>TL01 11083 | | EA | 1 | 1 |
| 80 | 4 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | | 2815-01-127-2912 | PLATE<br>7N7998 11083 | | EA | 1 | 1 |
| 80 | 5 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-01-127-8568 | GASKET<br>7N7997 11083 | | EA | 1 | 1 |
| 80 | 6 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | | 5315-01-107-4226 | DOWEL<br>5B7652 11083 | | EA | 2 | 2 |
| 80 | 7 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | | 2990-01-103-6817 | DOWEL<br>1S9540 11083 | | EA | 1 | 1 |
| 80 | 8 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-104-4371 | SEAL<br>3S5496 11083 | | EA | 1 | 2 |
| 80 | 9 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3120-01-128-1114 | BEARING<br>8N4110 11083 | | EA | 1 | 1 |
| 80 | 10 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .050 | 3120-00-893-8317 | BEARING<br>7M4046 11083 | | EA | 4 | 4 |
| 80 | 11 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5365-00-938-5568 | PLUG<br>8M9307 11083 | | EA | 1 | 1 |
| 80 | 12 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-362-7988 | WASHER<br>6F7062 11083 | | EA | 1 | 1 |
| 80 | 13 | XB | XB | XB | XB | | | | CYLINDER BLOCK ASSY<br>8N4775 11083 | | EA | 1 | 1 |
| 80 | 14 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5306-00-450-4026 | BOLT, MACHINE<br>7S3224 11083 | | EA | 14 | 26 |
| 80 | 15 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | D | .010 | 5310-00-431-7244 | WASHER<br>2S5658 11083 | | EA | 14 | 26 |
| 80 | 16 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 3130-01-129-2163 | CAP<br>6N8001 11083 | | EA | 6 | 6 |
| 80 | 17 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | | | 3130-01-148-5959 | CAP<br>6N8002 11083 | | EA | 1 | 1 |
| 80 | 18 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-549-7691 | BAND<br>9L5854 11083 | | EA | 6 | 6 |
| 80 | 19 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .030 | 5330-00-494-2764 | SEAL<br>5S6670 11083 | | EA | 18 | 18 |
| 80 | 20 | PAHZZ | PAFZZ | PAHZZ | PAHZZ | | .006 | 2815-00-024-4596 | LINER<br>2P8889 11083 | | EA | 6 | 6 |
| 80 | 21 | XA | XA | XA | XA | | | | BLOCK, CYLINDER<br>8N4776 11083 | | EA | 1 | 1 |

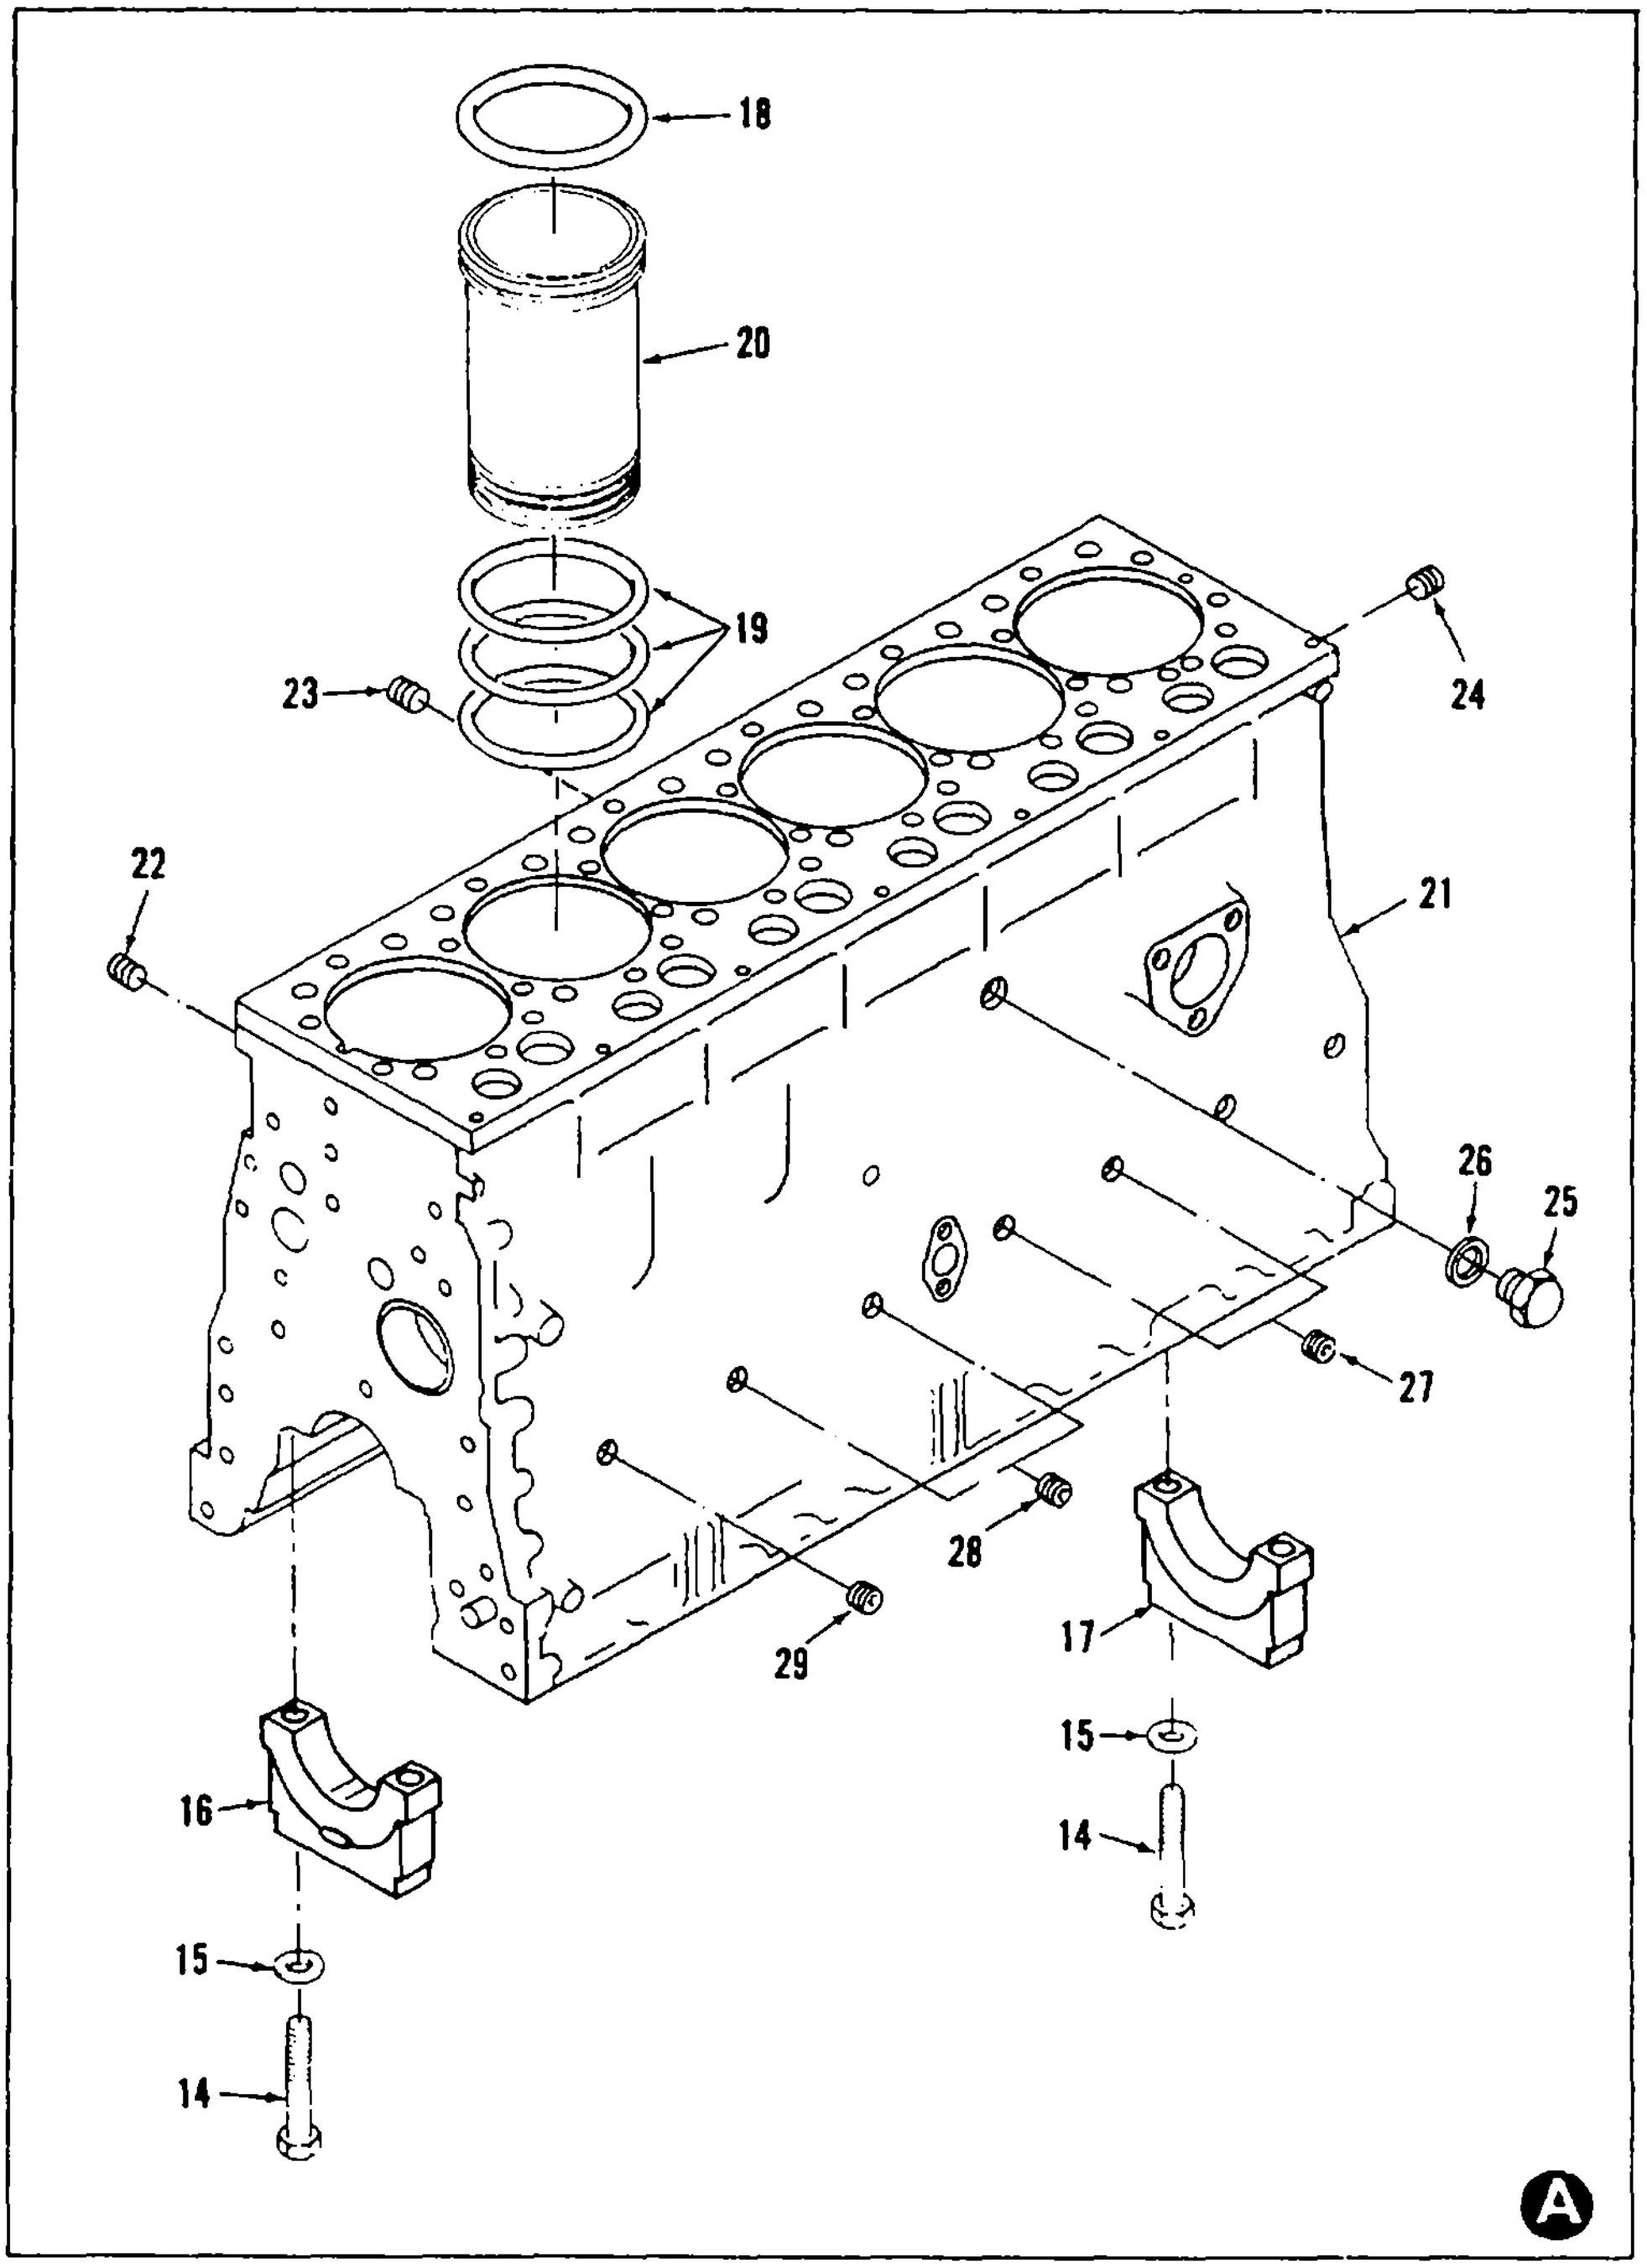
18
20
19
23
24
22
21
26
25
27
28
29
17
16
15
14
15
14
A

Figure 80. Cylinder Block (Sheet 2 of 2)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 10 - ENGINE - CONTINUED | | | | |
| 80 | | | | | | | | | CYLINDER BLOCK - CONTINUED | | | | |
| 80 | 22 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .008 | 4730-00-924-7886 | PLUG<br>5M6214 | 11083 | EA | 1 | 6 |
| 80 | 23 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .008 | 5340-00-417-2920 | PLUG<br>4B5387 | 11083 | EA | 1 | 2 |
| 80 | 24 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .008 | 4730-00-010-3874 | PLUG<br>2B858 | 11083 | EA | 1 | 4 |
| 80 | 25 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .008 | 5365-00-938-5568 | PLUG<br>8M9307 | 11083 | EA | 1 | 1 |
| 80 | 26 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .010 | 5310-00-362-7988 | WASHER<br>6F7062 | 11083 | EA | 1 | 1 |
| 80 | 27 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .008 | 4730-00-460-6725 | PLUG<br>3J5389<br>70920416 | 11083<br>89928 | EA | 2 | 1 |
| 80 | 28 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .008 | 4730-00-287-3279 | PLUG<br>5M6213 | 11083 | EA | 2 | 9 |
| 80 | 29 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | | .008 | 4730-00-042-8988 | PLUG<br>7H3171 | 11083 | EA | 1 | 1 |

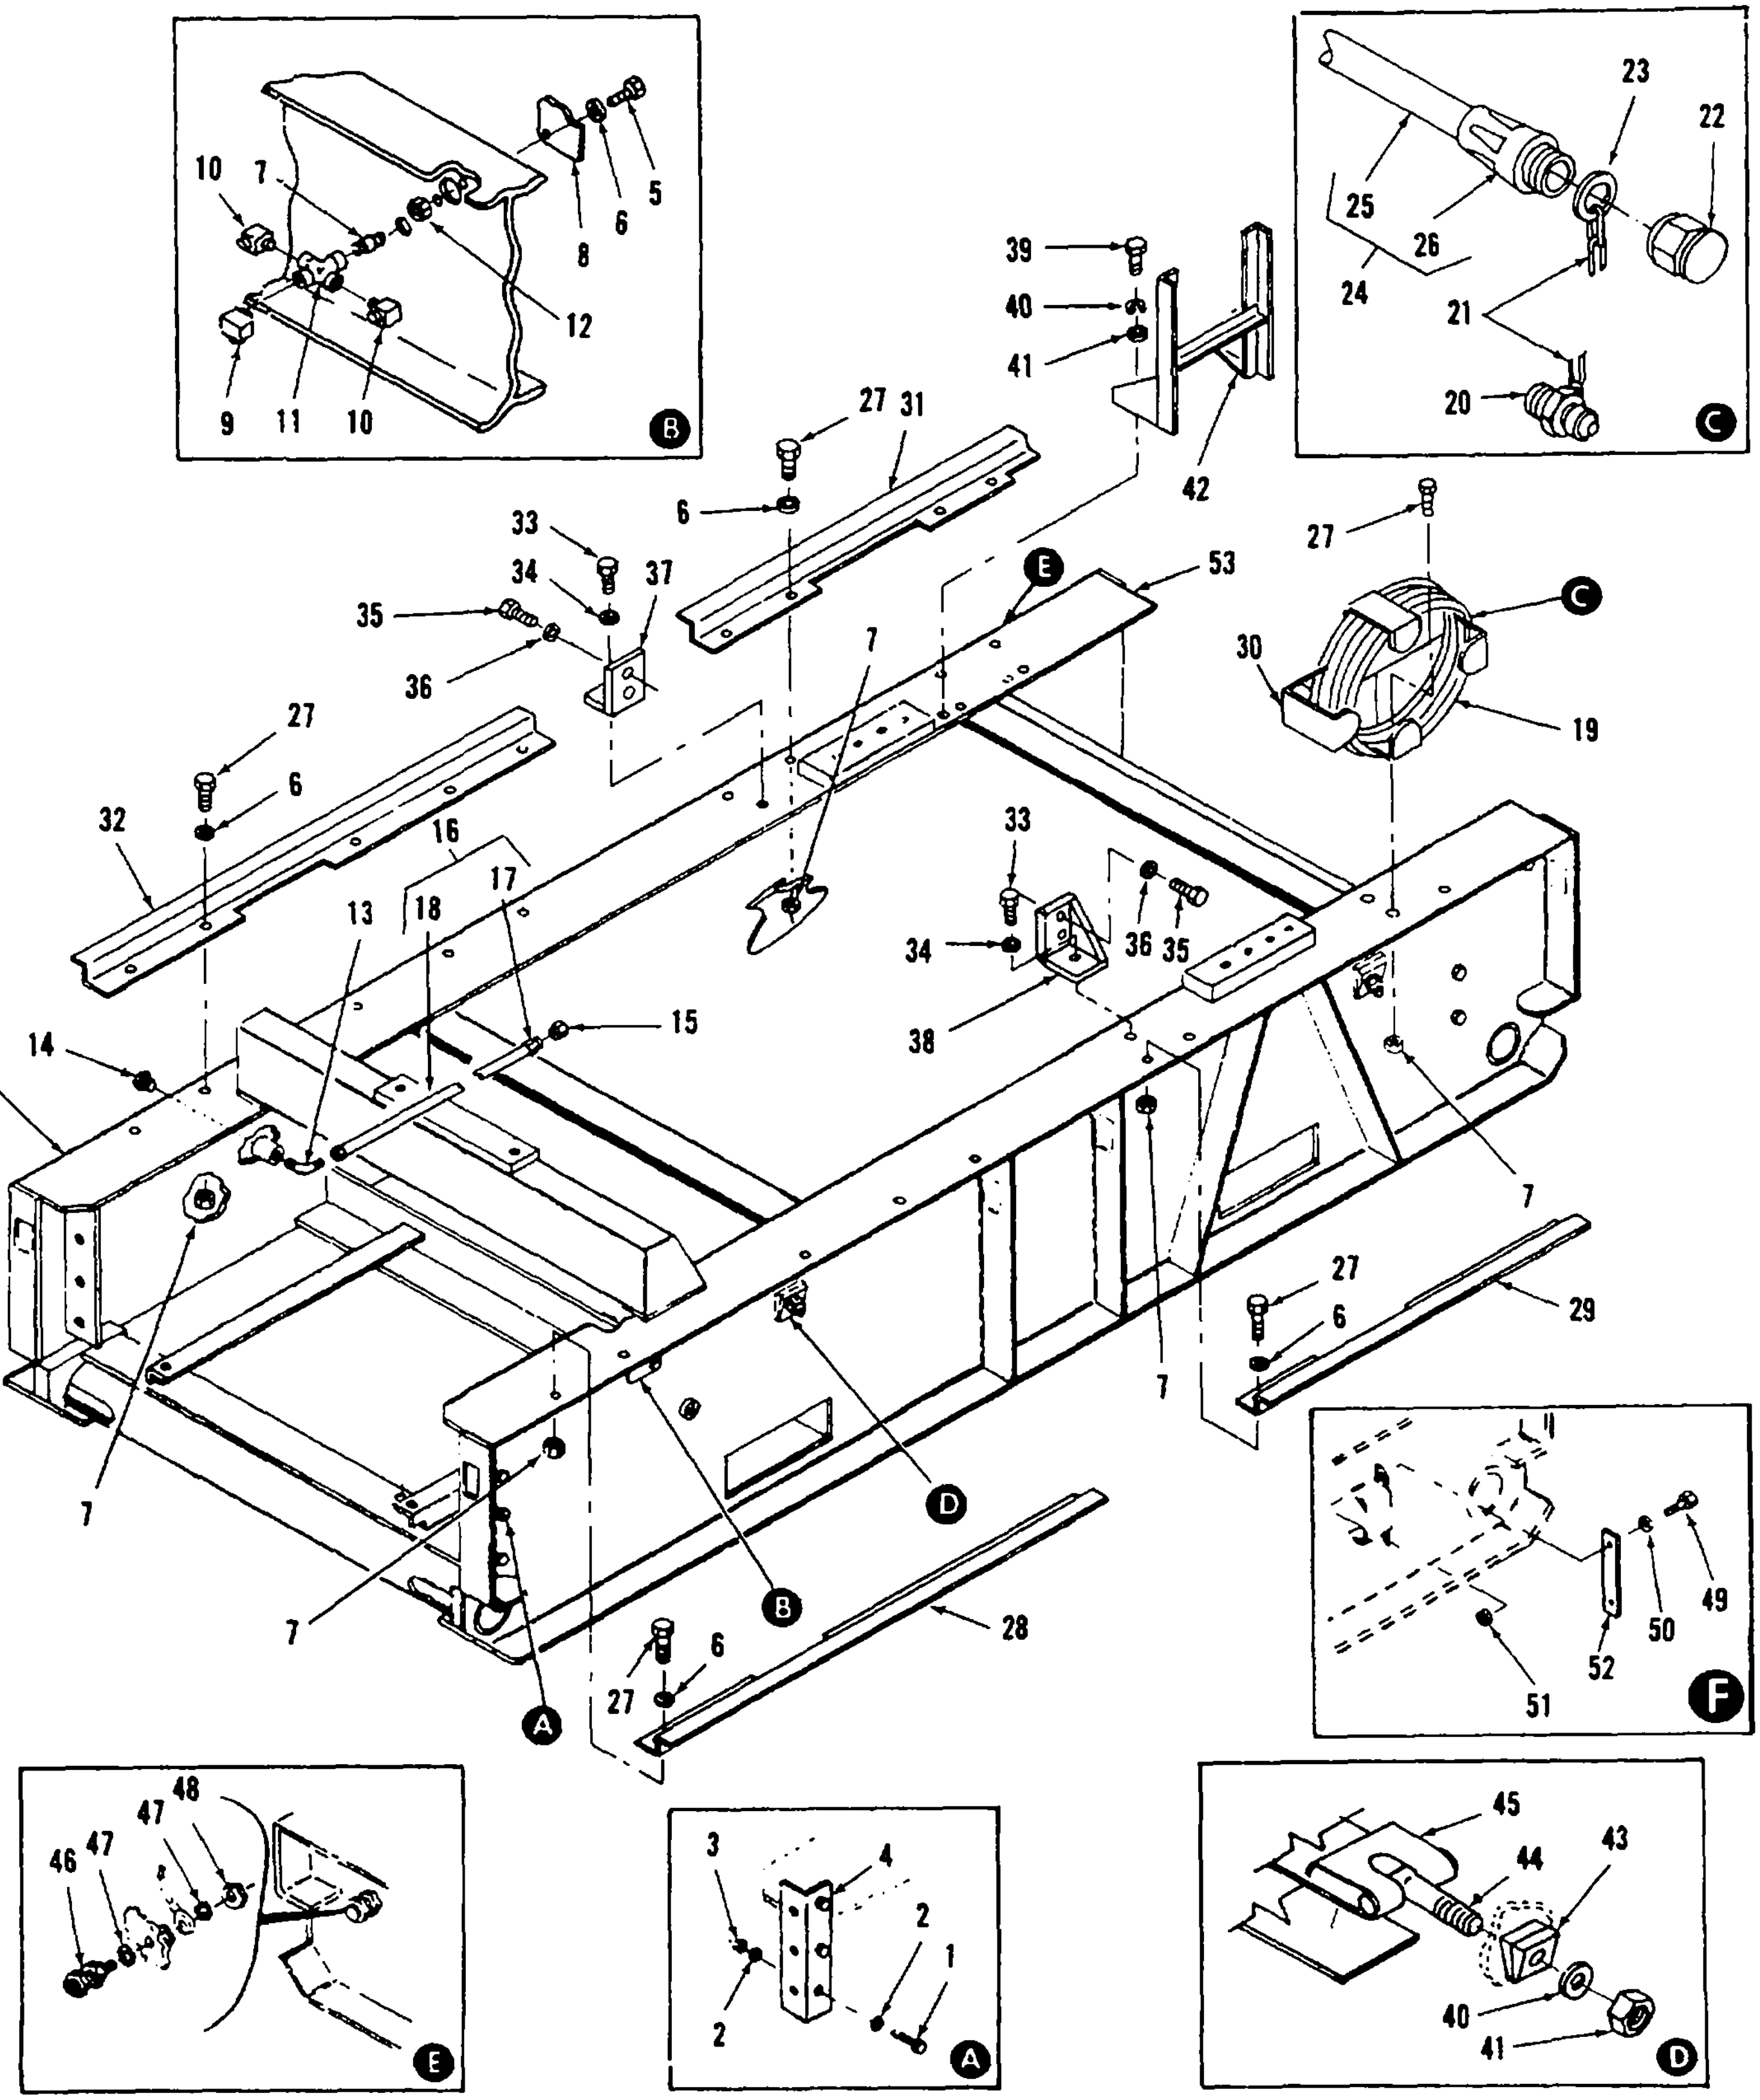
10
7
8
6
5
12
9
11
10
B
25
26
23
22
24
21
20
C
39
40
41
42
27
31
6
33
34
37
35
36
E
53
7
27
30
C
19
27
6
32
16
17
13
18
15
33
36
35
34
38
14
F
7
7
27
6
29
7
7
D
B
28
27
6
A
52
51
50
49
F
48
47
47
46
E
3
4
2
1
2
A
45
44
43
40
41
D

Figure 81. Skid Base

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO. | b ITEM NO. | (2) SMR CODE a ARMY | b AIR FORCE | c NAVY | d USMC | (3) USMC a SSI | b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 11 - SUPPORT SYSTEM | | | | |
| 81 | | | | | | | | | SKID BASE | | | | |
| 81 | 1 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-225-8499 | SCREW, HEX HEAD<br>MS90725-34 | 96906 | EA | 6 | 20 |
| 81 | 2 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-181-4219 | WASHER, FLAT<br>MS27183-12 | 96906 | EA | 12 | 62 |
| 81 | 3 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-245-3424 | NUT, SELF-LOCKING<br>MS17829-5C | 96906 | EA | 6 | 27 |
| 81 | 4 | MFO | MFO | MFO | MFO | | | | BRACKET<br>70-4363 | 30554 | EA | 2 | 2 |
| 81 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-225-3840 | SCREW, HEX HEAD<br>MS90725-7 | 96906 | EA | 2 | 18 |
| 81 | 6 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER, FLAT<br>MS27183-10 | 96906 | EA | 10 | 252 |
| 81 | 7 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT, SELF-LOCKING<br>MS17829-4C | 96906 | EA | 2 | 157 |
| 81 | 8 | MFO | MFO | MFO | MFO | | | | PLATE, HTR EXH COV<br>71-4417 | 30554 | EA | 1 | 1 |
| 81 | 9 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-207-9278 | ELBOW, PIPE TO HOSE<br>23916-8-6<br>71-4821 | 99103<br>30554 | EA | 1 | 1 |
| 81 | 10 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-906-0851 | ELBOW, PIPE TO HOSE<br>23916-6<br>71-4818 | 99103<br>30554 | EA | 2 | 2 |
| 81 | 11 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-949-8667 | CROSS, FEMALE PIPE<br>02K02-6<br>71-4814 | 30757<br>30554 | EA | 1 | 1 |
| 81 | 12 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4770-00-019-2067 | NIPPLE, CLOSE<br>MS51953-49 | 96906 | EA | 1 | 1 |
| 81 | 13 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-231-3939 | ELBOW<br>MS20823-16-12 | 96906 | EA | 1 | 1 |
| 81 | 14 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 4730-01-005-5806 | PLUG<br>MS20913-6 | 96906 | EA | 1 | 1 |
| 81 | 15 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-842-1139 | FITTING, END<br>MS24587-16 | 96906 | EA | 1 | 2 |
| 81 | 16 | MFO | MFO | MFO | MFO | | | 4720-00-640-0374 | HOSE<br>MS28741-16-0190 | 96906 | EA | 1 | 1 |
| 81 | 17 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-842-1139 | FITTING<br>MS24587-16 | 96906 | EA | 2 | 2 |
| 81 | 18 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .070 | 4720-00-278-1323 | HOSE<br>MIL-H-8924-16 | 81349 | FT | 2 | 2 |
| 81 | 19 | AFO | AFO | AFO | AFO | | | | LINE, FUEL, AUX.<br>69-668 | 30554 | EA | 1 | 1 |
| 81 | 20 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-040-7450 | UNION<br>202712-5-5B<br>5-LHBTX-B | 01276<br>30780 | EA | 1 | 1 |
| 81 | 21 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .005 | 4010-00-554-8661 | CHAIN, WELDLESS<br>RRC271TY2CL6 | 81349 | FT | 1 | 1 |
| 81 | 22 | PAFZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5340-01-186-2049 | CAP, PLUG<br>MS5501/8-F-6 | 81349 | EA | 2 | 2 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 11 - SUPPORT SYSTEM - CONTINUED | | | | |
| 81 | | | | | | | | | SKID BASE - CONTINUED | | | | |
| 81 | 23 | XA | XA | XA | XA | | | | RING<br>69-668-04 | 30554 | EA | 1 | 1 |
| 81 | 24 | AFF | AFF | AFF | AFF | | | | HOSE ASSY<br>MS28741-5-2992 | 96906 | EA | 1 | 1 |
| 81 | 25 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .070 | 4720-00-289-9197 | HOSE<br>MIL-H-8294-5 | 81349 | FT | 25 | 25 |
| 81 | 26 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-842-2201 | FITTING<br>MS24587-5 | 96906 | EA | 2 | 2 |
| 81 | 27 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-225-3839 | SCREW, HEX HEAD<br>MS90725-8 | 96906 | EA | 40 | 40 |
| 81 | 28 | XB | XB | XB | XB | | | | DOOR SEAL, BRACKET, RH<br>71-4457 | 30554 | EA | 1 | 1 |
| 81 | 29 | XB | XB | XB | XB | | | | DOOR SEAL, BRACKET, RH<br>71-4456 | 30554 | EA | 1 | 1 |
| 81 | 30 | XB | XB | XB | XB | | | | MOUNT, AUX, FUEL HOSE<br>71-4740 | 30554 | EA | 1 | 1 |
| 81 | 31 | XB | XB | XB | XB | | | | DOOR SEAL, BRACKET, LH<br>71-4454 | 30554 | EA | 1 | 1 |
| 81 | 32 | XB | XB | XB | XB | | | | DOOR SEAL, BRACKET, LH<br>71-4455 | 30554 | EA | 1 | 1 |
| 81 | 33 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-939-9204 | SCREW, HEX HEAD<br>MS90725-187 | 96906 | EA | 2 | 2 |
| 81 | 34 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-838-1702 | NUT, HEX<br>MS35691-57 | 96906 | EA | 2 | 3 |
| 81 | 35 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-724-5911 | SCREW<br>MS90725-163 | 96906 | EA | 4 | 14 |
| 81 | 36 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-820-6653 | WASHER, LOCK<br>MS35338-50 | 96906 | EA | 4 | 11 |
| 81 | 37 | XB | XB | XB | XB | | | | SUPPORT, FLYWHEEL HSG<br>71-4622-01 | 30554 | EA | 1 | 1 |
| 81 | 38 | XB | XB | XB | XB | | | | SUPPORT, FLYWHEEL HSG<br>71-4622-02 | 30554 | EA | 1 | 1 |
| 81 | 39 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-269-3213 | SCREW<br>MS90725-62 | 96906 | EA | 4 | 17 |
| 81 | 40 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-080-6004 | WASHER<br>MS27183-14 | 96906 | EA | 6 | 43 |
| 81 | 41 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8790 | NUT<br>MS17829-6C | 96906 | EA | 6 | 25 |
| 81 | 42 | XB | XB | XB | XB | | | | MOUNT, TERMINAL BD.<br>70-4354 | 30554 | EA | 1 | 1 |
| 81 | 43 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-234-9726 | WASHER, BEVEL<br>71-4833 | 30554 | EA | 4 | 4 |
| 81 | 44 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5306-00-205-6195 | BOLT, TEE<br>70-4054 | 30554 | EA | 4 | 4 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 11 - SUPPORT SYSTEM - CONTINUED | | | | |
| 81 | | | | | | | | | SKID BASE - CONTINUED | | | | |
| 81 | 45 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | | | 5340-01-130-9431 | STRAP, RETAINING<br>70-4172 | 30554 | EA | 2 | 2 |
| 81 | 46 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .009 | 5940-00-234-3383 | TERMINAL, LOAD<br>69-692-6 | 30554 | EA | 1 | 1 |
| 81 | 47 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-889-2527 | WASHER, LOCK<br>MS45904-72 | 96906 | EA | 2 | 2 |
| 81 | 48 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5310-00-880-7744 | NUT, PLAIN HEX<br>MS51967-5 | 96906 | EA | 1 | 5 |
| 81 | 49 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-942-2196 | SCREW<br>MS90725-60 | 96906 | EA | 2 | 10 |
| 81 | 50 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-081-4219 | WASHER<br>MS27183-14 | 96906 | EA | 2 | 43 |
| 81 | 51 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | D | .008 | 5310-00-483-8790 | NUT<br>MS17829-6C | 96906 | EA | 2 | 25 |
| 81 | 52 | MOO | MOO | MOO | MOO | | | | PLATE, STOP, GRD ROD<br>71-4635 | 30554 | EA | 1 | 1 |
| 81 | 53 | XA | XA | XA | XA | | | | BASE, ENGINE GENERATOR, WELDED<br>70-4270 | 30554 | EA | 1 | 1 |

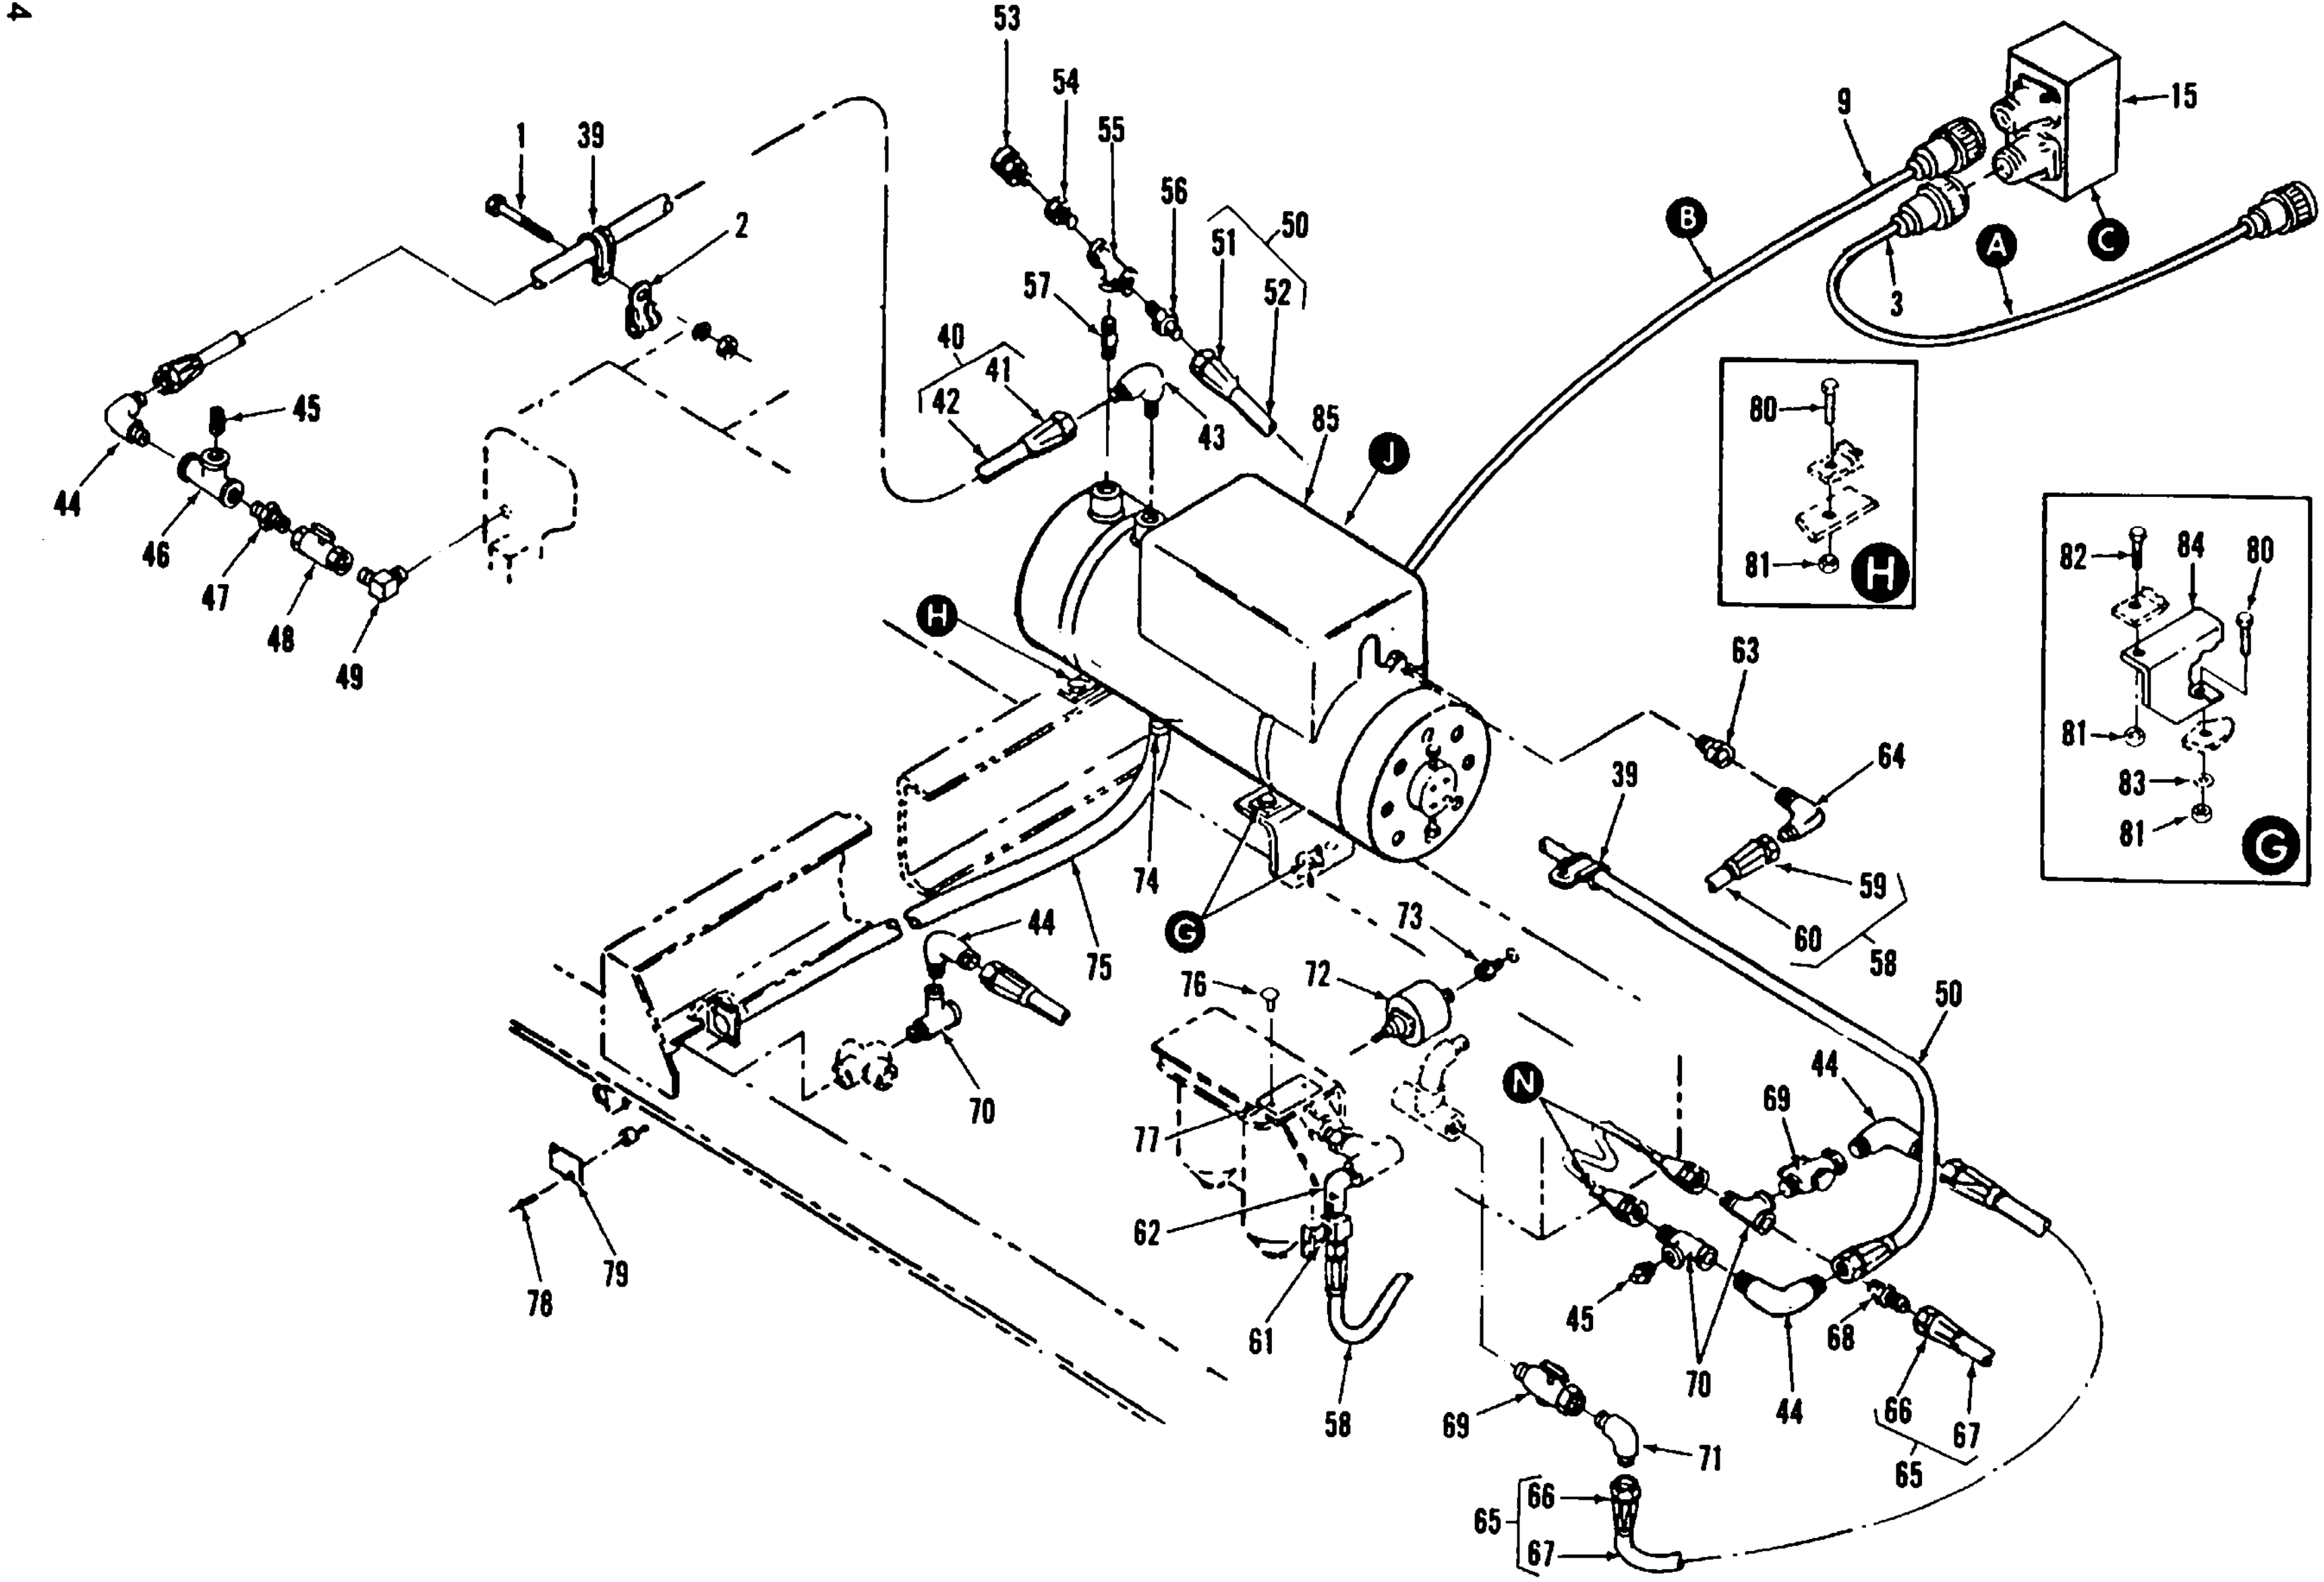
53
54
55
56
50
51
52
57
40
41
42
43
85
J
1
39
2
45
44
46
47
48
49
9
15
B
A
C
3
80
81
H
82
84
80
81
83
81
G
63
64
39
59
60
58
50
H
74
75
44
G
73
76
72
70
77
62
61
58
N
69
44
45
70
44
68
66
67
65
69
71
65
66
67
78
79

Figure 82. Fuel Burning Winterization Kit (Sheet 1 of 6)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 12 - FUEL BURNING WINTERIZATION KIT | | | | |
| 82 | | PBFFF | PAOFF | PAFZZ | PAFFF | | .005 | 6115-01-131-7228 | FUEL BURNING WINTERIZATION KIT<br>76-4115 | <br>30554 | | | |
| 82 | 1 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-269-3218 | SCREW<br>MS90725-68 | <br>96906 | EA | 1 | 2 |
| 82 | 2 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-954-6014 | CLAMP<br>MS21333-121 | <br>96906 | EA | 1 | 1 |
| 82 | 3 | AFF | AFF | AFF | AFF | | | 6150-01-023-0398 | HARNESS ASSY<br>70-4345 | <br>30554 | EA | 1 | 1 |
| 82 | 4 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-725-4153 | CONNECTOR, PLUG, P26<br>MS3106R18-11S | <br>96906 | EA | 1 | 3 |
| 82 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-879-3265 | CONNECTOR, PLUG, P7<br>MS3106R18-11P | <br>96906 | EA | 1 | 1 |
| 82 | 6 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-074-2072 | STRAP, TIE DOWN<br>MS3367-1-9 | <br>96906 | EA | 9 | 61 |
| 82 | 7 | PAOZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 9905-00-752-4649 | MARKER, BAND<br>M43436/1-1 | <br>81349 | EA | 1 | 1 |
| 82 | 8 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .080 | 6145-00-578-7514 | WIRE, ELECTRICAL<br>M5086/2-12-9 | <br>81349 | FT | 8 | 66 |
| 82 | 9 | AOO | AFF | AFF | AFF | | | | HARNESS ASSY<br>76-4177 | <br>30554 | EA | 1 | 1 |
| 82 | 10 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-755-3493 | CONNECTOR, PLUG, P30<br>MS3106R16-10S | <br>96906 | EA | 1 | 1 |
| 82 | 11 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-879-3265 | CONNECTOR, PLUG, P27<br>MS3106R18-11P | <br>96906 | EA | 2 | 31 |
| 82 | 12 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-074-2072 | STRAP, TIE DOWN<br>MS3367-1-9 | <br>96906 | EA | 52 | 61 |
| 82 | 13 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 9905-00-841-4445 | BAND, MARKER<br>M43436/1-2 | <br>81349 | EA | 1 | 1 |
| 82 | 14 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-7514 | WIRE, ELECTRICAL<br>M5086/2-12-9 | <br>81349 | FT | 56 | 66 |
| 82 | 15 | PAOZZ | PAFFF | PAFFF | PAFFF | D | .008 | 6115-00-235-4703 | CONTROL BOX<br>74-0650 | <br>30554 | EA | 1 | 1 |
| 82 | 16 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-889-2999 | SCREW<br>MS35206-217 | <br>96906 | EA | 8 | 8 |
| 82 | 17 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-836-3520 | NUT AND WASHER<br>69-561-1<br>511-041800-00 | <br>30554<br>78189 | EA | 8 | 8 |
| 82 | 18 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-852-9611 | CONNECTOR, RECEPTACLE, J26<br>MS3102R18-11P | <br>96906 | EA | 1 | 1 |
| 82 | 19 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-01-073-1240 | CONNECTOR, RECEPTACLE, J27<br>MS3102R18-11S | <br>96906 | EA | 1 | 3 |
| 82 | 20 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-211-9344 | SCREW AND WASHER<br>69662-17<br>61-060441-40-0142B-0542B | <br>30554<br>78189 | EA | 3 | 3 |
| 82 | 21 | MOO | MOO | MOO | MOO | | | | COVER, CONTROL BOX<br>69-656 | <br>30554 | EA | 1 | 1 |
| 82 | 22 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .040 | 6625-01-108-2600 | LIGHT ASSY, INDICATOR<br>MS25331-4 | <br>96906 | EA | 1 | 1 |
| 82 | 23 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .230 | 6240-00-155-8714 | LAMP, INCANDESCENT<br>MS25231-313 | <br>96906 | EA | 1 | 1 |
| 82 | 24 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-7514 | WIRE, ELECTRICAL<br>M5086/2-12-9 | <br>81349 | FT | 4 | 66 |

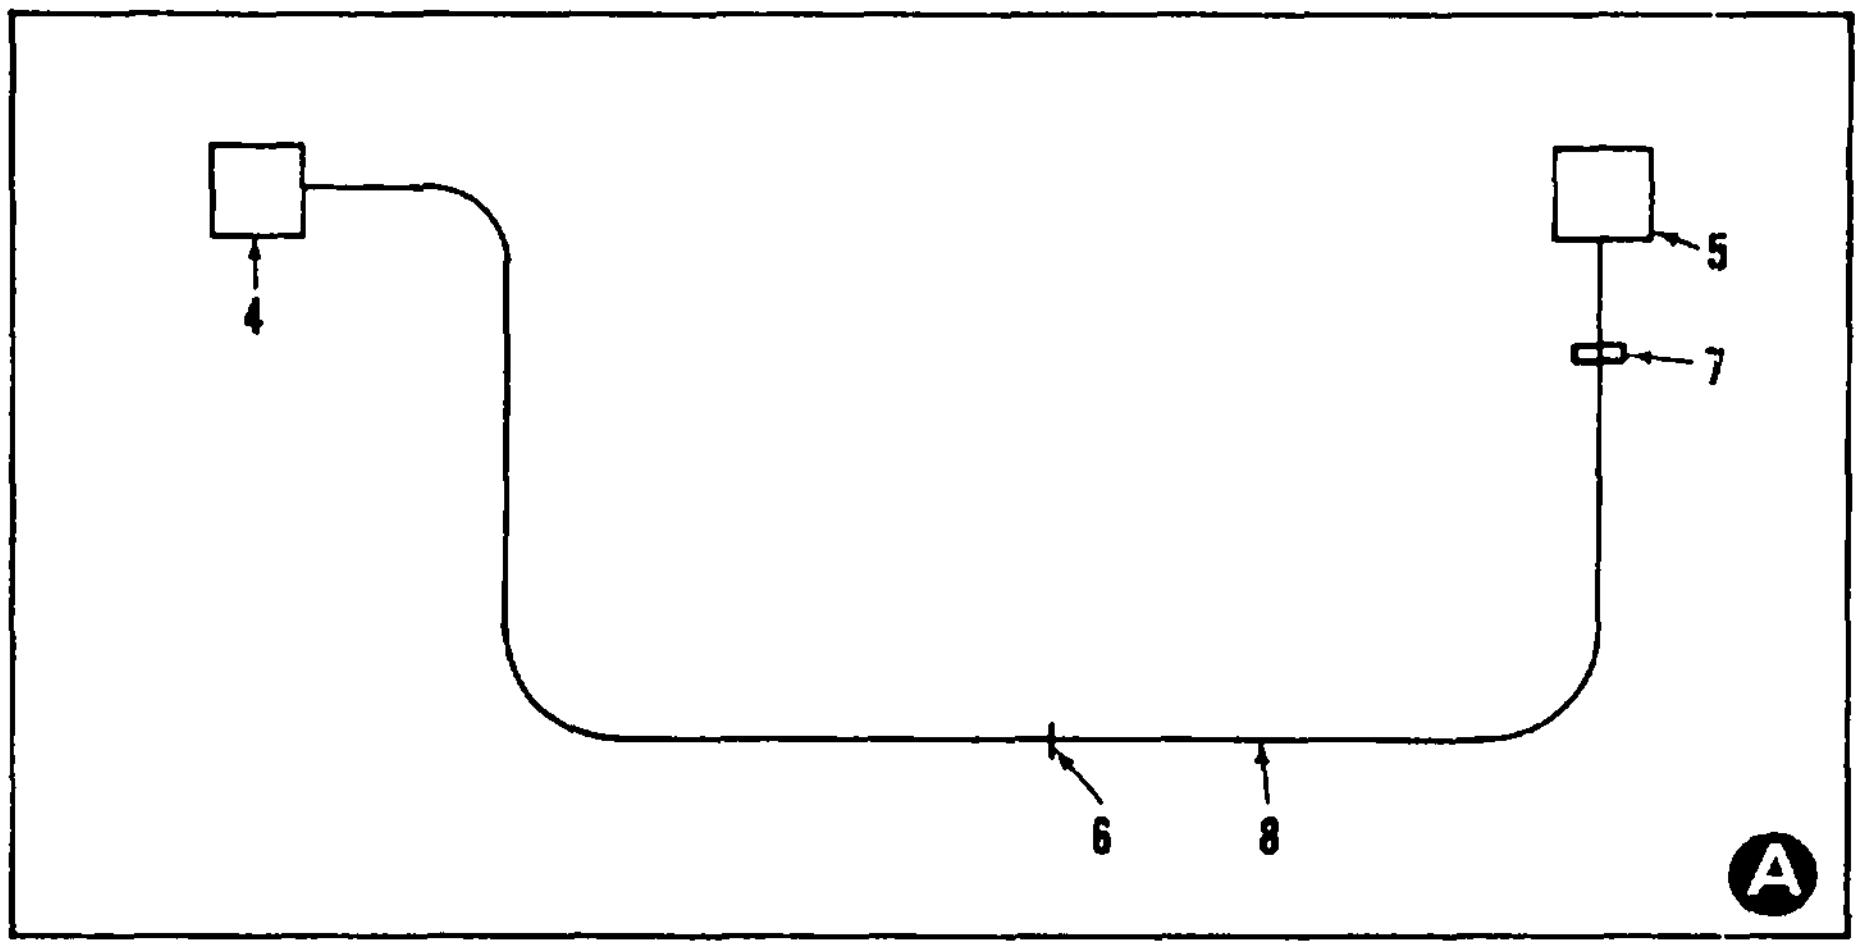

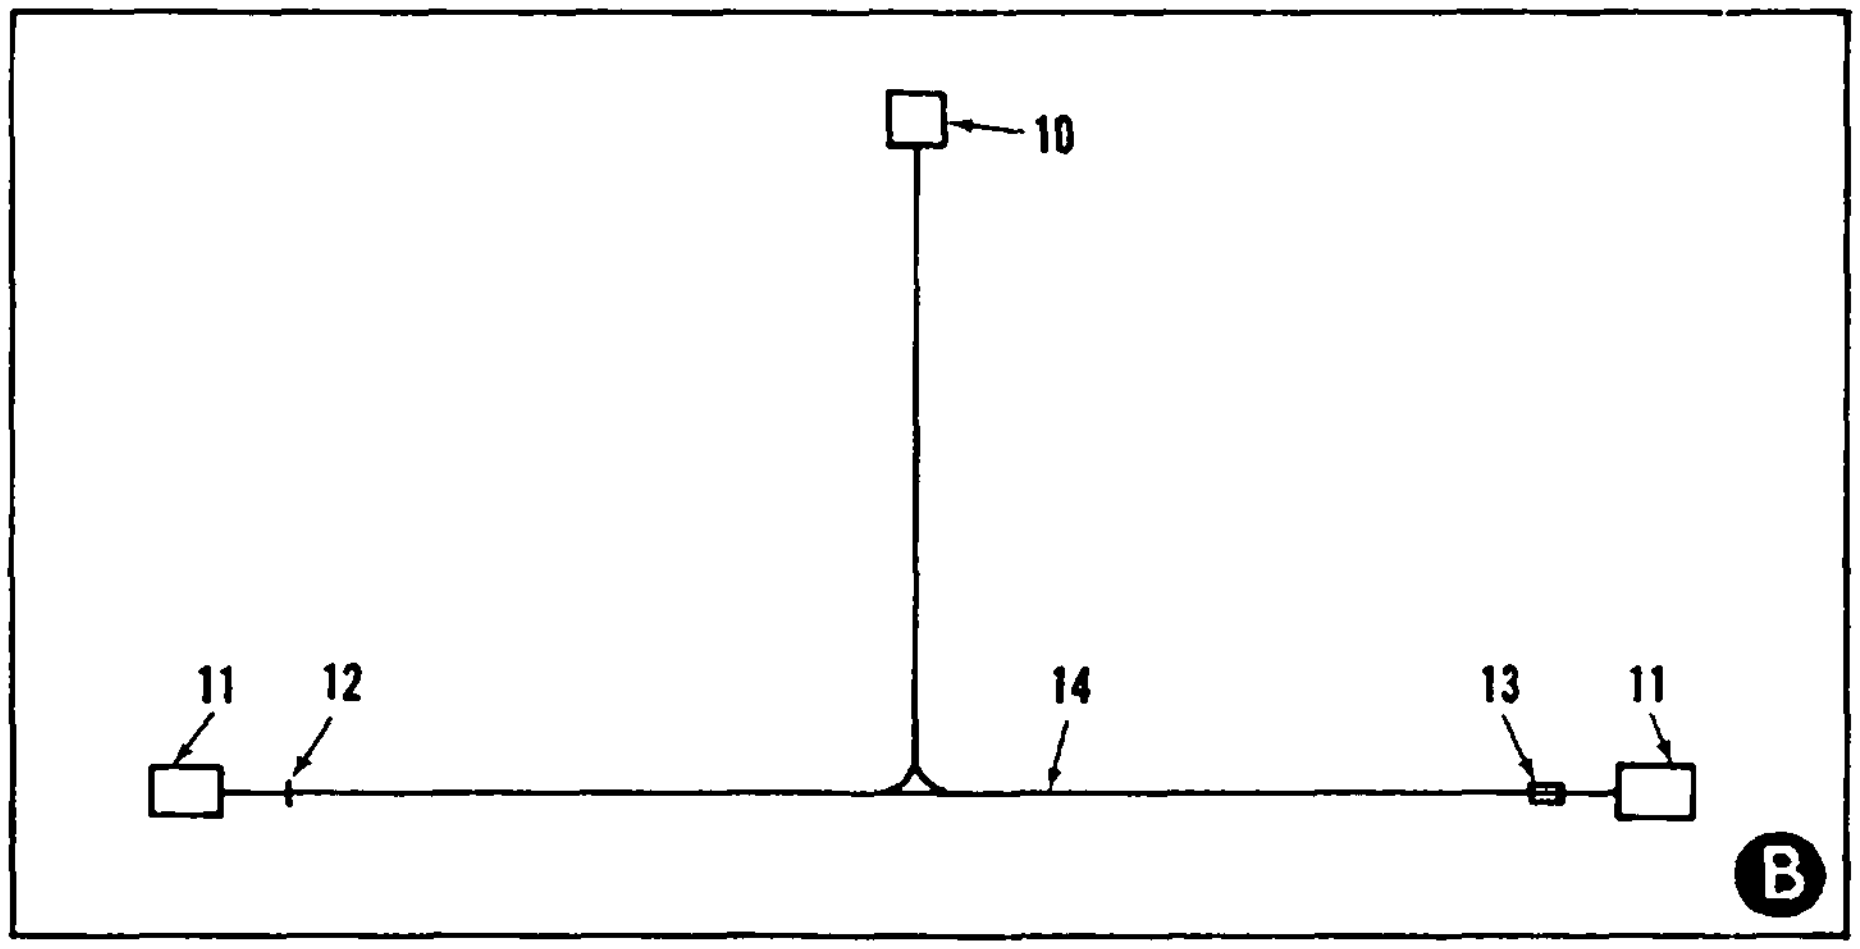
10
11
12
14
13
11
B

Figure 82. Fuel Burning Winterization Kit (Sheet 2 of 6)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 12 - FUEL BURNING WINTERIZATION KIT - CONTINUED | | | | |
| 82 | | | | | | | | | FUEL BURNING WINTERIZATION KIT - CONTINUED | | | | |
| 82 | 25 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 81349 | | FT | 4 | 4 |
| 82 | 26 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4774 | LUG, TERMINAL<br>MS25036-153 96906 | | EA | 2 | 2 |
| 82 | 27 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4775 | LUG, TERMINAL<br>MS25036-156 96906 | | EA | 2 | 2 |
| 82 | 28 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5925-00-686-3301 | CIRCUIT BREAKER<br>MS25244-15 96906 | | EA | 1 | 1 |
| 82 | 29 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-283-5280 | LUG, TERMINAL<br>MS25036-106 96906 | | EA | 3 | 3 |
| 82 | 30 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-204-8990 | LUG, TERMINAL<br>MS25036-111 96906 | | EA | 3 | 3 |
| 82 | 31 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .060 | 5930-00-655-1575 | SWITCH, TOGGLE<br>MS35059-22 96906 | | EA | 1 | 1 |
| 82 | 32 | XB | XB | XB | XB | | | | PLATE, FACE<br>69-654 30554 | | EA | 1 | 1 |
| 82 | 33 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-03 -6967 | SCREW AND WASHER<br>69-662-16 30554<br>61-060441-40-0142B-0542B 78189 | | EA | 4 | 4 |
| 82 | 34 | AFF | AFF | AFF | AFF | | | | COMPONENT BOARD ASSY<br>74-0501 30554 | | EA | 1 | 1 |
| 82 | 35 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-252-9692 | SPACER, THREADED<br>70-4024 30554 | | EA | 2 | 2 |
| 82 | 36 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5961-00-702-5763 | DIODE, CR 1<br>NR1034A 04713<br>69-740 30554 | | EA | 1 | 1 |
| 82 | 37 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-01-121-8722 | TERMINAL<br>8000A 16258<br>71-4939 30554 | | EA | 2 | 2 |
| 82 | 38 | XA | XA | XA | XA | | | | FRAME, CONTROL BOX<br>69-655 30554 | | EA | 1 | 1 |
| 82 | 39 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-053-8994 | CLAMP<br>MS21533-126 96906 | | EA | 2 | 2 |
| 82 | 40 | AOO | AFF | AFF | AFF | | | | HOSE ASSY<br>MS28741-8-0300 96906 | | EA | 1 | 1 |
| 82 | 41 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-842-2202 | FITTING, END<br>MS24587-8 96906 | | EA | 2 | 12 |
| 82 | 42 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-542-4433 | HOSE<br>MIL-H-8794-8 8134 | | FT | 4 | 40 |
| 82 | 43 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-618-8125 | ELBOW, 90 DEGREE, MALE<br>71-4842-10 30554<br>8-8CTX-S 08752 | | EA | 1 | 1 |
| 82 | 44 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-231-3013 | ELBOW, 90 DEGREE, MALE<br>MS20822-8 96906 | | EA | 4 | 4 |
| 82 | 45 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-188-3514 | PLUG, SQ HD<br>MS20913-3 96906 | | EA | 2 | 2 |
| 82 | 46 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-278-3991 | TEE, FEMALE<br>AN917-3 88044 | | EA | 1 | 1 |
| 82 | 47 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-952-3180 | NIPPLE, REDUCER<br>71-4881-01 30554<br>C3069X8X6 79470 | | EA | 1 | 1 |

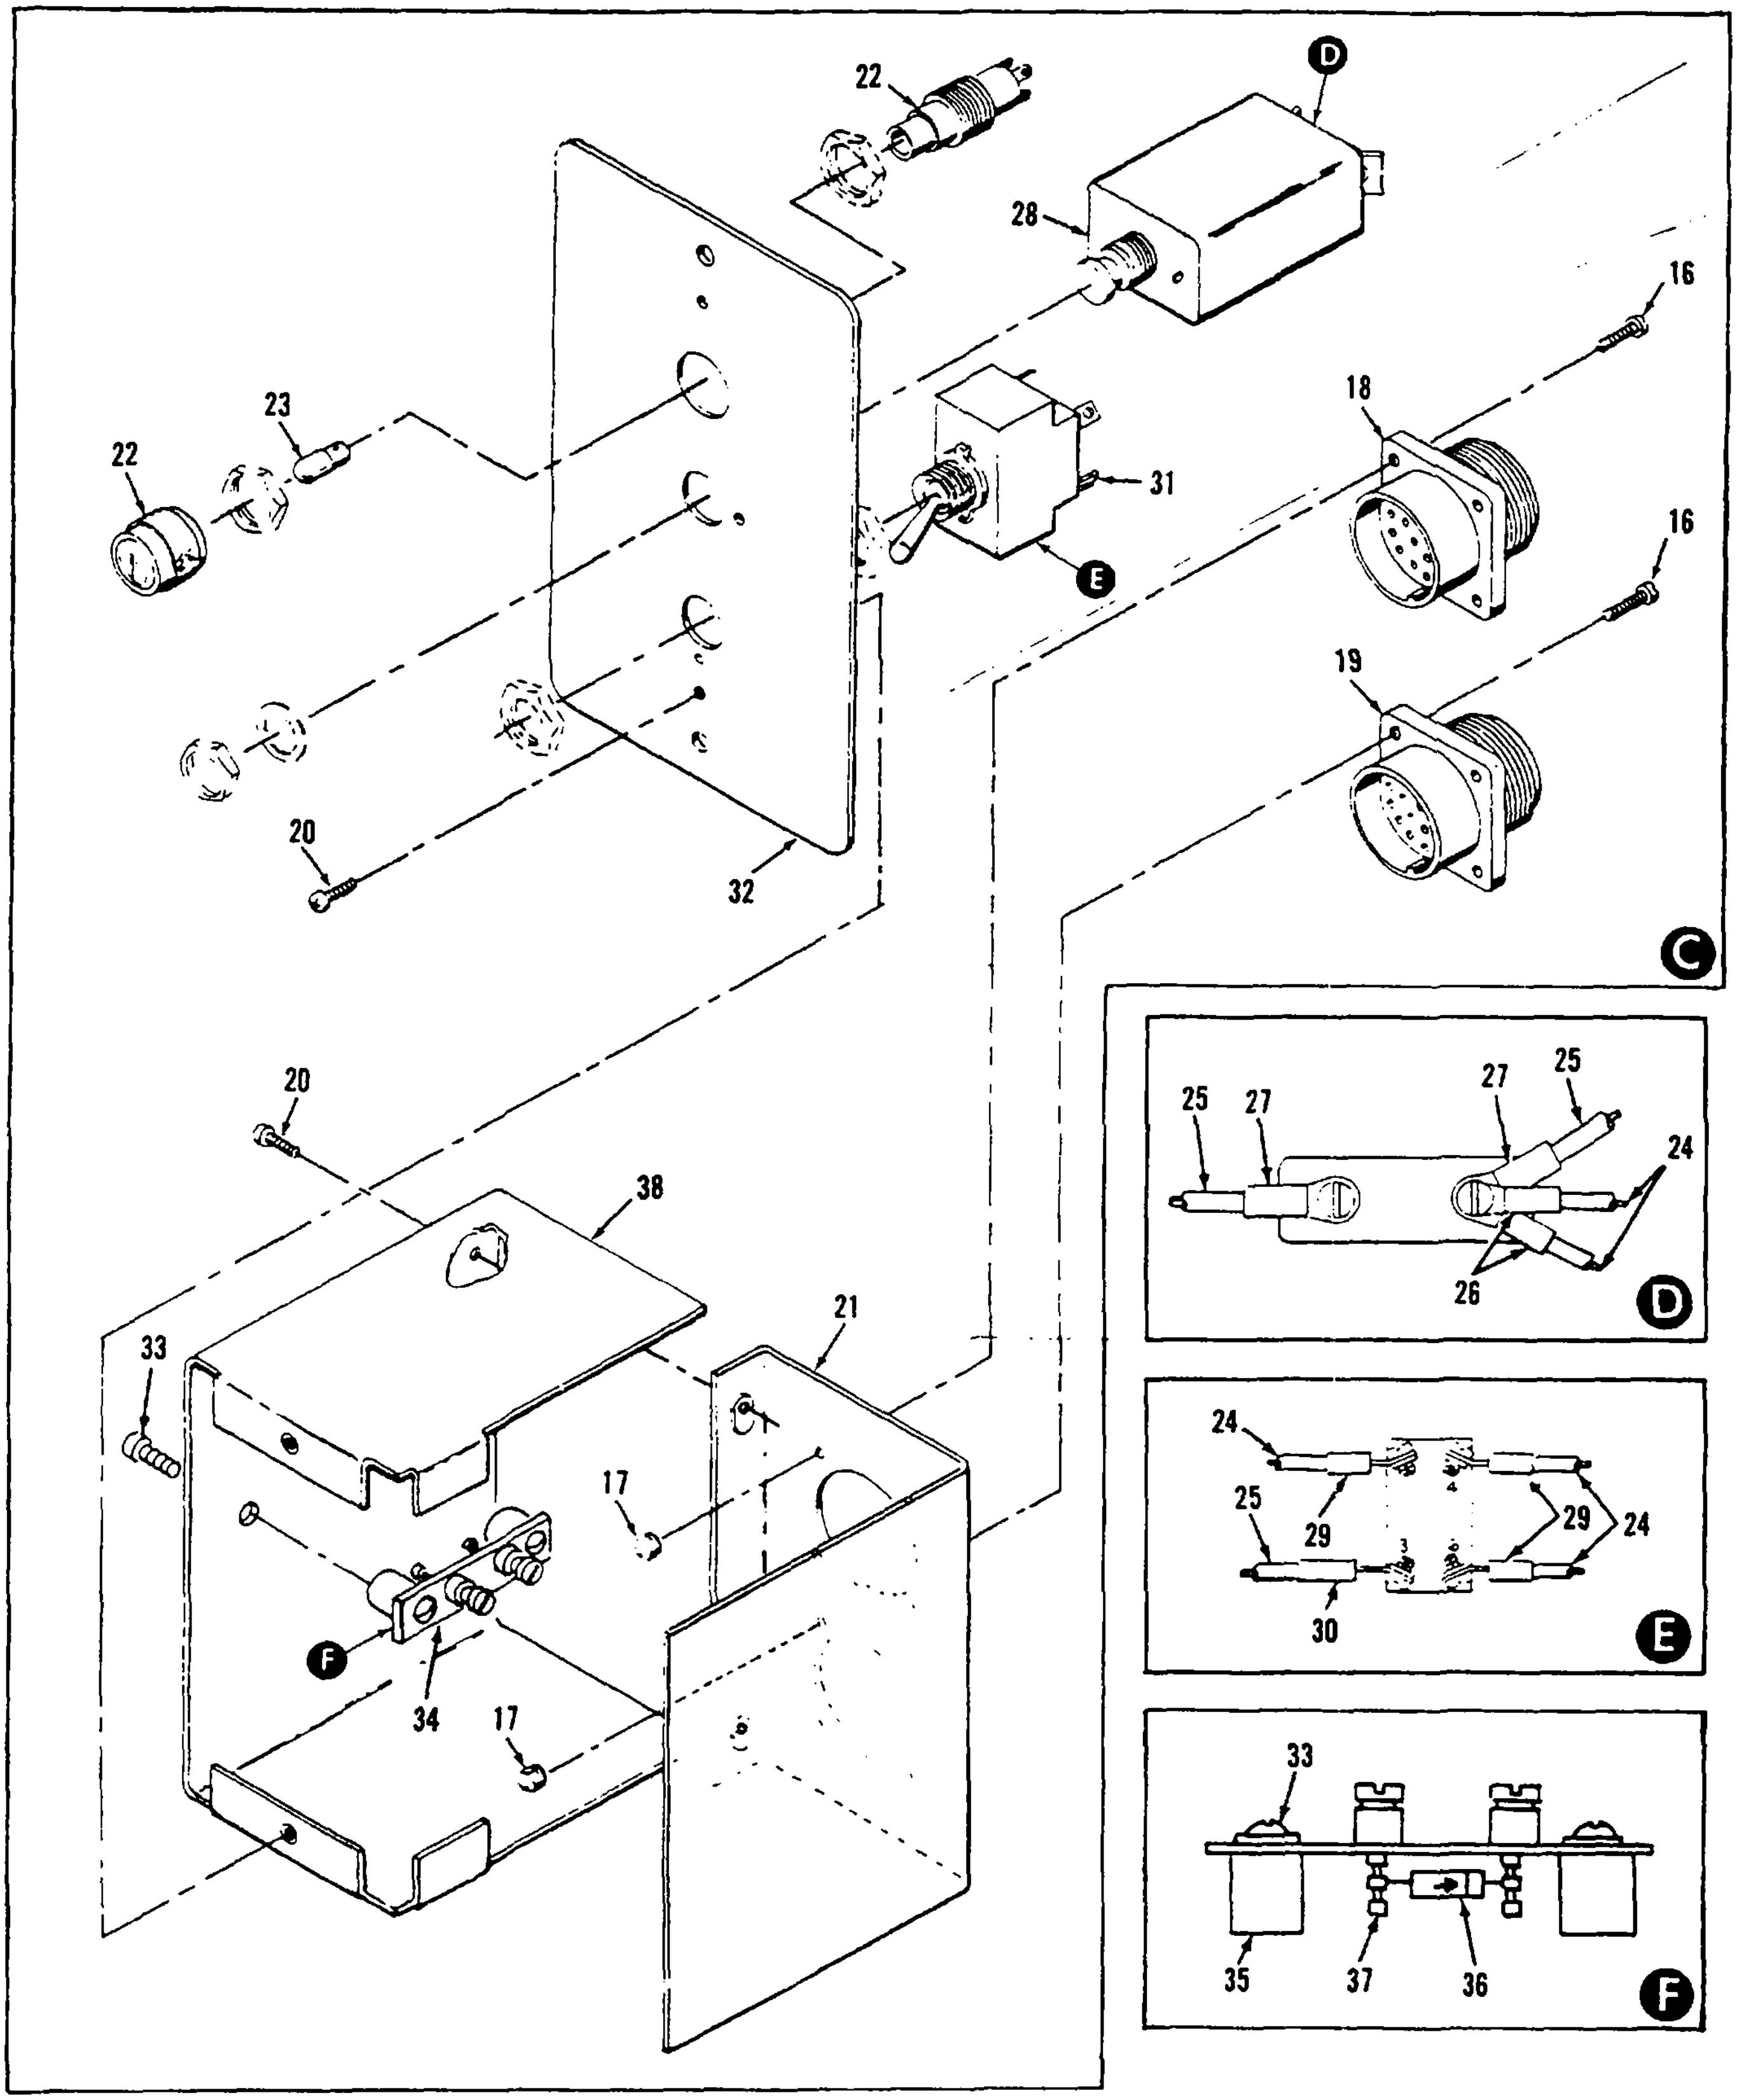
22
D
28
16
23
22
18
31
E
16
19
20
32
C
20
38
25
27
27
25
24
26
D
21
33
24
25
29
29
24
17
30
E
F
34
17
33
35
37
36
F

Figure 82. Fuel Burning Winterization Kit (Sheet 3 of 6)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 12 - FUEL BURNING WINTERIZATION KIT - CONTINUED | | | | |
| 82 | | | | | | | | | FUEL BURNING WINTERIZATION KIT - CONTINUED | | | | |
| 82 | 48 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .005 | 4820-136-1085 | COCK, SHUT-OFF<br>69-659 30554<br>A400-3 16024 | | EA | 1 | 1 |
| 82 | 49 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-01-130-8764 | ELBOW, 90 DEGREE, MALE<br>71-4825 30554<br>23873-8-12 99103 | | EA | 1 | 1 |
| 82 | 50 | AOO | AFF | AFF | AFF | | | | HOSE ASSY<br>MS28741-8-0450 96906 | | EA | 1 | 1 |
| 82 | 51 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-842-2202 | FITTING, END<br>MS24587-8 96906 | | EA | 2 | 12 |
| 82 | 52 | PAFIZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-542-4433 | HOSE<br>MIL-H-8794-8 81349 | | FT | 4 | 40 |
| 82 | 53 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .007 | 4820-00-228-3282 | VALVE<br>71-4908 30554<br>16-004-013-20PORM5PSIG 43990 | | EA | 1 | 1 |
| 82 | 54 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-194-0216 | BUSHING, REDUCING<br>AN912-5 88044 | | EA | 1 | 1 |
| 82 | 55 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-278-3438 | TEE, FEMALE<br>AN917-4 88044 | | EA | 1 | 1 |
| 82 | 56 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 4730-00-809-9427 | CONNECTOR, MALE<br>71-4844-06 30554 | | EA | 1 | 1 |
| 82 | 57 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-921-3612 | NIPPLE, CLOSE<br>MS51953-73 96906 | | EA | 1 | 1 |
| 82 | 58 | AOO | AFF | AFF | AFF | | | | HOSE ASSY<br>MS28741-4-0740 96906 | | EA | 1 | 1 |
| 82 | 59 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-842-2200 | FITTING, END<br>MS24587-4 96906 | | EA | 2 | 2 |
| 82 | 60 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-639-9907 | HOSE<br>MIL-H-8794-4 81349 | | FT | 7 | 7 |
| 82 | 61 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .023 | 2910-00-060-6182 | VALVE, NEEDLE<br>71-4845 30554<br>6700 79470 | | EA | 1 | 1 |
| 82 | 62 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-231-5602 | ELBOW, STREET<br>AN914-2 88044 | | EA | 1 | 1 |
| 82 | 63 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-415-3712 | ADAPTER<br>710-4918 30554<br>3200X2 79470 | | EA | 1 | 1 |
| 82 | 64 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-231-4009 | ELBOW, MALE<br>MS20822-4 96906 | | EA | 4 | 4 |
| 82 | 65 | AOO | AFF | AFF | AFF | | | | HOSE ASSY<br>MS28741-8-0464 96906 | | EA | 4 | 4 |
| 82 | 66 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-842-2202 | FITTING, END<br>MS24587-8 96906 | | EA | 2 | 12 |
| 82 | 67 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-542-4433 | HOSE<br>MIL-H-8794-8 81349 | | FT | 6 | 40 |
| 82 | 68 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 4730-00-194-1114 | CONNECTOR<br>AN816-8 88044 | | EA | 1 | 1 |
| 82 | 69 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .005 | 4820-00-287-5617 | COCK, DRAIN<br>71-4804 30544<br>170C-N 70411 | | EA | 4 | 4 |

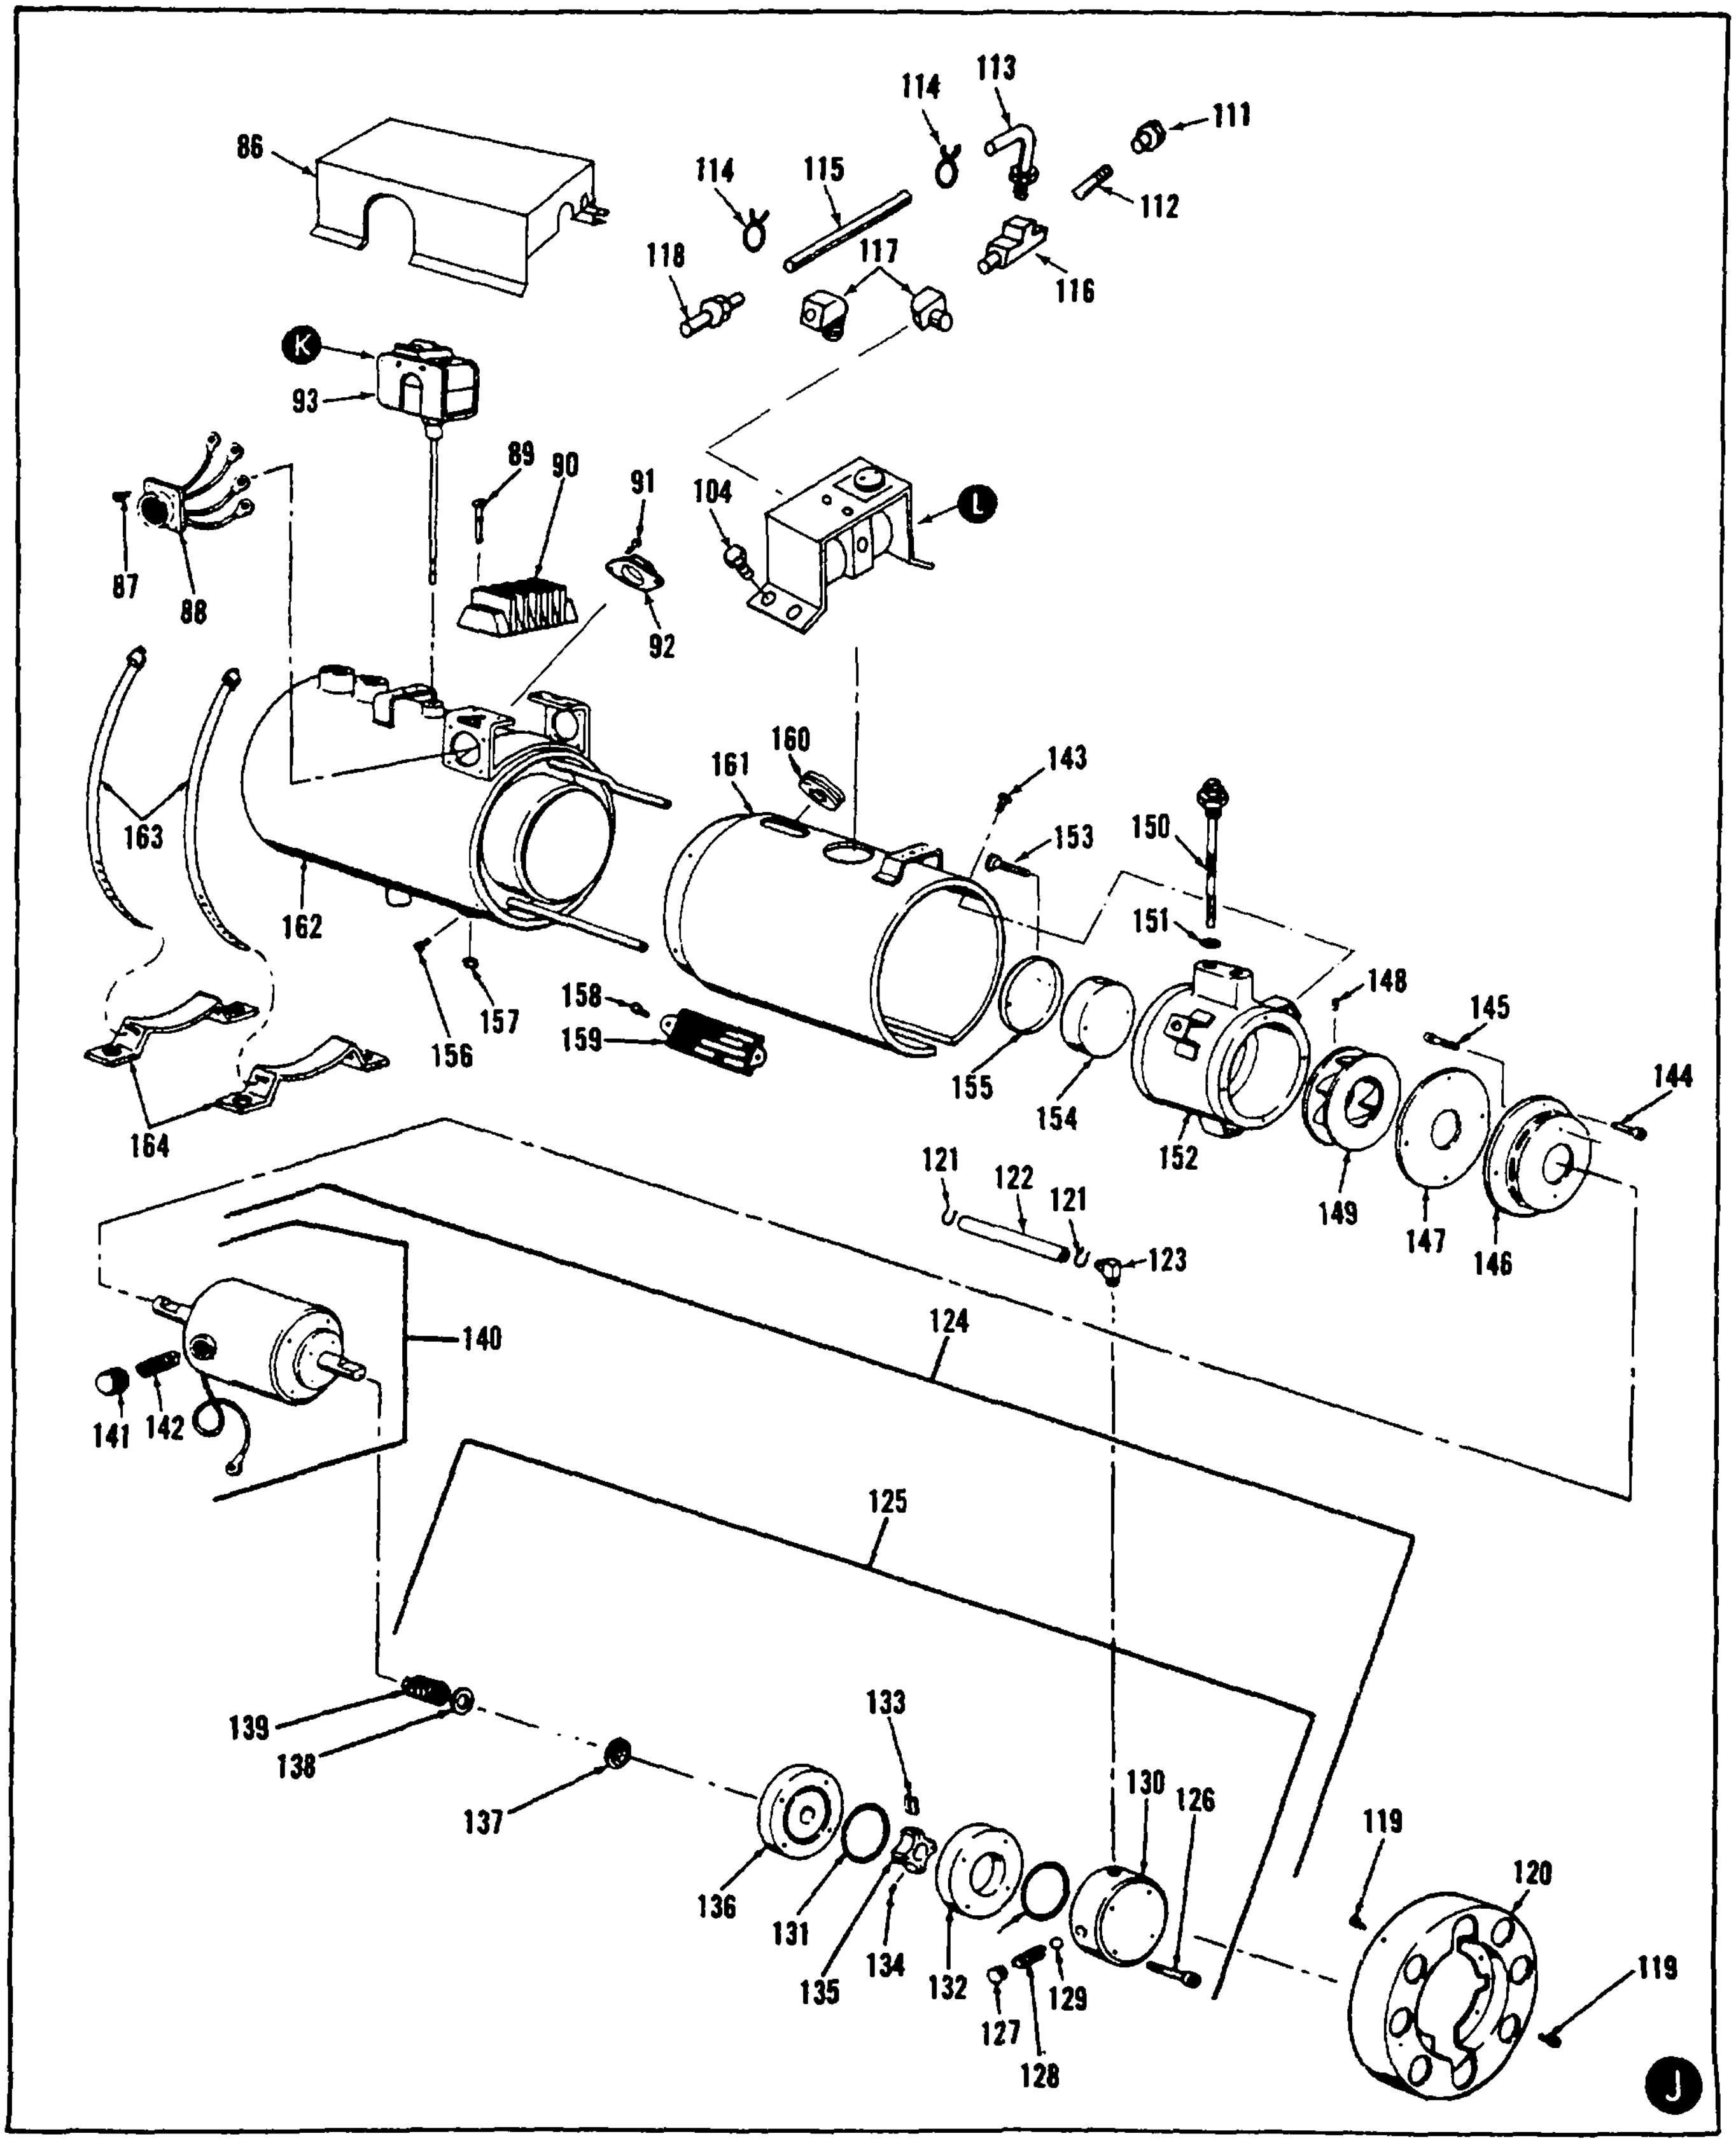
113
114
111
86
114
115
112
118
117
116
K
93
89
90
91
104
L
87
88
92
160
143
161
153
150
163
151
162
148
158
145
157
159
156
155
154
144
152
164
149
147
146
121
122
121
123
124
140
141
142
125
133
139
138
130
126
119
137
120
136
131
134
135
132
129
127
128
119
J

Figure 82. Fuel Burning Winterization Kit (Sheet 4 of 6)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 12 - FUEL BURNING WINTERIZATION KIT - CONTINUED | | | | |
| 82 | | | | | | | | | FUEL BURNING WINTERIZATION KIT - CONTINUED | | | | |
| 82 | 70 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-038-7174 | TEE, PIPE<br>71-4811 30554<br>224-6 99103<br>3/8MRO-S 30757 | | EA | 4 | 4 |
| 82 | 71 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-964-7776 | ELBOW<br>MS20823-8 96906 | | EA | 1 | 1 |
| 82 | 72 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5930-00-227-3890 | SWITCH, COOLANT<br>70-4044 30554<br>TC-125B-50M-2AN 85814 | | EA | 1 | 1 |
| 82 | 73 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-277-5609 | BUSHING, REDUCING<br>AN912-7 88044 | | EA | 1 | 1 |
| 82 | 74 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5340-00-270-8112 | CLAMP, SADDLE<br>71-4937 30554<br>35405 79260 | | EA | 1 | 1 |
| 82 | 75 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .005 | 2990-00-221-5885 | TUBE ASSY, HEATER EXHAUST<br>71-4415 30554 | | EA | 1 | 1 |
| 82 | 76 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | | 5320-00-582-3305 | RIVET<br>MS20600AD4W3 96906 | | EA | 2 | 2 |
| 82 | 77 | MDO | MDO | MDO | MDO | | | | PLATE, INSTRUCTION, HEATER SHUTOFF<br>71-4500 30554 | | EA | 1 | 1 |
| 82 | 78 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | | 5320-00-582-3303 | RIVET<br>MS20600AD4W5 96906 | | EA | 2 | 2 |
| 82 | 79 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION<br>71-4502-04 30554 | | EA | 1 | 1 |
| 82 | 80 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-225-3839 | SCREW<br>MS90725-8 96906 | | EA | 2 | 4 |
| 82 | 81 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483-8792 | NUT<br>MS17829-4C 96906 | | EA | 6 | 6 |
| 82 | 82 | PAFZZ | PAOZZ | PAFZZ | AFZZ | D | .008 | 5305-00-068-0502 | SCREW<br>MS90725-6 96906 | | EA | 2 | 4 |
| 82 | 83 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER<br>MS27183-10 96906 | | EA | 2 | 2 |
| 82 | 84 | XB | XB | XB | XB | | | | BRACKET, HEATER MTG.<br>71-4414 30554 | | EA | 1 | 1 |
| 82 | 85 | PBFFF | PAOFF | PAFFF | PAFFF | | | 2990-00-135-6427 | HEATER, ENGINE<br>69-775-01 30554<br>CP3050-24 46522 | | EA | 1 | 1 |
| 82 | 86 | XB | XB | XB | XB | | | | COVER, CONTROL ASSY<br>C54919-G1-1 46522 | | EA | 1 | 1 |
| 82 | 87 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | | SCREW<br>2290-0632-05-13 46522 | | EA | 4 | 8 |
| 82 | 88 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 2990-01-131-2751 | RECEPTACLE ASSY<br>A54940-G1 46522 | | EA | 1 | 1 |
| 82 | 89 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-01-121-9352 | SCREW<br>2251-0832-10-13 46522 | | EA | 4 | 8 |
| 82 | 90 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | | 5940-00-983-6082 | BLOCK, TERMINAL<br>A6005943 46522 | | EA | 1 | 1 |
| 82 | 91 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-01-138-7625 | SCREW<br>2251-0832-06-13 46522 | | EA | 2 | 10 |

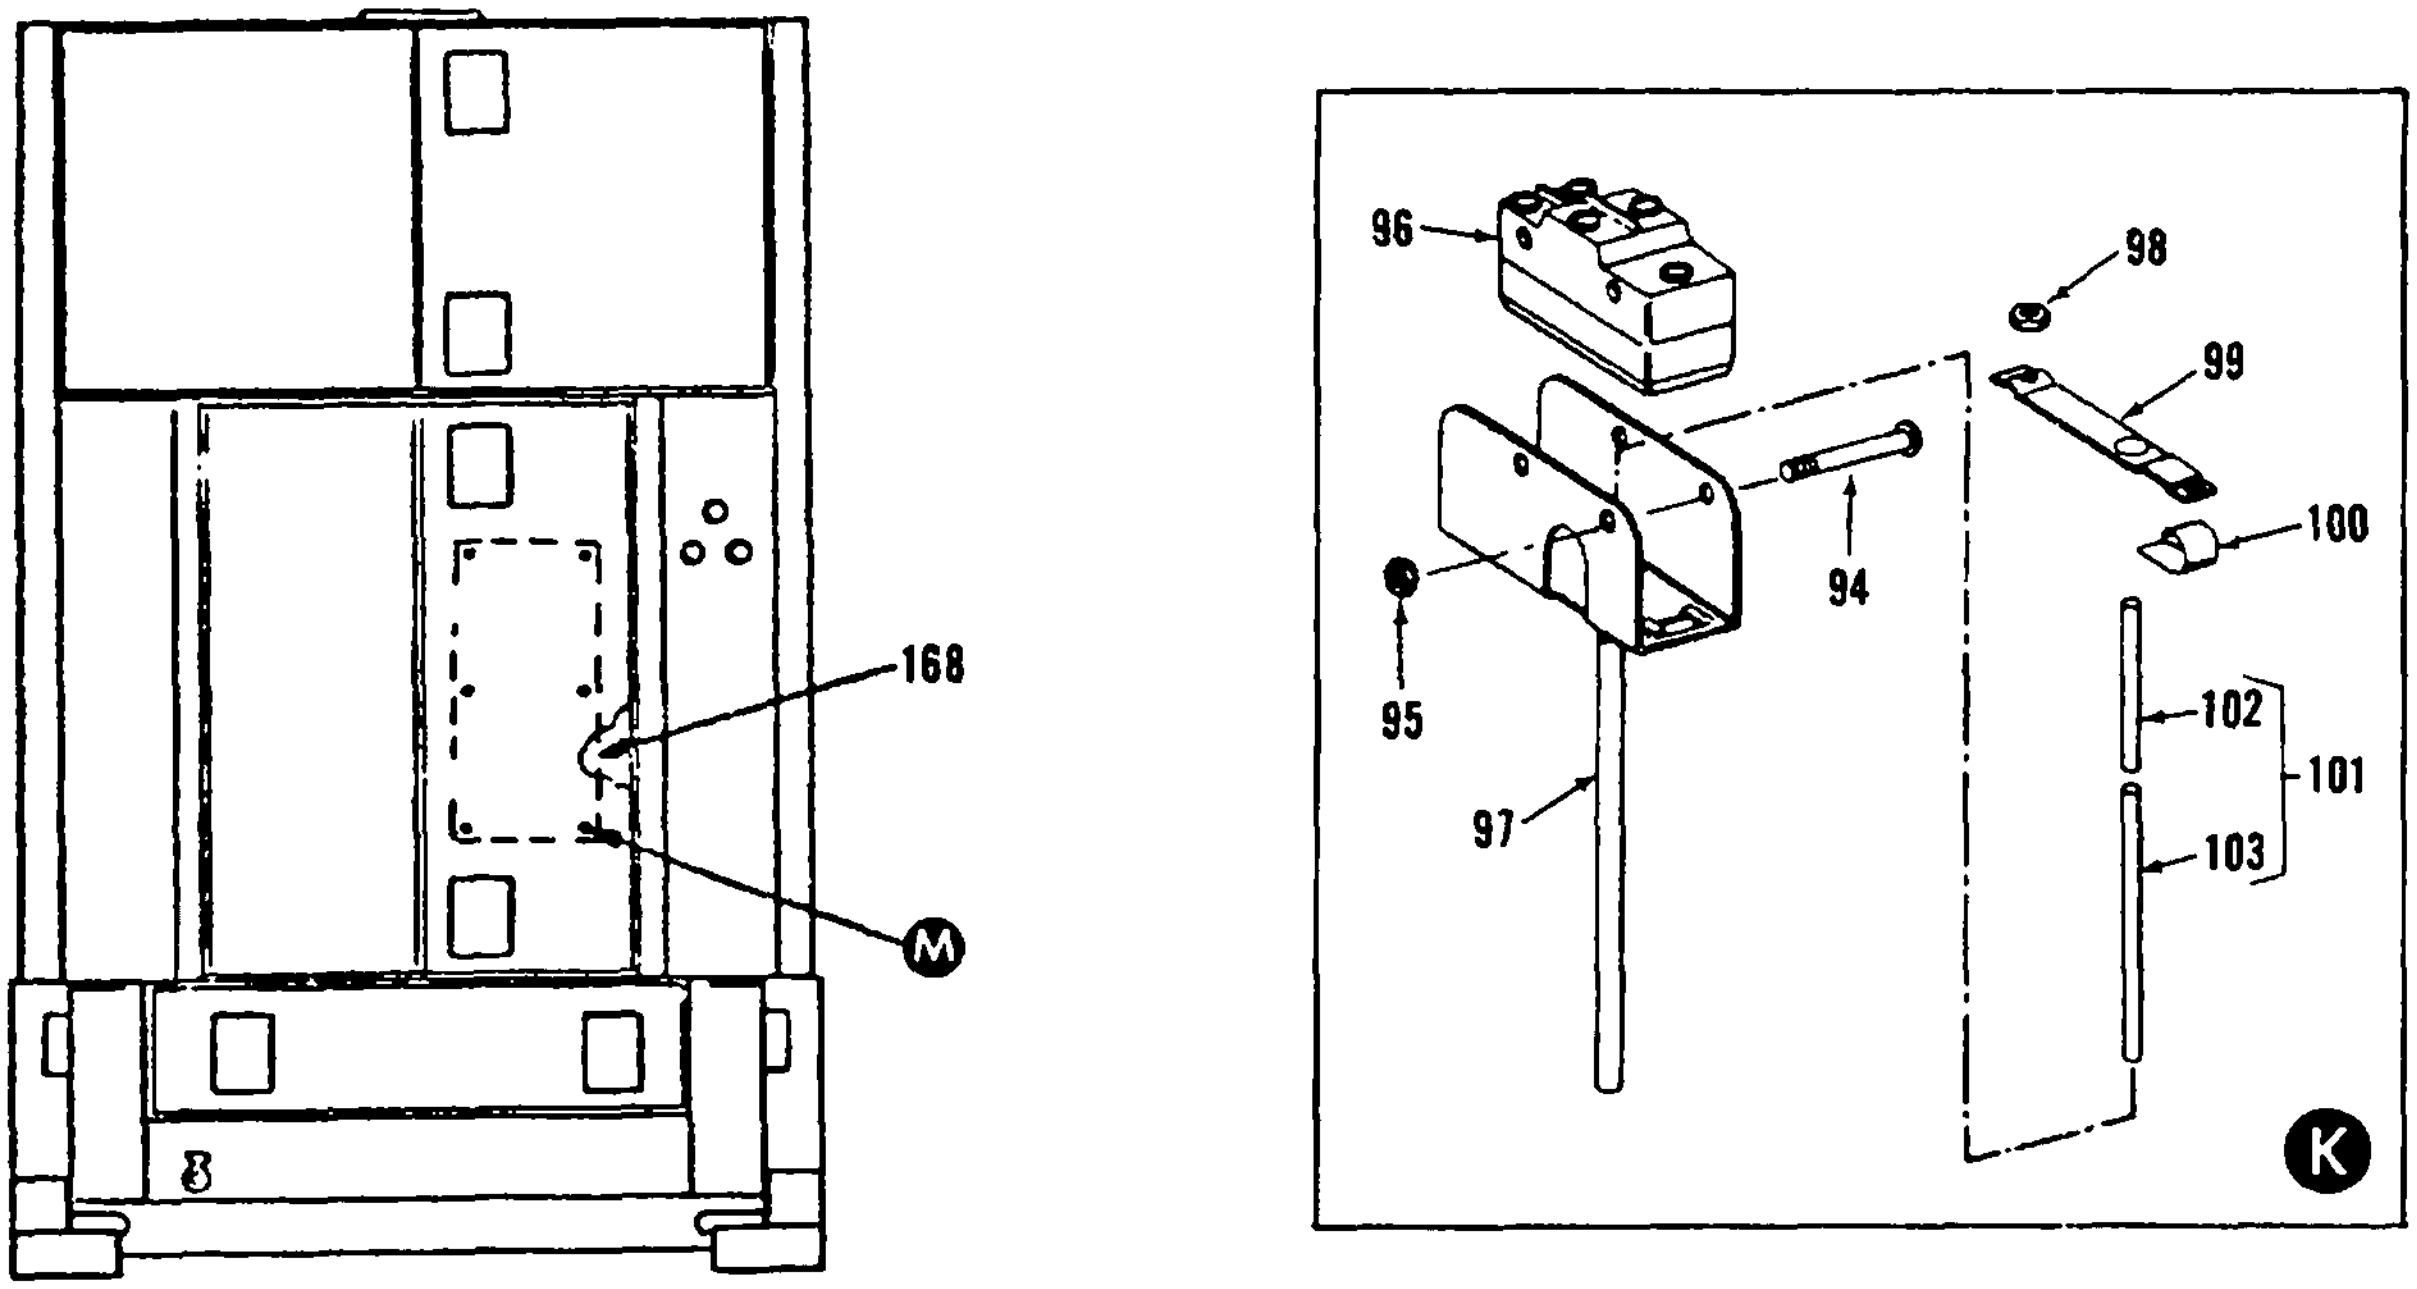
168
M
96
98
99
94
100
95
102
101
97
103
K

REAR VIEW OF GENERATOR SET

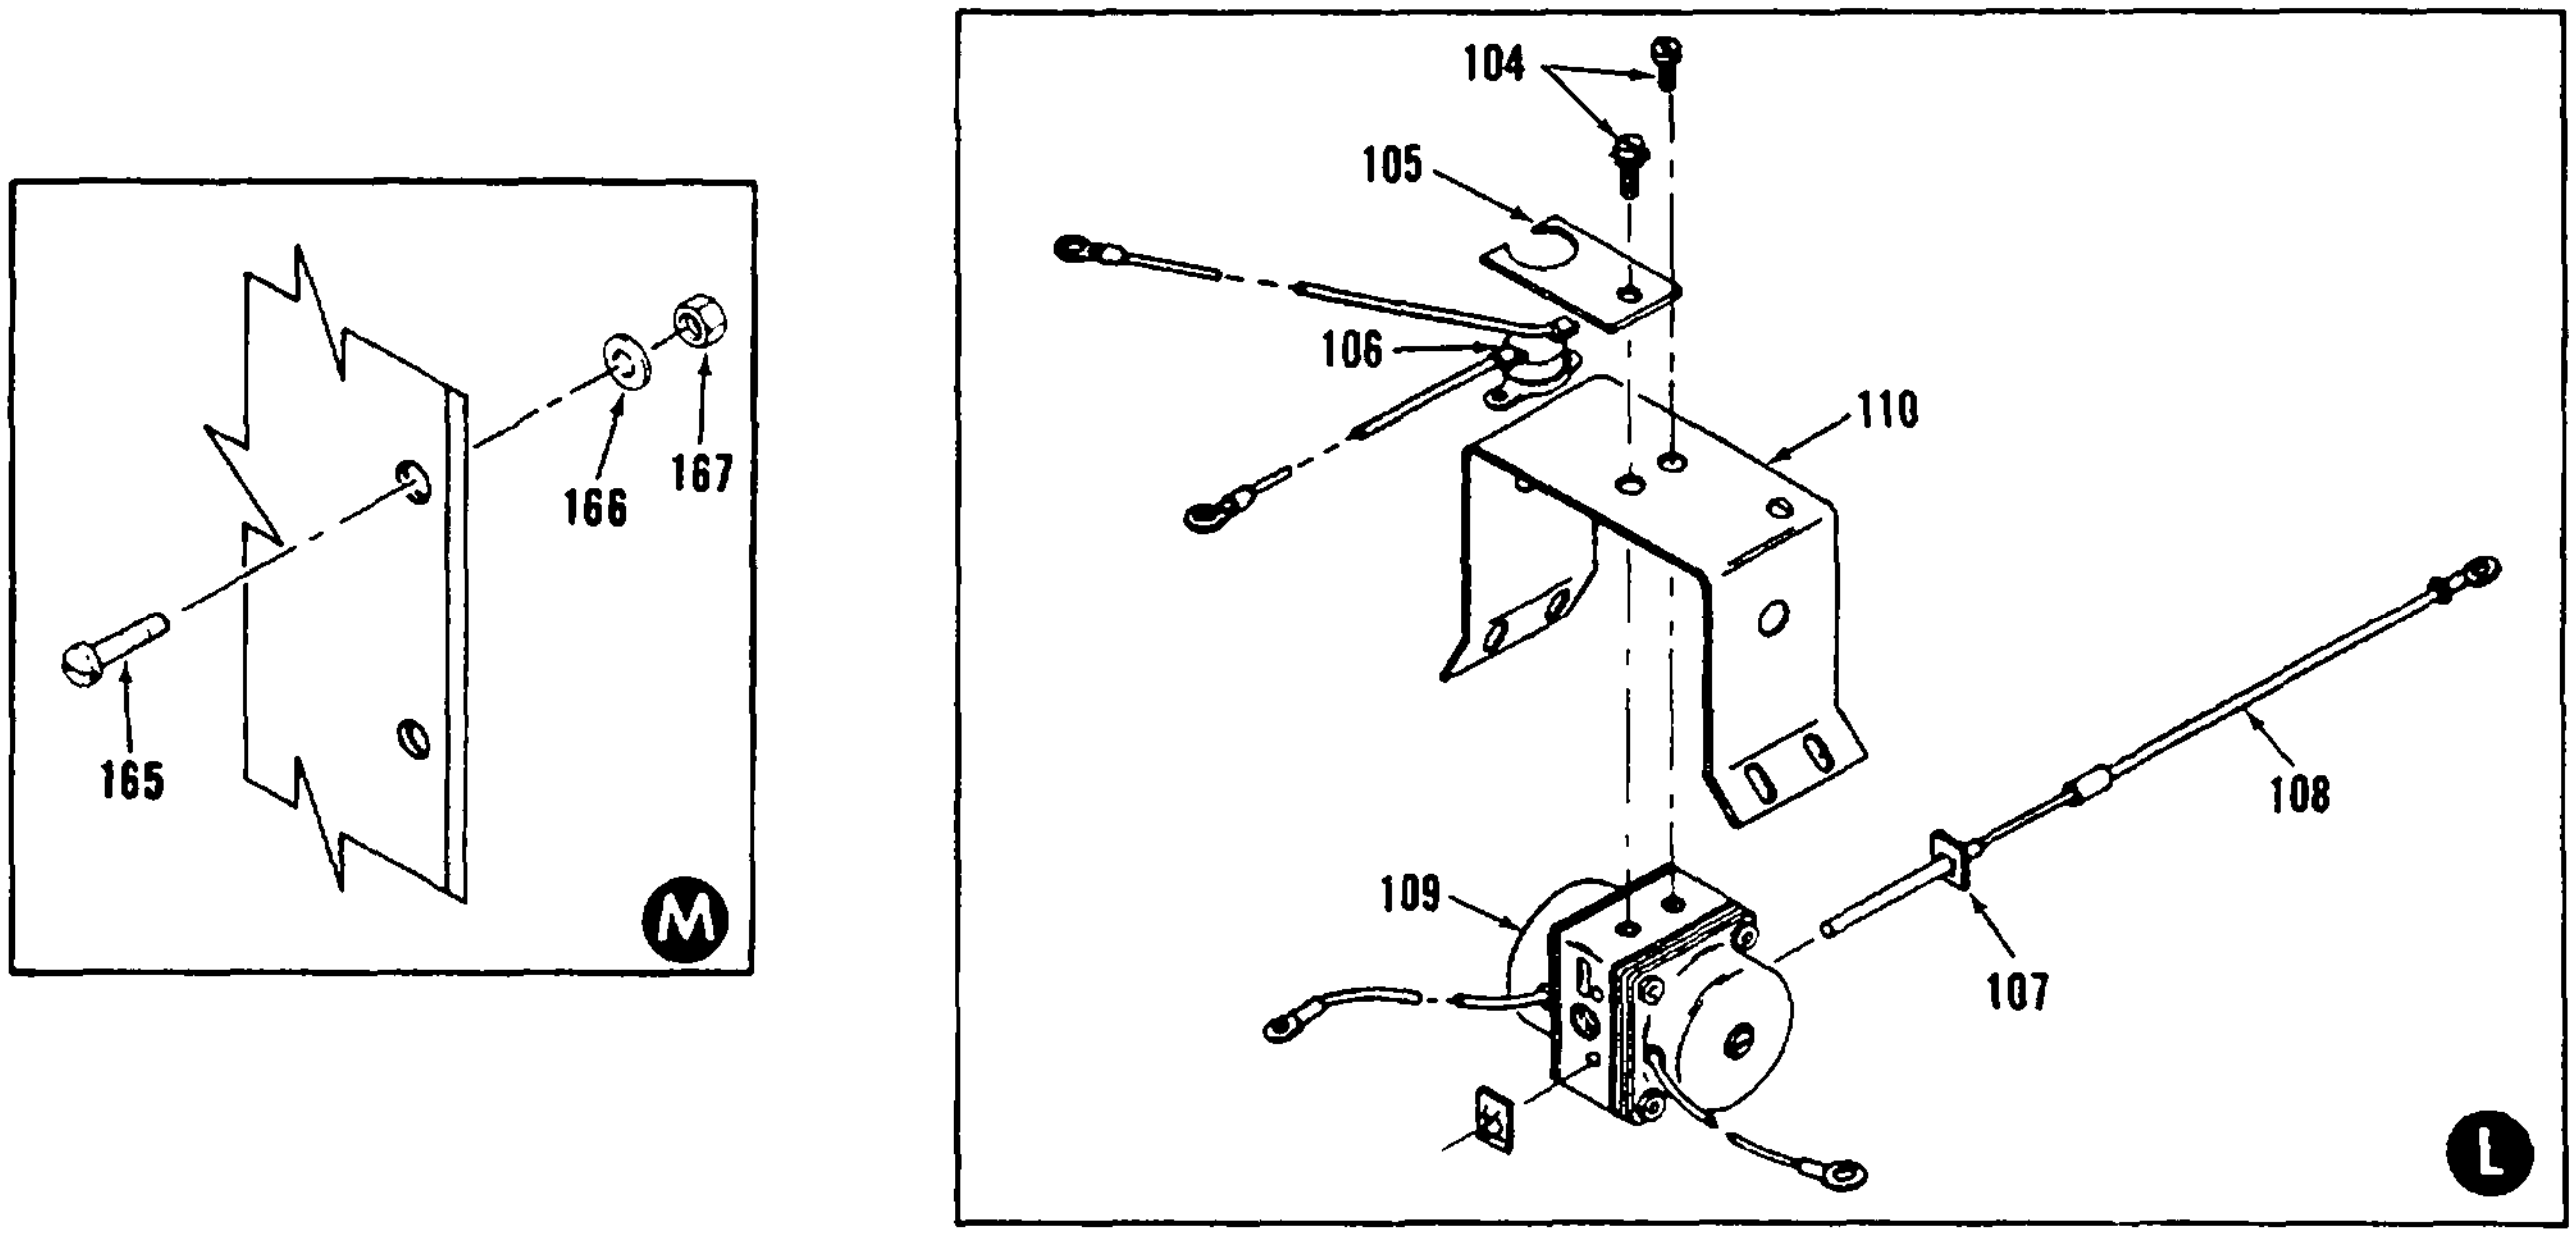
104
105
106
110
166
167
165
M
108
109
107
L

Figure 82. Fuel Burning Winterization Kit (Sheet 5 of 6)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 12 - FUEL BURNING WINTERIZATION KIT - CONTINUED | | | | |
| 82 | | | | | | | | | FUEL BURNING WINTERIZATION KIT - CONTINUED | | | | |
| 82 | 92 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5930-00-854-8344 | SWITCH, LIMIT<br>A2322 | | EA | 1 | 1 |
| 82 | 93 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5930-00-475-5537 | FLAME SWITCH ASSY<br>8376101<br>B51726-G1 | <br>46522<br>46522 | EA | 1 | 1 |
| 82 | 94 | XA--- | XA--- | XA | XA | | | | SCREW<br>2010-0632-16-13 | <br>46522 | EA | 2 | 2 |
| 82 | 95 | XA--- | XA--- | XA | XA | | | | NUT, HEX<br>42-0632-13 | <br>46522 | EA | 2 | 2 |
| 82 | 96 | XA--- | XA--- | XA | XA | | | | SWITCH<br>A51723-G1 | <br>46522 | EA | 1 | 1 |
| 82 | 97 | XA--- | XA--- | XA | XA | | | | FRAME ASSY<br>B51725-G1 | <br>46522 | EA | 1 | 1 |
| 82 | 98 | XA--- | XA--- | XA | XA | | | | NUT, LOCK<br>A51701-G1 | <br>46522 | EA | 1 | 1 |
| 82 | 99 | XA--- | XA--- | XA | XA | | | | LEVER<br>A51695-G1 | <br>46522 | EA | 1 | 1 |
| 82 | 100 | XA--- | XA--- | XA | XA | | | | SPRING<br>A51696-G1 | <br>46522 | EA | 1 | 1 |
| 82 | 101 | XA--- | XA--- | XA | XA | | | | ROD KIT<br>10947055 | <br>46522 | EA | 1 | 1 |
| 82 | 102 | XA | XA--- | XA | XA | | | | ROD<br>10947053<br>A50177-G1 | <br>46522<br>46522 | EA | 1 | 1 |
| 82 | 103 | XA--- | XA--- | XA | XA | | | | ROD<br>10947054<br>A50178-G1 | <br>46522<br>46522 | EA | 1 | 1 |
| 82 | 104 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-249-5278 | SCREW<br>2251-0832-06-17 | <br>46522 | EA | 6 | 6 |
| 82 | 105 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5340-01-145-4311 | BRACKET, THERMOSTAT<br>A54201-G1-1 | <br>46522 | EA | 1 | 1 |
| 82 | 106 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .023 | 4820-01-130-3387 | THERMOSTAT, VALVE<br>B54941-G1 | <br>46522 | EA | 1 | 1 |
| 82 | 107 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-01-027-1353 | NUT, PUSH-ON<br>M30002-83 | <br>46522 | EA | 2 | 2 |
| 82 | 108 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .007 | 4540-01-105-5667 | ELEMENT ASSY, VALVE<br>A54948-G2 | <br>46522 | EA | 1 | 1 |
| 82 | 109 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .007 | 4810-01-120-1079 | VALVE, REGULATOR<br>C54811-G1 | <br>46522 | EA | 1 | 1 |
| 82 | 110 | MOO | MOO | MOO | MOO | | | | BRACKET, VALVE<br>B54028-G1-1 | <br>46522 | EA | 1 | 1 |
| 82 | 111 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-287-3281 | PLUG, PIPE<br>A14140<br>2-130109E | <br>46522<br>81343 | EA | 1 | 1 |
| 82 | 112 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | | NOZZLE, ASSY<br>A18167-G2 | <br>46522 | EA | 1 | 1 |
| 82 | 113 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .005 | 4710-01-131-3398 | TUBE ASSY, FUEL<br>A54907-G1 | <br>46522 | EA | 1 | 1 |
| 82 | 114 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-063-7919 | CLAMP, HOSE<br>A8 | <br>05657 | EA | 1 | 1 |
| 82 | 115 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-01-124-8252 | HOSE, FUEL<br>A52789-G5 | <br>46522 | EA | 1 | 1 |

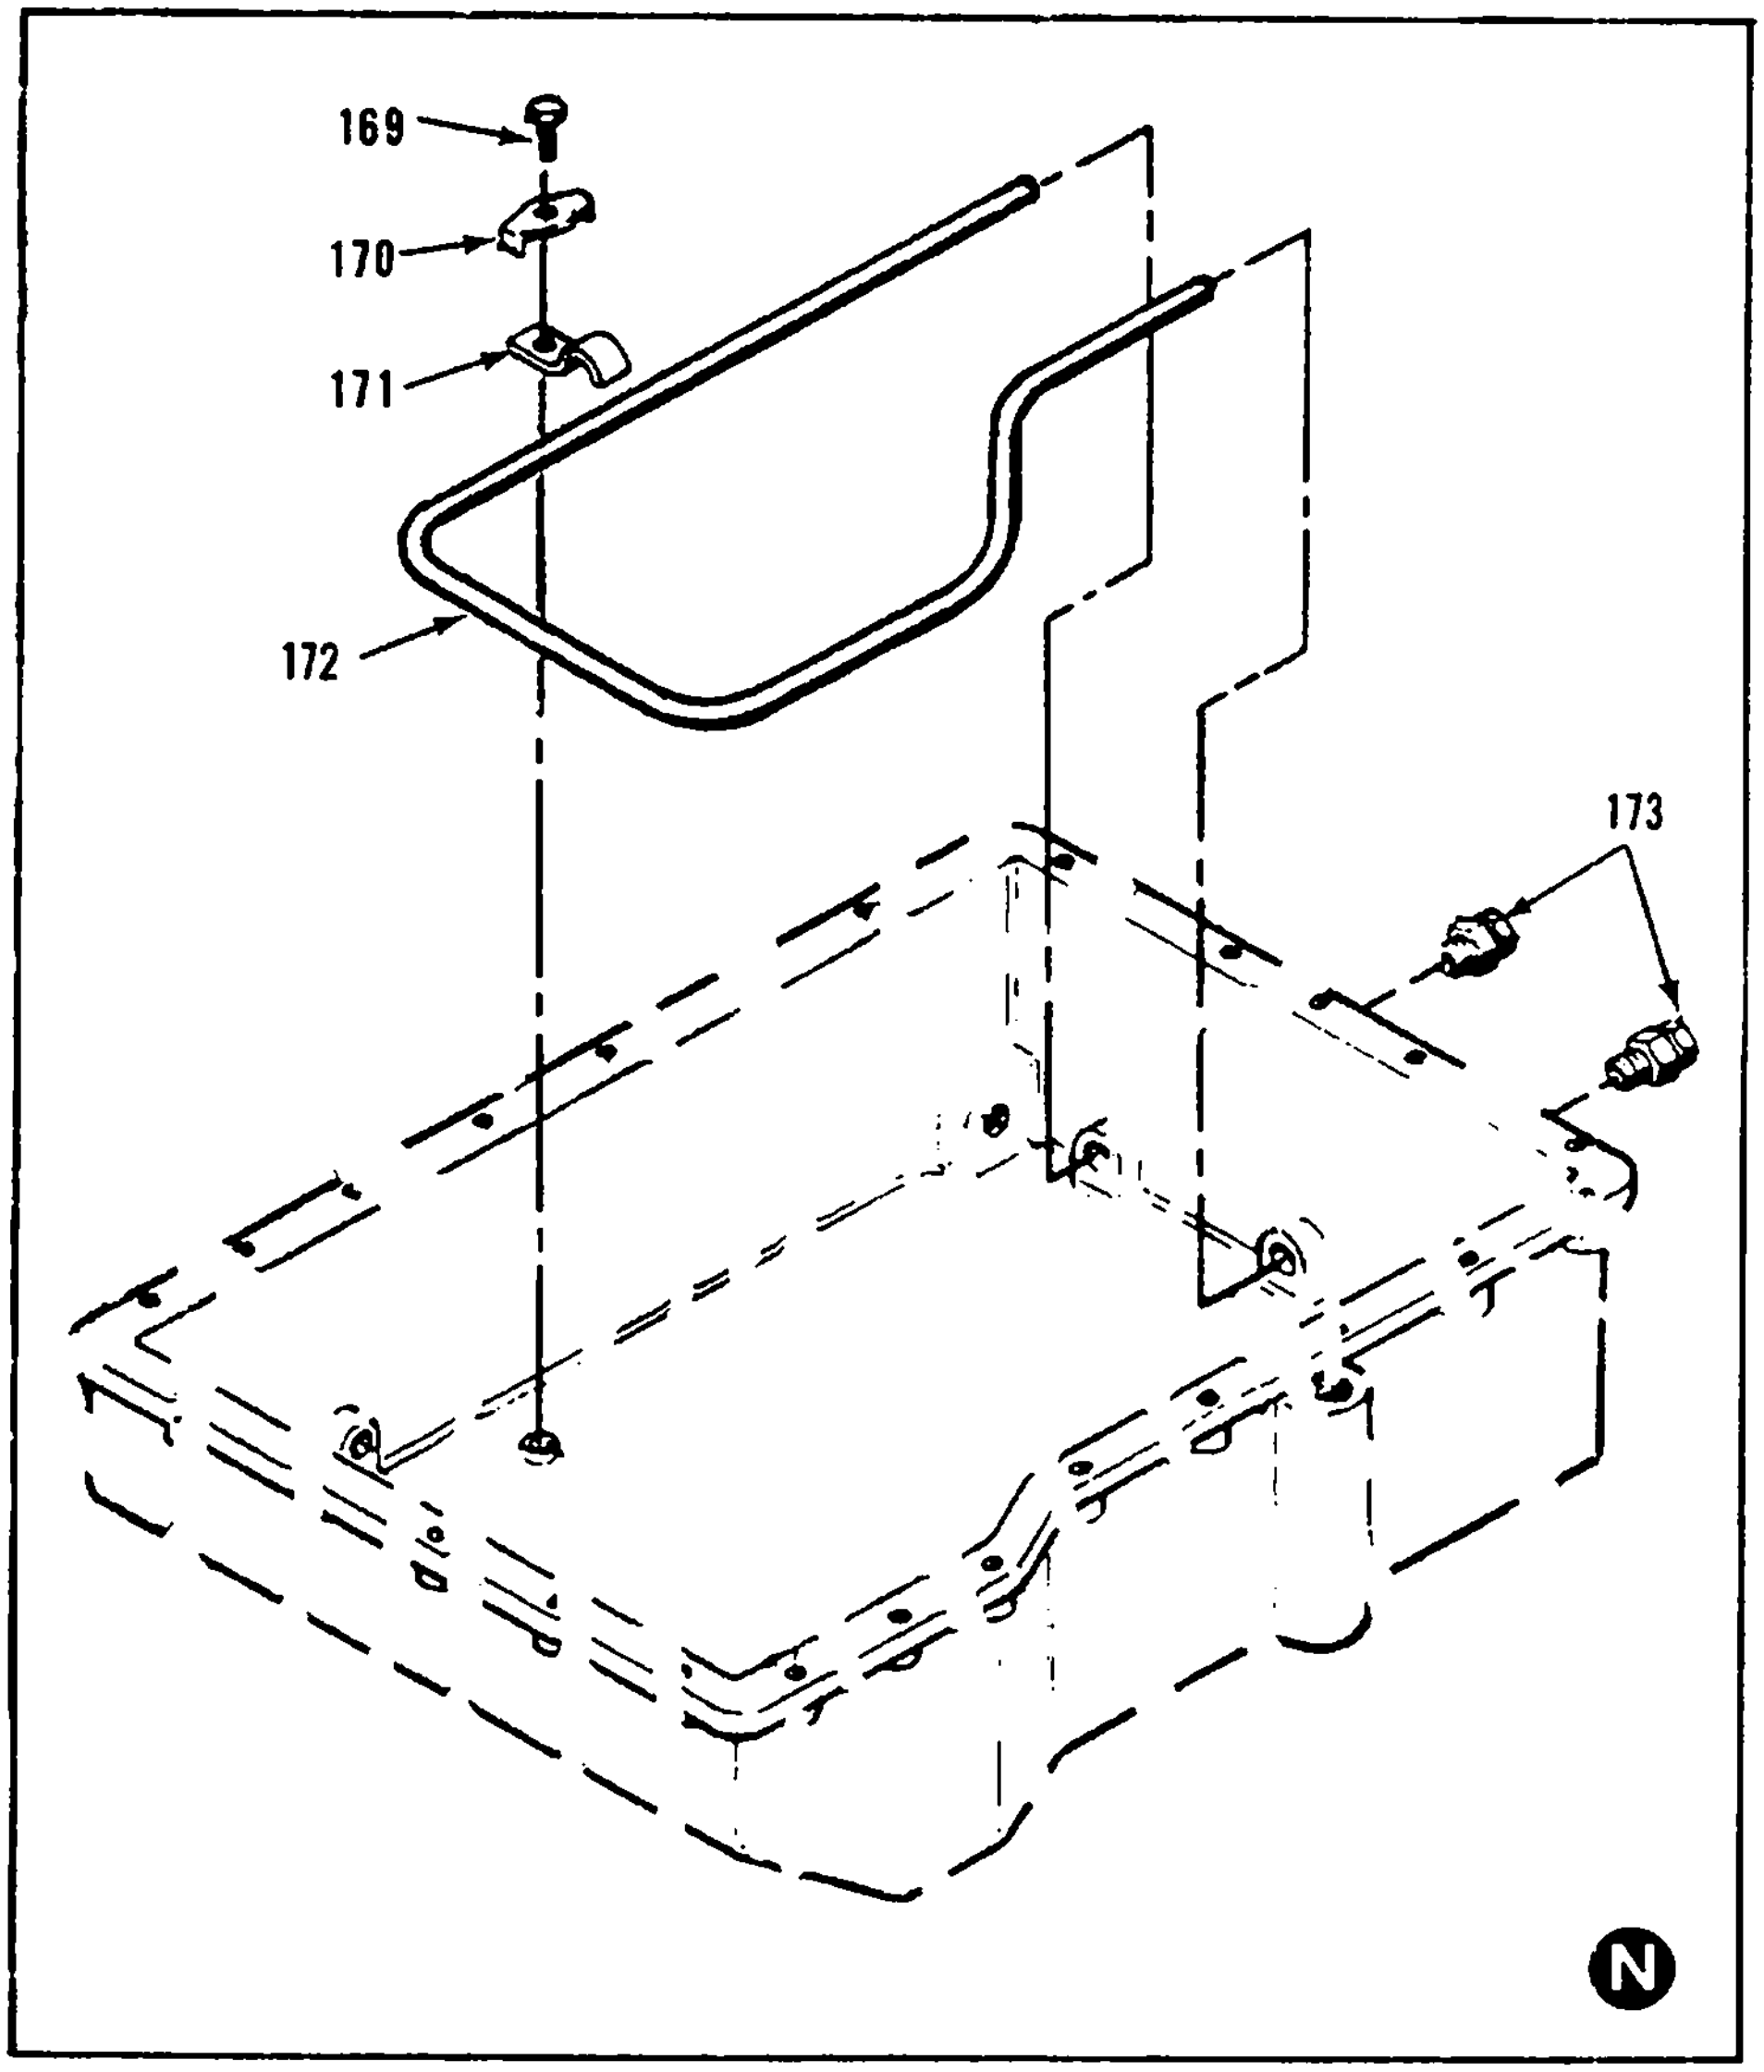
169
170
171
172
173
N

Figure 82. Fuel Burning Winterization Kit (Sheet 6 of 6)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 12 - FUEL BURNING WINTERIZATION KIT - CONTINUED | | | | |
| 82 | | | | | | | | | FUEL BURNING WINTERIZATION KIT - CONTINUED | | | | |
| 82 | 116 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-319-0454 | TEE, ADAPTER<br>A14141 | 46522 | EA | 1 | 1 |
| 82 | 117 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-639-9730 | ELBOW, STREET<br>A1522 | 46522 | EA | 2 | 2 |
| 82 | 118 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-01-131-7675 | CONNECTOR, FUEL LINE<br>A53181-G1 | 46522 | EA | 1 | 1 |
| 82 | 119 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-01-138-7625 | SCREW<br>2251-0832-06-13 | 46522 | EA | 8 | 10 |
| 82 | 120 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 2590-01-163-7280 | COVER, AIR INLET<br>B2859 | 46522 | EA | 1 | 1 |
| 82 | 121 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-374-2045 | CLAMP, HOSE<br>A2823 | 46522 | EA | 2 | 2 |
| 82 | 122 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-139-4105 | HOSE, PUMP<br>A2829 | 4652 | EA | 1 | 1 |
| 82 | 123 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-639-9011 | ELBOW, 90 DEGREE, 1/4 PIPE | | EA | 1 | 1 |
| 82 | 124 | AFF | AFF | AFF | AFF | | | | PUMP AND MOTOR ASSY<br>B54827-G1 | 46522 | EA | 1 | 1 |
| 82 | 125 | PAFZZ | PAFZZ | PAFFF | PAFFF | | .017 | 4320-00-217-5827 | PUMP ASSY<br>B2894 | 46522 | EA | 1 | 1 |
| 82 | 126 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-01-248-6917 | SCREW, 10-32, HEX HD, SKT<br>A2897 | 46522 | EA | 4 | 4 |
| 82 | 127 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-221-2136 | PLUG, 1/8, NPT<br>MS209-1S | 96906 | EA | 1 | 1 |
| 82 | 128 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .015 | 5360-00-221-6558 | SPRING, RELIEF VALVE<br>A2896 | 46522 | EA | 1 | 1 |
| 82 | 129 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .007 | 3110-00-157-2087 | BALL, RELIEF VALVE<br>A2903 | 46522 | EA | 1 | 1 |
| 82 | 130 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 2590-01-163-2707 | PORT PLATE<br>B2929 | 46522 | EA | 1 | 1 |
| 82 | 131 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-00-462-4524 | PACKING, PREFORMED<br>A2932 | 46522 | EA | 2 | 2 |
| 82 | 132 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | | 2590-01-220-2289 | CAM RING<br>A2898-1 | 46522 | EA | 1 | 1 |
| 82 | 133 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 2540-00-122-2114 | BLADE, PUMP<br>A2901 | 46522 | EA | 4 | 4 |
| 82 | 134 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-824-1643 | SETSCREW<br>A2902 | 46522 | EA | 1 | 1 |
| 82 | 135 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 2540-00-122-2059 | ROTOR<br>A2900 | 46522 | EA | 1 | 1 |
| 82 | 136 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .009 | 4210-00-140-8925 | ADAPTER<br>A2928 | 46522 | EA | 1 | 1 |
| 82 | 137 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5330-00-461-5732 | CAGE AND SEAL ASSY A2904 | 46522 | EA | 1 | 1 |
| 82 | 138 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-486-2519 | WASHER, SEAL<br>A2931 | 46522 | EA | 1 | 1 |
| 82 | 139 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .015 | 5360-00-485-0715 | SPRING, SEAL<br>A2930 | 46522 | EA | 1 | 1 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SS I | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
| | | | | | | | | | GROUP 12 - FUEL BURNING WINTERIZATION KIT - CONTINUED | | | | |
| 82 | | | | | | | | | FUEL BURNING WINTERIZATION KIT - CONTINUED | | | | |
| 82 | 140 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .010 | 6105-00-400-0196 | MOTOR, 24V<br>B2798 | 46522 | EA | 1 | 1 |
| 82 | 141 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .008 | 5977-00-456-6097 | CAP, BRUSH<br>A2480 | 46522 | EA | 2 | 2 |
| 82 | 142 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .047 | 5977-00-078-9102 | BRUSH AND SPRING<br>A2481 | 46522 | EA | 2 | 2 |
| 82 | 143 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .008 | 5305-00-436-7317 | SCREW, BURNER LEG<br>A2822 | 46522 | EA | 3 | 3 |
| 82 | 144 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-01-142-3150 | SCREW<br>2290-0632-05-13 | 46522 | EA | 4 | 8 |
| 82 | 145 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 3305-01-121-9352 | SCREW<br>2251-0832-10-13 | 46522 | EA | 4 | 8 |
| 82 | 146 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .009 | 2990-01-159-0879 | INLET, COMBUSTION<br>B2283 | 46522 | EA | 1 | 1 |
| 82 | 147 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | | 4210-00-138-2252 | PLATE, AIR INLET<br>A2631 | 46522 | EA | 1 | 1 |
| 82 | 148 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | | SCREW, SET<br>A2657 | 46522 | EA | 1 | 1 |
| 82 | 149 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 2990-00-139-4459 | FAN ASSY, COMBUSTION<br>B2615 | 46522 | EA | 1 | 1 |
| 82 | 150 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .080 | 4520-01-132-8908 | IGNITER, 24V<br>C2757 | 46522 | EA | 1 | 1 |
| 82 | 151 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-00-119-4732 | GASKET, IGNITER<br>A2096 | 46522 | EA | 1 | 1 |
| 82 | 152 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 2540-01-139-3477 | BURNER ASSY<br>C2583 | 46522 | EA | 1 | 1 |
| 82 | 153 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-052-9051 | SCREW<br>MS24630-36 | 96906 | EA | 2 | 2 |
| 82 | 154 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | | .023 | 2540-00-454-0665 | VAPORIZER<br>A2610 | 46522 | EA | 1 | 1 |
| 82 | 155 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 2990-00-477-6143 | RETAINER, VAPORIZER<br>A2612 | 46522 | EA | 1 | 1 |
| 82 | 156 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-410-3007 | SCREW<br>A2841 | 46522 | EA | 5 | 5 |
| 82 | 157 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-187-4191 | PLUG, DRAIN<br>MS51884-7ZH | 46522 | EA | 1 | 1 |
| 82 | 158 | PAFZZ | PAFZZ | PAFZZ | PAOZZ | D | .008 | 5305-01-138-7625 | SCREW, 8-32, 5/16 HEX HD<br>2251-0832-06-13 | 46522 | EA | 2 | 2 |
| 82 | 159 | MDO | MDO | MDO | MDO | | | | PLATE, IDENTIFICATION<br>B2714 | 46522 | EA | 1 | 1 |
| 82 | 160 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5325-01-105-7162 | GROMMET<br>A54814-G1 | 46522 | EA | 1 | 1 |
| 82 | 161 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 2590-01-164-9293 | CASING, BURNER<br>C54911-G1-1 | 46522 | EA | 1 | 1 |
| 82 | 162 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 2540-01-164-9279 | EXCHANGER, HEAT<br>D2691 | 46522 | EA | 1 | 1 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION |  | (2) SMR CODE |  |  |  | (3) USMC |  | (4) | (5) DESCRIPTION |  | (6) | (7) | (8) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | QTY INC IN UNIT | USMC QTY PER EQUIP |
|  |  |  |  |  |  |  |  |  | GROUP 12 - FUEL BURNING WINTERIZATION KIT - CONTINUED |  |  |  |  |
| 82 |  |  |  |  |  |  |  |  | FUEL BURNING WINTERIZATION KIT - CONTINUED |  |  |  |  |
| 82 | 163 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5340-01-965-0981 | CLAMP<br>B2185 |  | EA | 2 | 2 |
| 82 | 164 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 2540-01-165-0497 | BRACKET<br>B2793 46522 |  | EA | 2 | 2 |
| 82 | 165 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5305-00-036-6968 | SCREW AND WASHER<br>69-662-18<br>61-060641-40 -0142B-0542B | 30554<br>78189 | EA | 6 | 6 |
| 82 | 166 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .010 | 5310-00-983-8483 | WASHER<br>MS27183-5 | 96906 | EA | 6 | 6 |
| 82 | 167 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | D | .008 | 5310-00-081-8087 | NUT<br>MS21044-N06 | 96906 | EA | 6 | 6 |
| 82 | 168 | MDO | MDO | MDO | MDO |  |  |  | PLATE, WINTER, SYS. DIAG.<br>71-4521 | 30554 | EA | 1 | 1 |
| 82 | 169 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5305-00-721 -5492 | BOLT<br>T102 | 11083 | EA | 1 | 1 |
| 82 | 170 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .008 | 5340-00-919-9389 | LOCK<br>8M7640 11083 |  | EA | 1 | 1 |
| 82 | 171 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .013 | 5340-00-423 -8320 | CLIP<br>1B3057 | 11083 | EA | 1 | 1 |
| 82 | 172 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .003 | 4710-00-247 -9690 | TUBE<br>5R778 | 11083 | EA | 1 | 1 |
| 82 | 173 | PAFZZ | PAFZZ | PAHZZ | PAHZZ | D | .050 | 4730-00-401-8098 | CONNECTOR ASSY<br>8S1326 | 11083 | EA | 2 | 2 |

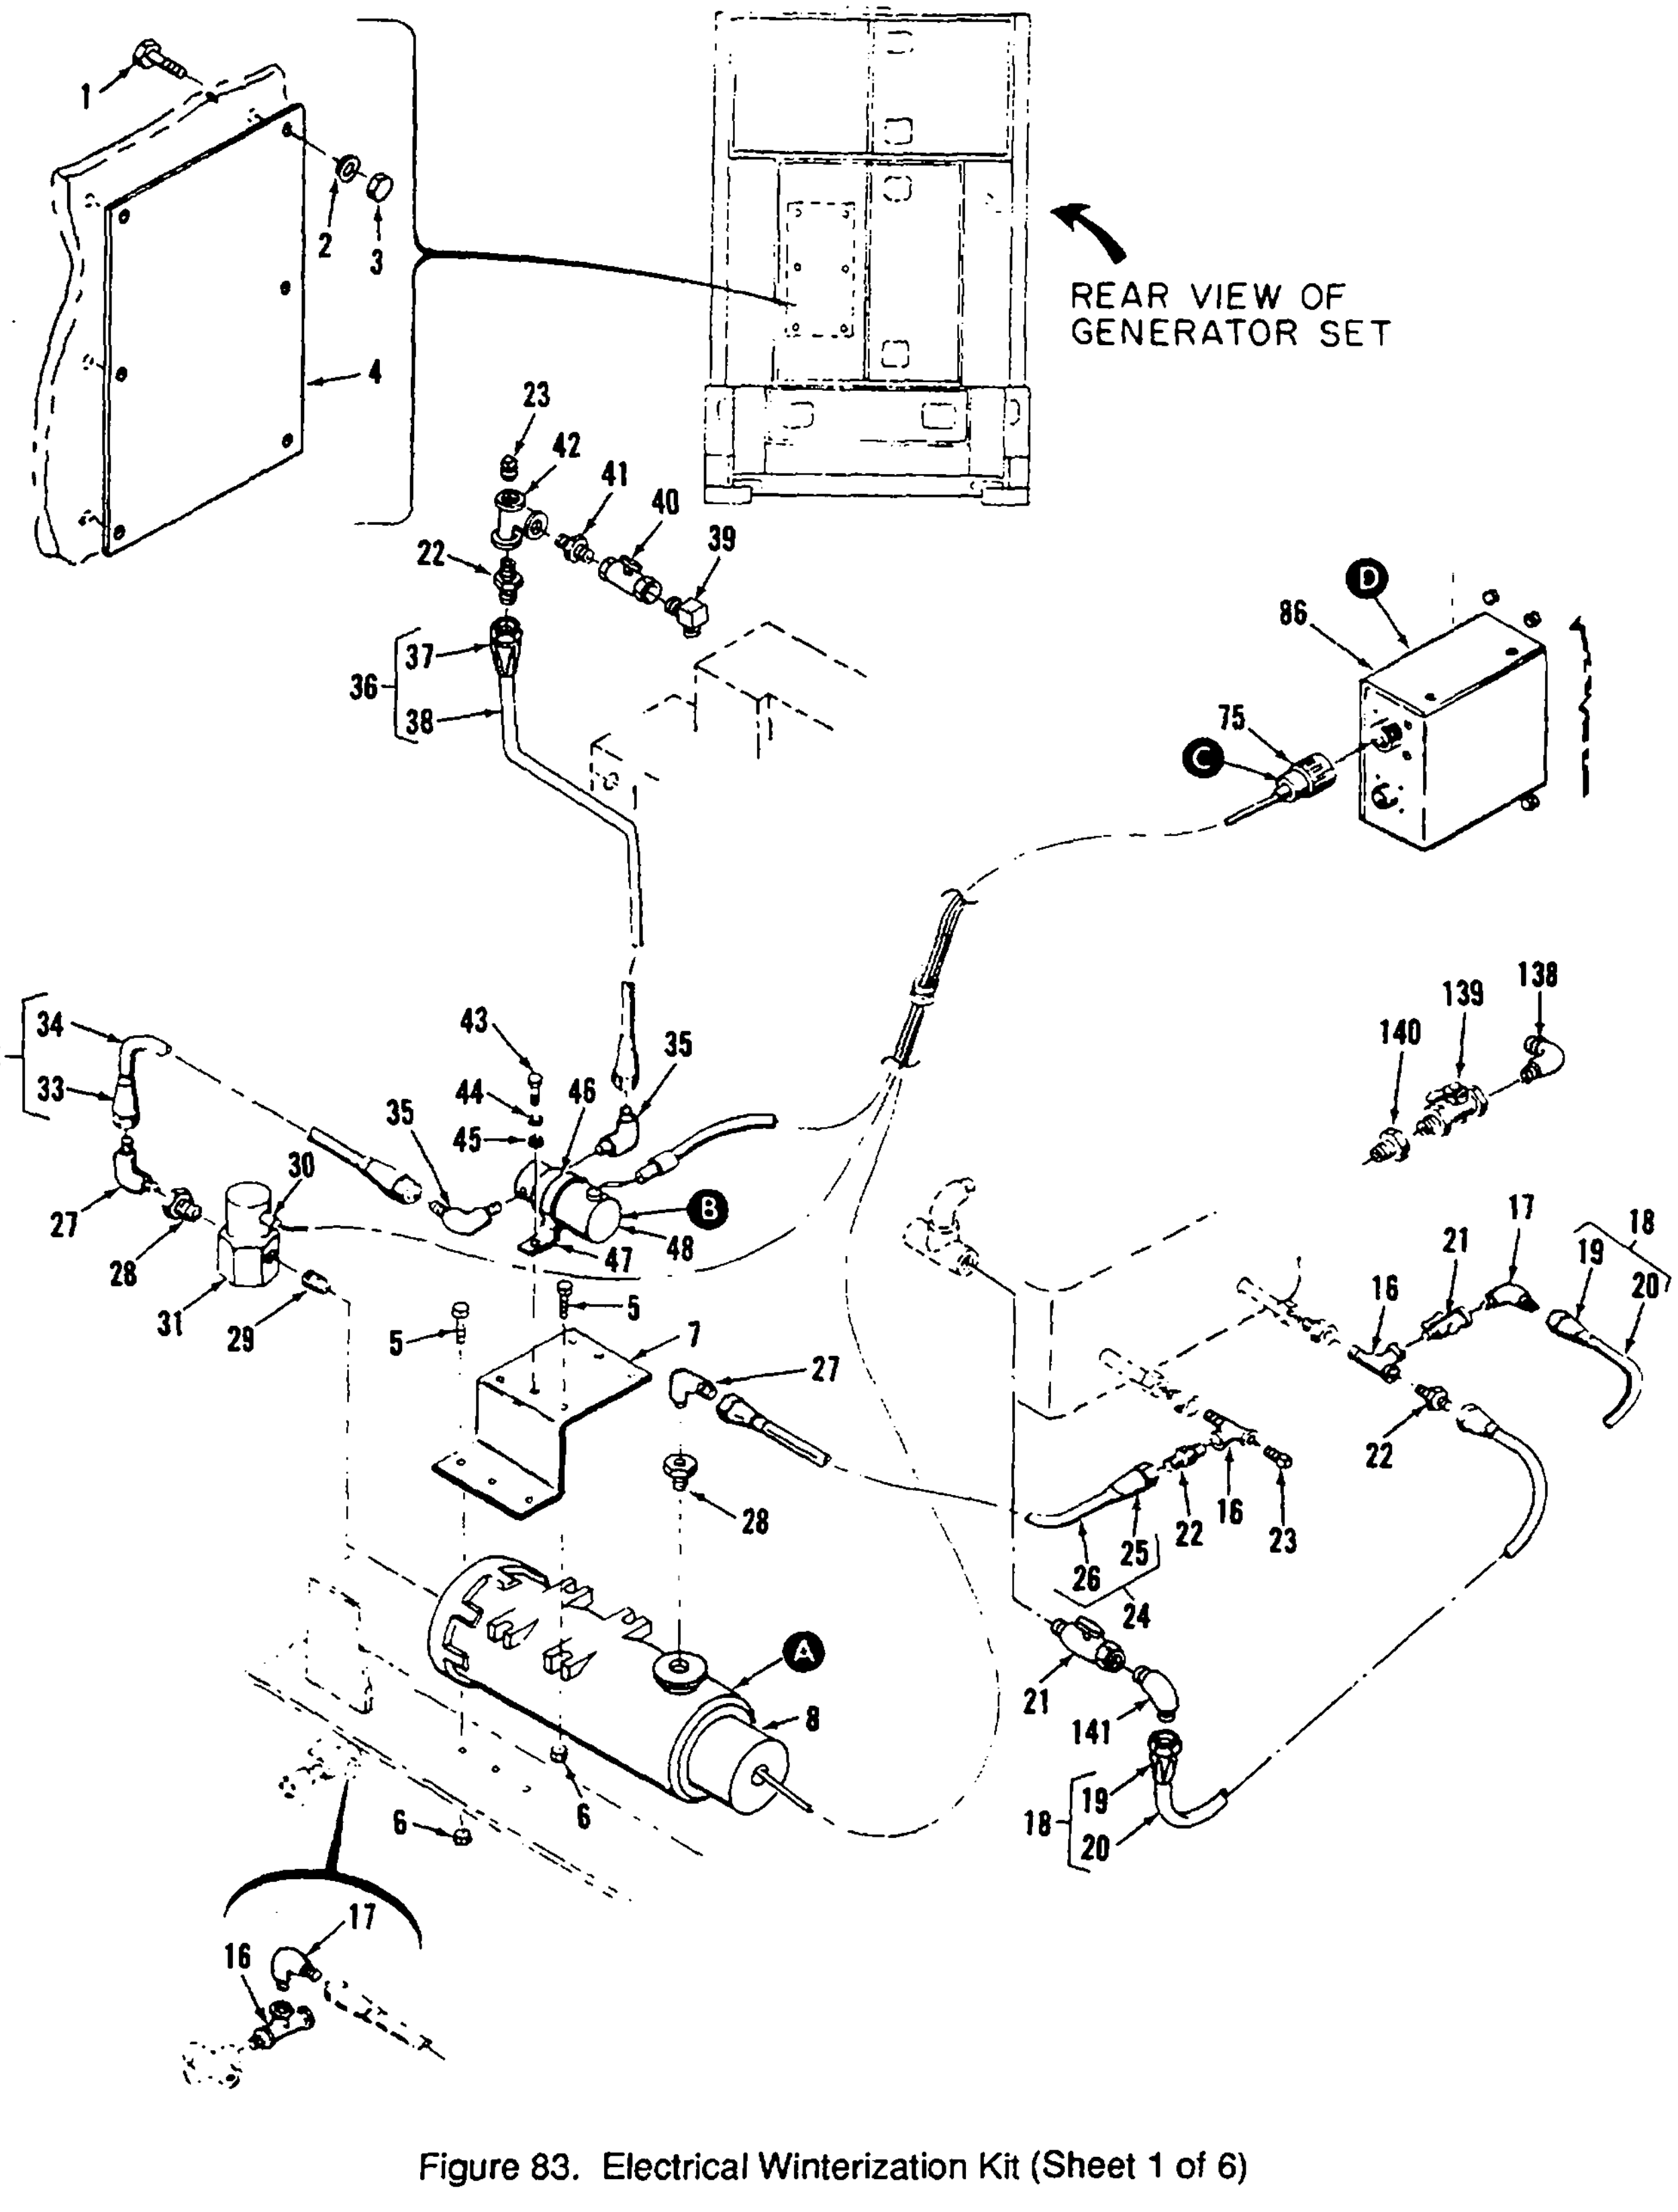
1
2
3
4
REAR VIEW OF
GENERATOR SET
23
42
41
40
39
22
37
36
38
D
86
75
C
34
32
33
43
44
45
46
35
35
27
28
30
31
29
B
48
47
5
5
7
27
28
A
8
6
6
17
16
140
139
138
21
17
18
19
20
16
22
22
16
23
26
25
24
21
141
18
19
20

Figure 83. Electrical Winterization Kit (Sheet 1 of 6)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SS I | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 13 - ELECTRICAL WINTERIZATION HEATER KIT | | | | |
| 83 | | PAFFF | PAOFF | PAFZZ | PAFFF | | .005 | 6115-01-125-9368 | ELECTRICAL WINTERIZATION KIT<br>76-4116 30554 | | EA | 1 | |
| 83 | 1 | PAOZZ | PAFZZ | PAFZZ | PAOZZ | D | .008 | 5305-00-036-6968 | SCREW AND WASHER<br>69-662-18<br>61-06051-40-0142B-0542B | <br>30554<br>78189 | EA | 6 | 12 |
| 83 | 2 | PAOZZ | PAFZZ | PAFZZ | PAOZZ | D | .010 | 5310-00-983-8483 | WASHER<br>MS27183-5 | <br>96906 | EA | 6 | 6 |
| 83 | 3 | PAOZZ | PAFZZ | PAFZZ | PAOZZ | D | .008 | 5310-00-081 -8087 | NUT<br>MS21044-NO6 | | EA | 6 | 6 |
| 83 | 4 | MOO | MOO | MOO | MOO | | | | PLATE, WINTERIZATION SYSTEM<br>71-4520 | <br>30554 | EA | 1 | 1 |
| 83 | 5 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-225 -3839 | SCREW<br>MS90725-8 | <br>96906 | EA | 7 | 7 |
| 83 | 6 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-483 -8792 | NUT<br>MS17829-4C | <br>96906 | EA | 7 | 7 |
| 83 | 7 | MOO | MOO | MOO | MOO | | | | BRACKET<br>71-4434 | <br>30554 | EA | 1 | 1 |
| 83 | 8 | PAOZZ | PAOFF | PAFFF | PAFFF | | .050 | 2990-00-65 -4265 | HEATER, ELECTRICAL<br>70-4073<br>BC220 | <br>30554<br>95408 | EA | 1 | 1 |
| 83 | 9 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-225 -3839 | SCREW, HEX HEAD<br>1/4 - 20 UNC-1A x 3/4 | <br>95408 | EA | 6 | 6 |
| 83 | 10 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-582 -5965 | WASHER, LOCK<br>MS35338-44 | <br>96906 | EA | 6 | 8 |
| 83 | 11 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 2820-00-997 -6132 | END CAP AND VALVE<br>C15099 | <br>95408 | EA | 1 | 1 |
| 83 | 12 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .030 | 5330-00-730-8936 | GASKET<br>GS-2 | <br>95408 | EA | 1 | 1 |
| 83 | 13 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .090 | 4540-00-703-1925 | ELEMENT<br>650T45 | <br>95408 | EA | 1 | 1 |
| 83 | 14 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .090 | 4730-00-011 -2578 | PLUG, DRAIN<br>1/4 NPT | <br>96906 | EA | 1 | 1 |
| 83 | 15 | PAFZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 2990-00-997-6134 | TANK<br>B35676 | <br>95408 | EA | 1 | 1 |
| 83 | 16 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-038 -7174 | TEE, PIPE<br>71-4811<br>224-6 | <br>30554<br>99103 | EA | 3 | 3 |
| 83 | 17 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-231-3013 | ELBOW, MALE<br>90 DEGREE<br>MS20822-8 | <br><br>96906 | EA | 2 | 2 |
| 83 | 18 | AFO | AFF | AFF | AFF | | | | HOSE ASSY<br>MS28741-8-8464 | <br>96906 | EA | 2 | 2 |
| 83 | 19 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-842 -2202 | FITTING<br>MS24587-8 | <br>96906 | EA | 4 | 8 |
| 83 | 20 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-542-4433 | HOSE<br>MIL-H-8794-8 | <br>81349 | FT | 8 | 16 |
| 83 | 21 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .005 | 4820-00-287 -5617 | COCK, DRAIN<br>71-4804<br>170C-N | <br>30554<br>70411 | EA | 2 | 2 |
| 83 | 22 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-194 -1114 | CONNECTOR, MALE<br>AN816-8 | <br>88044 | EA | 3 | 3 |
| 83 | 23 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-221 -2138 | PLUG, SQUARE HEAD<br>MS20913-3S | <br>96906 | EA | 2 | 2 |

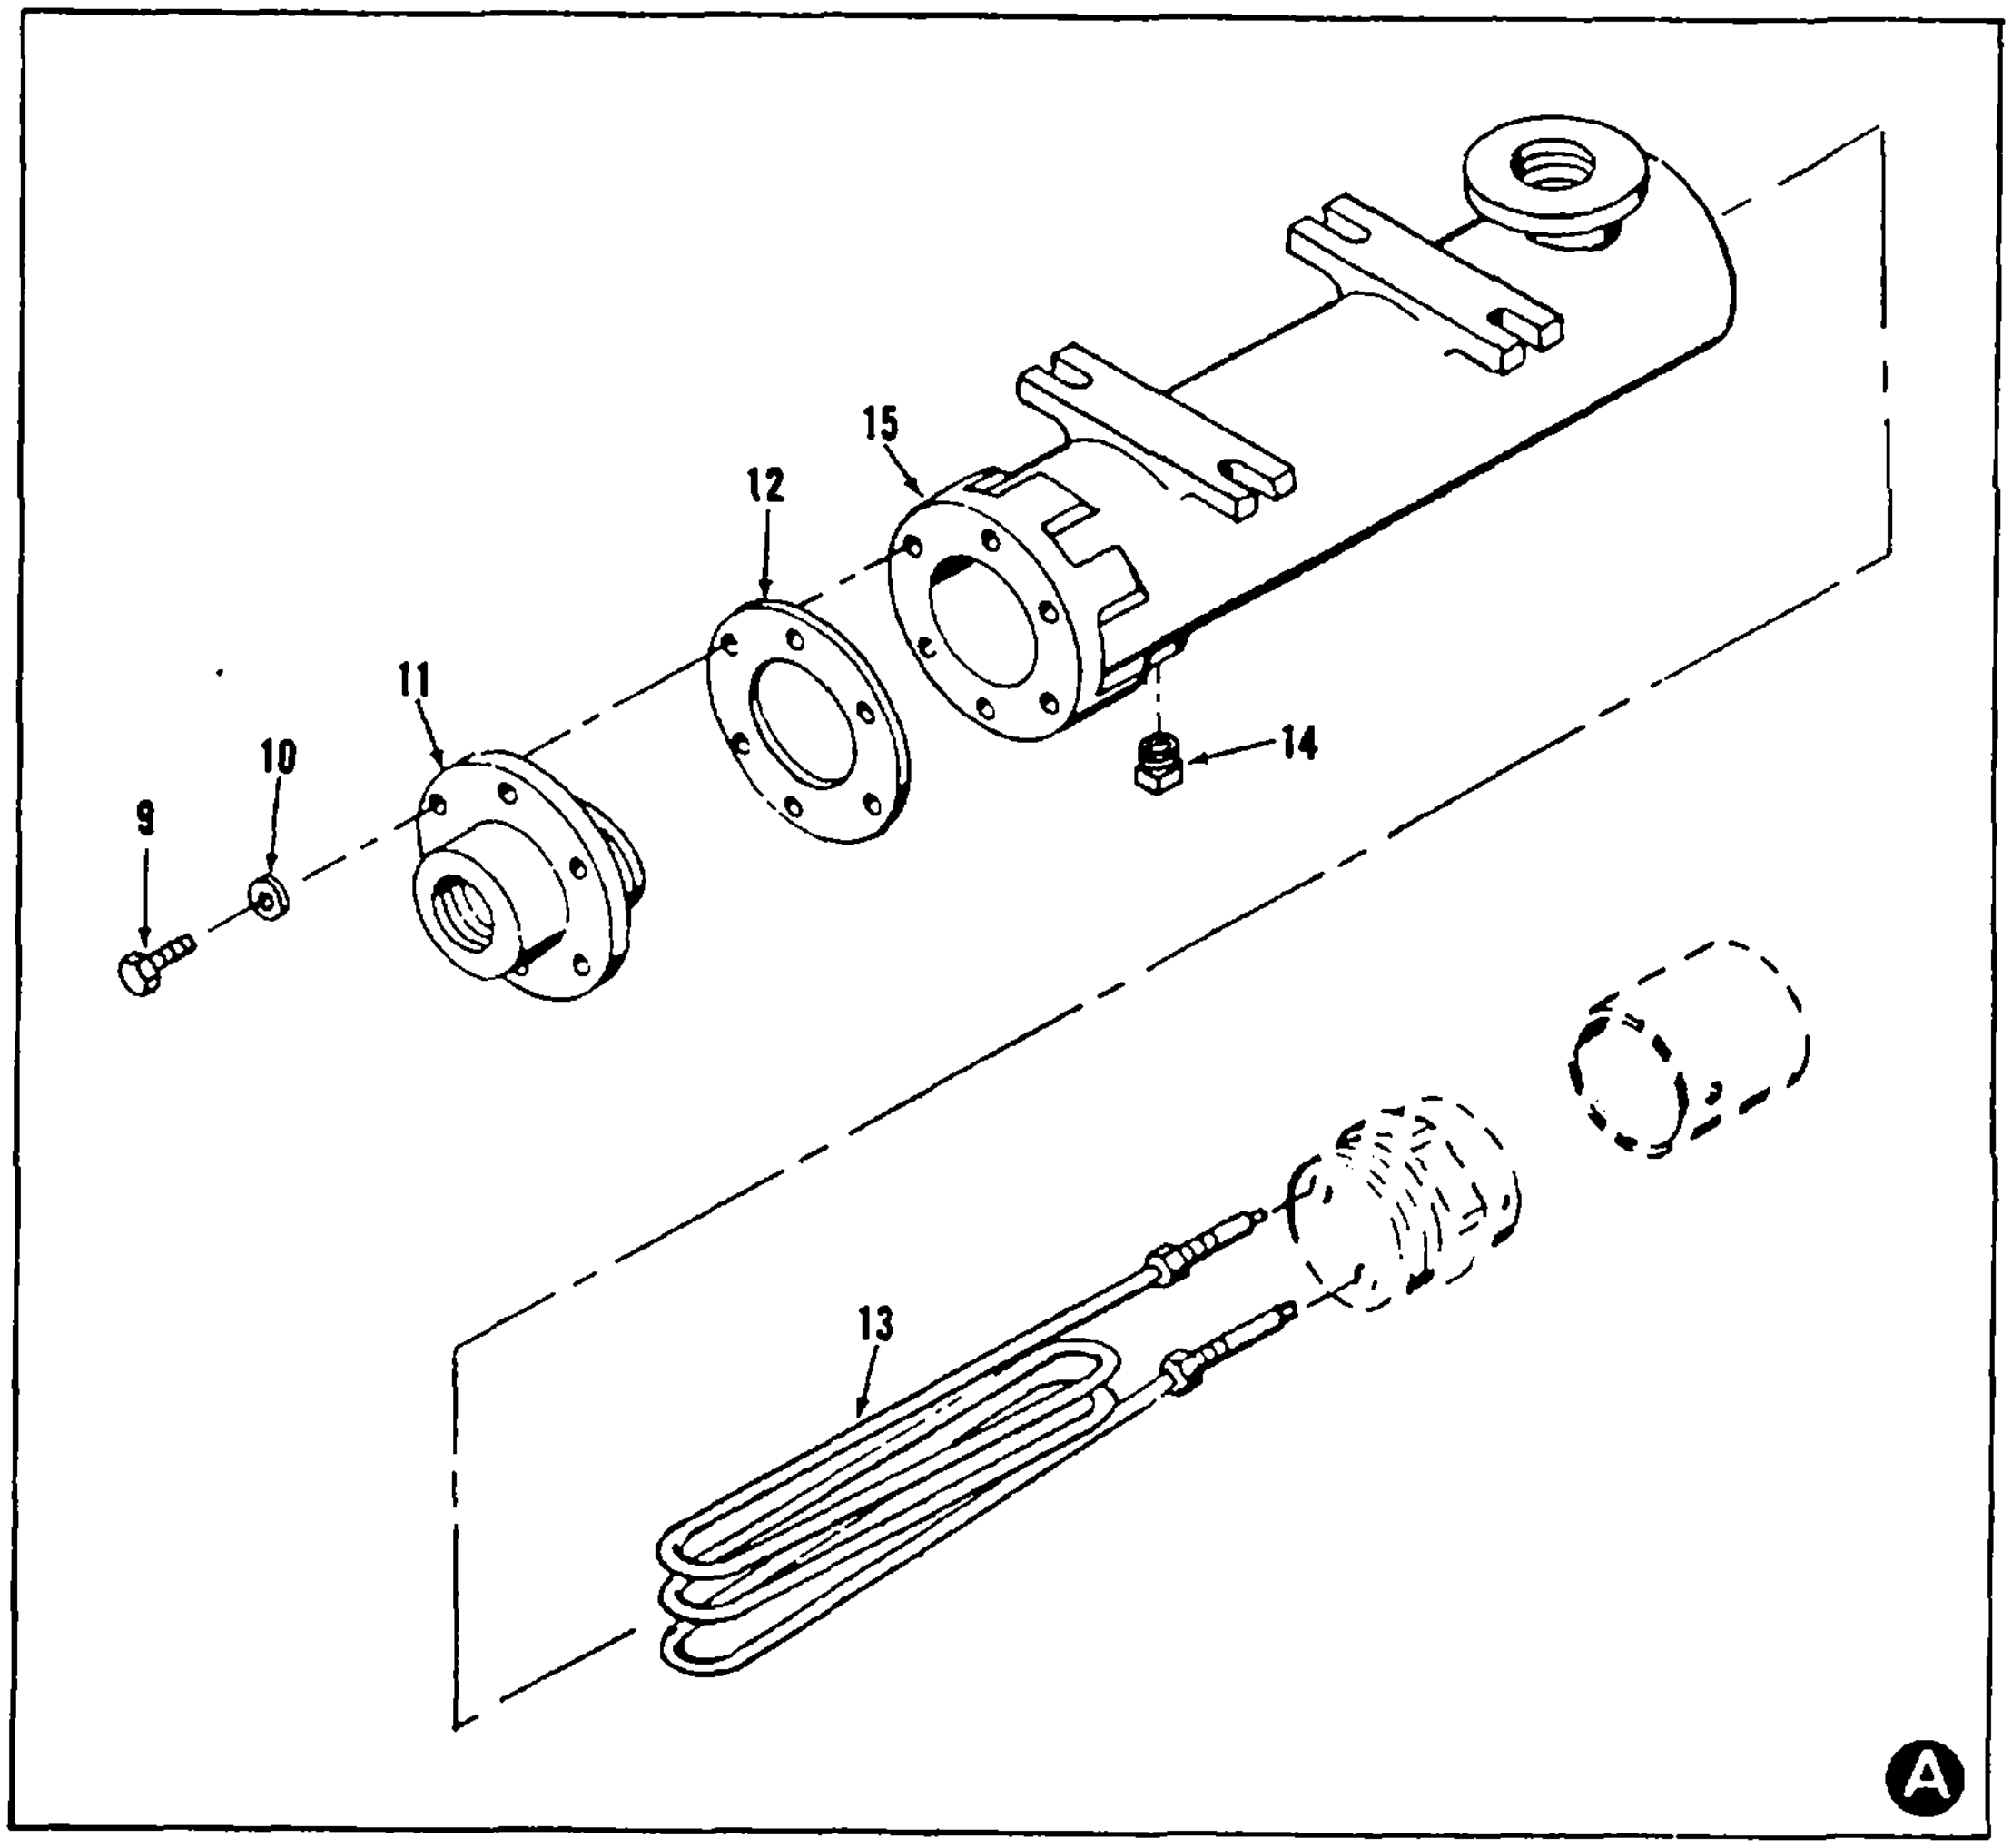
15
12
11
10
9
14
13
A

Figure 83. Electrical Winterization Kit (Sheet 2 of 6)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SS I | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 13 - ELECTRICAL WINTERIZATION HEATER KIT - CONTINUED | | | | |
| 83 | | | | | | | | | ELECTRICAL WINTERIZATION KIT - CONTINUED | | | | |
| 83 | 24 | AOO | AFO | AFF | AFF | | | | HOSE ASSY<br>MS28741-8-0190 | <br>96906 | EA | 1 | 1 |
| 83 | 25 | PAOZZ | PAOZZ | PAFZZ | PAZZ | D | .006 | 4730-00-842-2208 | FITTING<br>MS24087-8 | <br>96906 | EA | 2 | 8 |
| 83 | 26 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-542-4433 | HOSE<br>MIL-H-8794-8 | <br>81349 | FT | 2 | 16 |
| 83 | 27 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-618-8125 | ELBOW, MALE<br>90 DEG 8-8CTX-S<br>71-4842-10 | <br>08752<br>30554 | EA | 2 | 2 |
| 83 | 28 | PAOZZ | PAOZZ | PAOZZ | PAFZZ | D | .006 | 4730-00-892-4983 | REDUCER, PIPE<br>71-4822<br>247-16-8 | <br>30554<br>99103 | EA | 2 | 2 |
| 83 | 29 | PAOZZ | PAOZZ | PAOZZ | PAFZZ | D | .006 | 4730-00-196-1469 | NIPPLE, CLOSE<br>MS51953-121 | <br>96906 | EA | 1 | 1 |
| 83 | 30 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5325-00-276-6100 | GROMMET<br>MS35490-14 | <br>96906 | EA | 2 | 2 |
| 83 | 31 | PAOZZ | PAOZZ | PAOZZ | PAFZZ | D | .050 | 6620-00-072-6834 | THERMOSTAT<br>70-4074<br>KS1012 | <br>30554<br>95408 | EA | 1 | 1 |
| 83 | 32 | AOO | AFO | AFF | AFF | | | | HOSE ASSY<br>MS28741-8-0104 | <br>96906 | EA | 1 | 1 |
| 83 | 33 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4720-00-842-2202 | FITTING<br>MS24587-8 | <br>96906 | EA | 2 | 8 |
| 83 | 34 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-542-4433 | HOSE<br>MIL-H-8794-8 | <br>81349 | FT | 2 | 16 |
| 83 | 35 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-844-3308 | ELBOW, MALE 90 DEGREE<br>8-4CTX-S<br>71-4842-11 | <br>08752<br>30554 | EA | 2 | 2 |
| 83 | 36 | AOO | AFO | AFF | AFF | | | | HOSE ASSY<br>MS28741-8-0320 | <br>96906 | EA | 1 | 1 |
| 83 | 37 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-842-2202 | FITTING<br>MS24587-8 | <br>96906 | EA | 2 | 8 |
| 83 | 38 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .070 | 4720-00-542-433 | HOSE<br>MIL-H-8794-8 | <br>81349 | FT | 3 | 16 |
| 83 | 39 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-01-130-8764 | ELBOW<br>71-4825<br>23873-8-12 | <br>30554<br>99103 | EA | 1 | 1 |
| 83 | 40 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .005 | 4820-00-136-1085 | COCK, SHUT-OFF<br>69-659<br>A400-3 | <br>30554<br>16024 | EA | 1 | 1 |
| 83 | 41 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-952-3180 | NIPPLE<br>71-4881-01<br>C3069 x 8 x 6 | <br>30554<br>79470 | EA | 1 | 1 |
| 83 | 42 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-278-3991 | TEE, FEMALE<br>AN917-3 | <br>88044 | EA | 1 | 1 |
| 83 | 43 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-068-0502 | SCREW<br>MS90725-6 | <br>96906 | EA | 2 | 2 |
| 83 | 44 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-4058 | WASHER<br>MS27183-10 | <br>96906 | EA | 2 | 2 |
| 83 | 45 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-582-5965 | WASHER, LOCK<br>MS35338-44 | <br>96906 | EA | 2 | 8 |
| 83 | 46 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 4730-00-908-6292 | CLAMP, HOSE<br>MS35842-14 | <br>96906 | EA | 1 | 1 |

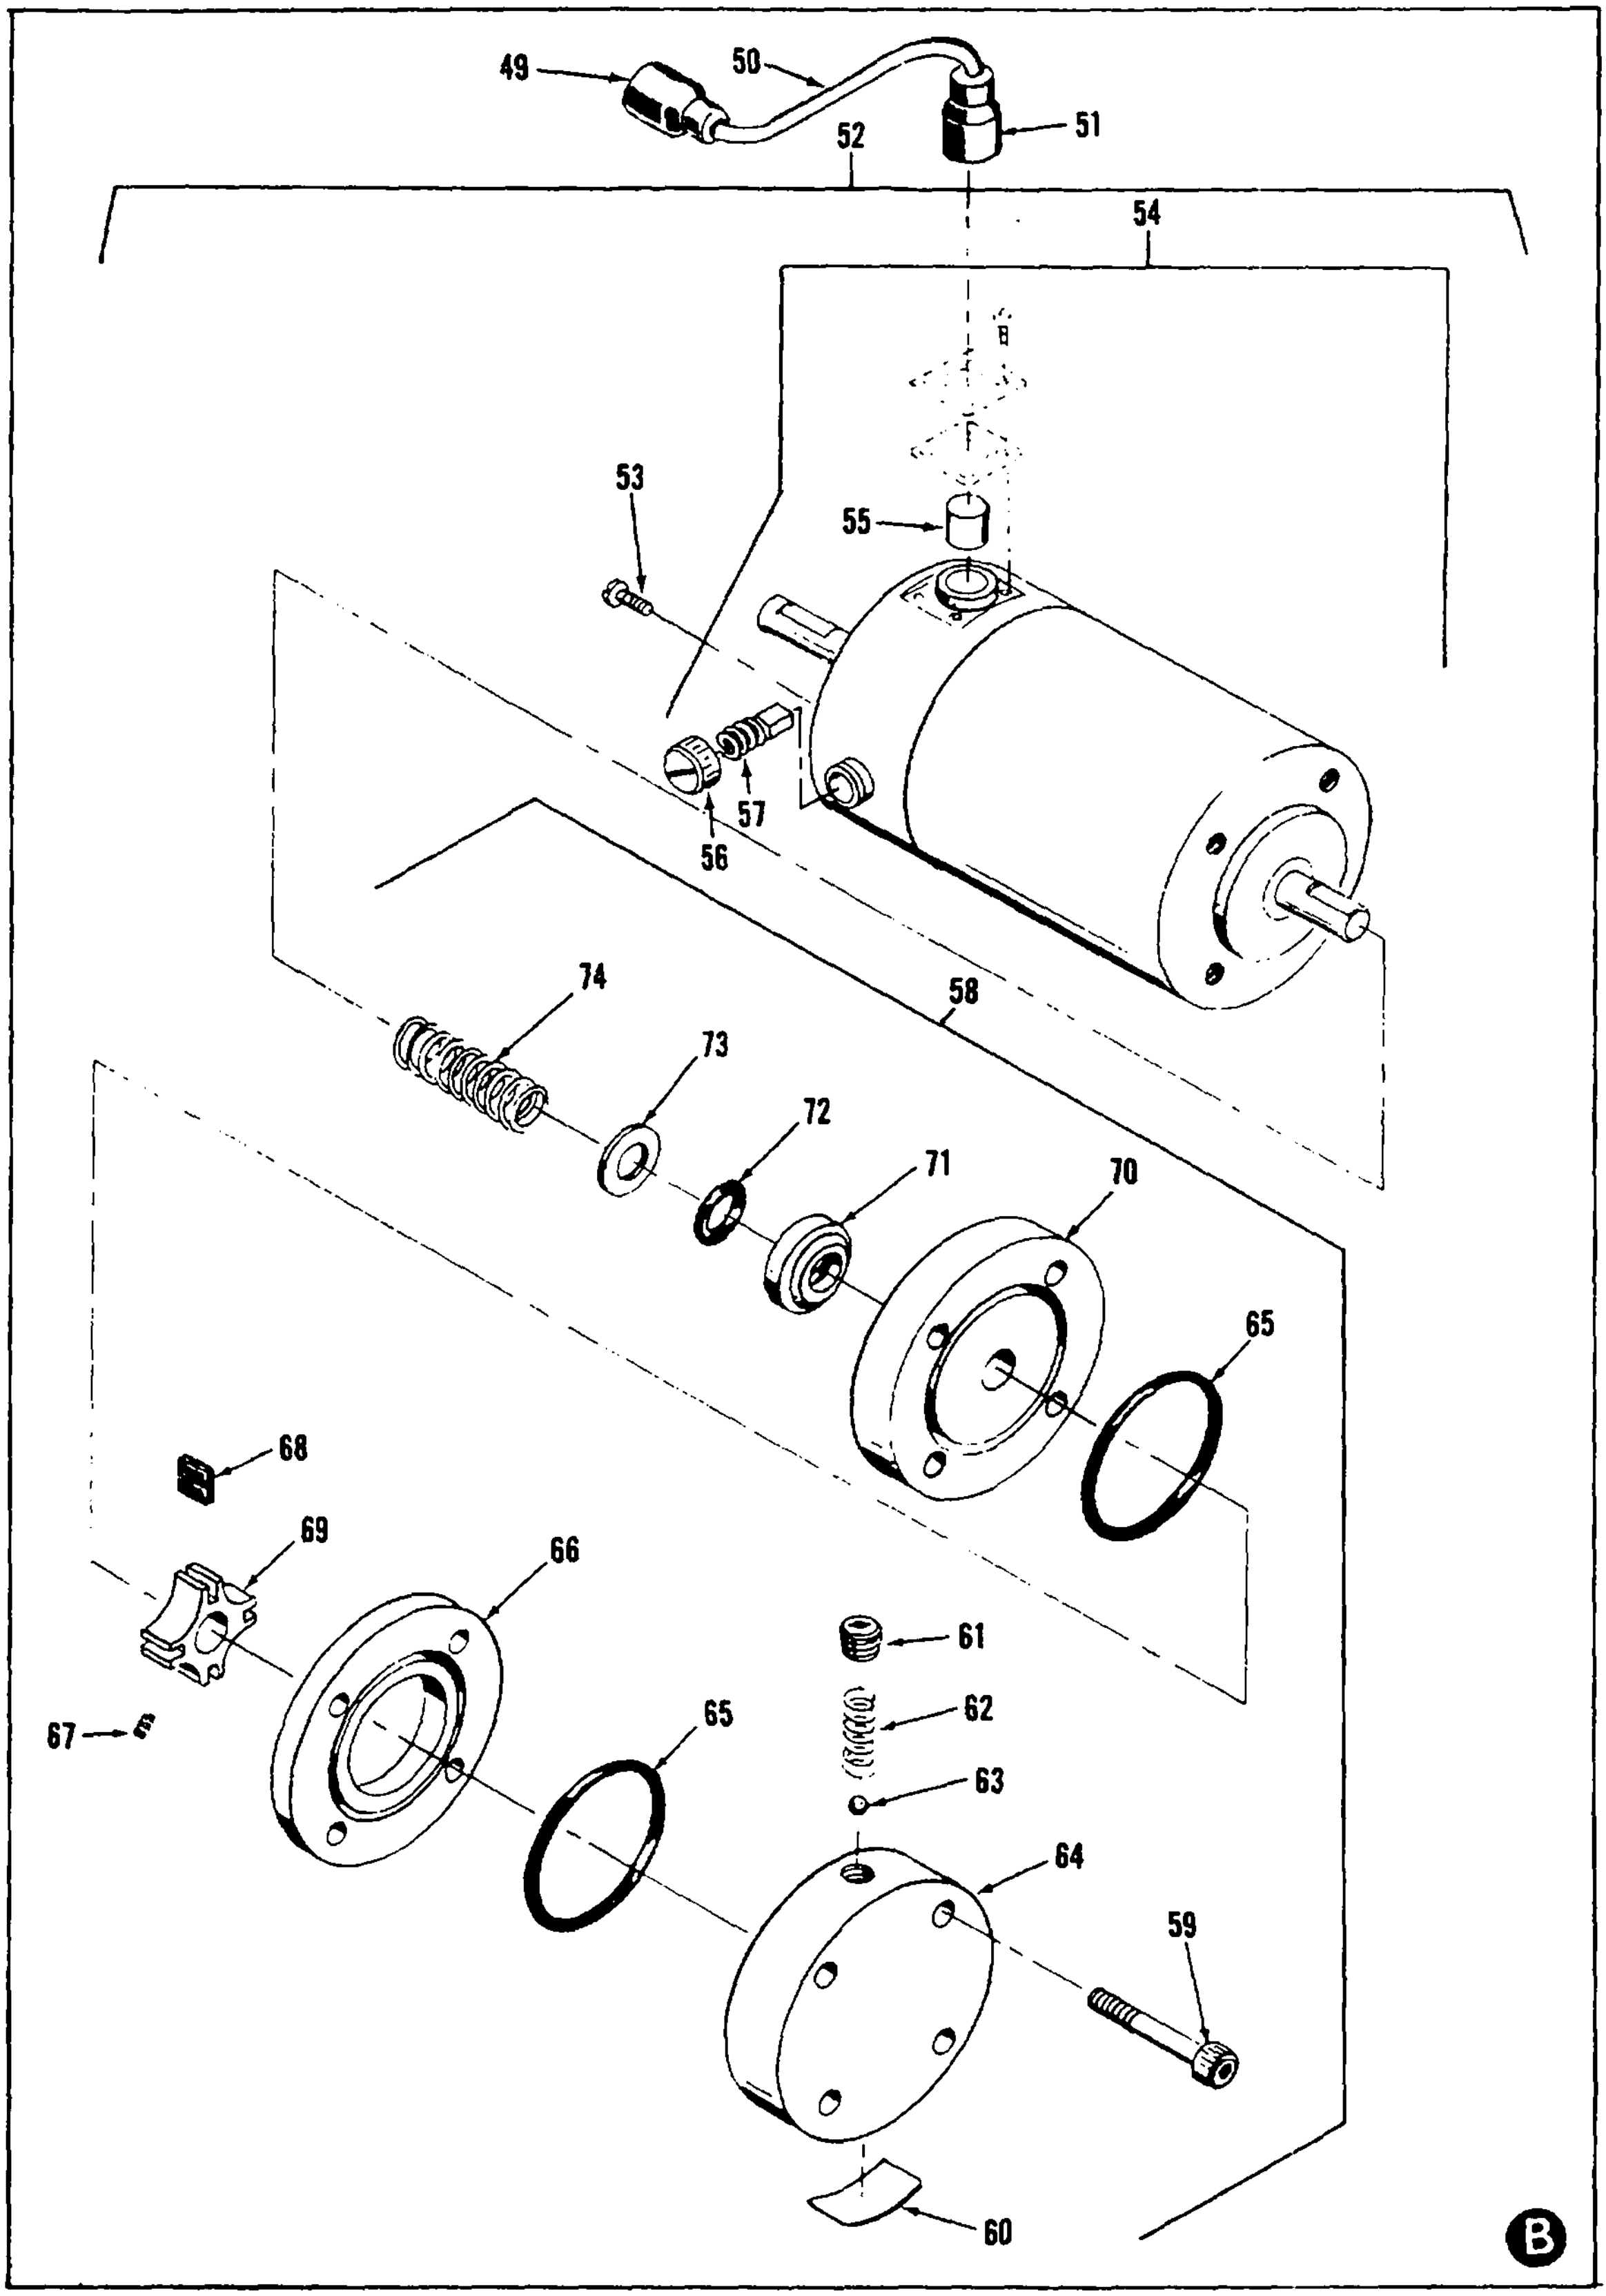
49
50
51
52
54
53
55
57
56
58
74
73
72
71
70
65
68
69
66
67
65
61
62
63
64
59
60
B

Figure 83. Electrical Winterization Kit (Sheet 3 of 6)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SS I | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 13 - ELECTRICAL WINTERIZATION HEATER KIT - CONTINUED | | | | |
| 83 | | | | | | | | | ELECTRICAL WINTERIZATION KIT - CONTINUED | | | | |
| 83 | 47 | XC | XC | XC | XC | | | | BRACKET, HEATER<br>71-4435 | 30554 | EA | 1 | 1 |
| 83 | 48 | PBOFF | PAOFF | PAFFF | PAFFF | | .008 | 4320-00-209-3854 | PUMP ASSY<br>71-4777 | 30554 | EA | 1 | 1 |
| 83 | 49 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-115-2306 | CONNECTOR, PLUG<br>MS27142-3 | 96906 | EA | 1 | 1 |
| 83 | 50 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 | 81349 | FT | 1 | 28 |
| 83 | 51 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .006 | 5935-00-691-5591 | SHELL, CONNECTOR<br>8724495 | 19207 | EA | 1 | 1 |
| 83 | 52 | XA | AFF | AFF | AFF | | | | PUMP - MOTOR ASSY<br>704048<br>P400-B1 | 30554<br>64560 | EA | 1 | 1 |
| 83 | 53 | XA | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-983-6656 | SCREW<br>P401 | 64560 | EA | 1 | 5 |
| 83 | 54 | XA | PAOZZ | PAFZZ | PAFZZ | | .030 | 6105-00-229-6846 | MOTOR ASSY<br>P196N8 | 64560 | EA | 1 | 1 |
| .83 | 55 | XA | PAOZZ | PAFZZ | PAFZZ | | .050 | 5910-00-147-6296 | CAPACITOR, FIXED<br>P123ZNGB | 00656 | EA | 1 | 1 |
| 83 | 56 | XA | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-031-2249 | CAP, BRUSH<br>14T3 | 62119 | EA | 2 | 2 |
| 83 | 57 | XA | PAOZZ | PAFZZ | PAFZZ | | .470 | 5977-00-951-5446 | BRUSH AND SPRING ASSY<br>25A18A3 | 62119 | EA | 2 | 2 |
| 83 | 58 | XA | PAFZZ | PAFFF | PAFFF | | .008 | 4320-00-217-5827 | PUMP ASSY<br>P400 | 64560 | EA | 1 | 1 |
| 83 | 59 | XA | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-983-6656 | SCREW<br>P401 | 64560 | EA | 4 | 5 |
| 83 | 60 | MDO | MDO | MDO | MDO | | | | NAMEPLATE<br>8995 | 64560 | EA | 1 | 1 |
| 83 | 61 | XA | PAOZZ | PAFZZ | PAFZZ | D | .008 | 4730-01-103-4249 | PLUG<br>8652 | 64560 | EA | 1 | 1 |
| 83 | 62 | XA | PAOZZ | PAFZZ | PAFZZ | D | .015 | 5360-00-255-4410 | SPRING, RELIEF VALVE P403 | 64560 | EA | 1 | 1 |
| 83 | 63 | XA | PAOZZ | PAFZZ | PAFZZ | D | .023 | 3110-00-198-1050 | BALL<br>P398 | 64560 | EA | 1 | 1 |
| 83 | 64 | XA | PAFZZ | PAFZZ | PAFZZ | D | .080 | 4320-01-181-1811 | PLATE<br>P393 | 64560 | EA | 1 | 1 |
| 83 | 65 | XA | PAOZZ | PAFZZ | PAFZZ | | .030 | 5330-01-091-3337 | PACKING, PREFORMED<br>P408 | 64560 | EA | 3 | 3 |
| 83 | 66 | XA | PAOZZ | PAFZZ | PAFZZ | D | .008 | 2930-00-167-0444 | RING, CAM<br>P392 | 64560 | EA | 1 | 1 |
| 83 | 67 | XA | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5305-01-124-0483 | SETSCREW<br>P397 | 64560 | EA | 1 | 1 |
| 83 | 68 | XA | PAOZZ | PAFZZ | PAFZZ | D | .008 | 2930-00-167-0443 | BLADE<br>P395 | 64560 | EA | 4 | 4 |
| 83 | 69 | XA | PAFZZ | PAFZZ | PAFZZ | | | 4320-01-091-4068 | ROTOR<br>P394 | 64560 | EA | 1 | 1 |
| 83 | 70 | XA | PAOZZ | PAFZZ | PAFZZ | D | .006 | 2930-00-167-0442 | ADAPTER<br>P391 | 64560 | EA | 1 | 1 |

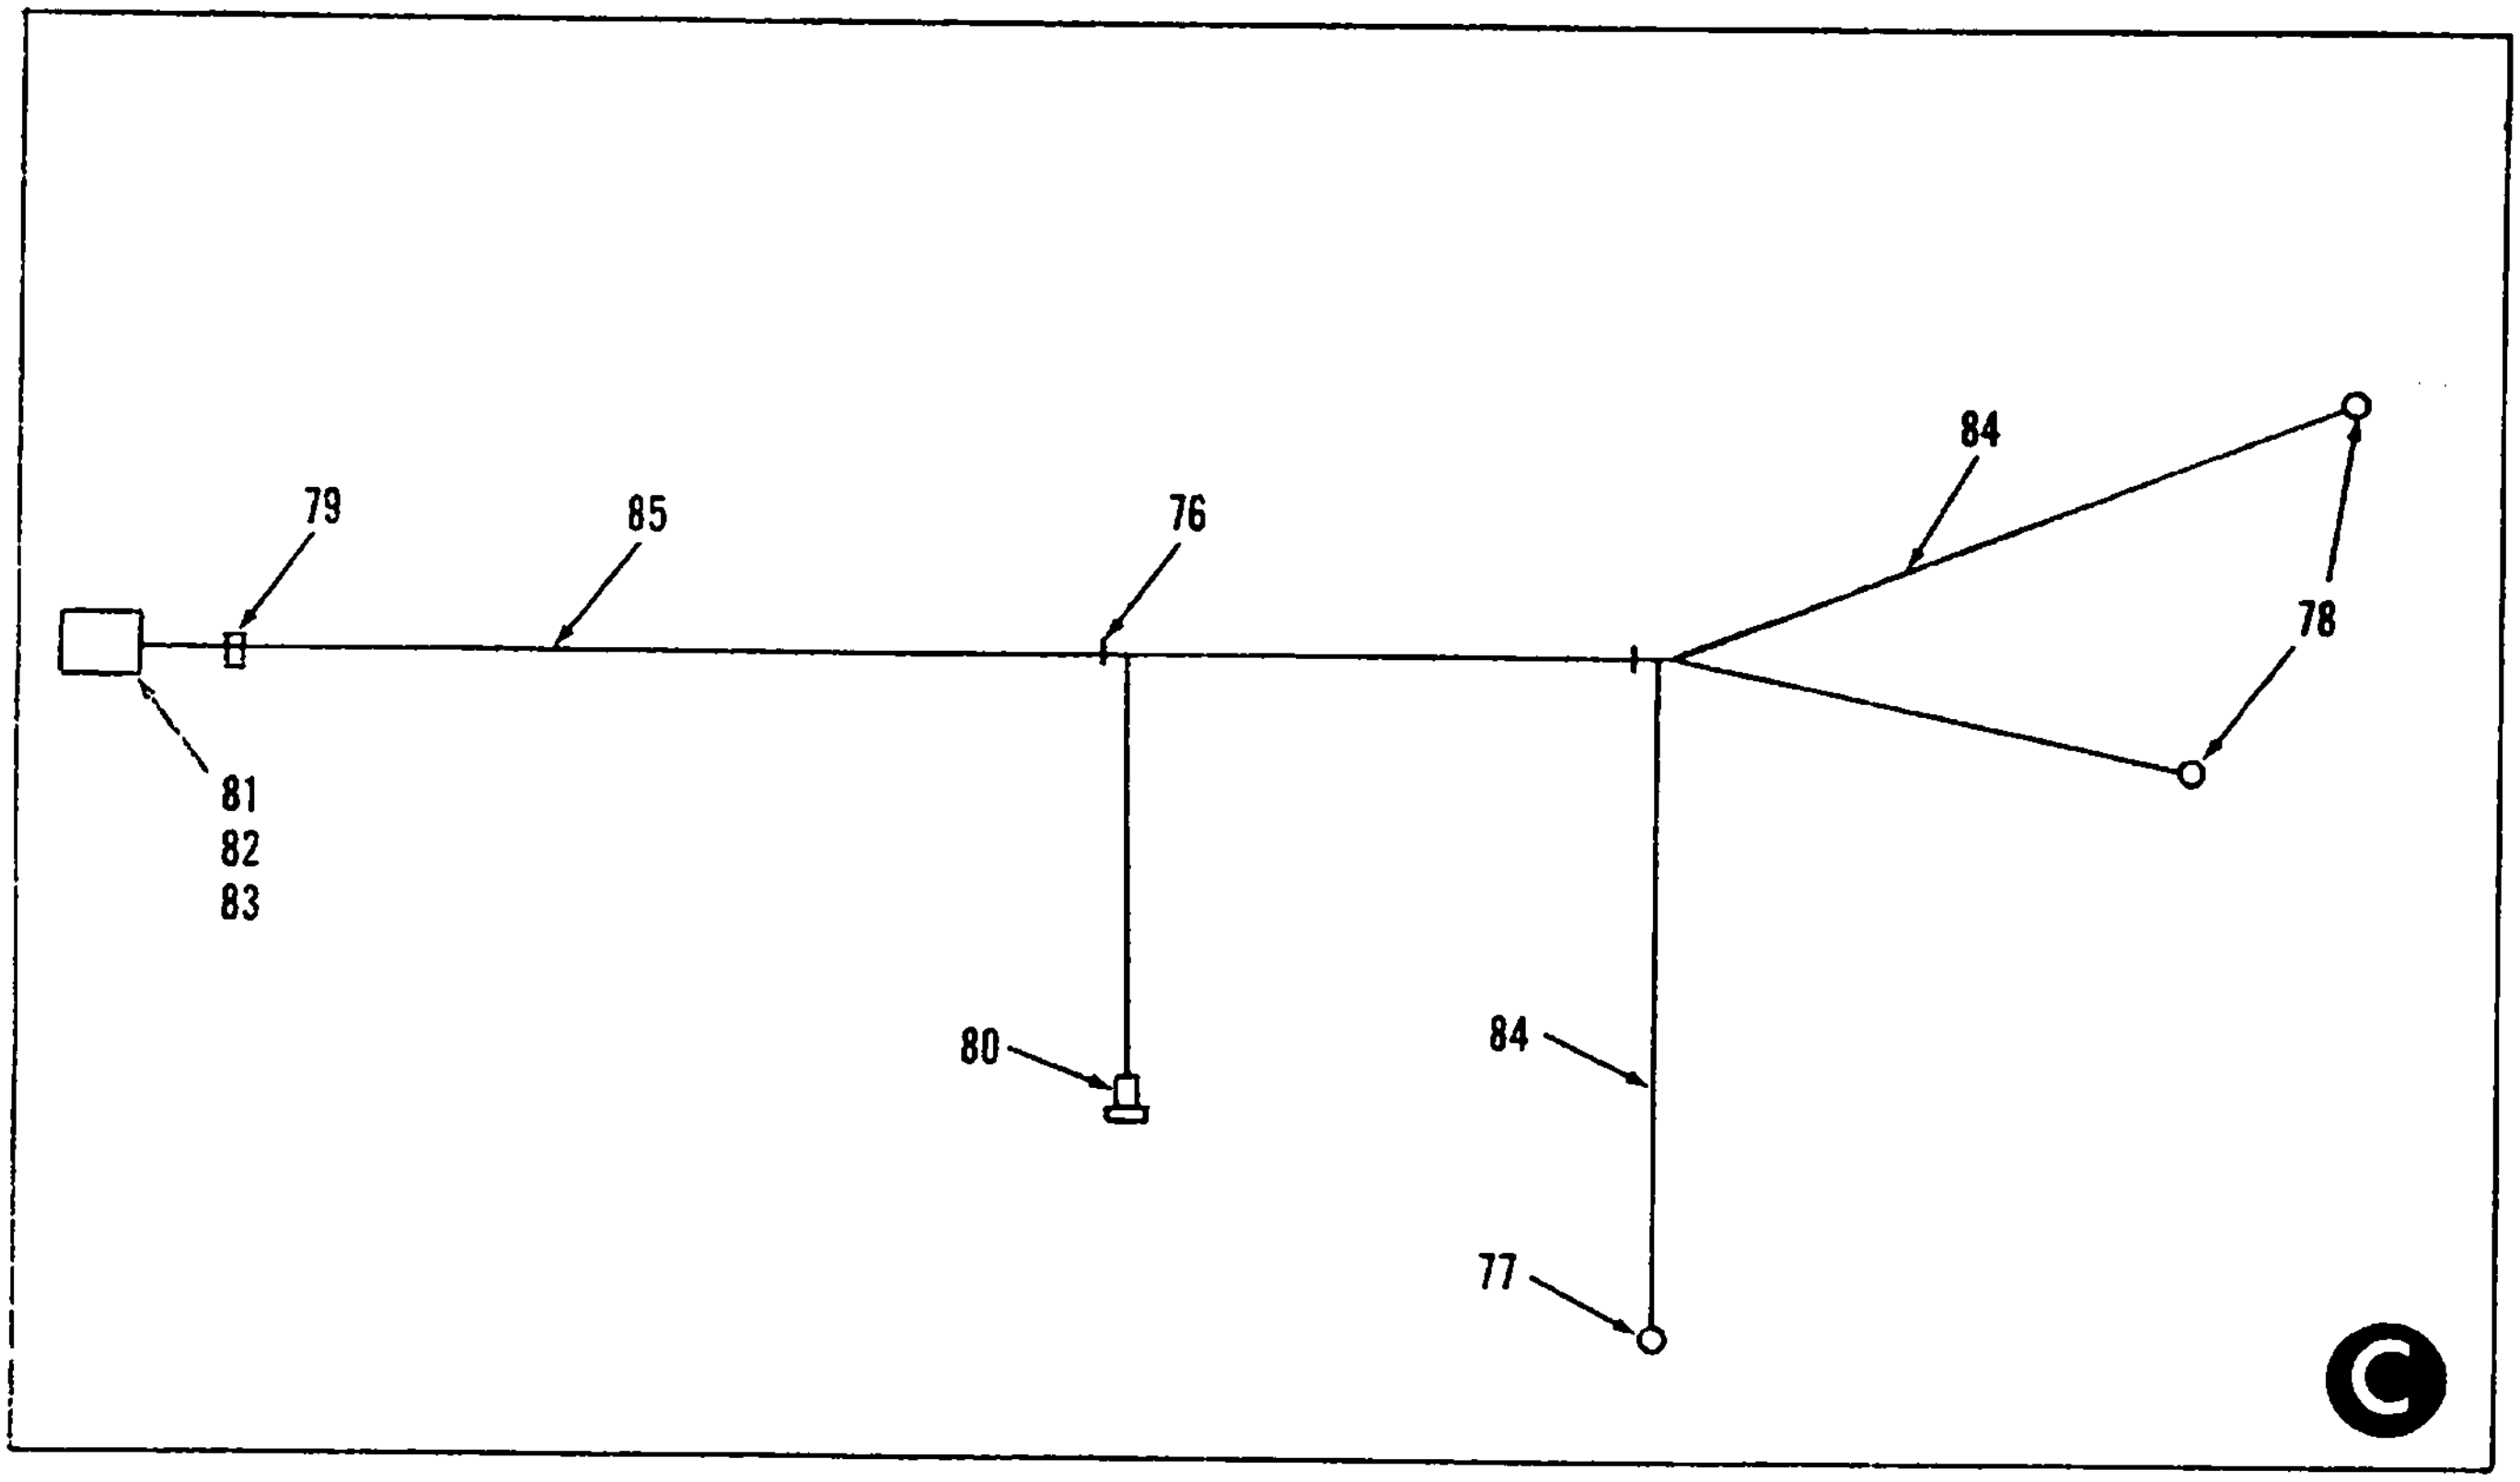
79
85
76
84
78
81
82
83
80
84
77
C

Figure 83. Electrical Winterization Kit (Sheet 4 of 6)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SS I | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 13 - ELECTRICAL WINTERIZATION HEATER KIT - CONTINUED | | | | |
| 83 | | | | | | | | | ELECTRICAL WINTERIZATION KIT - CONTINUED | | | | |
| 83 | 71 | XA--- | PAOZZ | PAFZZ | PAFZZ | | .050 | 5330-00-230-9806 | CAGE, SEAL<br>P406 | 64560 | EA | 1 | 1 |
| 83 | 72 | XA | PAOZZ | PAFZZ | PAFZZ | | .050 | 5330-00-245-4070 | PACKING, PREFORMED<br>P399 | 64560 | EA | 1 | 1 |
| 83 | 73 | XA--- | PAOZZ | PAFZZ | PAFZZ | | .050 | 5310-00-237-7457 | WASHER, SEAL<br>P405 | 64560 | EA | 1 | 1 |
| 83 | 74 | XA | PAOZZ | PAFZZ | PAFZZ | | .015 | 5360-00-255-4408 | SPRING, SEAL<br>P404 | 64560 | EA | 1 | 1 |
| 83 | 75 | AOO | AFO | AFF | AFF | | | | WIRING HARNESS<br>71-4433 | 30554 | EA | 1 | 1 |
| 83 | 76 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-727-5153 | TIE DOWN, STRAP<br>MS3367-4-9 | 96906 | EA | 43 | 58 |
| 83 | 77 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4794 | LUG, TERMINAL<br>MS25036-112 | 96906 | EA | 4 | 4 |
| 83 | 78 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-283-5280 | LUG, TERMINAL<br>MS25036-106 | 96906 | EA | 1 | 8 |
| 83 | 79 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 9905-00-841-4445 | BAND, MARKER<br>M43436/1-2 | 81349 | EA | 1 | 2 |
| 83 | 80 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | | .050 | 5935-00-115-2307 | CONNECTOR ASSY, MALE<br>MS27144-2 | 96906 | EA | 1 | 1 |
| 83 | 81 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5935-00-565-9503 | PLUG, END SEAL<br>MS25251-12 | 96906 | EA | 1 | 1 |
| 83 | 82 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5340-00-823-5322 | PLUG, END SEAL<br>MS25251-16 | 96906 | EA | 5 | 5 |
| 83 | 83 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-879-0235 | CONNECTOR, PLUG, P1<br>MS3106R28-9P | 96906 | EA | 1 | 1 |
| 83 | 84 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-7514 | WIRE, ELECTRICAL<br>M5086/2-12-9 | 81349 | FT | 42 | 50 |
| 83 | 85 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 | 81349 | FT | 20 | 28 |
| 83 | 86 | AFO | APO | AFF | AFF | | | | CONTROL BOX, ELECTRICAL<br>70-4196 | 30554 | EA | 1 | 1 |
| 83 | 87 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6968 | SCREW AND WASHER<br>69-662-18<br>61-060641-40-0142B-0542B | <br>30554<br>78189 | EA | 6 | 12 |
| 83 | 88 | MOO | MOO | MOO | MOO | | | | COVER<br>70-4198 | 30554 | EA | 1 | 1 |
| 83 | 89 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6903 | SCREW AND WASHER<br>69-662-4<br>61-040741-40-0142B-0542B | <br>30554<br>78189 | EA | 4 | 4 |
| 83 | 90 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-836-3520 | NUT AND WASHER<br>69-561-1<br>511-041800-00 | <br>30554<br>78189 | EA | 4 | 4 |
| 83 | 91 | PAOZZ | PAOZZ | PAFZZ | PAFZZ | D | .005 | 5935-00-137-4671 | COVER, ELECTRICAL<br>MS25043-16D | 96906 | EA | 1 | 1 |
| 83 | 92 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6976 | SCREW AND WASHER<br>69-662-21<br>61-061041-40-014B-0542B | <br>30554<br>78189 | EA | 4 | 6 |
| 83 | 93 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-063-7360 | NUT AND WASHER<br>69-561-2<br>511-061800-00 | <br>30554<br>78189 | EA | 4 | 4 |

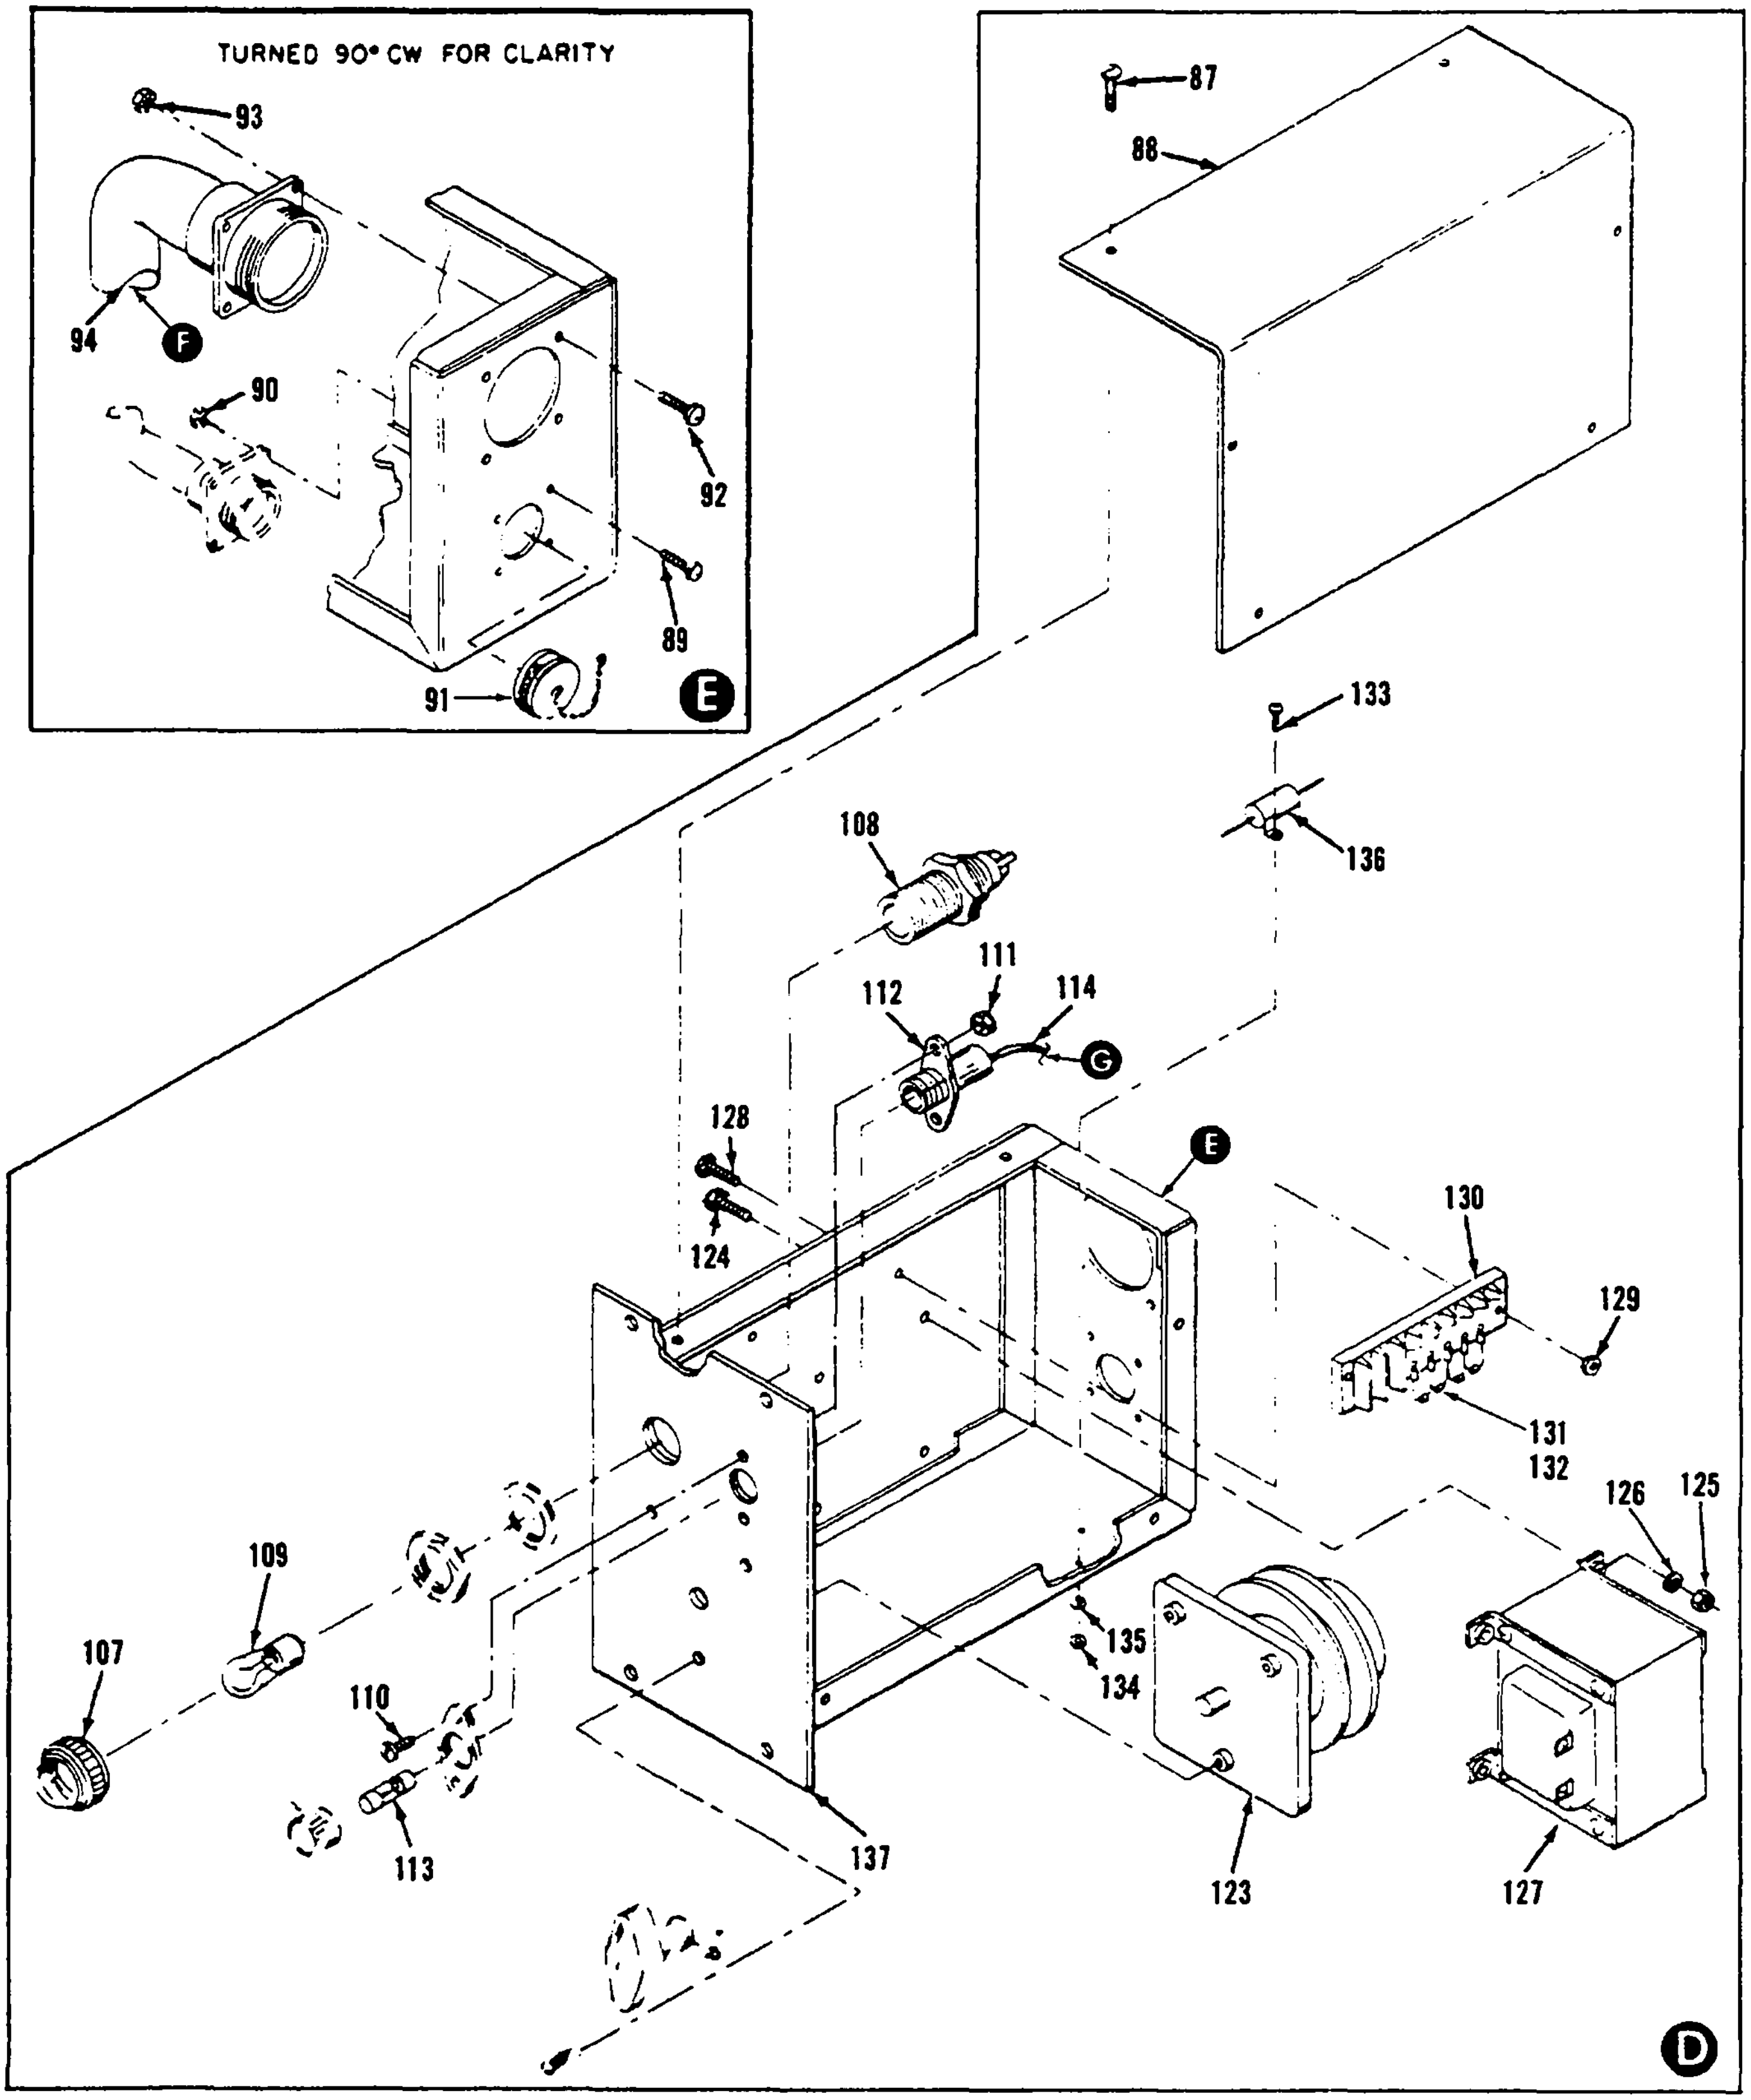
TURNED 90° CW FOR CLARITY
93
94
F
90
92
89
91
E
87
88
133
136
108
111
114
112
G
128
124
E
130
129
131
132
126
125
109
107
110
113
137
135
134
123
127
D

Figure 83. Electrical Winterization Kit (Sheet 5 of 6)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SS I | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | *GROUP 13 - ELECTRICAL WINTERIZATION HEATER KIT - CONTINUED* | | | | |
| 83 | | | | | | | | | ELECTRICAL WINTERIZATION KIT - CONTINUED | | | | |
| 83 | 94 | AOO | AFF | AFF | AFF | | | | WIRING HARNESS<br>70-4202 | 30554 | EA | 1 | 1 |
| 83 | 95 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-727-5153 | TIE DOWN, STRAP<br>MS3367-4-9 | 96906 | EA | 14 | 58 |
| 83 | 96 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4774 | LUG, TERMINAL<br>MS25036-153 | 96906 | EA | 2 | 4 |
| 83 | 97 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-204-8990 | LUG, TERMINAL<br>320634 | 00779 | EA | 5 | 7 |
| 83 | 98 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-283-5280 | LUG, TERMINAL<br>MS25036-106 | 96906 | EA | 6 | 8 |
| 83 | 99 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4775 | LUG, TERMINAL<br>MS25036-156 | 96906 | EA | 2 | 4 |
| 83 | 100 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 9905-00-893-3570 | BAND, MARKER<br>M43436/1-3 | 81349 | EA | 1 | 1 |
| 83 | 101 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-755-2892 | CONNECTOR, RECEPTACLE, J19<br>MS3102R28-9S | 96906 | EA | 1 | 1 |
| 83 | 102 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-227-9278 | TUBING, INSULATION MIL-I-631-TYPE F, CLASS 1 | 81349 | FT | 2 | 8 |
| 83 | 103 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5935-00-806-4588 | CONNECTOR, RECEPTACLE, J49<br>MS3102R16-10P | 96906 | EA | 1 | 1 |
| 83 | 104 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5970-00-685-8377 | TUBING, INSULATION, MIL-I-631-TYPE F, CLASS 1 | 81349 | FT | 6 | 8 |
| 83 | 105 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-7514 | WIRE, ELECTRICAL<br>M5086/2-12-9 | 81349 | FT | 6 | 50 |
| 83 | 106 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 | 81349 | FT | 3 | 28 |
| 83 | 107 | PAFZZ | PAFZZ | PAOZZ | PAOZZ | | .023 | 6210-00-067-8357 | LENS, INDICATOR<br>LC21YN3 | 81349 | EA | 1 | 1 |
| 83 | 108 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 6210-00-753 -2289 | HOUSING, INDICATOR, DS11<br>LH80/1 | 81349 | EA | 1 | 1 |
| 83 | 109 | PAOZZ | PAOZZ | PAOZZ | PAOZZ | | .230 | 6240-00-143-3060 | LAMP<br>MS15567-1 | 96906 | EA | 1 | 1 |
| 83 | 110 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6902 | SCREW AND WASHER<br>69-662-36<br>61-081241-40 -0142B-0542B | <br>30554<br>78189 | EA | 2 | 2 |
| 83 | 111 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-052-3632 | NUT AND WASHER<br>511-081800-00<br>69-561-3 | <br>78189<br>30554 | EA | 2 | 6 |
| 83 | 112 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5920-00-687-1896 | FUSE HOLDER, F2<br>571004<br>71-4867 | <br>75915<br>30554 | EA | 1 | 1 |
| 83 | 113 | PAOZZ | PAFZZ | PAOZZ | PAOZZ | | 2.000 | 5920-00-230-9097 | FUSE<br>FO9A250V30A | 81349 | EA | 1 | 1 |
| 83 | 114 | AOO | AFF | AFF | AFF | | | | WIRING HARNESS<br>71-4744 | 30554 | EA | 1 | 1 |
| 83 | 115 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5975-00-727-5153 | STRAP, TIE DOWN<br>MS3367-4-9 | 96906 | EA | 1 | 58 |
| 83 | 116 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-204-8990 | TERMINAL LUG<br>320634 | 00779 | EA | 2 | 7 |

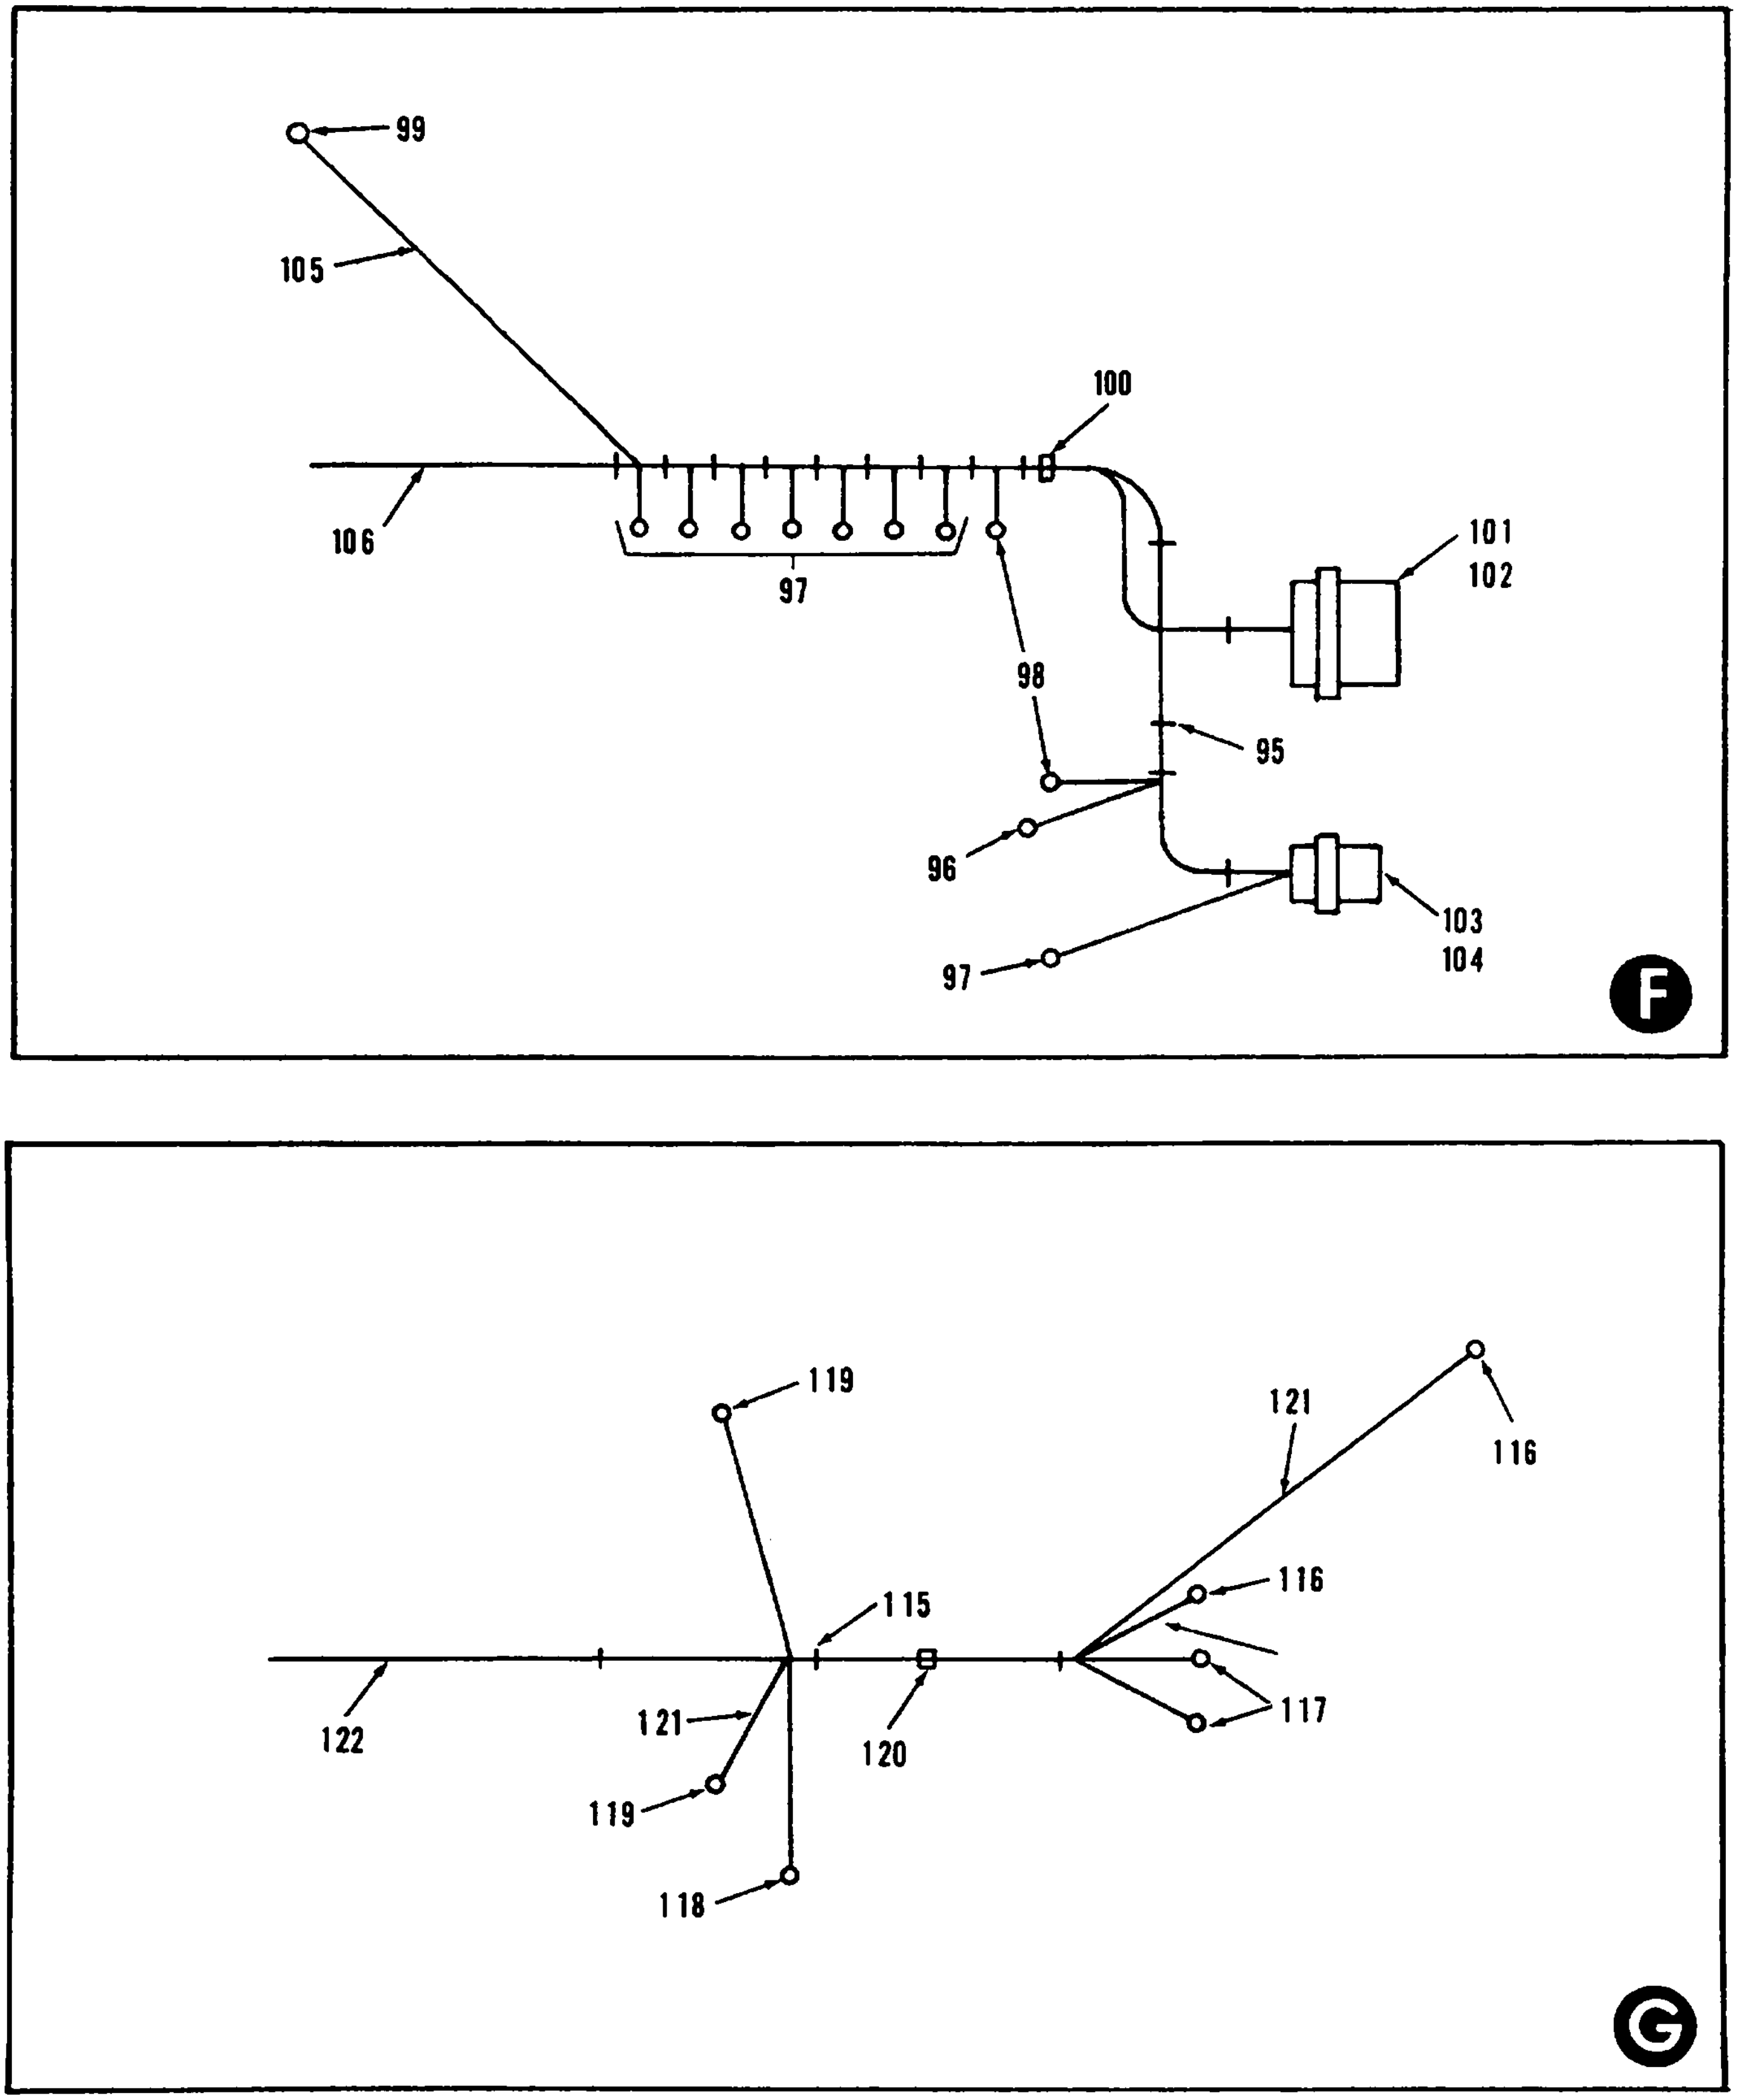
99
105
100
106
101
102
97
98
95
96
103
104
97
F
119
121
116
116
115
117
122
121
120
119
118
G

Figure 83. Electrical Winterization Kit (Sheet 6 of 6)

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC | (8) USMC QTY |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SS I | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | IN UNIT | PER EQUIP |
| | | | | | | | | | GROUP 13 - ELECTRICAL WINTERIZATION HEATER KIT - CONTINUED | | | | |
| 83 | | | | | | | | | ELECTRICAL WINTERIZATION KIT - CONTINUED | | | | |
| 83 | 117 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-283-5280 | LUG, TERMINAL<br>MS25036-106 | 96906 | EA | 1 | 8 |
| 83 | 118 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4774 | LUG, TERMINAL<br>MS25036-153 | 96906 | EA | 2 | 4 |
| 83 | 119 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-143-4775 | LUG, TERMINAL<br>MS25036-156 | 96906 | EA | 2 | 4 |
| 83 | 120 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 9905-00-841-4445 | MARKER, BAND<br>M43436/1-2 | 81349 | EA | 1 | 2 |
| 83 | 121 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-7514 | WIRE, ELECTRICAL<br>M5086/2-12-9 | 81349 | FT | 2 | 50 |
| 83 | 122 | PAOZZ | PAFZZ | PAFZZ | PAFZZ | D | .080 | 6145-00-578-6605 | WIRE, ELECTRICAL<br>M5086/2-16-9 | 81349 | FT | 4 | 28 |
| 83 | 123 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .060 | 5930-00-483-0446 | SWITCH, ROTARY,<br>S22<br>24201G2<br>70-4066 | 82121<br>30554 | EA | 1 | 1 |
| 83 | 124 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-038-3103 | SCREW AND WASHER<br>61-080841-40-<br>0142B-0542B<br>69-662-35 | 78189<br>30554 | EA | 4 | 4 |
| 83 | 125 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-052-3632 | NUT AND WASHER<br>511-081800-00<br>69-561-3 | 78189<br>30554 | EA | 4 | 6 |
| 83 | 126 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-809-8544 | WASHER<br>MS27183-7 | 96906 | EA | 4 | 4 |
| 83 | 127 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .005 | 5950-00-236-0390 | TRANSFORMER<br>00000-4840<br>70-4065 | 93568<br>30554 | EA | 1 | 1 |
| 83 | 128 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5305-00-036-6976 | SCREW AND WASHER<br>69-662-21<br>61-060041-40-0142B-0542B | 30554<br>78189 | EA | 2 | 6 |
| 83 | 129 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-983-9747 | NUT<br>MS35649-262 | 96906 | EA | 2 | 2 |
| 83 | 130 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .003 | 5940-00-983-6049 | BOARD, TERMINAL, TB1<br>37TB8 | 81349 | EA | 1 | 1 |
| 83 | 131 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5961-00-506-6434 | DIODE, CR23<br>THROUGH CR26<br>JAN1N5624 | 81349 | EA | 4 | 4 |
| 83 | 132 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5940-00-704-8966 | LUG, TERMINAL<br>MS25036-102 | 96906 | EA | 8 | 8 |
| 83 | 133 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | | 5305-00-988-1167 | SCREW, PLATE<br>MS35206-204 | 96906 | EA | 2 | 2 |
| 83 | 134 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .008 | 5310-00-934-9738 | NUT<br>MS35649-222 | 96906 | EA | 2 | 2 |
| 83 | 135 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .010 | 5310-00-543-5060 | WASHER, LOCK<br>MS35338-39 | 96906 | EA | 2 | 2 |
| 83 | 136 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .050 | 5905-00-224-7871 | RESISTOR, FIXED, R20<br>RER65F249IM | 81349 | EA | 1 | 1 |
| 83 | 137 | XA | XA | XA | XA | | | | CHASSIS, CONTROL BOX<br>70-4197 | 30554 | EA | 1 | 1 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO. | (1) ILLUSTRATION b ITEM NO. | (2) SMR CODE a ARMY | (2) SMR CODE b AIR FORCE | (2) SMR CODE c NAVY | (2) SMR CODE d USMC | (3) USMC a SS I | (3) USMC b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | (5) DESCRIPTION USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | GROUP 13 - ELECTRICAL WINTERIZATION HEATER KIT - CONTINUED | | | | |
| 83 | | | | | | | | | ELECTRICAL WINTERIZATION KIT - CONTINUED | | | | |
| 83 | 138 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-231-3018 | ELBOW, 90 DEGREE<br>MS20822-16-12 | 96906 | EA | 1 | 1 |
| 83 | 139 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .005 | 4820-00-090-0554 | COCK, SHUT-OFF 3/4 P<br>71-4859 | 30554 | EA | 1 | 1 |
| 83 | 140 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-196-1505 | NIPPLE, PIPE<br>MS51953-101 | 96906 | EA | 1 | 1 |
| 83 | 141 | PAFZZ | PAFZZ | PAFZZ | PAFZZ | D | .006 | 4730-00-964 -7776 | ELBOW, PIPE TO TUBE<br>MS20823-8 | 96906 | EA | 1 | 1 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD) (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 14 - BULK MATERIALS<br>BULK MATERIALS LIST | | | | |
| BULK | 1 | PAOZZ | PAOZZN | PAOZZ | PAOZZ | | | 4720-00-916-7092 | TUBING, NYLON<br>44-SN | 30327 | FT | 9 | 9 |
| BULK | 2 | PAOZZ | PAFZZN | PAFZZ | PAFZZ | | | 4720-00-595-1088 | HOSE<br>MIL-H-8794-16O | 81349 | FT | 2 | 2 |
| BULK | 3 | PAOZZ | PAOZZN | PAOZZ | PAOZZ | | | 4720-00-937-1114 | HOSE<br>ZZH428 | 81349 | FT | 2 | 2 |
| BULK | 4 | PAOZZ | PAFFZN | PAOZZ | PAOZZ | | | 4730-01-068-7274 | TUBE<br>5P1198 | 11033 | EA | 1 | 1 |
| BULK | 5 | PAFZZ | PAFZZN | PAHZZ | PAHZZ | | | 6145-00-578-6604 | WIRE, ELECTRICAL<br>M5086/2-14-9 | 81349 | FT | 2 | 2 |

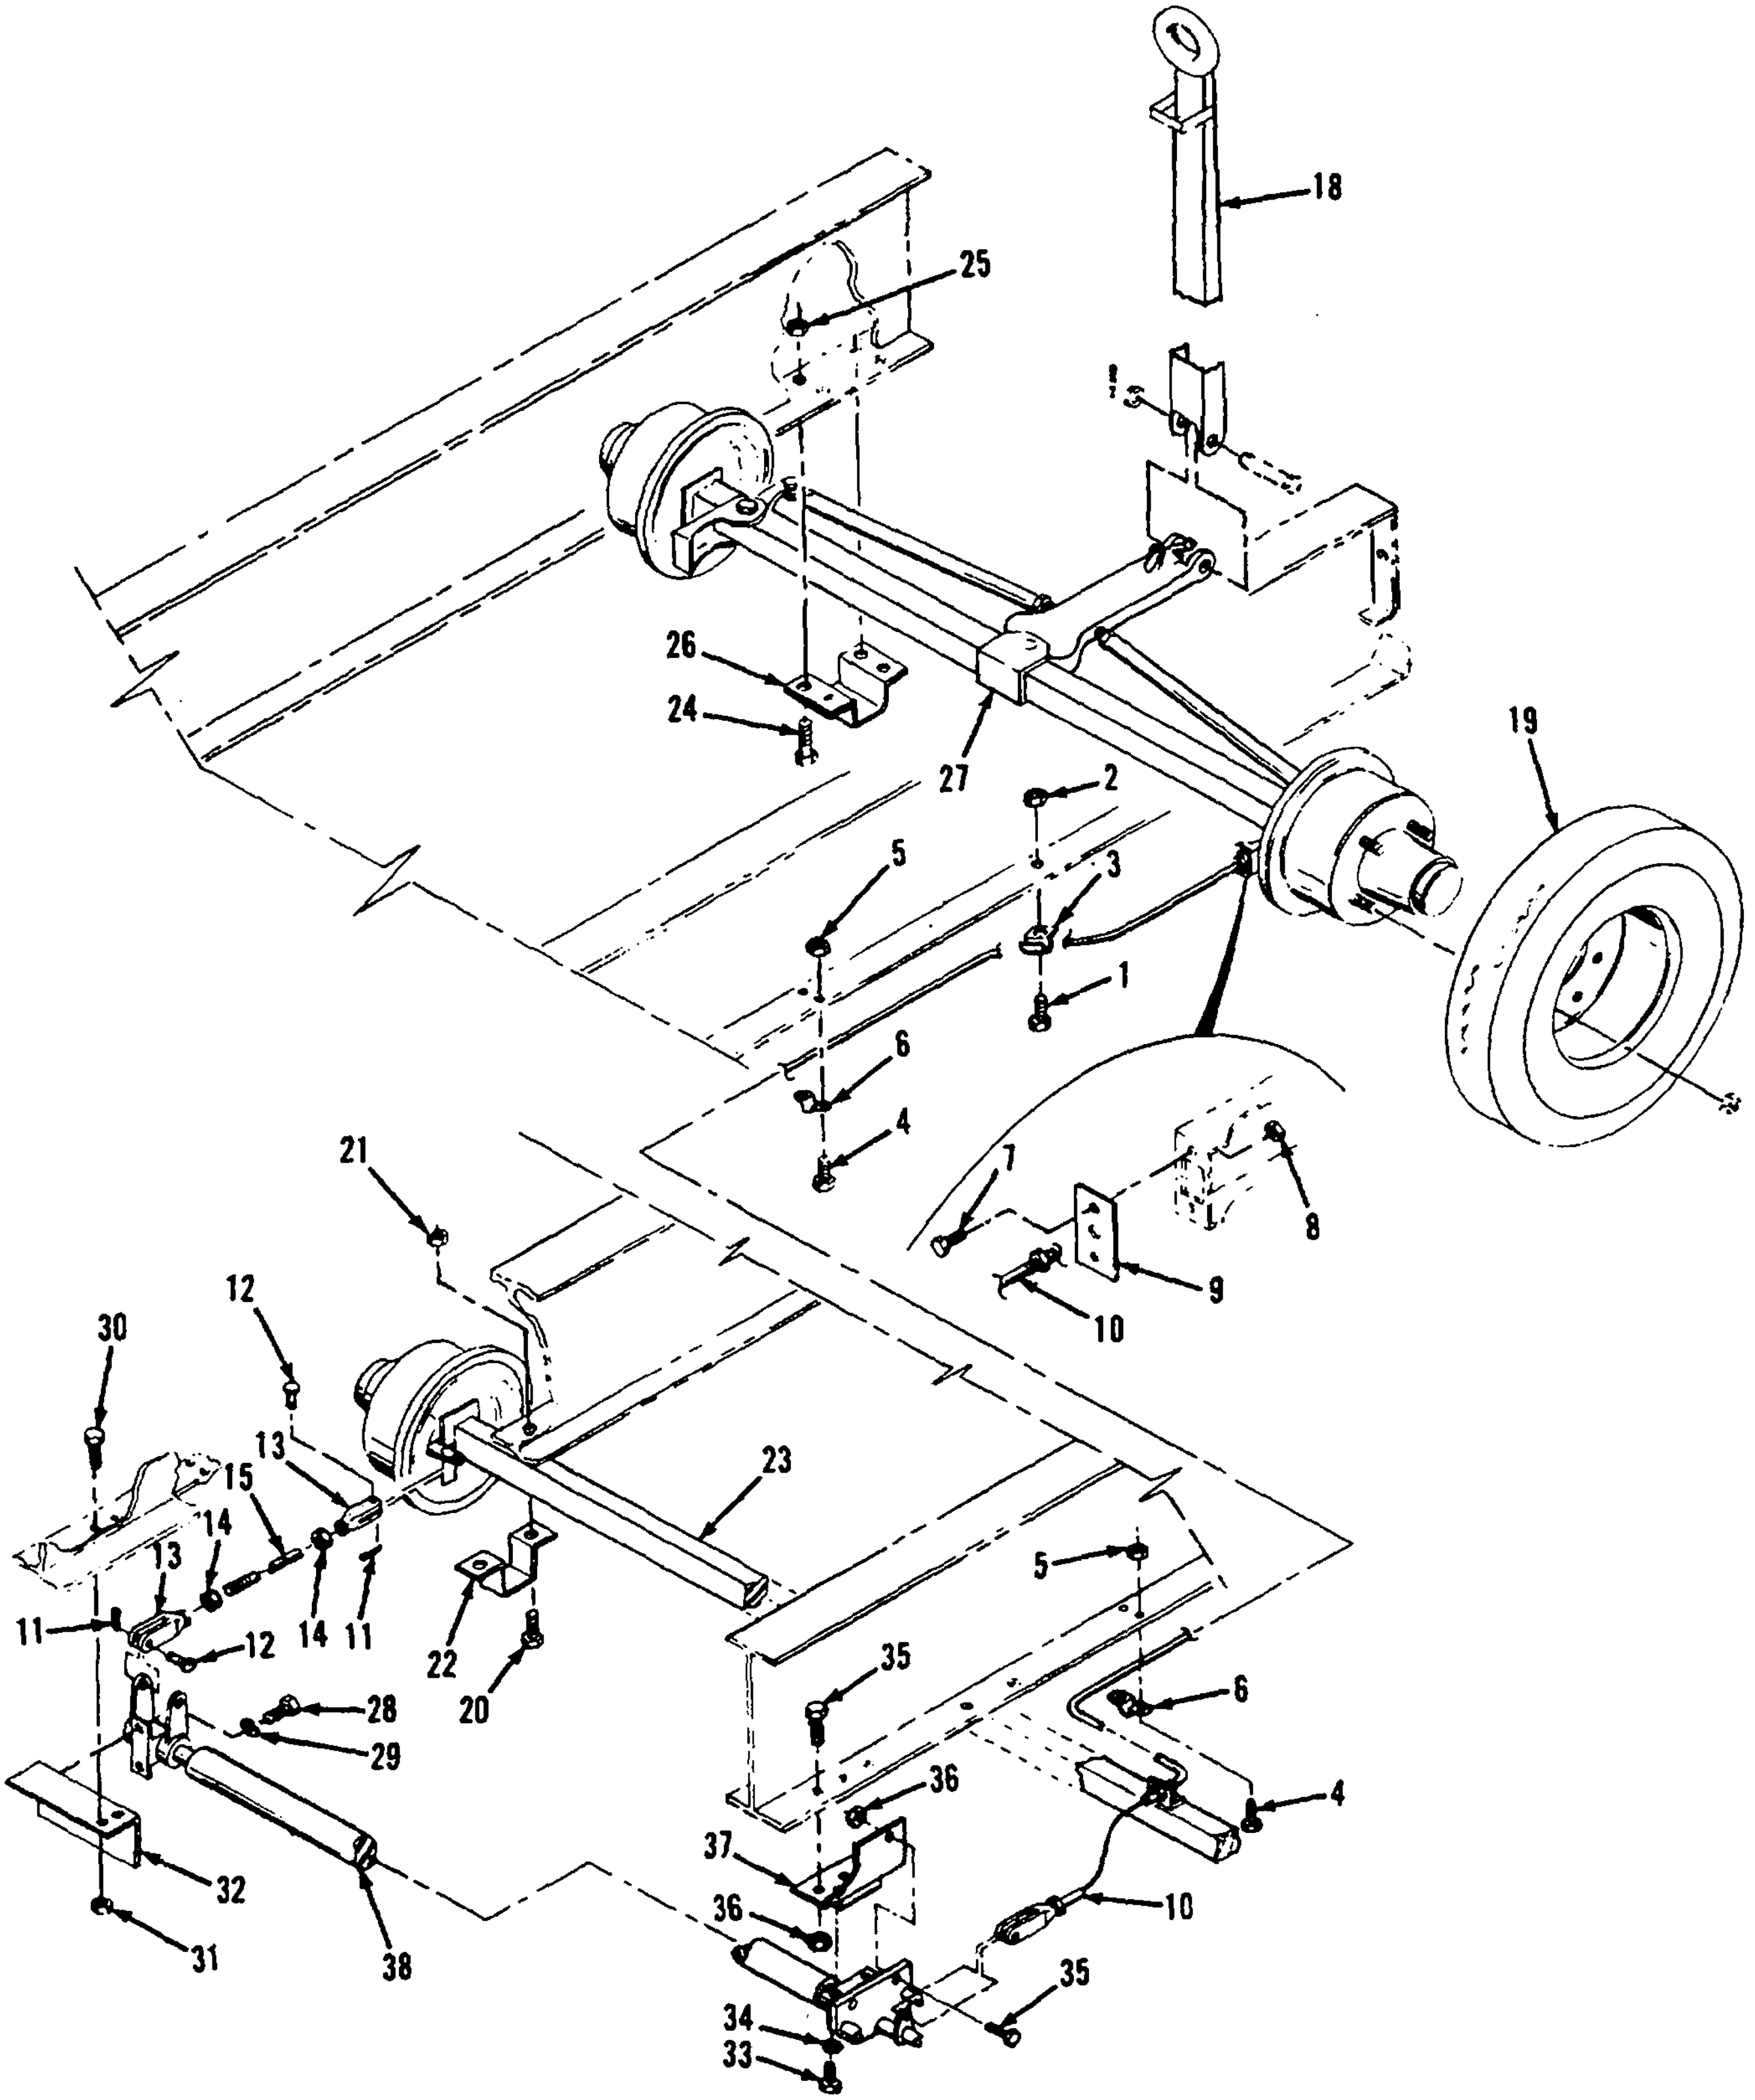
18
25
26
24
27
19
2
5
3
1
6
4
21
7
8
9
10
12
30
13
15
14
23
13
11
12
14
11
5
22
20
28
29
35
6
36
4
37
32
10
36
31
38
35
34
33

Figure 84. Wheel Mounting Kit

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | GROUP 15-KIT, WHEEL MOUNTING<br>WHEEL MOUNTING KIT (FIG. 84) | | | | |
| 84 | | XBFFF | PAFFF | PAHHH | PAFFF | | | 6115-01-135-6165 | KIT, WHEEL, GENERATOR SET 100KW<br>81-4800 98749<br>COMPOSED OF | | EA | 1 | 1 |
| 84 | 1 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5305-00-225-9081 | SCREW<br>MS90725-36 22938 | | EA | 2 | 10 |
| 84 | 2 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-245-3424 | NUT<br>MS17829-5C 22938 | | EA | 2 | 89 |
| 84 | 3 | XA-- | MOO | XBHZZ | XB-- | | | | GUIDE, BRAKE CABLE<br>00217-0214 22938 | | EA | 2 | 2 |
| 84 | 4 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5305-00-225-9081 | SCREW<br>MS90725-36 22938 | | EA | 8 | 10 |
| 84 | 5 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-245-3424 | NUT<br>MS17829-5C 22938 | | EA | 8 | 89 |
| 84 | 6 | XA-- | PAOZZ | PAHZZ | XB-- | | | 5340-00-900-6338 | CLAMP, CABLE<br>1-7071 22938 | | EA | 4 | 4 |
| 84 | 7 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5305-00-068-0507 | SCREW<br>MS90726-7 22938 | | EA | 4 | 4 |
| 84 | 8 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-768-0319 | NUT<br>MS51968-2 22938 | | EA | 4 | 4 |
| 84 | 9 | XA-- | MOO | XBHZZ | XB-- | | | | PLATE<br>6-7071 22938 | | EA | 2 | 2 |
| 84 | 10 | XA-- | PAOZZ | XBHZZ | XB-- | | | 2530-00-518-1216 | BRAKE CABLE AND CONDUIT ASSY<br>00234-0153 22938 | | EA | 2 | 2 |
| 84 | 11 | XA-- | PAOZZ | XBHZZ | PAFZZ | | | 5315-00-842-3044 | PIN, COTTER<br>MS24665-283 22938 | | EA | 8 | 20 |
| 84 | 12 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5315-00-193-4113 | PIN<br>32X203 22938 | | EA | 8 | 8 |
| 84 | 13 | XA-- | PAOZZ | XBHZZ | XB-- | | | 5340-00-308-6129 | YOKE<br>33X103 22938 | | EA | 6 | 6 |
| 84 | 14 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-975-2075 | NUT<br>MS35691-21 22938 | | EA | 6 | 8 |
| 84 | 15 | XA-- | PAOZZ | XBHZZ | XB-- | | | | STUD, THREADED<br>00218-0141 22938 | | EA | 2 | 2 |
| 84 | 16 | DELETED | | | | | | | | | | | |
| 84 | 17 | DELETED | | | | | | | | | | | |
| 84 | 17A | DELETED | | | | | | | | | | | |
| 84 | 17B | DELETED | | | | | | | | | | | |
| 84 | 17C | DELETED | | | | | | | | | | | |
| 84 | 17D | DELETED | | | | | | | | | | | |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | WHEEL MOUNTING KIT<br>(FIG. 84-CONTINUED) | | | | |
| 84 | 18 | XA-- | PAOZZ | MBHZZ | XB— | | | 2540-00-972-7148 | DRAWBAR ASSY<br>36-7016 | <br>95026 | EA | 1 | 1 |
| 84 | 19 | XA-- | AOO | XBHZZ | XB-- | | | 2530-00-590-2680 | WHEEL ASSY<br>00374-0067<br>4-1590<br>(SEE FIG. 84) | <br>9356B<br>95026 | EA | 4 | 4 |
| 84 | 20 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5305-00-053-8993 | SCREW<br>MS90725-112 | <br>96906 | EA | 4 | 8 |
| 84 | 21 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-595-7421 | NUT, SELF LOCKING<br>MS17829-8C | <br>96906 | EA | 4 | 53 |
| 84 | 22 | XA-- | MOO | XBHZZ | XB— | | | | AXLE CLAMP<br>4-1112 | <br>95026 | EA | 2 | 2 |
| 84 | 23 | XA-- | PBOZZ | XAHZZ | XA-- | | | | AXLE ASSY, REAR<br>00208-0103<br>8-6758<br>(SEE FIG. 85) | <br>93568<br>95026 | EA | 1 | 1 |
| 84 | 24 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5305-00-724-5910 | SCREW<br>MS90725-162 | <br>96906 | EA | 8 | 8 |
| 84 | 25 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-245-3419 | NUT<br>MS17829-10C | <br>96906 | EA | 8 | 20 |
| 84 | 26 | XA-- | MOO | XBHZZ | XB— | | | | CLAMP, AXLE<br>00208-0109 | <br>93568 | EA | 2 | 2 |
| 84 | 27 | XA-- | PBOZZ | AHHZZ | AFFZZ | | | | AXLE ASSY, FRONT<br>00208-0105<br>(SEE FIG. 86) | <br>93568 | EA | 1 | 1 |
| 84 | 28 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5305-00-269-2805 | SCREW<br>MS90726-62 | <br>96906 | EA | 1 | 3 |
| 84 | 29 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-637-9541 | WASHER, LOCK<br>MS35338-46 | <br>96906 | EA | 2 | 76 |
| 84 | 30 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5305-00-269-4511 | SCREW<br>MS90725-63 | <br>96906 | EA | 2 | 7 |
| 84 | 31 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-003-9414 | NUT<br>MS17829-6C | <br>96906 | EA | 2 | 34 |
| 84 | 32 | XA-- | MOO | XBHZZ | XB-- | | | | BRACKET, CROSS SHAFT<br>00217-0216 | <br>93568 | EA | 1 | 1 |
| 84 | 33 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5305-00-269-2805 | SCREW<br>MS90726-62 | <br>96906 | EA | 2 | 3 |
| 84 | 34 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-637-9541 | WASHER, LOCK<br>MS35338-46 | <br>96906 | EA | 2 | 76 |
| 84 | 35 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5305-00-269-2806 | SCREW<br>MS90725-63 | <br>96906 | EA | 5 | 7 |
| 84 | 36 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-003-9414 | NUT<br>MS17829-6C | <br>96906 | EA | 5 | 34 |
| 84 | 37 | XA-- | MFF | XBHZZ | XB-- | | | | BRACKET, HAND BRAKE<br>00217-0215 | <br>93568 | EA | 1 | 1 |
| 84 | 38 | XA-- | AOO | XBHZZ | XB-- | | | | HAND BRAKE AND SHAFT ASSY<br>00218-0138 | <br>93568 | EA | 1 | 1 |

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | WHEEL ASSEMBLY-WHEEL MOUNTING KIT (SEE INDEX 19 OP FIG. 84) (FIG. 85) | | | | |
| 85 | 1 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 2610-00-051-0020 | TIRE WITH FLAP (7.50X10) | 81349 | EA | 1 | 1 |
| 85 | 2 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 2610-00-535-6496 | TUBE, INNER (7.50X10) MS35392-53 | 96906 | EA | 1 | 1 |
| 85 | 3 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5305-00-226-7767 | BOLT MS90726-109 | 96906 | EA | 10 | 10 |
| 85 | 4 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-685-2246 | NUT MS35690-822 | 96906 | EA | 10 | 15 |
| 85 | 5 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-584-5272 | WASHER LOCK MS35338-48 | 96906 | EA | 10 | 114 |
| 85 | 6 | XA— | PAOZZ | PAHZZ | PAFZZ | | | 2530-00-590-2680 | WHEEL ASSEMBLY MS24326-1 CONSISTING OF | 96906 | EA | 1 | 1 |
| 85 | 7 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 2530-00-911-5386 | DISC, WHEEL (W/O VALVE HOLE) 1590-3 | 95026 | EA | 1 | 1 |
| 85 | 8 | XA-- | PAOZZ | XAHZZ | XA— | | | 2530-00-911-5387 | DISC, WHEEL(W/VALVE HOLE) 1590-4 | 95026 | EA | 1 | 1 |

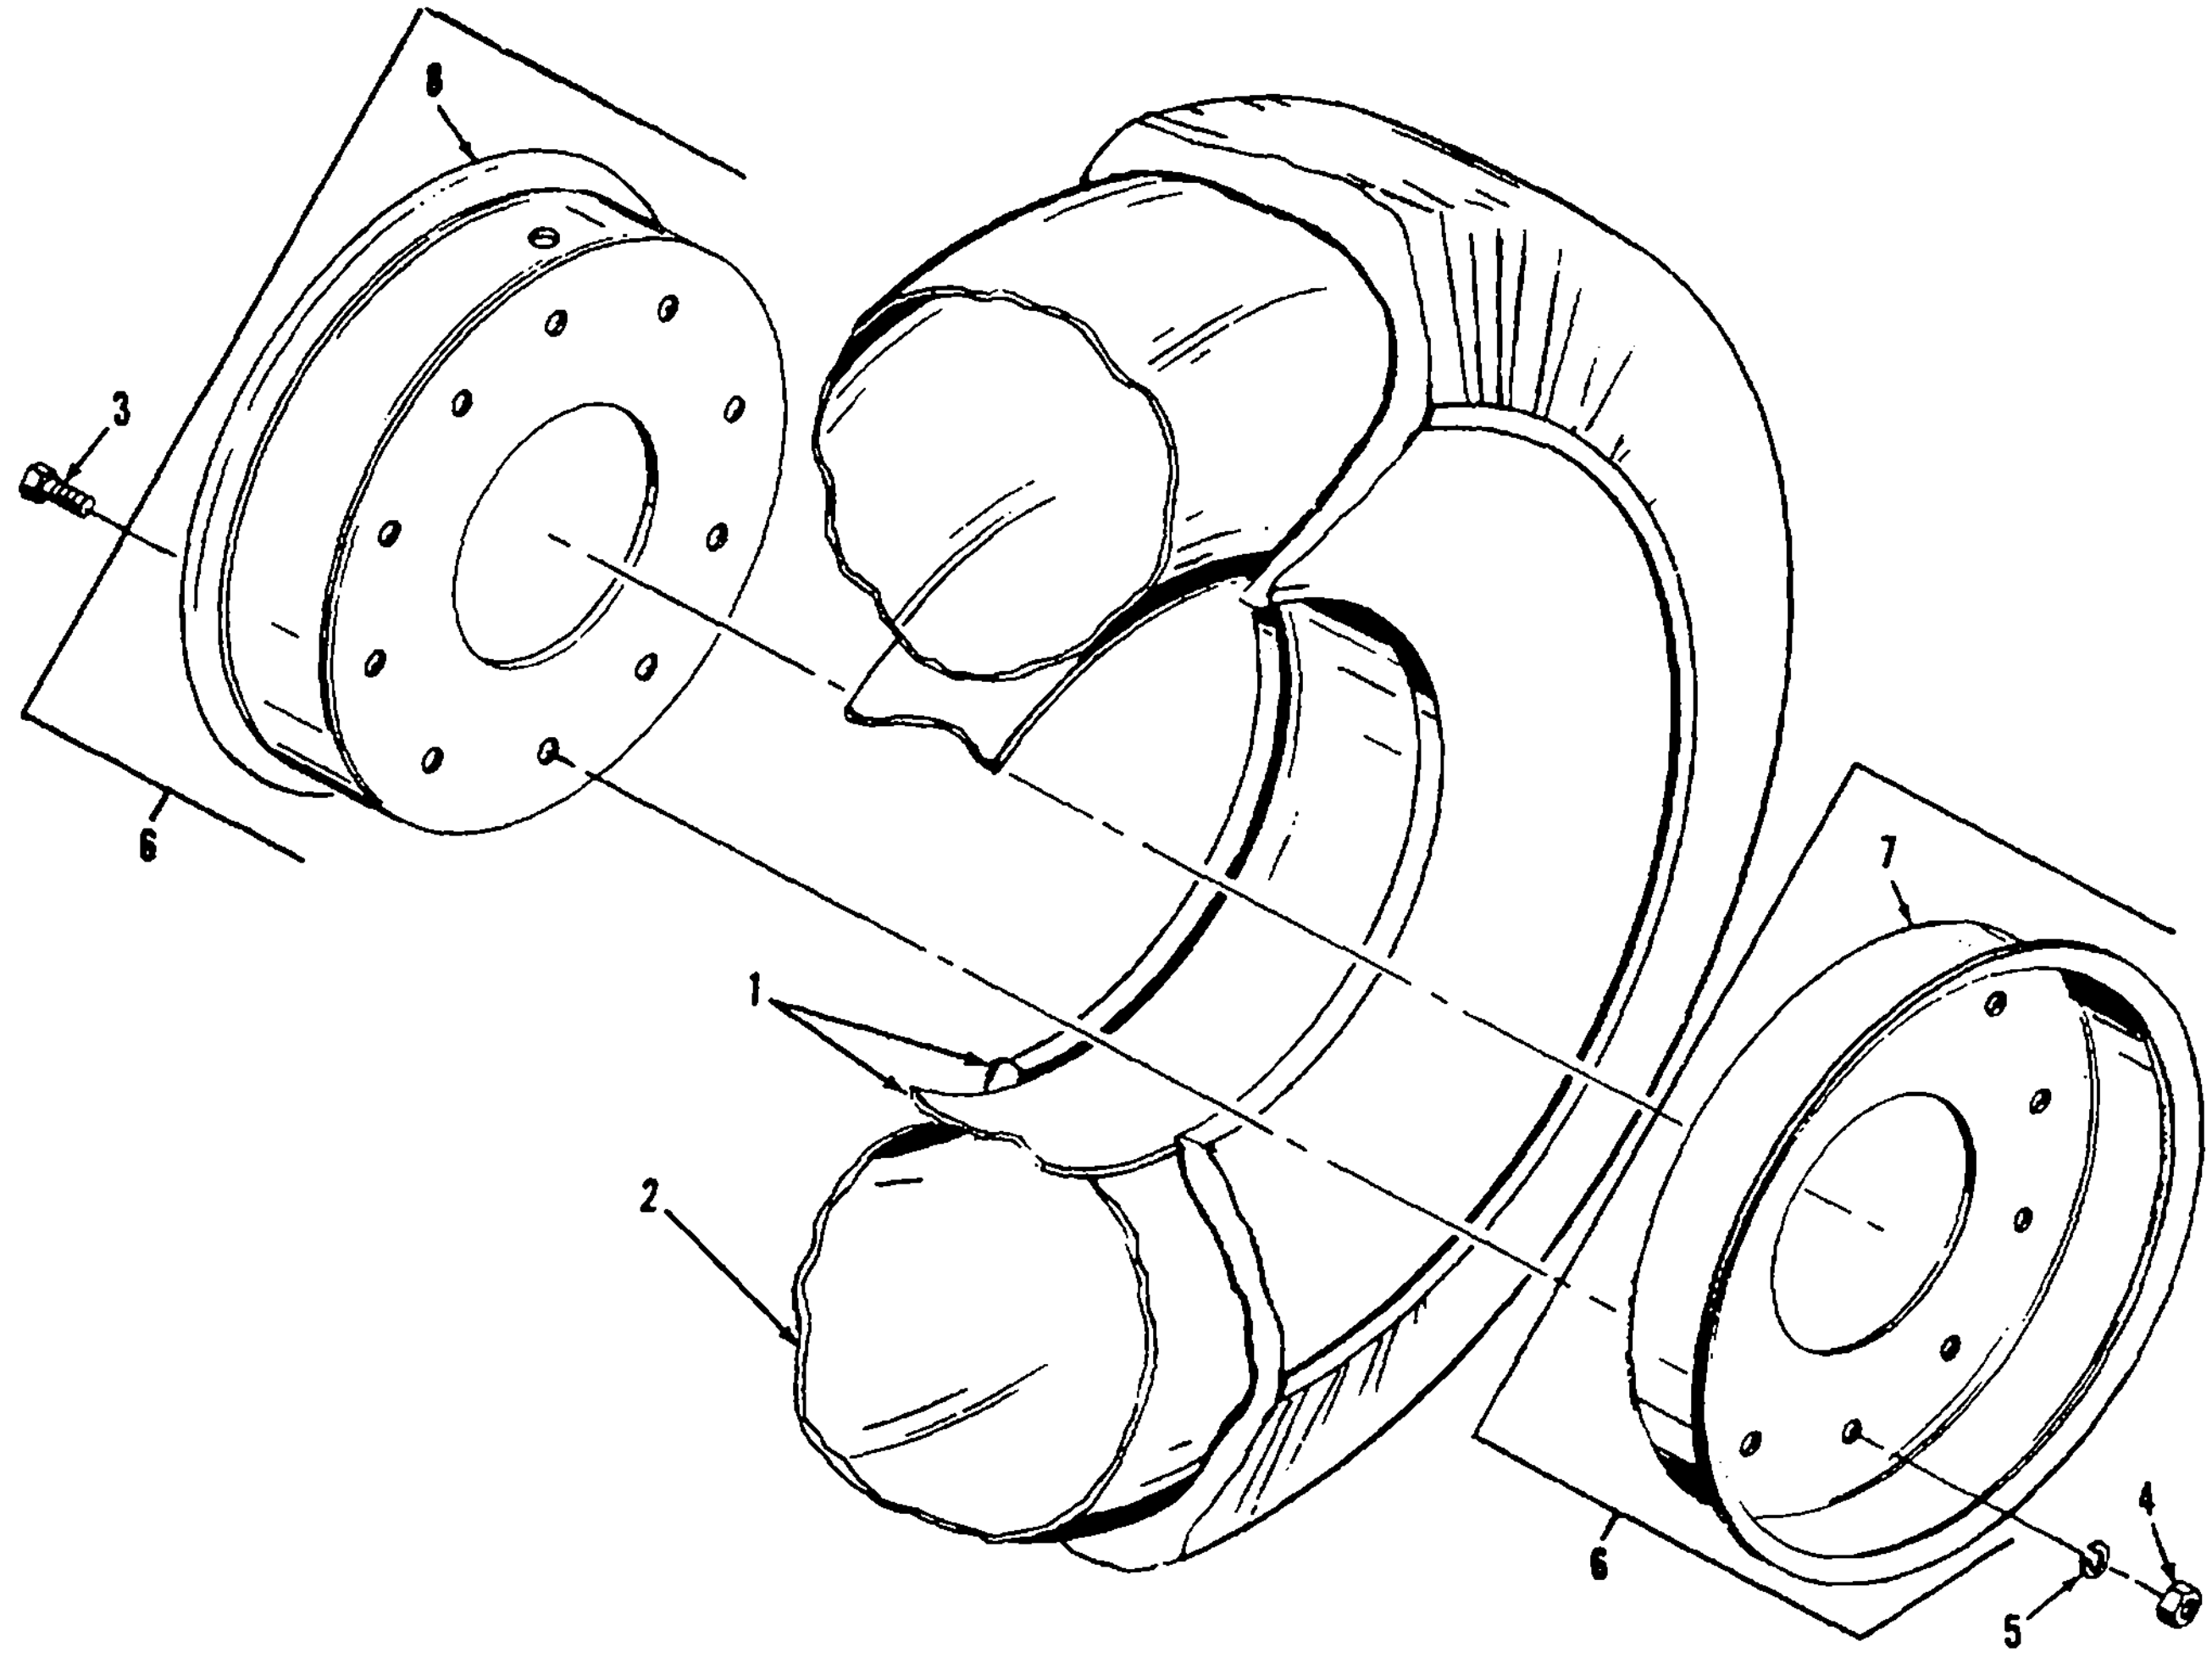

Figure 85. Wheel Assembly-Wheel Mounting Kit

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO. | (1) ILLUSTRATION b ITEM NO. | (2) SMR CODE a ARMY | (2) SMR CODE b AIR FORCE | (2) SMR CODE c NAVY | (2) SMR CODE d USMC | (3) USMC a SSI | (3) USMC b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | (5) DESCRIPTION USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | REAR AXLE ASSEMBLY<br>(SEE INDEX 23 OR FIG. 84)<br>(FIG. 86) | | | | |
| 86 | 1 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5315-00-298-1499 | PIN, COTTER<br>MS24665-360 | 22938 | EA | 2 | 2 |
| 86 | 2 | XA-- | PAOZZ | XBHZZ | XB— | | | 5310-00-911-5467 | NUT<br>00900-0676<br>2-906<br>81-4827 | 22938 | EA | 2 | 4 |
| 86 | 3 | XA— | PAOZZ | XBHZZ | XB— | | | 5310-00-911-5468 | WASHER<br>00901-0614<br>7-914<br>81-4826 | 22938 | EA | 2 | 4 |
| 86 | 4 | XA— | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-732-0559 | NUT<br>MS51968-14 | 22938 | EA | 8 | 8 |
| 86 | 5 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5305-00-269 -2803 | BOLT<br>MS90726-60<br>MS35292-62 | 22938 | EA | 8 | 16 |
| 86 | 6 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-637-9541 | WASHER, LOCK<br>MS35338-46 | 22938 | EA | 8 | 76 |
| 86 | 7 | XA-- | AFPFF | AHHHH | AFPFP | | | | BRAKE ASSY<br>6-8104<br>00218-0136<br>(SEE FIG. 87)<br>81-4839-2 | 22938 | EA | 2 | 4 6 |
| 86 | 8 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 2530-00-003 -5228 | HUB AND DRUM ASSEMBLY<br>8-606 /81-4828<br>CONSISTING OF | 22938 | EA | 2 | 2 |
| 86 | 9 | XA-- | PAOZZ | XBHZZ | XB— | | | 2530-00-589-8537 | CAP, GREASE<br>15-1001<br>81-4838 | 22938 | EA | 1 | 2 |
| 86 | 10 | XA— | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-732-0560 | NUT<br>MS51968-4<br>MS51968-14 | 22938 | EA | 5 | 5 |
| 86 | 11 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-584-5272 | WASHER, LOCK<br>MS35338-48 | 22938 | EA | 5 | 114 |
| 86 | 12 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 3110-00-198 -2169 | BEARING CONE,<br>OUTER 17X136 | 22938 | EA | 1 | 2 |
| | | | | | | | | 3110-00-275 -0083 | BEARING, A18393 | | | | |
| 86 | 13 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 3110-00-198-2170 | CUP, BEARING,<br>OUTER 17-135<br>81-4831-2 | 22938 | EA | 1 | 2 |
| 86 | 14 | XA-- | XA-- | XBHZZ | XB— | | | | HUB<br>606<br>81-4830 | 22938 | EA | 1 | 2 |
| 86 | 15 | XA— | PAOZZ | PAHZZ | PAFZZ | | | 5330-00-63-6649 | SEAL, GREASE<br>14-1000<br>81-4837 | 22938 | EA | 1 | 2 |
| 86 | 16 | XA— | PAOZZ | PAHZZ | PAFZZ | | | 3110-00-100-3537 | BEARING CONE,<br>INNER 17X138 | 22938 | EA | 1 | 2 |
| 86 | 17 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 3110-00-100-0542 | CUP, BEARING,<br>INNER<br>17-137 | 22938 | EA | 1 | 2 |
| 86 | 18 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5306-00-882-7811 | BOLT, RIBBED<br>16-806<br>81-4834 | 22938 | EA | 5 | 10 |
| 86 | 19 | XA-- | XA-- | PAHZZ | PAFZZ | | | | DRUM, BRAKE<br>11-8107<br>81-4833 | 22938 | EA | 1 | 2 |
| 86 | 20 | XA-- | XA— | XBHZZ | XB--- | | | | AXLE BEAM<br>00208-0104<br>6508-8 | 93568<br>95026 | EA | 1 | 1 |
| 86 | 21 | XA— | PAOZZ | PAHZZ | PAFZZ | | | 2530-00-518 | CABLE.BRAKE<br>81-4856<br>00234-0153 | 30554<br>93568 | EA | 2 | 2 |

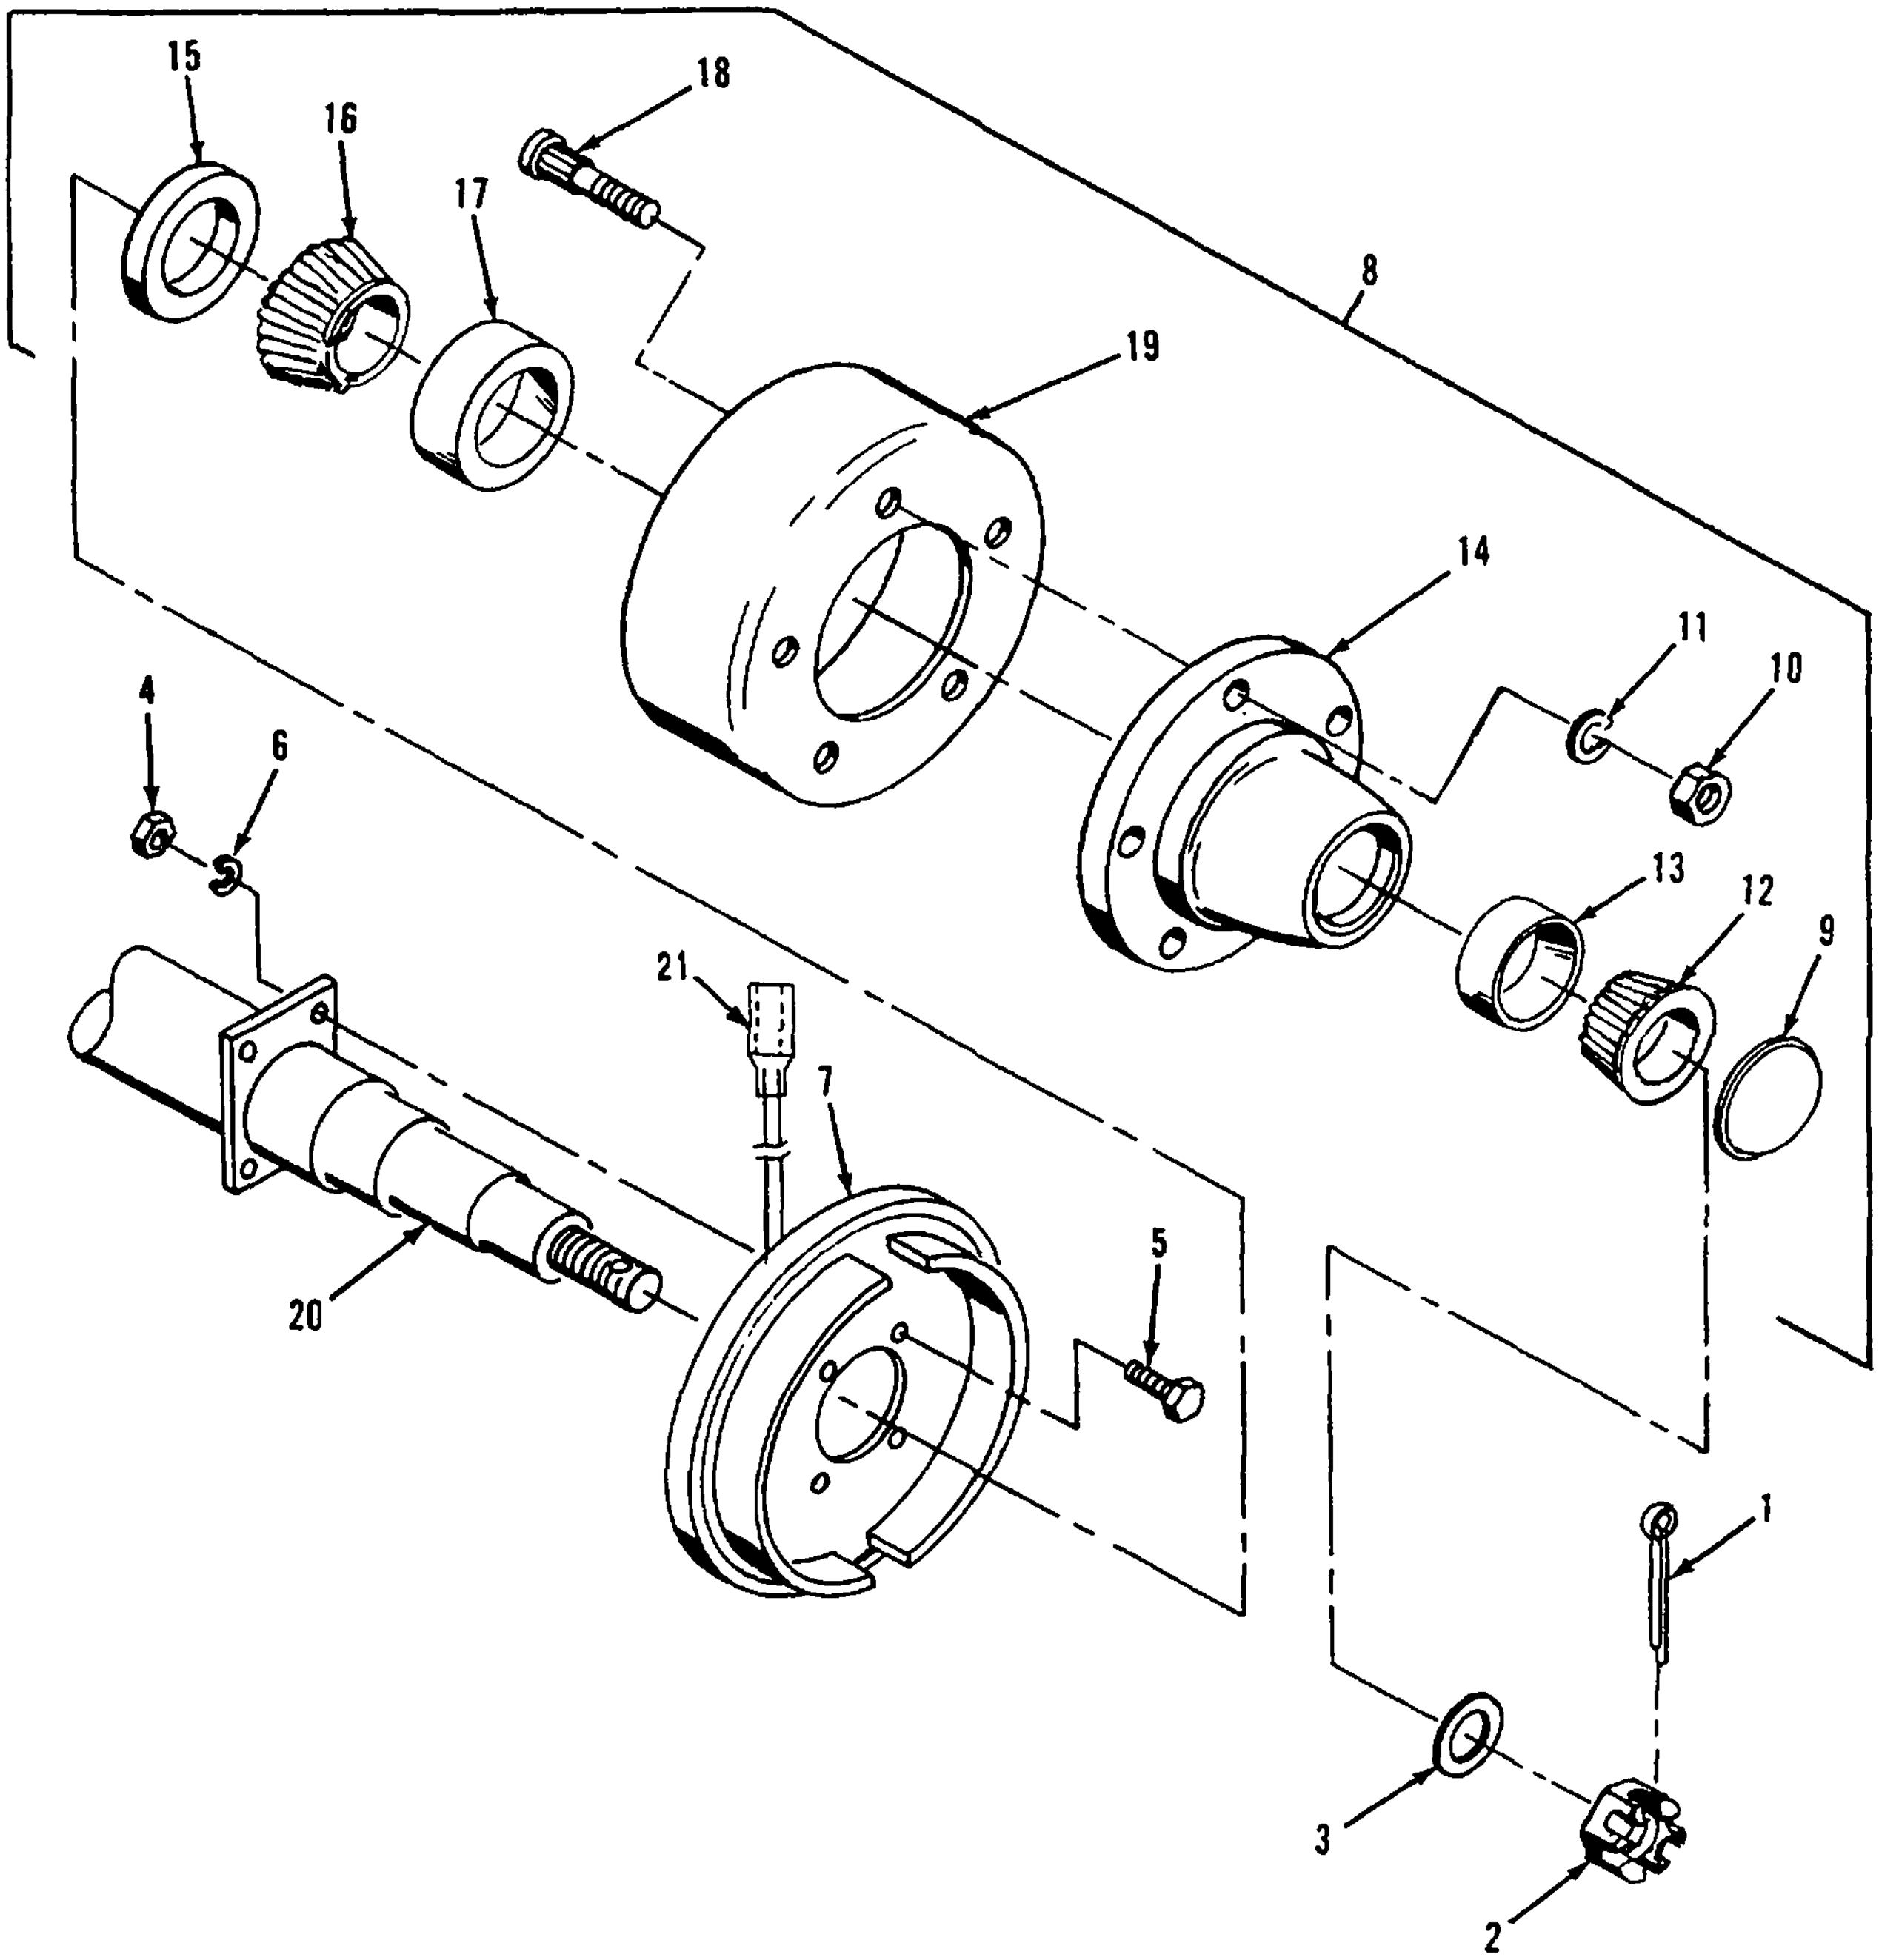
15
18
16
17
8
19
14
11
10
4
6
13
12
9
21
7
5
20
1
3
2

Figure 86. Rear Axle Assembly - Wheel Mounting Kit

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | FRONT AXLE ASSEMBLY<br>(SEE INDEX 27 OF FIG. 84)<br>(FIG. 87) | | | | |
| 87 | 1 | XA-- | PAO2Z | PAHZZ | PAFZZ | | | 5315-00-298-1401 | PIN, COTTER<br>MS24665-357 | <br>22938 | EA | 2 | 4 |
| 87 | 2 | XA-- | PAO2Z | XBHZZ | XB— | | | 5310-00-911-5467 | NUT<br>2-906<br>00900-0676 | <br>22938<br>22938 | EA | 2 | 4 |
| 87 | 3 | XA-- | PAOZZ | XBHZZ | XB— | | | 5310-00-911-5468 | WASHER<br>00901-0614<br>7-914 | <br>22938 | EA | 2 | 4 |
| 87 | 4 | XA— | PAOZZ | PAHZZ | PAFZZ | | | 5305-00-269-2803 | BOLT<br>MS90726-60 | <br>22938 | EA | 8 | 16 |
| 87 | 5 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-732-0559 | NUT<br>MS51968-8 | <br>22938 | EA | 8 | 8 |
| 87 | 6 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-637-9541 | WASHER, LOCK<br>MS35338-46 | <br>22938 | EA | 8 | 76 |
| 87 | 7 | XA-- | AFF | AHHHH | AFFFF | | | | BRAKE ASSY<br>00218-0136<br>(SEE FIG. 87) | <br>22938 | EA | 2 | 4 |
| 87 | 8 | XA-- | AFF | AHHHH | AFFFF | | | 2530-00-003-5228 | HUB AND DRUM<br>ASSY 8-60C<br>CONSISTING OF | <br>22938 | EA | 2 | 2 |
| 87 | 9 | XA-- | PAOZZ | XBHZZ | XB-- | | | 2530-00-589-8537 | CUP, GREASE<br>15-1001 | <br>22938 | EA | 1 | 2 |
| 87 | 10 | XA-- | PAHZZ | PAHZZ | PAFZZ | | | 5310-00-685-2246 | NUT<br>MS35690-822 | <br>22938 | EA | 5 | 15 |
| 87 | 11 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5310-00-584-5272 | WASHER, LOCK<br>MS35338-48 | <br>22938 | EA | 5 | 114 |
| 87 | 12 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 3110-00-198-2169 | BEARING CONE, OUTER<br>17X136 | <br>22938 | EA | 1 | 2 |
| 87 | 13 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 3110-00-198-2170 | CUP, BEARING, OUTER<br>17-135 | <br>22938 | EA | 1 | 2 |
| 87 | 14 | XA-- | XA— | XBHZZ | XB— | | | | HUB<br>606 | <br>22938 | EA | 1 | 2 |
| 87 | 15 | XA-- | PAOZZ | XBHZZ | XB-- | | | 5330-00-631-6649 | SEAL, GREASE<br>14-1000 | <br>22938 | EA | 1 | 2 |
| 87 | 16 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 3110-00-100-3537 | BEARING CONE, INNER<br>17X138 22938 | | EA | 1 | 2 |
| 87 | 17 | XA-- | PAO2Z | PAHZZ | PAFZZ | | | 3110-00-100-0542 | CUP, BEARING,<br>INNER 17-137 | <br>22938 | EA | 1 | 2 |
| 87 | 18 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5306-00-882-7811 | STUD<br>16-806 | <br>22938 | EA | 5 | 10 |
| 87 | 19 | XA-- | XA— | PAHZZ | PAFZZ | | | | DRUM, BRAKE<br>11-8107 | <br>22938 | EA | 1 | 2 |
| 87 | 20 | XA-- | PAO2Z | PAHZZ | PAFZZ | | | 4730-00-172-0034 | FITTING, LUBE<br>MS15003-6 | <br>22938 | EA | 9 | 11 |
| 87 | 21 | XA-- | AFFFF | AHHHH | AFFFF | | | | ROD TIE ASSY<br>16L485<br>00331-0179<br>CONSISTING OF | <br>22938<br>22938 | EA | 2 | 2 |

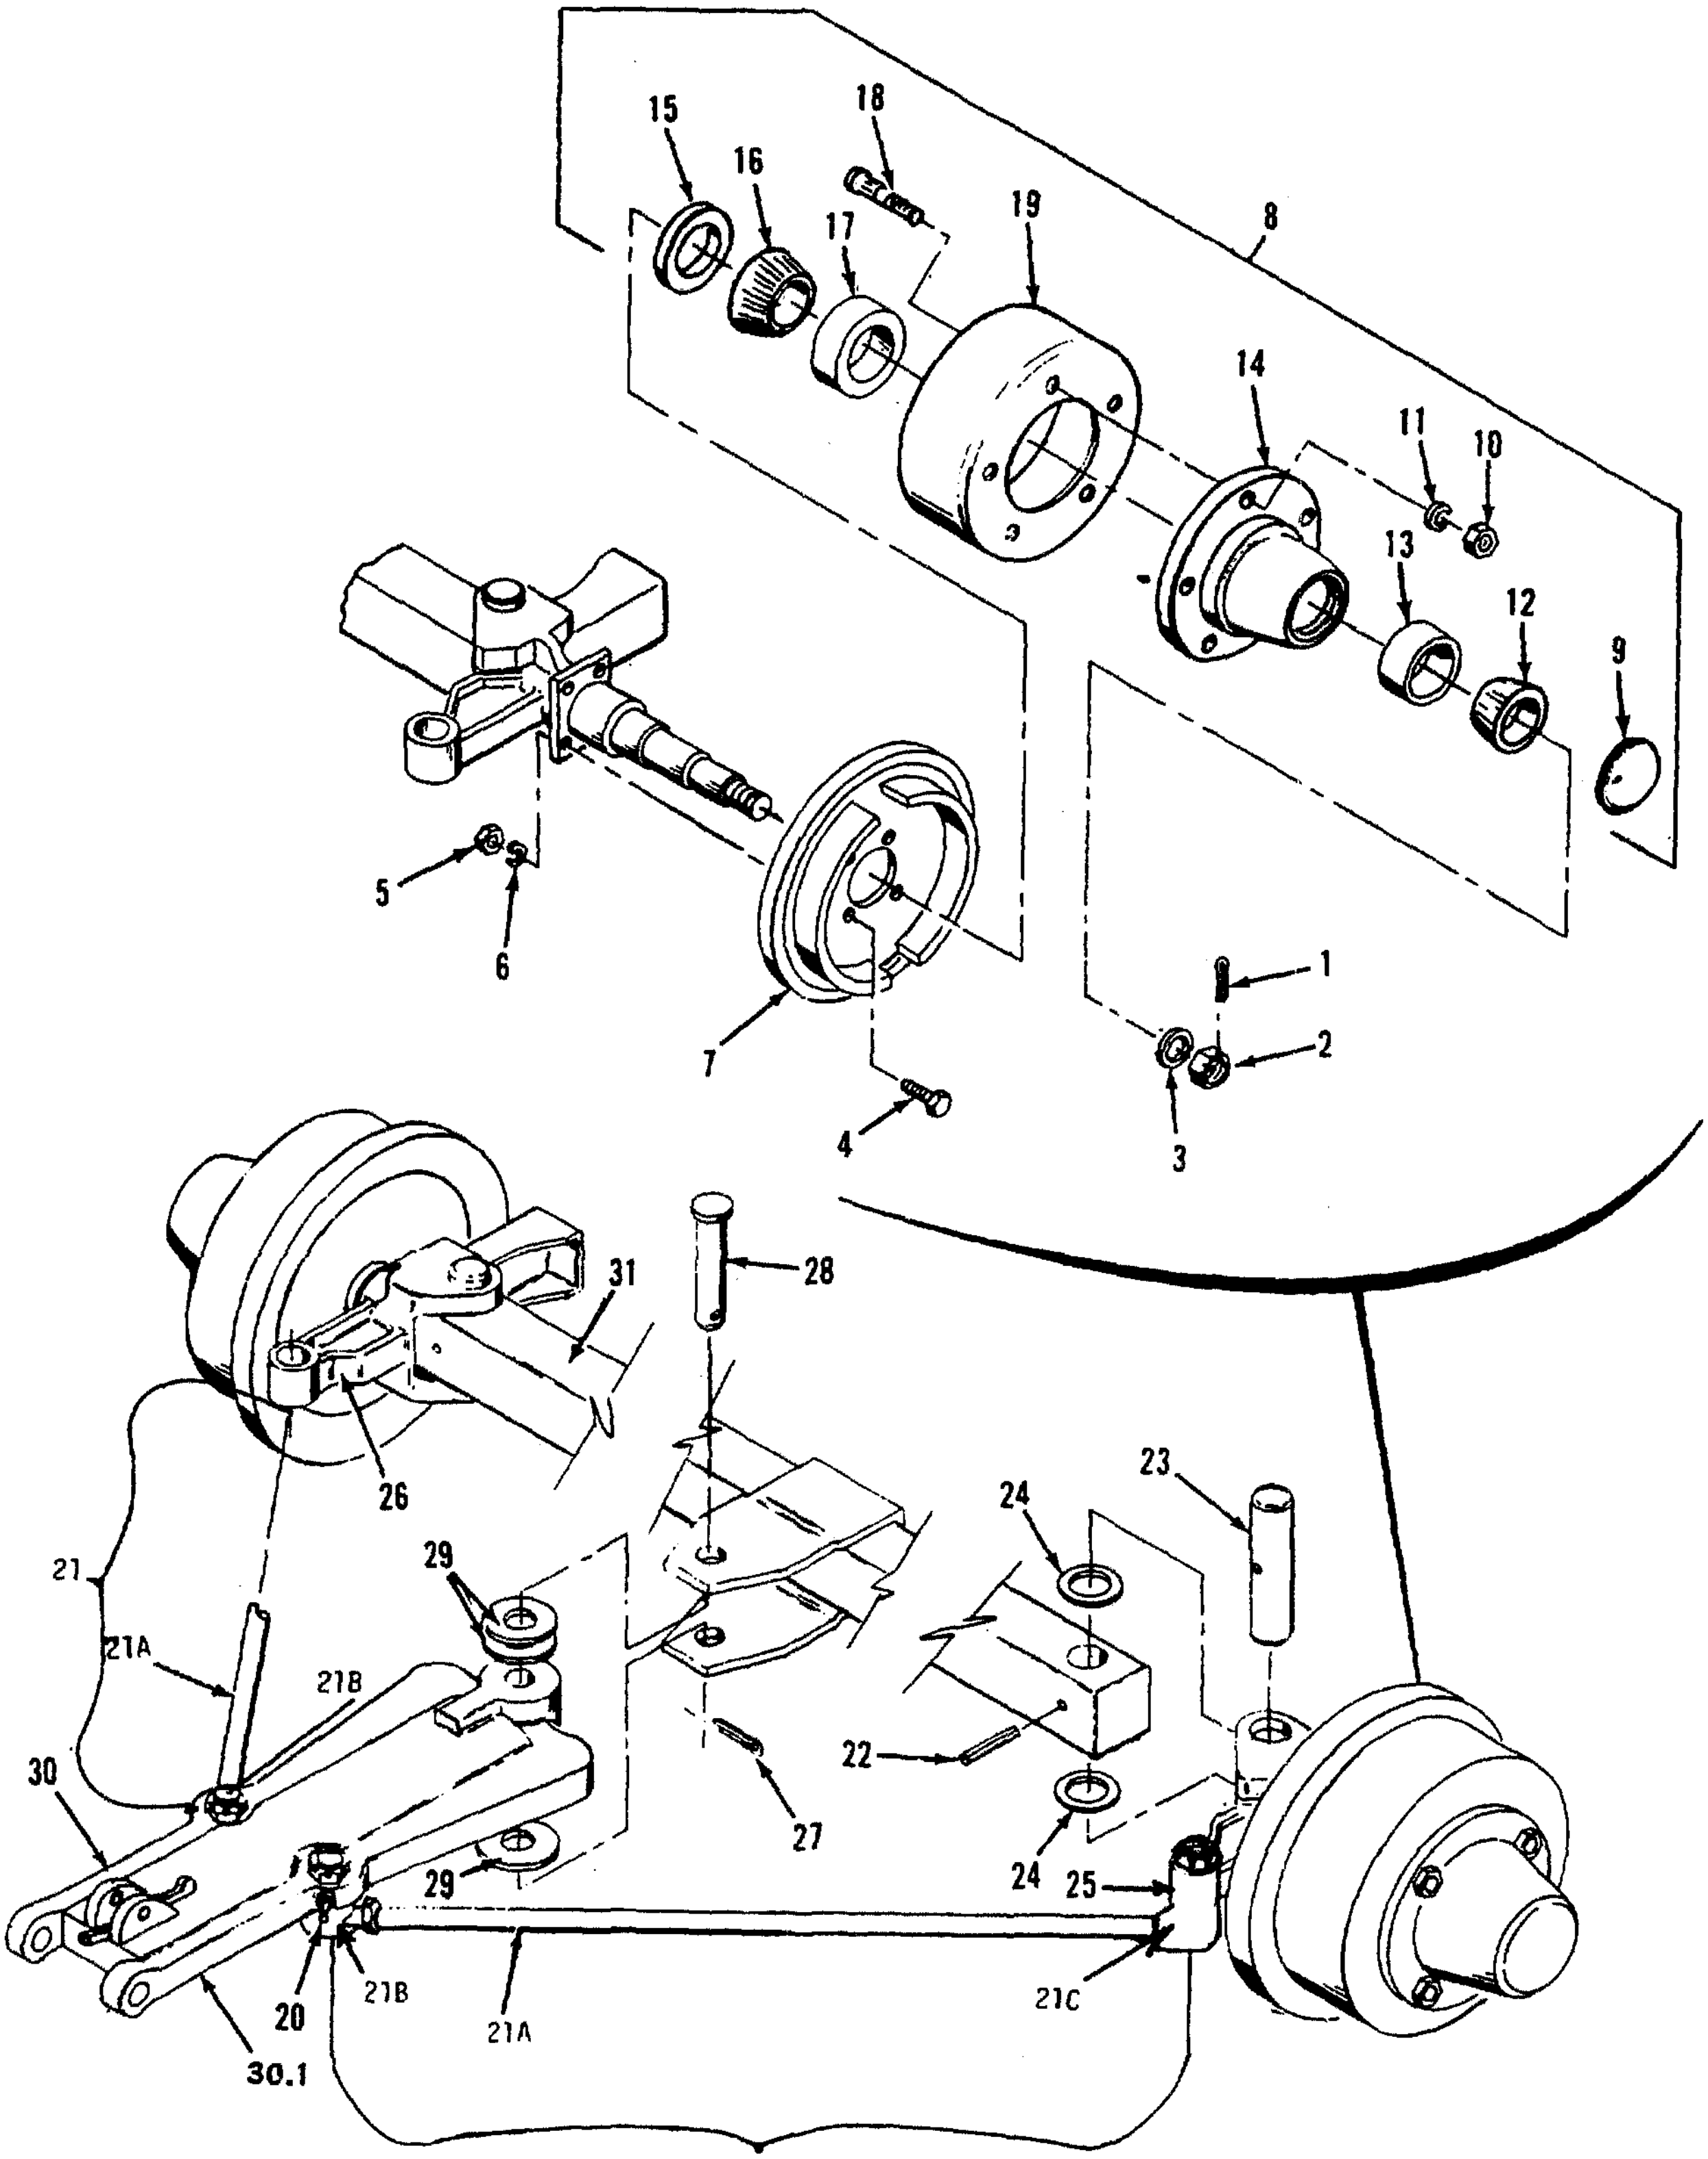
15
18
16
19
17
8
14
11
10
13
12
9
5
6
7
1
2
4
3
31
28
26
23
24
21
29
21A
21B
30
22
27
24
25
29
20
21B
21A
21C
30.1

Figure 87. Front Axle Assembly-Wheel Mounting Kit

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | FRONT AXLE ASSEBMLY<br>(SEE INDEX 27 OF FIG. 84)<br>(FIG. 87) - CONTINUED | | | | |
| 87 | 21A | | PAOZZ | | | | | 2530-01-005-2607 | TIE ROD<br>16TU2108 | <br>22938 | EA | 2 | 2 |
| 87 | 21B | | PAOZZ | | | | | 2530-00-833-1098 | TIE ROD END<br>(LH THD) 403-10 | <br>22938 | EA | 2 | 2 |
| 87 | 21C | | PAOZZ | | | | | 2530-00-883-1099 | TIE ROD END<br>(RH THD) 403-11 | <br>22938 | EA | 2 | 2 |
| 87 | 22 | | PAOZZ | PAHZZ | PAFZZ | | | 5315-01-058-3488 | PIN, ROLL<br>NAS561S3-6 | <br>80205 | EA | 2 | 2 |
| 87 | 23 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 2530-00-471-0010 | PIN, KING<br>6-809<br>00899-0126 | <br>22938<br>22938 | EA | 2 | 2 |
| 87 | 24 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 2530-00-829-8582 | WASHER, FLAT<br>11X145<br>00901-0615 | <br>22938<br>22938 | EA | 4 | 4 |
| 87 | 25 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 2530-00-518-1313 | SPINDLE AND KNUCKLE<br>3-1207<br>00208-0108 | <br>22938<br>22938 | EA | 1 | 1 |
| 87 | 26 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 2530-00-518-1300 | SPINDLE AND KNUCKLE<br>2-1207<br>00208-0107 | <br>22938<br>22938 | EA | 1 | 1 |
| 87 | 27 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5315-00-297-2444 | PIN, COTTER<br>MS24665-623 | <br>22938 | EA | 1 | 1 |
| 87 | 28 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 2530-00-086-2013 | PIN, CENTER<br>20-800<br>00899-0125 | <br>22938<br>22938 | EA | 1 | 1 |
| 87 | 29 | XA-- | PAOZZ | PAOZZ | PAFZZ | | | 5310-00-209-0698 | WASHER<br>MS27183-29 | <br>22938 | EA | 3 | 3 |
| 87 | 30 | XA-- | AFFFF | AHHHH | AFFFF | | | | ARM AND LATCH ASSY<br>3-522<br>00295-0106 | <br>22938<br>22938 | EA | 1 | 1 |
| 87 | 30.1 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 2530-01-264-9298 | CENTER, ARM | 62589 | EA | 1 | 1 |
| 87 | 30A | PAOZZ | | | | | | 2530-01-023-8391 | LATCH<br>3855 | <br>22938 | EA | 1 | |
| 87 | 30B | PAOZZ | | | | | | 2315-00-226-3780 | ROLL PIN<br>MS16562-174 | <br>22938 | EA | 1 | |
| 87 | 30C | PAOZZ | | | | | | 5360-01-020-5145 | SPRING<br>4008 | <br>22938 | EA | 1 | |
| 87 | 31 | XA— | PBFZZ | XAHZZ | XA-- | | | 2530-00-971-4757 | AXLE BEAM<br>5018-3<br>00208-0106 | <br>22938<br>22938 | EA | 1 | 1 |

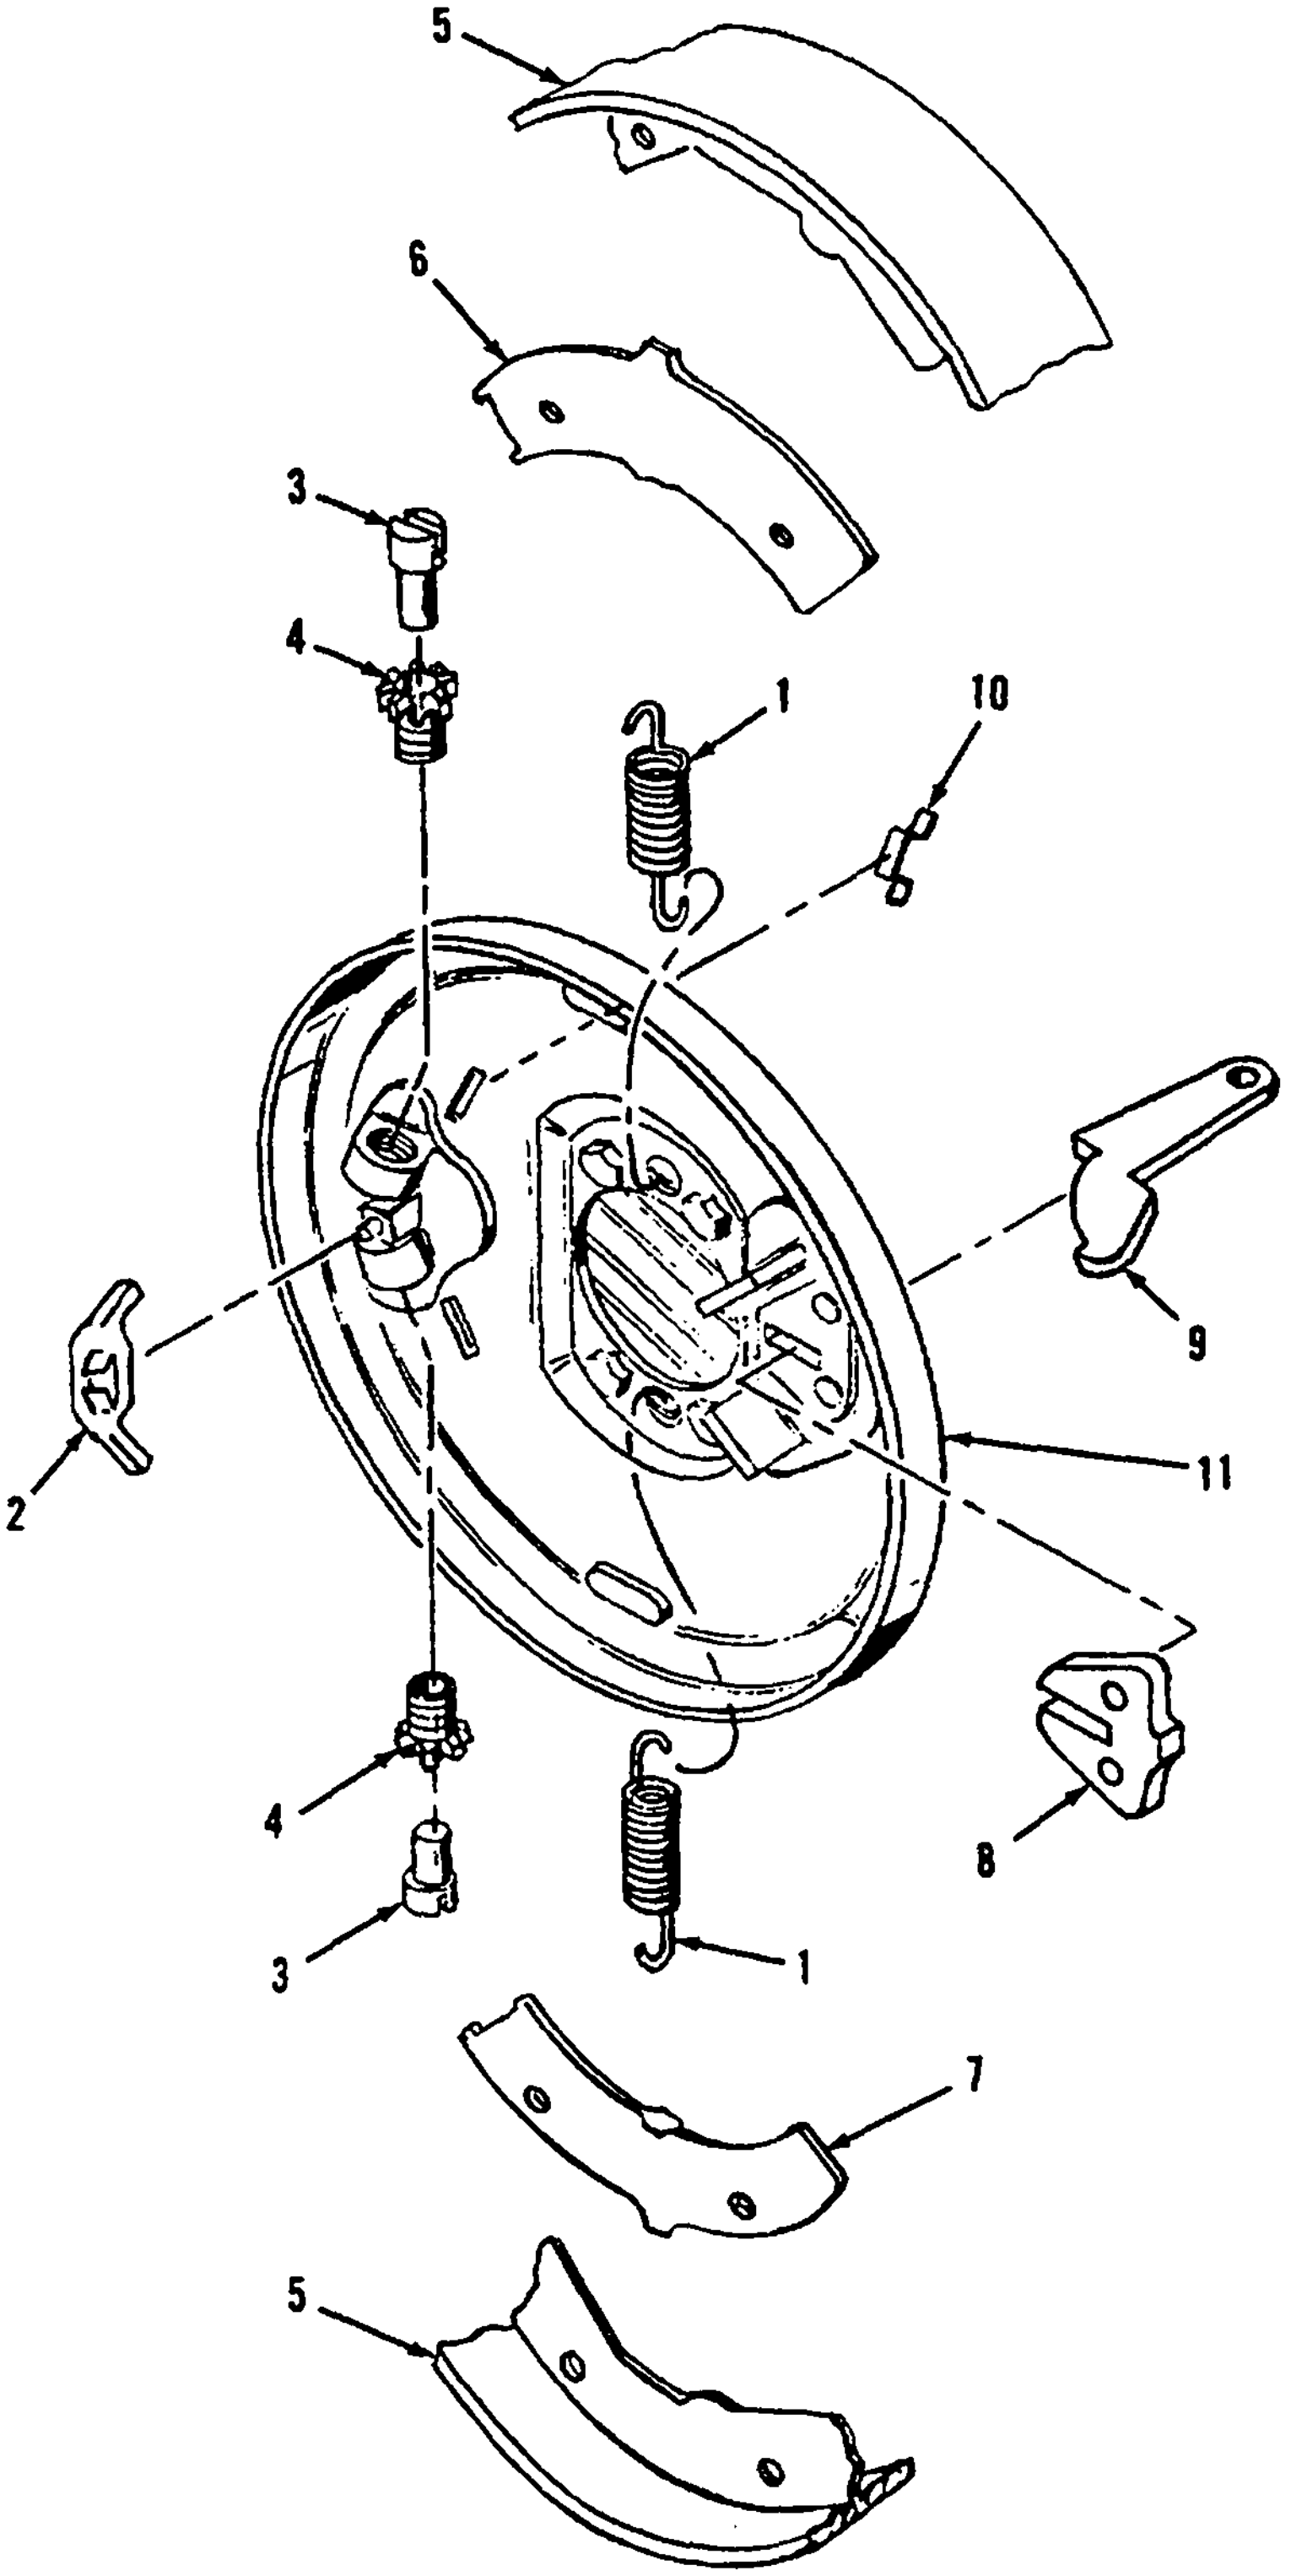
5
6
3
4
1
10
9
2
11
4
8
3
1
7
5

Figure 88. Brake Assembly-Wheel Mounting Kit

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION | | (2) SMR CODE | | | | (3) USMC | | (4) | (5) DESCRIPTION | | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M | | |
| | | | | | | | | | BRAKE ASSEMBLY-WHEEL MOUNTING KIT (SEE INDEX 7 OF FIG. 86 AND INDEX 7 OF FIG. 87) (FIG. 88) | | | | |
| 88 | 1 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 5360-00-494-7401 | SPRING, RETURN<br>8104-10 22938 | | EA | 2 | 2 |
| 88 | 2 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 2530-00-128-0781 | CLIP, SPRING<br>8104-9 22938 | | EA | 1 | 1 |
| 88 | 3 | XA-- | PAOZZ | XBHZZ | PAFZZ | | | 2530-00-118-5131 | PIN, ADJUSTMENT<br>8104-12 22938 | | EA | 2 | 2 |
| 88 | 4 | XA-- | PAOZZ | XBHZZ | PAFZZ | | | 2530-00-772-6334 | BOLT, ADJUSTMENT<br>8104-16 22938 | | EA | 2 | 2 |
| 88 | 5 | XA-- | PAOZZ | PAHZZ | PAFZZ | | | 2530-00-676-7820 | SHOE AND LINING ASSY<br>A4-3722H112-5 78500 | | EA | 2 | 2 |
| 88 | 6 | XA-- | PAOZZ | XBHZZ | PAFZZ | | | 2530-00-004-8277 | LEVER<br>8104-17 22938 | | EA | 2 | 2 |
| 88 | 7 | XA-- | PAOZZ | XBHZZ | XB-- | | | 2530-00-315-9863 | LEVER<br>8104-18 22938 | | EA | 1 | 1 |
| 88 | 8 | XA-- | PAOZZ | XBHZZ | XB-- | | | 2530-00-118-1412 | WEDGE ASSY<br>8104-13 22938 | | EA | 1 | 1 |
| 88 | 9 | XA-- | MOO | XBHZZ | XB-- | | | | LEVER, CONTROL<br>8104-2 22938 | | EA | 1 | 1 |
| 88 | 10 | XA-- | PAOZZ | XBHZZ | XB-- | | | 2530-00-491-3149 | COVER, DUST<br>8104-15 22938 | | EA | 2 | 2 |
| 88 | 11 | XA-- | PBOZZ | XBHZZ | XB-- | | | | PLATE ASSY, BACKING<br>8104-19 22938 | | EA | 1 | 1 |

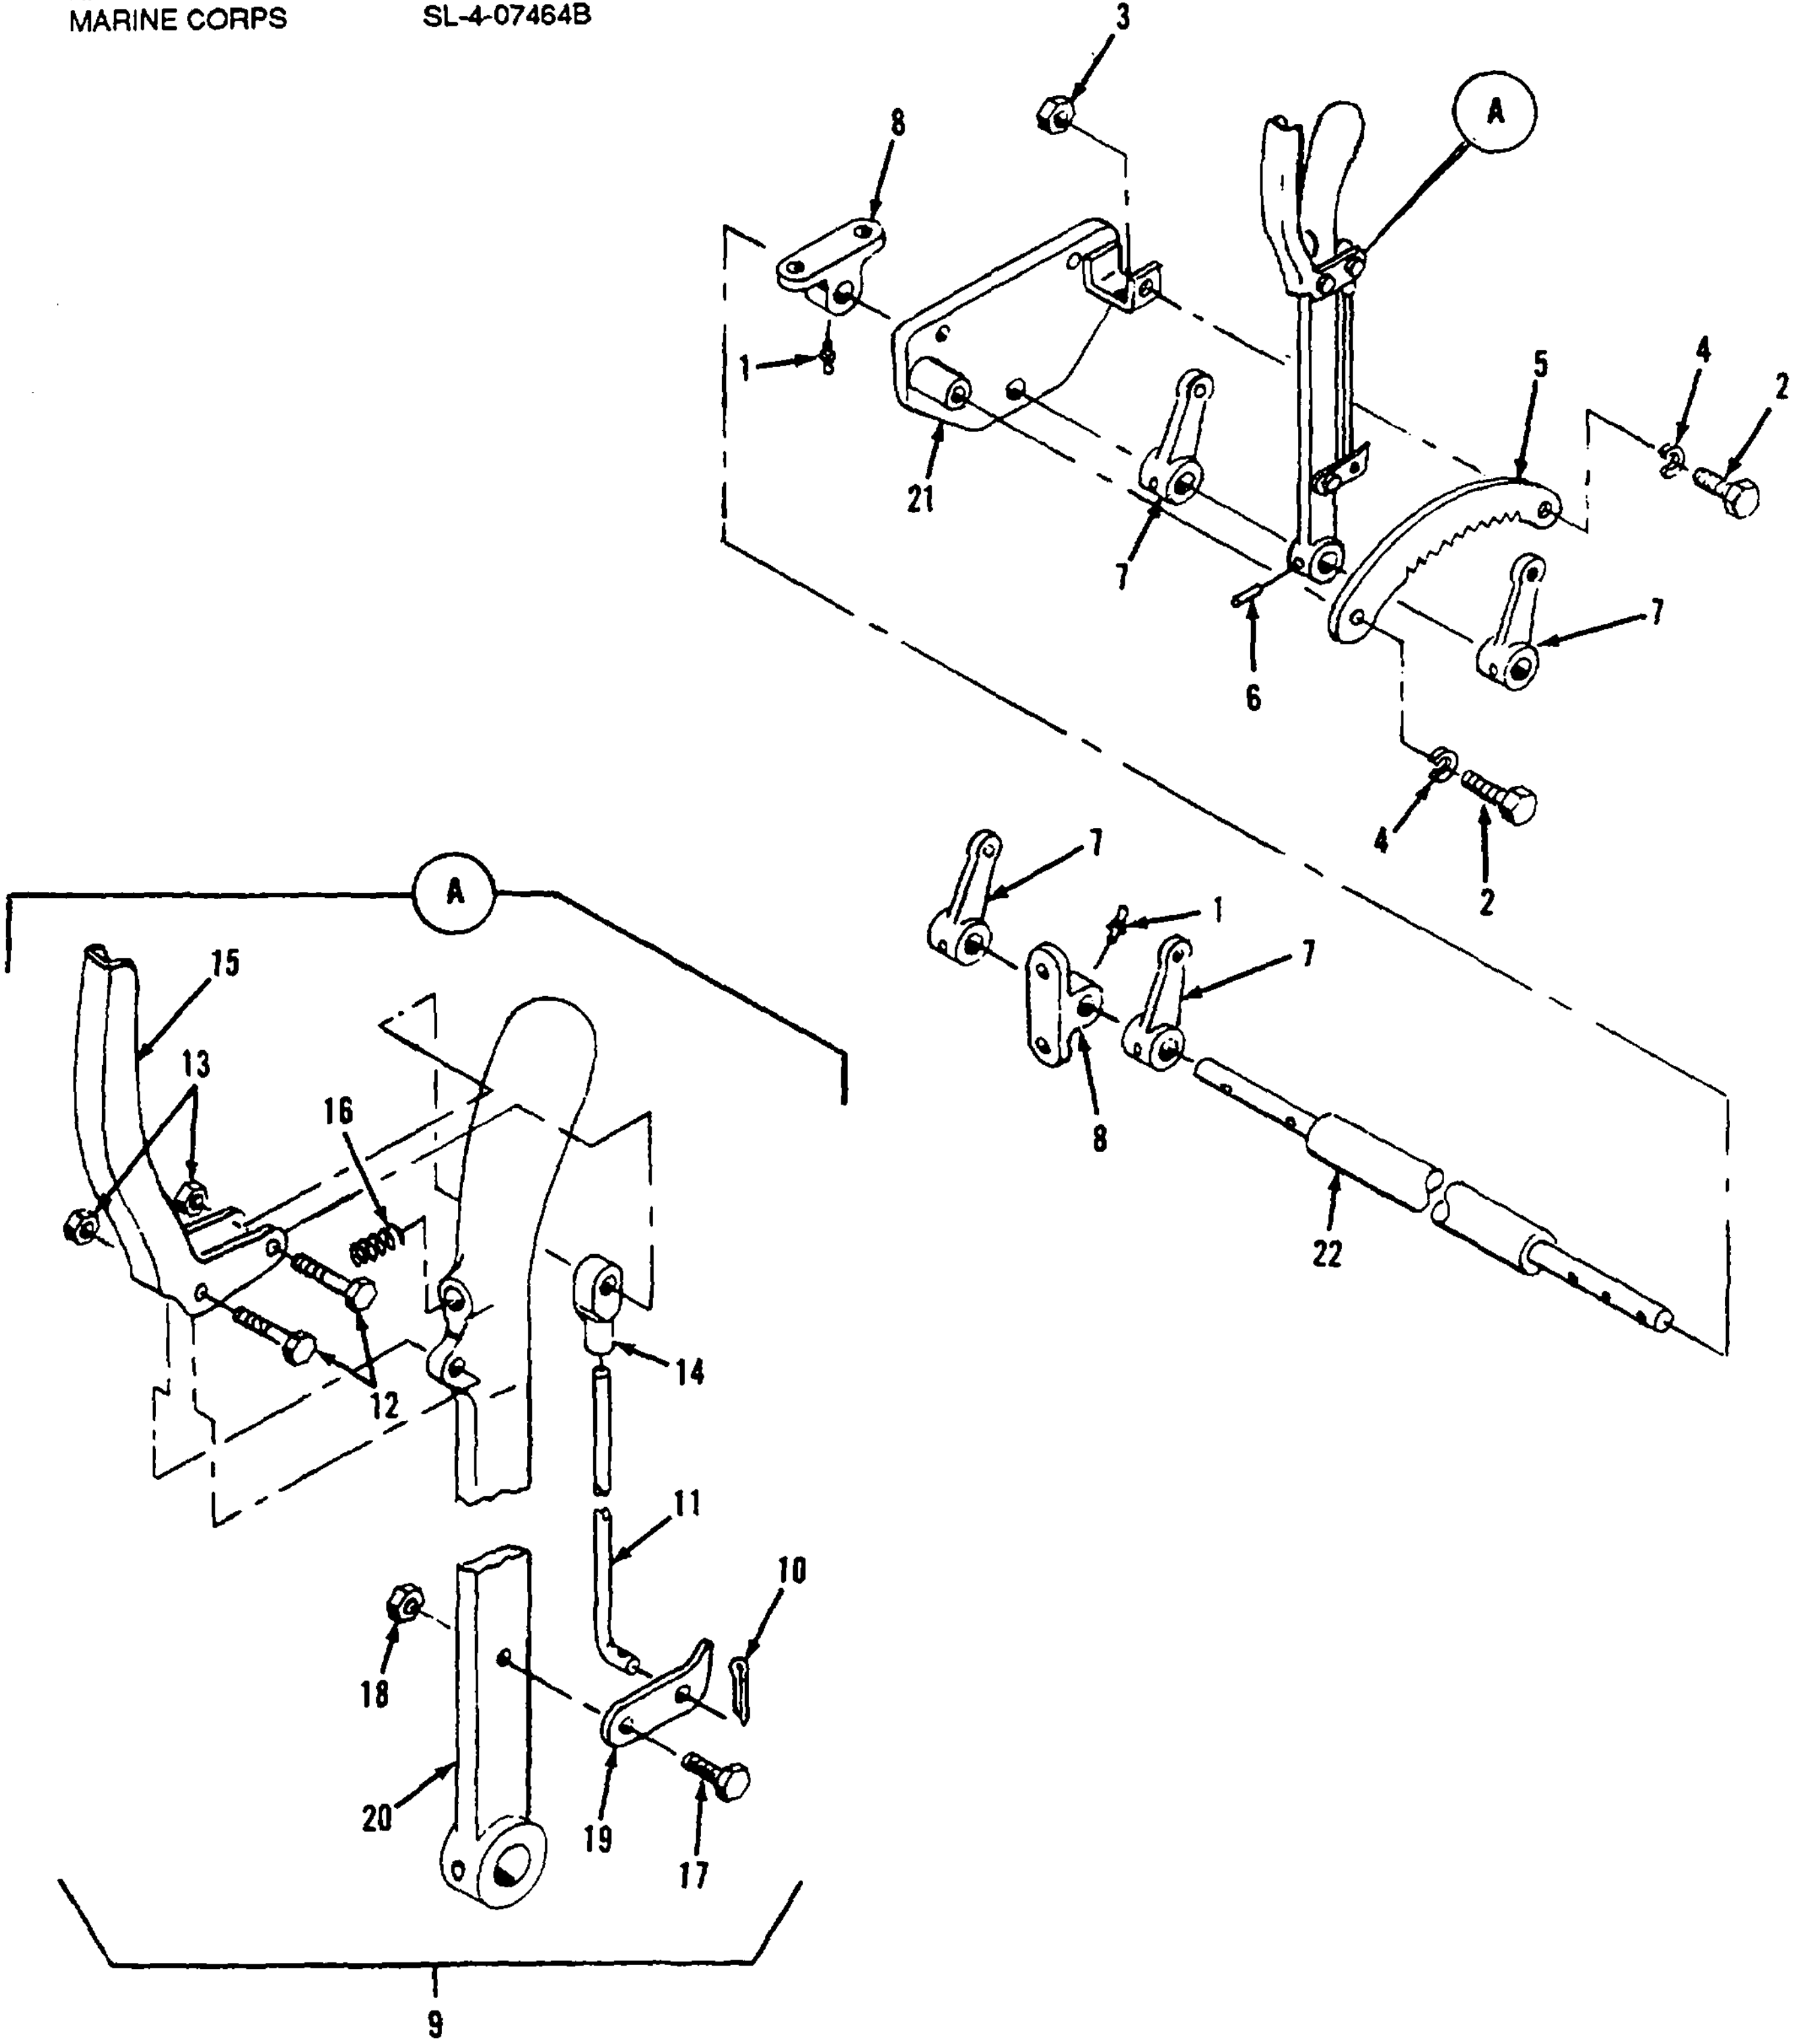
3
8
A
1
5
4
2
21
7
7
6
4
2
7
1
7
8
22
A
15
13
16
14
12
11
10
18
20
19
17
9

Figure 89. Hand Brake and Shaft Assembly

## SECTION II. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION |  | (2) SMR CODE |  |  |  | (3) USMC |  | (4) | (5) DESCRIPTION |  | (6) | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| a FIG NO. | b ITEM NO. | a ARMY | b AIR FORCE | c NAVY | d USMC | a SSI | b REPL FACTOR | NATIONAL STOCK NUMBER | REF NUMBER & MFR CODE | USABLE ON CODE | U/M |  |  |
|  |  |  |  |  |  |  |  |  | HANDBRAKE AND SHAFT ASSEMBLY<br>(SEE INDEX 38 OF FIG. 84)<br>(FIG. 89) |  |  |  |  |
| 89 | 1 | XA-- | PAOZZ | PAHZZ | PAFZZ |  |  | 4730-00-172-0034 | FITTING, LUBE<br>MS15003-6 | 22938 | EA | 2 | 11 |
| 89 | 2 | XA-- | PAOZZ | PAHZZ | PAFZZ |  |  | 5305-00-269-3211 | SCREW<br>MS90725-60 | 22938 | EA | 2 | 14 |
| 89 | 3 | XA-- | PAOZZ | PAHZZ | PAFZZ |  |  | 5310-00-732-0558 | NUT<br>MS51967-8 | 22938 | EA | 1 | 2 |
| 89 | 4 | XA-- | PAFZZ | PAHZZ | PAFZZ |  |  | 5310-00-637-9541 | WASHER, LOCK<br>MS35338-46 | 22038 | EA | 2 | 76 |
| 89 | 5 | XA-- | PAOZZ | XBHZZ | XB-- |  |  | 2530-00-971-4760 | RATCHET<br>7070-10<br>00267-0260 | 22938<br>22938 | EA | 1 | 1 |
| 89 | 6 | XA-- | PAFZZ | PAHZZ | PAFZZ |  |  | 5315-00-543-3714 | PIN<br>27X455C | 22938 | EA | 5 | 5 |
| 89 | 7 | XA-- | PAOZZ | XBHZZ | XB-- |  |  | 2530-00-871-6901 | LEVER<br>7047-3<br>00218-0140 | 22938<br>22938 | EA | 4 | 4 |
| 89 | 8 | XA-- | PAOZZ | XBHZZ | XB-- |  |  |  | BEARING<br>00213-1007 | 22938 | EA | 2 | 2 |
| 89 | 9 | XA-- | AOO | XAHZZ | XA-- |  |  |  | HAND LEVER AND BRAKE ASSY<br>7070-20<br>CONSISTING OF | 22938 | EA | 1 | 1 |
| 89 | 10 | XA-- | PAOZZ | PAHZZ | PAFZZ |  |  | 5315-00-839-5820 | PIN, COTTER<br>MS24665-134 | 22938 | EA | 1 | 1 |
| 89 | 11 | XA-- | PAOZZ | PAHZZ | PAFZZ |  |  | 2530-00-981-2506 | ROD, PAWL<br>7070-15 | 22938 | EA | 1 | 1 |
| 89 | 12 | XA-- | PAOZZ | PAHZZ | PAFZZ |  |  | 5305-00-989-1861 | SCREW, LATCH<br>7070-4 | 22938 | EA | 2 | 2 |
| 89 | 13 | XA-- | PAOZZ | PAHZZ | PAFZZ |  |  | 5310-00-989-3184 | NUT<br>7070-5 | 22938 | EA | 2 | 2 |
| 89 | 14 | XA-- | PAOZZ | XBHZZ | XB-- |  |  | 5340-00-279-9112 | ROD END<br>7070-6 | 22938 | EA | 1 | 1 |
| 89 | 15 | XA-- | PAOZZ | XBHZZ | XB-- |  |  | 3040-01-116-5906 | GPIP, LATCH<br>7070-2 | 22938 | EA | 1 | 1 |
| 89 | 16 | XA-- | PAOZZ | PAHZZ | PAFZZ |  |  | 5360-00-988-9511 | SPRING, LATCH<br>7070-3 | 22938 | EA | 1 | 1 |
| 89 | 17 | XA-- | PAOZZ | PAHZZ | PAFZZ |  |  | 5306-00-225-9089 | BOLT<br>MS90726-34 | 22938 | EA | 1 | 1 |
| 89 | 18 | XA-- | PAOZZ | PAHZZ | PAFZZ |  |  | 5310-00-989-3185 | NUT<br>7070-9 | 22938 | EA | 1 | 1 |
| 89 | 19 | XA-- | PAOZZ | PAHZZ | PAFZZ |  |  | 2530-00-971-4759 | PAWL<br>7070-7 22938 |  | EA | 1 | 1 |
| 89 | 20 | XA-- | PAOZZ | XBHZZ | XB-- |  |  | 3040-01-116-5905 | LEVER, HAND<br>7070-1 | 22938 | EA | 1 | 1 |
| 89 | 21 | XA-- | PBOZZ | XBHZZ | XB-- |  |  |  | BRACKET<br>00217-0211 | 22938 | EA | 1 | 1 |
| 89 | 22 | XA-- | PBOZZ | XBHZZ | XB-- |  |  |  | SHAFT ASSY, CROSS<br>00341-0258 |  | EA | 1 | 1 |

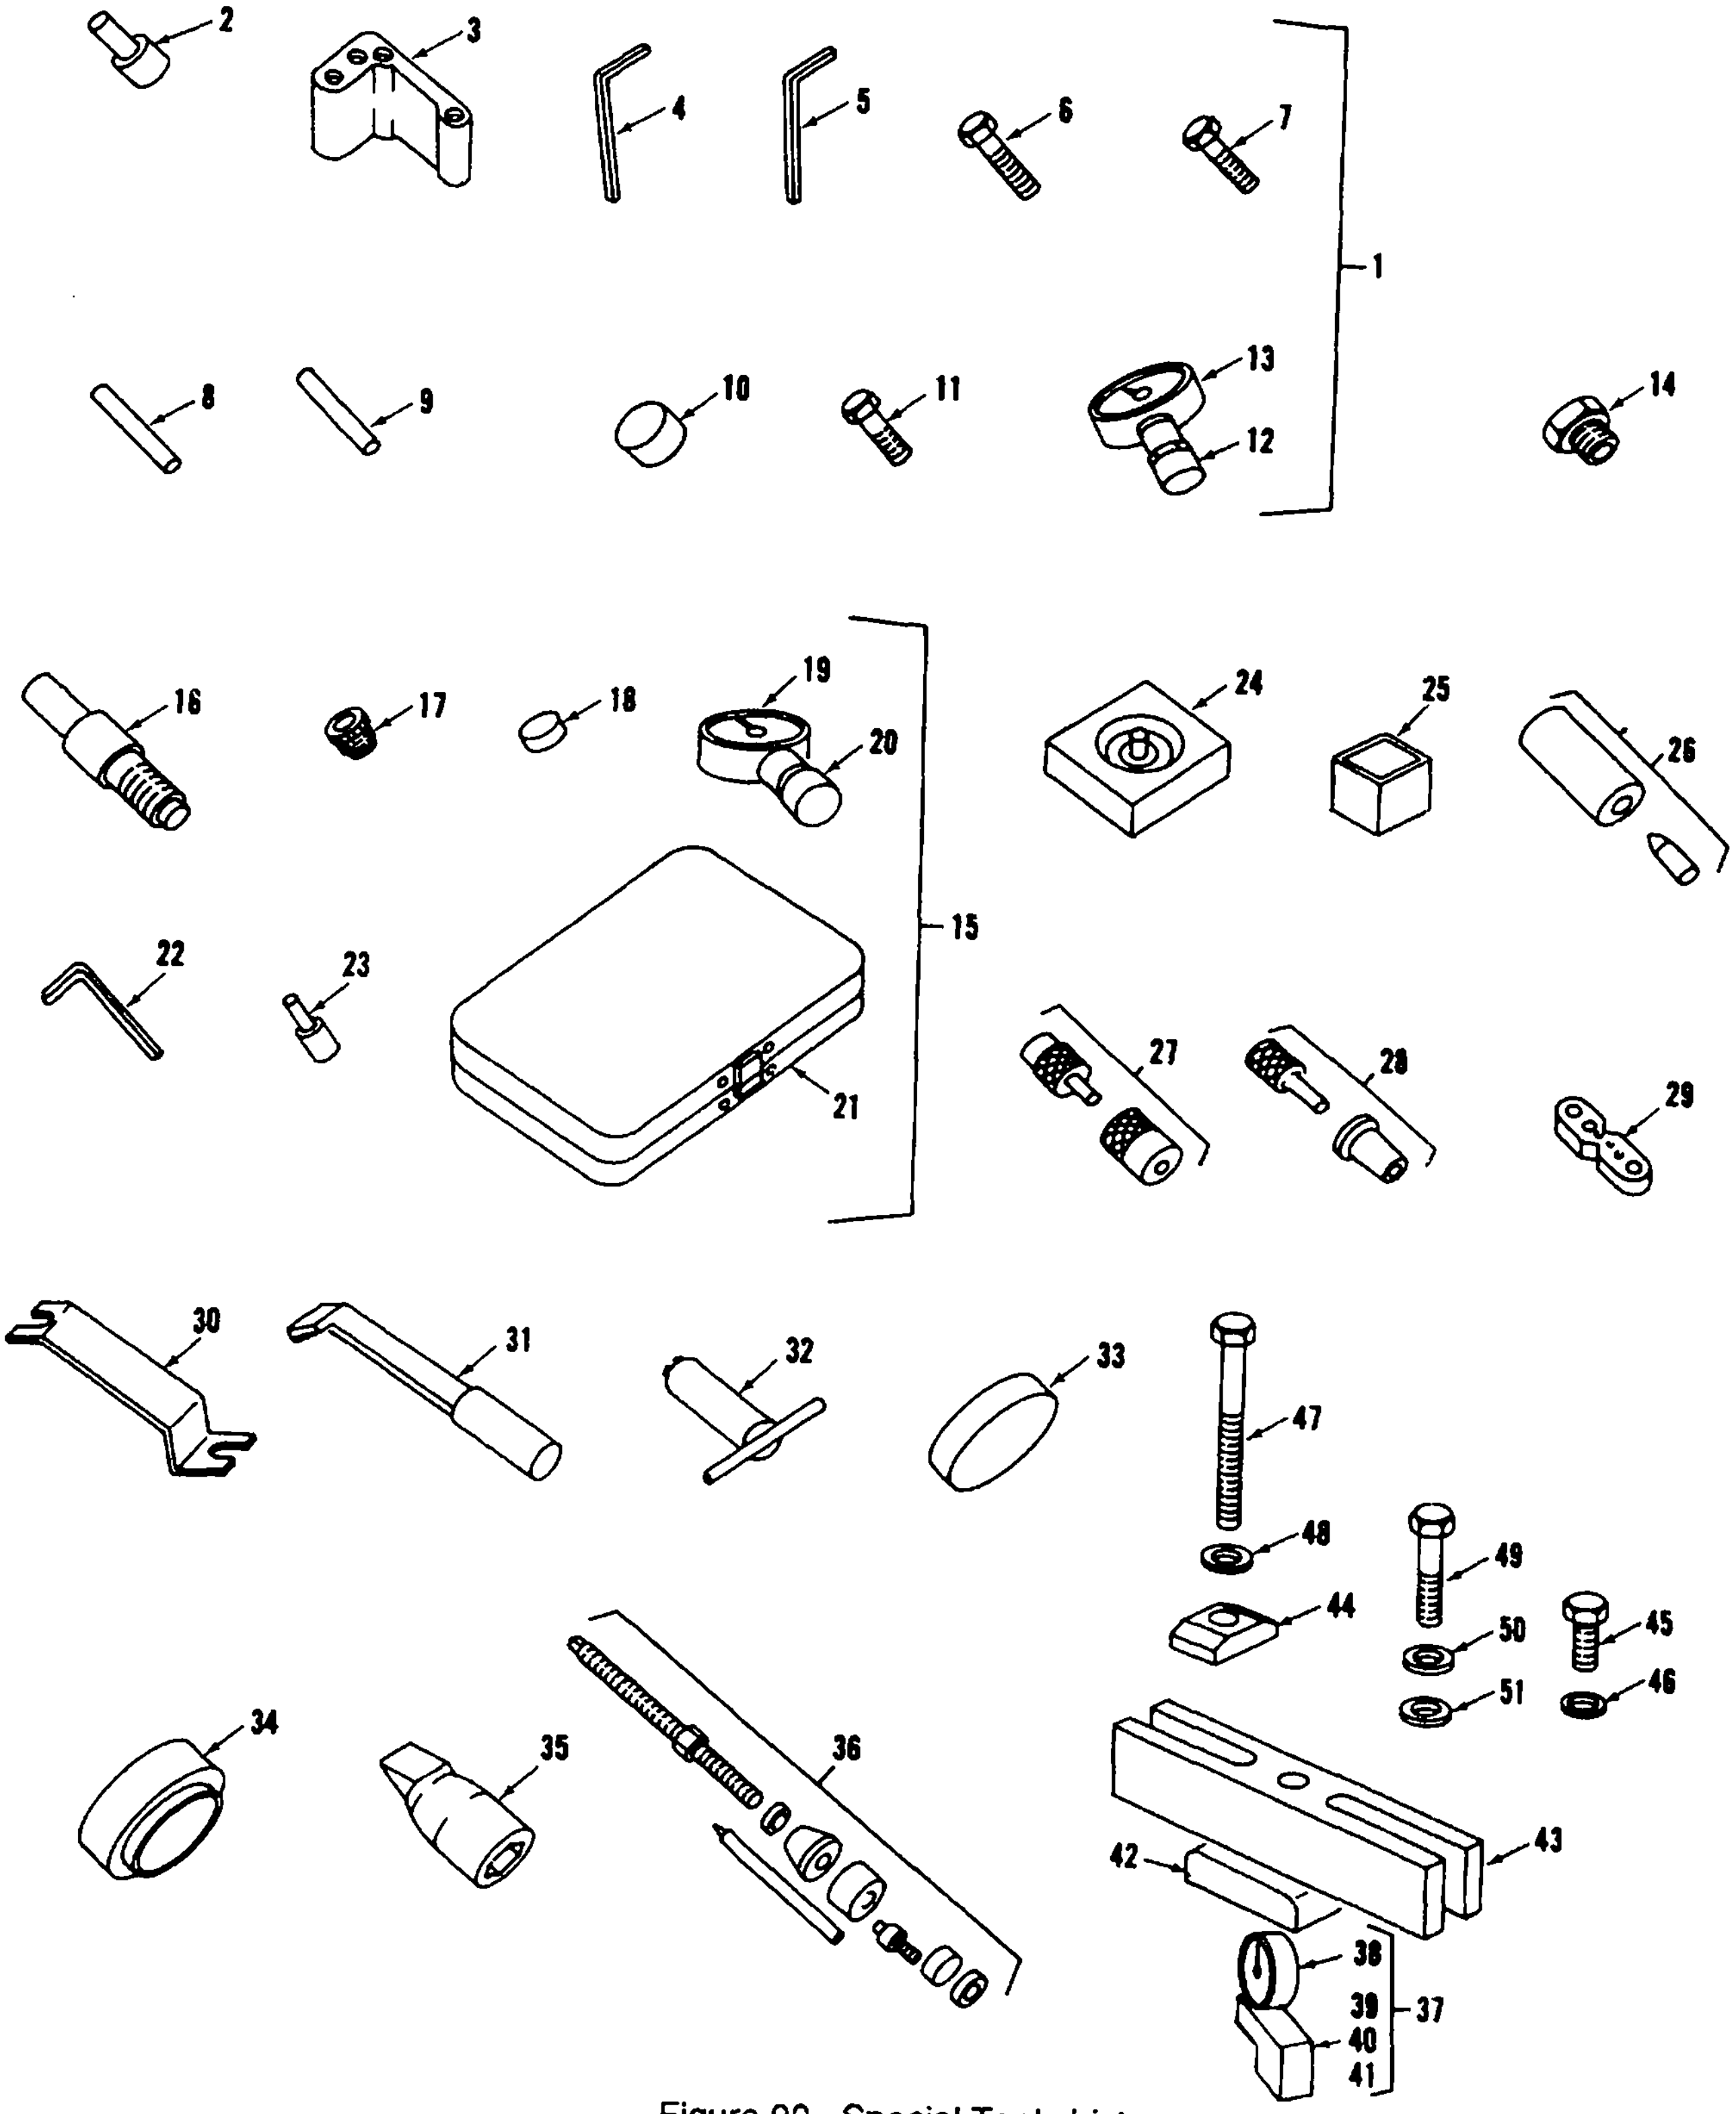
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51

Figure 90. Special Tools List

## SECTION III. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUSTRATION a FIG NO. | (1) ILLUSTRATION b ITEM NO. | (2) SMR CODE a ARMY | (2) SMR CODE b AIR FORCE | (2) SMR CODE c NAVY | (2) SMR CODE d USMC | (3) USMC a SSI | (3) USMC b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | (5) DESCRIPTION USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | SPECIAL TOOLS LIST | | | | |
| 90 | | | | | | | | | FIELD SERVICE TOOL KIT<br>5P2403 | 11083 | EA | 1 | 1 |
| 90 | 1 | | | | | | | | PIN<br>5P299 | 11083 | EA | 1 | 1 |
| 90 | 2 | | | | | | | | ADAPTER<br>5P6602 | 11083 | EA | 1 | 1 |
| 90 | 3 | | | | | | | | WRENCH<br>5P4205 | 11083 | EA | 1 | 1 |
| 90 | 4 | | | | | | | | WRENCH<br>8S2243 | 11083 | EA | 1 | 1 |
| 90 | 6 | | | | | | | | BOLT, 1/4 NC X 2-1/2<br>1D4533 | 11083 | EA | 2 | 2 |
| 90 | 7 | | | | | | | | BOLT, 5/16 NC X 2-1/4<br>1D4538 | 11083 | EA | 2 | 2 |
| 90 | 8 | | | | | | | | MAGNETIC POINT<br>3P1569 | 11083 | EA | 1 | 1 |
| 90 | 9 | | | | | | | | MAGNETIC POINT<br>5P4809 | 11083 | EA | 1 | 1 |
| 90 | 10 | | | | | | | | GAGE<br>5P4209 | 11083 | EA | 1 | 1 |
| 90 | 11 | | | | | | | | BOLT, 3/4 NF X 11-1/4<br>2H3740 | 11083 | EA | 1 | 1 |
| 90 | 12 | | | | | | | | COLLET<br>3P1565 | 11083 | EA | 1 | 1 |
| 90 | 13 | | | | | | | | INDICATOR, DIAL<br>3P1567 | 11083 | EA | 1 | 1 |
| 90 | 14 | | | | | | | | CLAMP<br>6V190 11083 | | EA | 1 | 1 |
| 90 | 15 | | | | | | | | TOOL KIT<br>3P2200 11083 | | EA | 1 | 1 |
| 90 | 16 | | | | | | | | PUMP, CALIBRATION<br>3P1540 | 11083 | EA | 1 | 1 |
| 90 | 17 | | | | | | | | BUSHING<br>4N218 | 11083 | EA | 1 | 1 |
| 90 | 18 | | | | | | | | MICROGAGE<br>1P7379 | 11083 | EA | 1 | 1 |
| 90 | 19 | | | | | | | | INDICATOR, DIAL<br>3P1568 | 11083 | EA | 1 | 1 |
| 90 | 20 | | | | | | | | COLLET BASE<br>3P2226 | 11083 | EA | 1 | 1 |
| 90 | 21 | | | | | | | | BOX<br>5P6510 | 11083 | EA | 1 | 1 |
| 90 | 22 | | | | | | | | WRENCH<br>1S9836 | 11083 | EA | 1 | 1 |
| 90 | 23 | | | | | | | | PIN, CALIBRATION<br>3P1545 | 11083 | EA | 1 | 1 |
| 90 | 24 | | | | | | | | SOLID BALLHEAD ASSY TOOL<br>T94312 | 31361 | EA | 1 | 1 |
| 90 | 25 | | | | | | | | BALLHEAD SPACER<br>T94063 | 31361 | EA | 1 | 1 |
| 90 | 26 | | | | | | | | SEAL INSTALLATION TOOL<br>T94157 | 31361 | EA | 1 | 1 |

## SECTION III. REPAIR PARTS FOR ORGANIZATIONAL, INTERMEDIATE (FIELD), (DIRECT AND GENERAL SUPPORT) AND DEPOT MAINTENANCE

| (1) ILLUS-TRATION a FIG NO. | b ITEM NO. | (2) SMR CODE a ARMY | b AIR FORCE | c NAVY | d USMC | (3) USMC a SSI | b REPL FACTOR | (4) NATIONAL STOCK NUMBER | (5) DESCRIPTION REF NUMBER & MFR CODE | USABLE ON CODE | (6) U/M | (7) QTY INC IN UNIT | (8) USMC QTY PER EQUIP |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 90 | | | | | | | | | SPECIAL TOOLS LIST - CONTINUED | | | | |
| 90 | 27 | | | | | | | | IDLER STUD INSTALLATION TOOL<br>T79623 31361 | | EA | 1 | 1 |
| 90 | 28 | | | | | | | | CLOCK VALVE ASSY TOOL<br>T79516 31361 | | EA | 1 | 1 |
| 90 | 29 | | | | | | | | CHECK VALVE ASSY TOOL<br>T79679 31361 | | EA | 1 | 1 |
| 90 | 30 | | | | | | | | PILOT VAVLE PLUNGER WRENCH<br>370109 31361 | | EA | 1 | 1 |
| 90 | 31 | | | | | | | | BENDING TOOL<br>T82192 31361 | | EA | 1 | 1 |
| 90 | 32 | | | | | | | | SEATING TOOL<br>T79733 31361 | | EA | 1 | 1 |
| 90 | 33 | | | | | | | | LOCATOR<br>9S8871 11083 | | EA | 1 | 1 |
| 90 | 34 | | | | | | | | INSTALLATION TOOL<br>5P7298 11083 | | EA | 1 | 1 |
| 90 | 35 | | | | | | | | DISTORTER<br>5P7312 11083 | | EA | 1 | 1 |
| 90 | 36 | | | | | | | | CAMSHAFT BEARING INSTALLATION AND REMOVAL KIT<br>8S2241 11083 | | EA | 1 | 1 |
| 90 | 37 | | | | | | | | LINER PROJECTION TOOL GROUP<br>1P5510 11083 | | EA | 1 | 1 |
| 90 | 38 | | | | | | | | DIAL INDICATOR<br>1P2403 11083 | | EA | 1 | 1 |
| 90 | 39 | | | | | | | | CONTACT POINT 88 IN. LONG<br>1P5512 11083 | | EA | 1 | 1 |
| 90 | 40 | | | | | | | | GAUGE BODY<br>1P2402 11083 | | EA | 1 | 1 |
| 90 | 41 | | | | | | | | GAUGE<br>1P5507 11083 | | EA | 1 | 1 |
| 90 | 42 | | | | | | | | ADAPTER PLATE<br>1P2394 11083 | | EA | 1 | 1 |
| 90 | 43 | | | | | | | | PUSH PULLER (CROSS BAR ONLY)<br>8B7548 11083 | | EA | 1 | 1 |
| 90 | 44 | | | | | | | | PLATES<br>3H465 11083 | | EA | 2 | 2 |
| 90 | 45 | | | | | | | | BOLTS, 5/8-11 NC, 1.75 IN.<br>S1589 11083 | | EA | 14 | 14 |
| 90 | 46 | | | | | | | | WASHER<br>1S379 11083 | | EA | 14 | 14 |
| 90 | 47 | | | | | | | | BOLT, 5/8-11 NC, 6.00 IN.<br>1D4595 11083 | | EA | 2 | 2 |
| 90 | 48 | | | | | | | | WASHER<br>2S736 11083 | | EA | 2 | 2 |
| 90 | 49 | | | | | | | | BOLT<br>S1603 11083 | | EA | 1 | 1 |
| 90 | 50 | | | | | | | | WASHER<br>4B280 11083 | | EA | 1 | 1 |
| 90 | 51 | | | | | | | | WASHER<br>4N3371 11083 | | EA | 1 | 1 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| National Stock Number | Figure Number | Item Number |
|---|---|---|
| 2520-00-847A351 | 68 | 7 |
| 2520-00-890-2235 | 56 | - |
| 2520-01-067-2179 | 40 | 12 |
| 2530-01-067-5649 | 69 | 32 |
| 2530-01-067-5675 | 69 | 20 |
| 2530-01-068-9709 | 40 | 29 |
| 2530-01-133-7420 | 57 | 47 |
| 2540-00-122-2059 | 82 | 135 |
| 2540-00-122-2114 | 82 | 133 |
| 2540-00-454-0665 | 82 | 154 |
| 2540-01-139-3477 | 82 | 152 |
| 2540-01-164-9279 | 82 | 162 |
| 2540-01-165-0497 | 82 | 164 |
| 2590-01-163-2707 | 82 | 130 |
| 2590-01-163-7280 | 82 | 120 |
| 2590-01-164-9293 | 82 | 161 |
| 2590-01-220-2289 | 82 | 132 |
| 2790-00-209-1788 | 59 | 3 |
| 2805-00-423-9151 | 71 | 8 |
| 2815-00-024-4596 | 80 | 20 |
| 2815-00-148-6705 | 78 | 3 |
| 2815-00-188-1925 | 71 | 3 |
| 2815-00-192-8768 | 43 | 31 |
| 2815-00-195-8276 | 67 | 16 |
| 2815-00-211-4462 | 65 | 25 |
| 2815-00-237-3756 | 64 | 3 |
| 2815-01-253-3471 | 68 | 5 |
| 2815-00-269-7075 | 36 | 2 |
| 2815-00-351-7401 | 70 | 12 |
| 2815-00-407-8369 | 61 | 65 |
| 2815-00-411-3925 | 66 | 25 |
| 2815-00-421-3846 | 63 | 12 |
| 2815-00-450-9341 | 65 | 30 |
| 2815-00-450-9342 | 66 | 7 |
| 2815-00-450-9344 | 77 | 4 |
| 2815-00-457-1615 | 65 | 13 |
| 2815-00-457-1615 | 65 | 17 |
| 2815-00-470-6352 | 69 | 23 |
| 2815-00-470-6353 | 63 | 8 |
| 2815-00-476-5433 | 74 | 7 |
| 2815-00-477-1811 | 74 | 8 |
| 2815-00-485-9403 | 55 | 26 |
| 2815-00-485-9935 | 66 | 15 |
| 2815-00-487-3123 | 65 | 29 |
| 2815-00-518-3561 | 70 | 11 |
| 2815-00-529-5441 | 66 | 17 |
| 2815-00-994-7407 | 55 | 3 |
| 2815-01-011-2686 | 69 | 11 |
| 2815-01-032-2211 | 54 | 15 |
| 2815-01-035-0109 | 66 | 3 |
| 2815-01-040-3662 | 54 |  |
| 2815-01-053-04728 | 55 | 42 |
| 2815-01-068-1729 | 69 | 29 |
| 2815-01-068-8565 | 68 | 5 |
| 2815-01-116-5936 | 66 | 22 |
| 2815-01-119-2241 | 76 | 2 |
| 2815-01-125-1379 | 65 | 16 |
| 2815-01-125-1675 | 65 | 13 |
| 2815-01-125-4078 | 71 | 17 |
| 2815-01-125-4580 | 65 | 18 |
| 2815-01-125-5538 | 76 | 8 |
| 2815-01-125-5544 | 75 | 6 |
| 2815-01-125-5947 | 65 | 15 |
| 2815-01-125-9797 | 70 | 3 |
| 2910-00-225-5103 | 34 | 40 |
| 2910-00-787-6552 | 34 | 34 |
| 2815-01-125-9819 | 80 | 1 |
| 2815-01-125-9841 | 70 | 13 |
| 2815-01-125-9998 | 62 | 18 |
| 2815-01-126-0275 | 62 | 4 |
| 2815-01-126-1861 | 63 | 3 |
| 2815-01-126-7494 | 65 | 24 |
| 2815-01-126-9995 | 65 | 11 |
| 2815-01-127-2912 | 80 | 4 |
| 2815-01-135-2333 | 43 | 37 |
| 2815-01-146-4256 | 66 | 13B |
| 2815-01-148-2595 | 70 | 10 |
| 2815-01-160-0851 | 66 | 5 |
| 2815-01-165-9635 | 65 | 23 |
| 2815-01-183-4649 | 66 | 13A |
| 2820-00-997-6132 | 83 | 11 |
| 2910-00-033-2200 | 39 | 12 |
| 2910-00-033-2200 | 40 | 66 |
| 2910-00-060-6182 | 82 | 61 |
| 2910-00-085-5598 | 34 | 25 |
| 2910-00-141-9758 | 42 | 5 |
| 2910-00-208-7316 | 36 | 44 |
| 2910-00-287-1912 | 34 | 30 |
| 2910-00-287-1912 | 35 | 15 |
| 2910-00-374-6020 | 34 | 36 |
| 2910-00-405-6153 | 36 | 40 |
| 2910-00-477-3439 | 41 | 3 |
| 2910-00-640-5622 | 35 | 8 |
| 2910-00-752-9138 | 42 | 6 |
| 2910-00-893-6402 | 34 | 22 |
| 2910-00-901-1304 | 36 | 27 |
| 2910-00-923-2466 | 40 | 43 |
| 2910-00-994-7409 | 55 | 5 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 2910-01-011-2674 | 60 | 6 |
| 2910-01-021-1845 | 39 | 6 |
| 2910-01-024-0939 | 40 | 38 |
| 2910-01-024-0963 | 40 | 36 |
| 2910-01-024-1512 | 40 | 31 |
| 2910-01-024-1513 | 40 | 42 |
| 2910-01-024-2868 | 40 | 49 |
| 2910-01-063-3144 | 34 | 20 |
| 2910-01-068-6095 | 40 | 10 |
| 2910-01-068-9785 | 40 | 6 |
| 2910-01-095-7595 | 34 | 19 |
| 2910-01-104-9318 | 40 | 26 |
| 2910-01-107-2419 | 40 | 63 |
| 2910-01-125-4534 | 40 | 34 |
| 2910-01-115-2238 | 39 | 7 |
| 2910-01-123-1263 | 39 | 13 |
| 2910-01-125-4519 | 40 | 0 |
| 2910-01-125-4520 | 40 | 48 |
| 2910-01-125-9799 | 41 | 2 |
| 2910-01-125-9825 | 41 | 5 |
| 2910-01-125-9976 | 17 | 3 |
| 2910-01-126-4893 | 57 | 12 |
| 2910-01-127-6157 | 57 | 16 |
| 2910-01-128-9190 | 40 | 15 |
| 2910-01-140-8212 | 40 | 18 |
| 2910-01-145-1943 | 38 | 11A |
| 2910-01-145-1943 | 38 | 19 |
| 2910-01-147-3000 | 40 | 55 |
| 2910-01-210-6474 | 58 | 22 |
| 2920-00-058-6574 | 16 | 27 |
| 2920-00-116-5287 | 62 | 12 |
| 2920-00-118-1222 | 10 | - |
| 2920-00-133-9888 | 10 | 43 |
| 2920-00-135-6398 | 10 | 35 |
| 2920-00-184-7519 | 16 | 20 |
| 2920-00-223-6256 | 16 | 4 |
| 2920-00-237-1211 | 16 | 26 |
| 2920-00-302-6342 | 16 | KIT |
| 2920-00-304-3493 | 16 |  |
| 2920-00-351-2208 | 16 | KIT |
| 2920-00-499-9974 | 16 | 19 |
| 2920-00-499-9974 | 16 | KIT |
| 2920-00-499-9975 | 16 | 24 |
| 2920-00-722-9103 | 16 | 18 |
| 2920-00-764-7912 | 10 | 14 |
| 2920-00-764-7913 | 10 | 12 |
| 2920-00-764-7914 | 10 | 27 |
| 2920-00-767-6824 | 16 | 13 |
| 2920-01-040-0309 | 66 | 4 |
| 2920-01-164-8123 | 16 | 13 |
| 2925-00-927-1460 | 10 | 24 |
| 2930-00-023-5568 | 44 | 13 |
| 2930-00-034-3802 | 44 | 31 |
| 2930-00-167-0442 | 83 | 70 |
| 2930-00-167-0443 | 83 | 68 |
| 2930-00-167-0444 | 83 | 66 |
| 2930-00-191-8996 | 44 | 58 |
| 2930-00-248-0802 | 44 | 7 |
| 2930-00-251-3811 | 61 | 33 |
| 2930-00-365-2152 | 68 | 2 |
| 2930-00-388-9960 | 44 | 9 |
| 2930-00-572-6148 | 44 | 32 |
| 2930-00-720-2677 | 44 | 57 |
| 2930-00-776-0491 | 44 | 30 |
| 2930-01-126-4959 | 45 | 8 |
| 2930-01-127-6149 | 45 | 19 |
| 2930-01-129-7911 | 46 | 10 |
| 2930-01-146-4187 | 44 | 47 |
| 2930-01-281-5253 | 46 | 6 |
| 2940-00-463-1362 | 53 | 15 |
| 2940-00-484-3204 | 61 | 38 |
| 2940-00-580-6283 | 61 | 55 |
| 2940-00-725-3360 | 79 | 7 |
| 2940-00-911-9942 | 61 | 29 |
| 2940-01-125-4101 | 61 | 61 |
| 2940-01-126-4896 | 61 | 63 |
| 2940-01-126-7475 | 61 | 50 |
| 2940-01-129-0822 | 61 | 62 |
| 2940-01-207-2541 | 68 | 9 |
| 2940-01-210-0486 | 35 | 13 |
| 2950-00-498-3765 | 55 | 17 |
| 2950-00-551-8363 | 55 | 33 |
| 2950-00-551-8685 | 55 | 43 |
| 2950-00-552-0197 | 55 | 32 |
| 2950-00-689-3128 | 55 | 28 |
| 2950-00-948-1611 | 55 | 23 |
| 2950-00-948-1653 | 55 | 24 |
| 2950-00-948-1771 | 55 | 38 |
| 2950-00-950-2470 | 55 | 20 |
| 2970-00-209-1788 | 59 | 3 |
| 2990-00-089-2079 | 43 | 17 |
| 2990-00-116-0415 | 57 | 4 |
| 2990-00-116-3239 | 62 | 15 |
| 2990-00-116-3240 | 62 | 16 |
| 2990-00-135-6427 | 62 | 85 |
| 2990-00-139-4459 | 82 | 149 |
| 2990-00-177-3449 | 55 | 6 |
| 2990-00-221-5810 | 43 | 22 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 2990-00-221-5885 | 82 | 75 |
| 2990-00-288-3650 | 66 | 12 |
| 2990-00-346-9032 | 58 | 72 |
| 2990-00-477-6143 | 82 | 155 |
| 2990-00-490-5542 | 63 | 14 |
| 2990-00-651-4265 | 83 | 8 |
| 2990-00-859-0131 | 58 | 49 |
| 2990-00-886-5448 | 58 | 27 |
| 2990-00-981-1041 | 55 | 4 |
| 2990-00-997-6134 | 83 | 15 |
| 2990-01-032-7257 | 54 | 11 |
| 2990-01-032-7257 | 55 | 8 |
| 2990-01-103-6817 | 80 | 7 |
| 2990-01-125-2796 | 57 | 85 |
| 2990-01-125-4002 | 57 | 82 |
| 2990-01-125-4521 | 57 | 8 |
| 2990-01-125-4535 | 57 | 57 |
| 2990-01-125-4536 | 57 | 96 |
| 2990-01-125-9665 | 58 | 89 |
| 2990-01-125-9798 | 57 | 23 |
| 2990-01-125-9824 | 58 | 3 |
| 2990-01-126-0261 | 57 | 26 |
| 2990-01-126-9201 | 57 | 19 |
| 2990-01-127-1668 | 57 | 40 |
| 2990-01-127-6912 | 58 | 54 |
| 2990-01-127-7930 | 58 | 33 |
| 2990-01-127-8193 | 58 | 59 |
| 2990-01-128-1528 | 58 | 61 |
| 2990-01-128-2411 | 58 | 63 |
| 2990-01-128-2460 | 58 | 42 |
| 2990-01-129-4955 | 58 | 57 |
| 2990-01-130-1074 | 58 | 65 |
| 2990-01-130-4937 | 58 | 93 |
| 2990-01-130-4938 | 58 | 50 |
| 2990-01-130-6482 | 58 | 69 |
| 2990-01-131-2751 | 82 | 88 |
| 2990-01-159-0879 | 82 | 146 |
| 2990-01-160-6692 | 58 | 32 |
| 3010-01-068-6996 | 16 | 12 |
| 3010-01-125-1665 | 56 | 8 |
| 3020-00-192-8738 | 71 | 4 |
| 3020-00-207-9284 | 10 | 34 |
| 3020-01-024-0102 | 40 | 54 |
| 3020-01-024-2915 | 40 | 61 |
| 3020-01-125-9844 | 59 | 19 |
| 3020-01-126-5409 | 76 | 17 |
| 3020-01-126-7417 | 69 | 9 |
| 3020-01-126-8956 | 76 | 3 |
| 3020-01-126-9232 | 78 | 6 |
| 3020-01-204-0162 | 57 | 55 |
| 3020-01-253-9284 | 69 | 21 |
| 3020-01-253-9284 | 69 | 24 |
| 3030-00-034-1865 | 48 | 1 |
| 3030-00-554-8314 | 9 | 4 |
| 3040-00-125-5536 | 76 | 12 |
| 3040-00-261-9594 | 20 | 13 |
| 3040-00-262-8220 | 20 | 10 |
| 3040-00-264-8664 | 20 | 7 |
| 3040-01-125-9823 | 57 | 51 |
| 3040-01-125-4505 | 56 | 6 |
| 3040-01-125-5892 | 56 | 11 |
| 3040-01-125-4522 | 57 | 91 |
| 3040-01-126-1906 | 56 | 11 |
| 3040-01-126-3919 | 57 | 94 |
| 3040-01-127-3133 | 57 | 92 |
| 3040-01-131-1923 | 58 | 29 |
| 3040-01-132-4761 | 65 | 23 |
| 3040-01-148-8880 | 40 | 64 |
| 3040-01-165-5714 | 65 | 19 |
| 3040-01-166-4461 | 58 | 44 |
| 3040-01-218-6218 | 58 | 29 |
| 3040-01-216-2741 | 44 | 18 |
| 3040-01-253-1995 | 69 | 22 |
| 3040-01-253-1996 | 69 | 25 |
| 3040-01-261-9754 | 20 | 15 |
| 3110-00-100-6155 | 7 | 14 |
| 3110-00-100-6160 | 61 | 45 |
| 3110-00-123-2583 | 11 | 41 |
| 3110-00-130-7718 | 10 | 38 |
| 3110-00-157-2087 | 82 | 127 |
| 3110-00-198-1050 | 83 | 63 |
| 3110-00-214-0524 | 52 | 33 |
| 3100-00-516-5490 | 45 | 13 |
| 3110-00-516-5490 | 59 | 17 |
| 3110-00-554-5302 | 45 | 18 |
| 3110-01-031-9372 | 57 | 90 |
| 3110-01-062-0950 | 40 | 72 |
| 3110-01-062-6770 | 40 | 73 |
| 3110-01-128-4154 | 57 | 89 |
| 3120-00-021-4055 | 57 | 43 |
| 3120-00-118-3007 | 57 | 76 |
| 3120-00-138-0241 | 16 | 6 |
| 3120-00-138-0241 | 16 | KIT |
| 3120-00-140-2016 | 16 | 3 |
| 3120-00-293-5041 | 16 | 21 |
| 3120-00-340-5178 | 56 | 4 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 3120-00-379-5942 | 44 | 20 |
| 3120-00-394-4276 | 78 | 4 |
| 3120-00-397-4451 | 78 | 10 |
| 3120-00-425-6467 | 16 | 15 |
| 3120-00-439-4878 | 76 | 14 |
| 3120-00-440-8560 | 57 | 48 |
| 3120-00-440-8463 | 69 | 15 |
| 3120-00-547-4349 | 44 | 22 |
| 3120-00-760-7417 | 69 | 34 |
| 3120-00-869-4517 | 16 | 6 |
| 3120-00-893-8317 | 80 | 10 |
| 3120-00-913-7982 | 20 | 4 |
| 3120-01-020-5814 | 55 | 34 |
| 3120-01-022-3955 | 40 | 35 |
| 3120-01-066-2505 | 76 | 5 |
| 3120-01-126-0375 | 76 | 6 |
| 3120-01-127-3363 | 45 | 16 |
| 3120-01-127-5195 | 76 | 13 |
| 3120-01-128-1114 | 80 | 9 |
| 3120-01-128-1115 | 57 | 101 |
| 3120-01-128-9026 | 57 | 27 |
| 3120-01-128-9027 | 70 | 6 |
| 3120-01-129-6639 | 58 | 75 |
| 3120-01-129-6640 | 58 | 61 |
| 3120-01-129-6641 | 58 | 52 |
| 3120-01-129-6866 | 58 | 95 |
| 3120-01-129-6867 | 58 | 71 |
| 3120-01-129-6868 | 58 | 45 |
| 3120-01-129-6869 | 58 | 37 |
| 3120-01-129-6876 | 58 | 66 |
| 3120-01-130-6158 | 78 | 1 |
| 3120-01-130-9116 | 70 | 4 |
| 3120-01-131-2316 | 57 | 87 |
| 3120-01-131-2316 | 57 | 102 |
| 3130-01-129-2163 | 80 | 16 |
| 3130-01-148-5959 | 80 | 17 |
| 3620-00-440-8594 | 57 | 100 |
| 4010-00-171-4506 | 7 | 9 |
| 4010-00-554-8661 | 36 | 39 |
| 4010-00-554-8661 | 38 | 16 |
| 4010-00-554-8661 | 81 | 21 |
| 4020-00-263-3483 | 19 | 74 |
| 4030-00-780-9350 | 1 | 3 |
| 4030-00-780-9350 | 19 | 72 |
| 4030-00-948-7315 | 7 | 8 |
| 4030-00-948-7315 | 36 | 38 |
| 4030-00-948-7315 | 38 | 15 |
| 4210-00-125-9445 | 59 | 22 |
| 4210-00-138-2252 | 82 | 147 |
| 4210-00-140-8925 | 82 | 136 |
| 4310-01-068-9779 | 40 | 33 |
| 4320-00-209-3854 | 83 | 48 |
| 4320-00-217-5827 | 82 | 125 |
| 4320-00-217-5827 | 83 | 58 |
| 4320-01-068-7131 | 69 | 17 |
| 4320-01-091-4068 | 83 | 69 |
| 4320-01-129-7911 | 46 | 10 |
| 4520-01-132-8908 | 82 | 150 |
| 4320-01-141-1385 | 69 | 14 |
| 4320-01-181-1811 | 83 | 64 |
| 4320-01-204-8062 | 69 | 16 |
| 4540-00-703-1925 | 83 | 13 |
| 4540-01-105-5667 | 82 | 108 |
| 4710-00-212-8792 | 55 | 44 |
| 4710-00-212-8793 | 55 | 50 |
| 4710-00-247-9690 | 82 | 172 |
| 4710-00-804-9249 | 36 | 1 |
| 4710-01-093-7440 | 41 | 16 |
| 4710-01-094-1807 | 41 | 15 |
| 4710-01-094-1963 | 41 | 18 |
| 4710-01-128-4739 | 41 | 19 |
| 4710-01-128-4740 | 41 | 20 |
| 4710-01-129-1580 | 56 | 15 |
| 4710-01-129-5674 | 61 | 12 |
| 4710-01-129-8085 | 41 | 17 |
| 4710-01-130-2131 | 67 | 9 |
| 4710-01-131-3398 | 82 | 113 |
| 4720-00-138-3895 | 43 | 28 |
| 4720-00-139-4105 | 82 | 122 |
| 4720-00-203-0917 | 36 | 12 |
| 4720-00-209-1563 | 42 | 2 |
| 4720-00-209-1568 | 43 | 4 |
| 4720-00-214-6252 | 37 | 21 |
| 4720-00-278-1323 | 34 | 9 |
| 4720-00-278-1323 | 37 | 17 |
| 4720-00-278-1323 | 37 | 20 |
| 4720-00-278-1323 | 37 | 47 |
| 4720-00-278-1323 | 37 | 53 |
| 4720-00-278-1323 | 81 | 18 |
| 4720-00-278-1323 | 37 | 44 |
| 4720-00-289-9197 | 37 | 50 |
| 4720-00-289-9197 | 81 | 25 |
| 4720-00-533-2840 | 44 | 56 |
| 4720-00-542-4433 | 82 | 42 |
| 4720-00-542-4433 | 82 | 67 |
| 4720-00-542-4433 | 83 | 20 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 4720-00-542-4433 | 83 | 26 |
| 4720-00-542-4433 | 83 | 34 |
| 4720-00-542-4433 | 83 | 38 |
| 4720-00-542-4433 | 83 | 52 |
| 4720-00-595-1088 | BULK | 2 |
| 4720-00-639-9907 | 37 | 14 |
| 4720-00-639-9907 | 37 | 23 |
| 4720-00-639-9907 | 37 | 27 |
| 4720-00-639-9907 | 37 | 31 |
| 4720-00-639-9907 | 37 | 34 |
| 4720-00-639-9907 | 37 | 41 |
| 4720-00-639-9907 | 82 | 60 |
| 4720-00-640-0374 | 81 | 16 |
| 4720-00-802-8008 | 34 | 7 |
| 4720-00-908-8217 | 46 | 8 |
| 4720-00-916-7092 | 37 | 56A |
| 4720-00-916-7092 | 37 | 57 |
| 4720-00-916-7092 | 37 | 58A |
| 4720-00-916-7092 | 37 | 61A |
| 4720-00-935-9330 | 37 | 18 |
| 4720-00-937-1114 | 44 | 36A |
| 4720-00-937-1114 | BULK | 3 |
| 4720-00-957-3039 | 37 | 25 |
| 4720-01-068-3420 | 68 | 8 |
| 4720-01-124-8252 | 82 | 115 |
| 4720-01-128-9402 | 44 | 3 |
| 4720-01-129-3135 | 44 | 2 |
| 4720-01-129-5582 | 61 | 22 |
| 4730-00-010-3874 | 66 | 6 |
| 4730-00-010-3874 | 67 | 10 |
| 4730-00-010-3874 | 80 | 24 |
| 4730-00-011-2578 | 43 | 36 |
| 4730-00-011-2578 | 63 | 11 |
| 4730-00-011-2578 | 82 | 14 |
| 4730-00-013-7397 | 54 | 5 |
| 4730-00-018-9566 | 58 | 81 |
| 4730-00-038-7174 | 82 | 70 |
| 4730-00-038-7174 | 83 | 16 |
| 4730-00-040-7450 | 81 | 20 |
| 4730-00-042-8988 | 61 | 67 |
| 4730-00-042-8988 | 80 | 29 |
| 4730-00-044-4577 | 35 | 12 |
| 4730-00-044-4683 | 57 | 67 |
| 4730-00-044-4688 | 61 | 68 |
| 4730-00-044-4688 | 78 | 7 |
| 4730-00-063-7919 | 82 | 114 |
| 4730-00-074-3559 | 61 | 9 |
| 4730-00-084-2200 | 37 | 40 |
| 4730-00-089-2515 | 46 | 22 |
| 4730-00-122-3969 | 46 | 14 |
| 4730-00-143-3941 | 35 | 2 |
| 4730-00-146-0333 | 55 | 45 |
| 4730-00-177-6166 | 34 | 5 |
| 4730-00-177-6166 | 53 | 20 |
| 4730-00-186-7798 | 34 | 6 |
| 4730-00-187-4191 | 82 | 157 |
| 4730-00-188-1893 | 61 | 15 |
| 4730-00-188-3513 | 34 | 4 |
| 4730-00-188-3513 | 53 | 19 |
| 4730-00-188-3514 | 82 | 45 |
| 4730-00-194-0216 | 82 | 54 |
| 4730-00-194-1114 | 82 | 68 |
| 4730-00-194-1114 | 83 | 22 |
| 4730-00-196-1469 | 83 | 29 |
| 4730-00-196-1505 | 67 | 2 |
| 4730-00-196-1505 | 83 | 41 |
| 4730-00-196-1539 | 38 | 18 |
| 4730-00-199-2104 | 61 | 20 |
| 4730-00-202-7706 | 61 | 18 |
| 4730-00-202-9997 | 34 | 12 |
| 4730-00-202-9997 | 38 | 10 |
| 4730-00-207-9278 | 81 | 9 |
| 4730-00-208-7228 | 38 | 11 |
| 4730-00-209-1559 | 44 | 37 |
| 4730-00-209-1570 | 11 | 27 |
| 4730-00-209-1570 | 37 | 35 |
| 4730-00-209-5015 | 34 | 10 |
| 4730-00-221-2136 | 82 | 127 |
| 4730-00-221-2138 | 83 | 23 |
| 4730-00-221-5397 | 49 | 12 |
| 4730-00-223-9255 | 38 | 17 |
| 4730-00-228-3202 | 49 | 11 |
| 4730-00-231-3012 | 36 | 41 |
| 4730-00-231-3013 | 82 | 44 |
| 4730-00-231-3013 | 83 | 17 |
| 4730-00-231-3018 | 67 | 1 |
| 4730-00-231-3018 | 83 | 138 |
| 4730-00-231-3939 | 81 | 13 |
| 4730-00-231-4009 | 82 | 64 |
| 4730-00-231-4010 | 36 | 42 |
| 4730-00-231-4010 | 37 | 24 |
| 4730-00-231-4013 | 49 | 3 |
| 4730-00-231-5598 | 44 | 38 |
| 4730-00-231-5602 | 82 | 62 |
| 4730-00-231-5622 | 34 | 14 |
| 4730-00-231-5622 | 35 | 1 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 4730-00-253-4413 | 51 | 16 |
| 4730-00-253-4415 | 61 | 23 |
| 4730-00-263-3122 | 46 | 13 |
| 4730-00-263-3122 | 71 | 15 |
| 4730-00-277-5609 | 22 | 4 |
| 4730-00-277-5609 | 82 | 73 |
| 4730-00-277-9386 | 54 | 10 |
| 4730-00-278-3438 | 82 | 55 |
| 4730-00-278-3462 | 43 | 34 |
| 4730-00-278-3989 | 82 | 46 |
| 4730-00-278-3991 | 83 | 42 |
| 4730-00-278-4685 | 49 | 2 |
| 4730-00-287-3279 | 45 | 22 |
| 4730-00-287-3279 | 46 | 22 |
| 4730-00-287-3279 | 47 | 2 |
| 4730-00-287-3279 | 61 | 11 |
| 4730-00-287-3279 | 80 | 28 |
| 4730-00-287-3281 | 82 | 111 |
| 4730-00-289-2378 | 34 | 11 |
| 4730-00-319-0454 | 82 | 116 |
| 4730-00-363-9320 | 41 | 4 |
| 4730-00-374-2045 | 82 | 121 |
| 4730-00-401-8098 | 67 | 5 |
| 4730-00-401-8098 | 82 | 173 |
| 4730-00-415-3172 | 82 | 63 |
| 4730-00-427-5121 | 57 | 14 |
| 4730-00-429-5121 | 46 | 23 |
| 4730-00-460-6725 | 80 | 27 |
| 4730-00-496-7511 | 53 | 7 |
| 4730-00-564-9527 | 46 | 15 |
| 4730-00-575-0405 | 37 | 38 |
| 4730-00-618-8125 | 82 | 43 |
| 4730-00-618-8125 | 83 | 27 |
| 4730-00-639-9011 | 82 | 123 |
| 4730-00-639-9730 | 82 | 117 |
| 4730-00-802-2560 | 37 | 37 |
| 4730-00-809-9427 | 82 | 56 |
| 4730-00-812-1333 | 36 | 36 |
| 4730-00-812-1333 | 38 | 13 |
| 4730-00-812-1333 | 49 | 10 |
| 4730-00-812-7999 | 35 | 4 |
| 4730-00-842-1139 | 81 | 15 |
| 4730-00-842-1139 | 81 | 17 |
| 4730-00-842-2200 | 37 | 13 |
| 4730-00-842-2200 | 37 | 22 |
| 4730-00-842-2200 | 37 | 26 |
| 4730-00-842-2200 | 37 | 30 |
| 4730-00-842-2200 | 37 | 33 |
| 4730-00-842-2200 | 82 | 59 |
| 4730-00-842-2201 | 37 | 49 |
| 4730-00-842-2201 | 81 | 26 |
| 4730-00-842-2202 | 82 | 41 |
| 4730-00-842-2202 | 82 | 51 |
| 4730-00-842-2202 | 82 | 66 |
| 4730-00-842-2202 | 83 | 19 |
| 4730-00-842-2202 | 83 | 33 |
| 4730-00-842-2202 | 83 | 37 |
| 4730-00-842-2208 | 83 | 25 |
| 4730-00-843-0269 | 34 | 8 |
| 4730-00-843-0269 | 37 | 16 |
| 4730-00-843-0269 | 37 | 19 |
| 4730-00-843-0269 | 37 | 43 |
| 4730-00-843-0269 | 37 | 46 |
| 4730-00-843-0269 | 37 | 52 |
| 4730-00-844-3308 | 83 | 35 |
| 4730-00-850-3812 | 68 | 12 |
| 4730-00-871-1288 | 56 | 17 |
| 4730-00-882-8622 | 56 | 16 |
| 4730-00-892-4983 | 83 | 28 |
| 4730-00-898-3878 | 36 | 43 |
| 4730-00-906-0851 | 81 | 10 |
| 4730-00-908-3193 | 43 | 27 |
| 4730-00-908-3194 | 44 | 35 |
| 4730-00-908-3195 | 44 | 55 |
| 4730-00-908-6292 | 44 | 1 |
| 4730-00-908-6292 | 83 | 46 |
| 4730-00-908-6294 | 42 | 1 |
| 4730-00-908-6294 | 43 | 10 |
| 4730-00-921-3612 | 44 | 39 |
| 4730-00-921-3612 | 82 | 57 |
| 4730-00-922-5069 | 36 | 3 |
| 4730-00-924-7886 | 56 | 26 |
| 4730-00-924-7886 | 57 | 66 |
| 4730-00-924-7886 | 59 | 18 |
| 4730-00-924-7886 | 80 | 22 |
| 4730-00-949-8667 | 81 | 11 |
| 4730-00-952-3180 | 82 | 47 |
| 4730-00-952-3180 | 83 | 41 |
| 4730-00-964-7776 | 82 | 71 |
| 4730-00-964-7776 | 83 | 141 |
| 4730-00-992-4548 | 37 | 28 |
| 4730-00-995-1559 | 34 | 13 |
| 4730-00-995-1559 | 49 | 4 |
| 4730-01-005-5806 | 81 | 14 |
| 4730-01-023-8633 | 40 | 50 |
| 4730-01-023-8633 | 57 | 70 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 4730-01-024-0059 | 57 | 36 |
| 4730-01-048-7874 | 65 | 8 |
| 4730-01-065-2698 | 55 | 46 |
| 4730-01-068-7124 | 40 | 51 |
| 4730-01-068-7274 | 54 | 6 |
| 4730-01-068-7274 | BULK | 4 |
| 4730-01-069-1411 | 40 | 4 |
| 4730-01-103-3727 | 57 | 62 |
| 4730-01-103-4249 | 83 | 61 |
| 4730-01-106-4024 | 40 | 9 |
| 4730-01-106-7246 | 46 | 7 |
| 4730-01-125-2149 | 60 | 11 |
| 4730-01-125-9752 | 54 | 9 |
| 4730-01-125-9775 | 58 | 88 |
| 4730-01-125-9776 | 54 | 8 |
| 4730-01-126-3765 | 56 | 29 |
| 4730-01-126-4892 | 69 | 6 |
| 4730-01-129-5654 | 37 | 59 |
| 4730-01-130-5492 | 58 | 83 |
| 4730-01-130-8764 | 82 | 49 |
| 4730-01-130-8764 | 83 | 39 |
| 4730-01-131-7675 | 82 | 118 |
| 4730-01-178-0773 | 65 | 7 |
| 4730-01-253-8588 | 65 | 6 |
| 4730-01-255-5537 | 60 | 10 |
| 4730-01-321-4491 | 61 | 59 |
| 4770-00-019-2067 | 81 | 12 |
| 4810-00-209-1562 | 49 | 7 |
| 4810-00-216-1849 | 34 | 3 |
| 4810-00-279-2825 | 36 | 23 |
| 4810-01-067-8276 | 36 | 26 |
| 4810-01-120-1079 | 82 | 109 |
| 4820-00-090-0554 | 67 | 3 |
| 4820-00-090-0554 | 83 | 139 |
| 4820-00-136-1085 | 44 | 40 |
| 4820-00-136-1085 | 82 | 48 |
| 4820-00-136-1085 | 83 | 40 |
| 4820-00-208-7312 | 34 | 46 |
| 4820-00-228-3282 | 82 | 53 |
| 4820-00-237-4298 | 61 | 40 |
| 4820-00-274-3647 | 35 | 22 |
| 4820 00 287 5617 | 82 | 69 |
| 4820-00-287-5617 | 83 | 21 |
| 4820-00-477-9779 | 35 | 9 |
| 4820-00-491-1310 | 36 | 34 |
| 4820-00-595-3191 | 36 | 37 |
| 4820-00-595-3191 | 38 | 17 |
| 4820-00-752-9040 | 34 | 26 |
| 4820-00-752-9040 | 35 | 9 |
| 4820-00-826-6465 | 59 | 9 |
| 4820-01-103-3732 | 40 | 8 |
| 4820-01-053-4586 | 40 | 4A |
| 4820-01-130-3387 | 82 | 106 |
| 4820-01-220-9597 | 58 | 78 |
| 4910-01-246-0923 | 49 | 18 |
| 5030-00-036-6967 | 26 | 1 |
| 5110-00-201-6015 | 24 | 23 |
| 5115-00-262-4366 | 52 | 29 |
| 5115-00-263-0653 | 52 | 78 |
| 5120-01-046-4948 | 6 | 11 |
| 5300-00-426-2865 | 73 | 13 |
| 5305-00-004-7245 | 40 | 17 |
| 5305-00-021-2509 | 52 | 8 |
| 5305-00-026-2577 | 10 | 3 |
| 5305-00-026-2597 | 10 | 19 |
| 5305-00-036-6902 | 23 | 18 |
| 5305-00-036-6902 | 24 | 17 |
| 5305-00-036-6902 | 38 | 14 |
| 5305-00-036-6902 | 83 | 110 |
| 5305-00-036-6903 | 12 | 5 |
| 5305-00-036-6903 | 23 | 42 |
| 5305-00-036-6903 | 24 | 21 |
| 5305-00-036-6903 | 25 | 42 |
| 5305-00-036-6903 | 26 | 24 |
| 5305-00-036-6903 | 29 | 5 |
| 5305-00-036-6903 | 49 | 13 |
| 5305-00-036-6903 | 83 | 89 |
| 5305-00-036-6906 | 1 | 16 |
| 5305-00-036-6906 | 3 | 4 |
| 5305-00-036-6906 | 11 | 38 |
| 5305-00-036-6906 | 24 | 7 |
| 5305-00-036-6906 | 31 | 5 |
| 5305-00-036-6906 | 33 | 34 |
| 5305-00-036-6967 | 12 | 14 |
| 5305-00-036-6967 | 27 | 9 |
| 5305-00-036-6967 | 36 | 12 |
| 5305-00-036-6967 | 82 | 33 |
| 5305-00-036-6968 | 2 | 1 |
| 5305-00-036-6968 | 18 | 3 |
| 5305-00-036-6968 | 22 | 31 |
| 5305-00-036-6968 | 23 | 13 |
| 5305-00-036-6968 | 24 | 4 |
| 5305-00-036-6968 | 25 | 7 |
| 5305-00-036-6968 | 25 | 36 |
| 5305-00-036-6968 | 30 | 4 |
| 5305-00-036-6968 | 82 | 165 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5305-00-036-6968 | 83 | 1 |
| 5305-00-036-6968 | 83 | 87 |
| 5305-00-036-6969 | 23 | 46 |
| 5305-00-036-6969 | 27 | 11 |
| 5305-00-036-6972 | 12 | 11 |
| 5305-00-036-6972 | 23 | 7 |
| 5305-00-036-6972 | 25 | 51 |
| 5305-00-036-6972 | 30 | 13 |
| 5305-00-036-6976 | 25 | 30 |
| 5305-00-036-6976 | 27 | 21 |
| 5305-00-036-6976 | 83 | 92 |
| 5305-00-036-6976 | 83 | 128 |
| 5305-00-036-6977 | 18 | 5 |
| 5305-00-036-6977 | 22 | 33 |
| 5305-00-036-6977 | 23 | 4 |
| 5305-00-038-3145 | 38 | 12 |
| 5305-00-038-3150 | 8 | 1 |
| 5305-00-038-3089 | 15 | 5 |
| 5305-00-038-3089 | 24 | 19 |
| 5305-00-038-3103 | 1 | 20 |
| 5305-00-038-3103 | 24 | 10 |
| 5305-00-038-3103 | 83 | 124 |
| 5305-00-038-3143 | 42 | 3 |
| 5305-00-038-3145 | 22 | 18 |
| 5305-00-038-3145 | 22 | 8 |
| 5305-00-038-3145 | 31 | 13 |
| 5305-00-038-3148 | 18 | 1 |
| 5305-00-038-3148 | 28 | 17 |
| 5305-00-038-3148 | 31 | 1 |
| 5305-00-038-3148 | 32 | 1 |
| 5305-00-038-3148 | 49 | 8 |
| 5305-00-042-6417 | 51 | 4 |
| 5305-00-042-6417 | 52 | 11 |
| 5305-00-052-9051 | 82 | 153 |
| 5305-00-054-6681 | 24 | 50 |
| 5305-00-057-1153 | 37 | 6 |
| 5305-00-068-0500 | 1 | 46 |
| 5305-00-068-0500 | 37 | 1 |
| 5305-00-068-0500 | 43 | 11 |
| 5305-00-068-0500 | 52 | 3 |
| 5305-00-068-0500 | 52 | 14 |
| 5305-00-068-0501 | 37 | 4 |
| 5305-00-068-0501 | 1 | 18 |
| 5305-00-068-0501 | 3 | 7 |
| 5305-00-068-0501 | 4 | 1 |
| 5305-00-068-0501 | 5 | 12 |
| 5305-00-068-0501 | 6 | 1 |
| 5305-00-068-0501 | 15 | 1 |
| 5305-00-068-0501 | 19 | 1 |
| 5305-00-068-0501 | 22 | 1 |
| 5305-00-068-0501 | 30 | 1 |
| 5305-00-068-0501 | 36 | 8 |
| 5305-00-068-0501 | 41 | 23 |
| 5305-00-068-0502 | 1 | 7 |
| 5305-00-068-0502 | 3 | 13 |
| 5305-00-068-0502 | 4 | 11 |
| 5305-00-068-0502 | 5 | 1 |
| 5305-00-068-0502 | 6 | 5 |
| 5305-00-068-0502 | 8 | 5 |
| 5305-00-068-0502 | 11 | 94 |
| 5305-00-068-0502 | 20 | 8 |
| 5305-00-068-0502 | 23 | 1 |
| 5305-00-068-0502 | 24 | 1 |
| 5305-00-068-0502 | 34 | 15 |
| 5305-00-068-0502 | 36 | 4 |
| 5305-00-068-0502 | 36 | 20 |
| 5305-00-068-0502 | 43 | 18 |
| 5305-00-068-0502 | 44 | 49 |
| 5305-00-068-0502 | 49 | 5 |
| 5305-00-068-0502 | 82 | 82 |
| 5305-00-068-0502 | 83 | 43 |
| 5305-00-068-7837 | 17 | 1 |
| 5305-00-068-7837 | 57 | 1 |
| 5305-00-069-5122 | 32 | 18 |
| 5305-00-071-2241 | 13 | 1 |
| 5305-00-071-2069 | 67 | 18 |
| 5305-00-071-2070 | 43 | 1 |
| 5305-00-071-2070 | 49 | 22 |
| 5305-00-071-2072 | 44 | 44 |
| 5305-00-071-2072 | 49 | 19 |
| 5305-00-071-2241 | 8 | 10 |
| 5305-00-071-2241 | 12 | 1 |
| 5305-00-071-2241 | 20 | 20 |
| 5305-00-071-2505 | 57 | 10 |
| 5305-00-071-2505 | 55 | 69 |
| 5305-00-071-2514 | 55 | 38 |
| 5305-00-115-9526 | 11 | 97 |
| 5305-00-115-9526 | 51 | 11 |
| 5305-00-115-9526 | 54 | 1 |
| 5305-00-115-9526 | 63 | 1 |
| 5305-00-115-9526 | 71 | 9 |
| 5305-00-115-9526 | 77 | 1 |
| 5305-00-132-7816 | 10 | 22 |
| 5305-00-151-9899 | 55 | 18 |
| 5305-00-177-5778 | 27 | 5 |
| 5305-00-191-6226 | 22 | 22 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5305-00-191-6226 | 22 | 37 |
| 5305-00-191-8284 | 55 | 22 |
| 5305-00-207-2715 | 27 | 32 |
| 5305-00-211-9343 | 20 | 11 |
| 5305-00-211-9344 | 15 | 4 |
| 5305-00-211-9344 | 82 | 20 |
| 5305-00-218-4864 | 25 | 34 |
| 5305-00-218-4864 | 52 | 19 |
| 5305-00-224-1092 | 23 | 5 |
| 5305-00-225-3839 | 3 | 11 |
| 5305-00-225-3839 | 11 | 34 |
| 5305-00-225-3839 | 19 | 3 |
| 5305-00-225-3839 | 20 | 16 |
| 5305-00-225-3839 | 26 | 4 |
| 5305-00-225-3839 | 44 | 41 |
| 5305-00-225-3839 | 57 | 6 |
| 5305-00-225-3839 | 81 | 27 |
| 5305-00-225-3839 | 82 | 80 |
| 5305-00-225-3839 | 83 | 5 |
| 5305-00-225-3839 | 83 | 9 |
| 5305-00-225-3840 | 5 | 5 |
| 5305-00-225-3840 | 44 | 51 |
| 5305-00-225-3840 | 81 | 5 |
| 5305-00-225-8389 | 28 | 14 |
| 5305-00-225-8507 | 53 | 1 |
| 5305-00-226-7768 | 52 | 27 |
| 5305-00-245-6035 | 55 | 37 |
| 5305-00-249-5278 | 82 | 104 |
| 5305-00-253-5617 | 52 | 1 |
| 5305-00-269-3208 | 51 | 14 |
| 5305-00-269-3209 | 31 | 5 |
| 5305-00-269-3209 | 37 | 9 |
| 5305-00-269-3213 | 3 | 14 |
| 5305-00-269-3213 | 29 | 1 |
| 5305-00-269-3213 | 33 | 1 |
| 5305-00-269-3213 | 81 | 39 |
| 5305-00-269-3214 | 33 | 4 |
| 5305-00-269-3214 | 60 | 1 |
| 5305-00-269-3214 | 67 | 14 |
| 5305-00-269-3215 | 55 | 9 |
| 5305-00-269-3216 | 46 | 1 |
| 5305-00-269-3216 | 55 | 1 |
| 5305-00-269-3216 | 56 | 27 |
| 5305-00-269-3216 | 69 | 1 |
| 5305-00-269-3217 | 28 | 9 |
| 5305-00-269-3218 | 44 | 4 |
| 5305-00-269-3218 | 82 | 1 |
| 5305-00-269-3220 | 59 | 1 |
| 5305-00-401-5261 | 65 | 2 |
| 5305-00-401-5270 | 65 | 1 |
| 5305-00-410-3007 | 82 | 156 |
| 5305-00-436-7317 | 82 | 143 |
| 5305-00-488-7847 | 44 | 10 |
| 5305-00-531-0298 | 23 | 25 |
| 5305-00-582-5807 | 32 | 16 |
| 5305-00-622-9475 | 32 | 9 |
| 5305-00-688-2111 | 61 | 7 |
| 5305-00-688-2111 | 61 | 34 |
| 5305-00-688-2111 | 61 | 57 |
| 5305-00-688-2111 | 69 | 3 |
| 5305-00-688-2111 | 72 | 7 |
| 5305-00-709-8540 | 34 | 27 |
| 5305-00-721-5492 | 68 | 1 |
| 5305-00-721-5492 | 82 | 169 |
| 5305-00-723-9398 | 21 | 14 |
| 5305-00-724-5906 | 11 | 30 |
| 5305-00-724-5911 | 51 | 6 |
| 5305-00-724-5911 | 62 | 8 |
| 5305-00-724-5911 | 81 | 35 |
| 5305-00-781-3929 | 45 | 3 |
| 5305-00-811-0798 | 52 | 35 |
| 5305-00-824-1643 | 82 | 134 |
| 5305-00-889-2999 | 82 | 16 |
| 5305-00-889-3000 | 24 | 38 |
| 5305-00-926-5517 | 51 | 1 |
| 5305-00-939-9204 | 81 | 33 |
| 5305-00-942-2196 | 27 | 1 |
| 5305-00-942-2196 | 53 | 3 |
| 5305-00-942-2196 | 81 | 49 |
| 5305-00-954-5629 | 19 | 69 |
| 5305-00-958-5453 | 30 | 16 |
| 5305-00-971-8093 | 65 | 5 |
| 5305-00-978-9370 | 57 | 22 |
| 5305-00-983-6656 | 83 | 53 |
| 5305-00-983-6656 | 83 | 59 |
| 5305-00-984-4982 | 18 | 23 |
| 5305-00-984-4982 | 19 | 63 |
| 5305-00-984-4982 | 23 | 27 |
| 5305-00-984-4988 | 19 | 34 |
| 5305-00-984-6193 | 4 | 5 |
| 5305-00-984-6193 | 19 | 31 |
| 5305-00-984-6195 | 19 | 52 |
| 5305-00-984-6200 | 31 | 8 |
| 5305-00-984-6215 | 19 | 57 |
| 5305-00-984-6221 | 23 | 24 |
| 5305-00-988-1167 | 83 | 133 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5305-00-988-7847 | 44 | 10 |
| 5305-00-993-1851 | 20 | 1 |
| 5305-01-010-2362 | 34 | 23 |
| 5305-01-024-4773 | 57 | 56 |
| 5305-01-024-4774 | 57 | 71 |
| 5305-01-024-4794 | 40 | 32 |
| 5305-01-025-4359 | 40 | 21 |
| 5305-01-121-9352 | 82 | 89 |
| 5305-01-121-9352 | 82 | 145 |
| 5305-00-124-0483 | 83 | 67 |
| 5305-01-128-5112 | 57 | 9 |
| 5305-01-128-6046 | 57 | 31 |
| 5305-01-128-8926 | 57 | 61 |
| 5305-01-128-8930 | 55 | 15 |
| 5305-01-129-6638 | 58 | 53 |
| 5305-01-131-5030 | 41 | 9 |
| 5305-01-132-2171 | 58 | 9 |
| 5305-01-133-0603 | 58 | 7 |
| 5305-01-133-0604 | 58 | 4 |
| 5305-01-133-0970 | 58 | 34 |
| 5305-01-133-0971 | 58 | 25 |
| 5305-01-133-1054 | 57 | 93 |
| 5305-01-138-7625 | 82 | 158 |
| 5305-01-138-5490 | 56 | 9 |
| 5305-01-138-7625 | 82 | 91 |
| 5305-01-138-7625 | 82 | 119 |
| 5305-01-141-9606 | 82 | 121 |
| 5305-00-412-3150 | 82 | 145 |
| 5305-00-145-7615 | 52 | 98 |
| 5305-00-211-1785 | 58 | 14 |
| 5305-00-211-1787 | 58 | 20 |
| 5305-00-248-6917 | 82 | 126 |
| 5305-00-325-8387 | 28 | 10 |
| 5305-00-325-8387 | 46 | 10 |
| 5306-00-008-5942 | 56 | 7 |
| 5306-00-116-1531 | 62 | 5 |
| 5306-00-118-3054 | 69 | 12 |
| 5306-00-118-6575 | 57 | 39 |
| 5306-00-137-0024 | 10 | 25 |
| 5306-00-140-1975 | 66 | 1 |
| 5306-00-175-7468 | 39 | 1 |
| 5306-00-205-6195 | 81 | 44 |
| 5306-00-218-5625 | 16 | 52 |
| 5306-00-225-8497 | 3 | 1 |
| 5306-00-225-8497 | 4 | 17 |
| 5306-00-225-8497 | 9 | 1 |
| 5306-00-225-8497 | 27 | 1 |
| 5306-00-225-8497 | 43 | 6 |
| 5306-00-225-8497 | 50 | 1 |
| 5306-00-225-8498 | 7 | 13 |
| 5306-00-225-8499 | 5 | 18 |
| 5306-00-225-8499 | 7 | 21 |
| 5306-00-225-8499 | 52 | 72 |
| 5306-00-225-8499 | 73 | 1 |
| 5306-00-225-8499 | 81 | 1 |
| 5306-00-225-8500 | 1 | 41 |
| 5306-00-226-4825 | 64 | 1 |
| 5306-00-226-4826 | 59 | 13 |
| 5306-00-226-4826 | 61 | 24 |
| 5306-00-226-4827 | 59 | 10 |
| 5306-00-226-4827 | 61 | 31 |
| 5306-00-226-4827 | 76 | 7 |
| 5306-00-226-4831 | 7 | 11 |
| 5306-00-226-4833 | 69 | 26 |
| 5306-00-226-4845 | 56 | 22 |
| 5306-00-228-6835 | 45 | 6 |
| 5306-00-255-4877 | 55 | 14 |
| 5306-00-260-4508 | 47 | 1 |
| 5306-00-260-4508 | 56 | 12 |
| 5306-00-260-4508 | 68 | 3 |
| 5306-00-260-1508 | 74 | 6 |
| 5306-00-260-4508 | 79 | 5 |
| 5306-00-260-4511 | 71 | 1 |
| 5306-00-261-1153 | 40 | 1 |
| 5306-00-261-1153 | 57 | 68 |
| 5306-00-263-7301 | 45 | 1 |
| 5306-00-263-7301 | 55 | 12 |
| 5306-00-263-7301 | 67 | 23 |
| 5306-00-263-7301 | 71 | 6 |
| 5306-00-263-7301 | 76 | 9 |
| 5306-00-263-7301 | 79 | 1 |
| 5306-00-263-7303 | 76 | 1 |
| 5306-00-263-8978 | 59 | 7 |
| 5306 00 263 8978 | 62 | 1 |
| 5306-00-268-5798 | 62 | 17 |
| 5306-00-273-6357 | 71 | 12 |
| 5306-00-275-5012 | 72 | 5 |
| 5306-00-285-1368 | 61 | 6 |
| 5306-00-285-1368 | 74 | 1 |
| 5306-00-298-4235 | 57 | 37 |
| 5306-00-310-5804 | 71 | 13 |
| 5306-00-404-1417 | 39 | 3 |
| 5306-00-404-1417 | 57 | 46 |
| 5306-00-423-8194 | 56 | 25 |
| 5306-00-423-8393 | 35 | 20 |
| 5306-00-423-8393 | 74 | 4 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5306-00-426-2865 | 67 | 11 |
| 5306-00-426-2932 | 45 | 12 |
| 5306-00-426-2932 | 46 | 4 |
| 5306-00-426-2932 | 67 | 15 |
| 5306-00-426-2932 | 69 | 5 |
| 5306-00-426-2939 | 75 | 16 |
| 5306-00-426-2974 | 46 | 2 |
| 5306-00-426-2974 | 69 | 13 |
| 5306-00-426-3080 | 73 | 5 |
| 5306-00-426-3189 | 57 | 30 |
| 5306-00-426-3209 | 35 | 17 |
| 5306-00-426-3209 | 62 | 10 |
| 5306-00-432-8194 | 60 | 1 |
| 5306-00-450-4026 | 80 | 14 |
| 5306-00-455-0459 | 71 | 11 |
| 5306-00-472-5282 | 43 | 29 |
| 5306-00-497-0342 | 70 | 3 |
| 5306-00-604-7961 | 35 | 10 |
| 5306-00-618-0709 | 44 | 14 |
| 5306-00-637-4956 | 54 | 13 |
| 5306-00-637-4956 | 61 | 1 |
| 5306-00-637-4956 | 61 | 16 |
| 5306-00-637-4956 | 35 | 5 |
| 5306-00-637-4956 | 67 | 20 |
| 5306-00-651-2686 | 56 | 1 |
| 5306-00-685-2384 | 62 | 21 |
| 5306-00-698-2150 | 74 | 5 |
| 5306-00-721-5679 | 40 | 2 |
| 5306-00-775-5209 | 16 | 45 |
| 5306-00-801-9785 | 61 | 30 |
| 5306-00-814-6559 | 65 | 3 |
| 5306-00-814-8957 | 73 | 9 |
| 5306-00-845-7961 | 52 | 36 |
| 5306-00-897-9295 | 46 | 11 |
| 5306-00-916-1493 | 59 | 4 |
| 5306-00-961-3444 | 28 | 21 |
| 5306-01-024-7524 | 40 | 19 |
| 5306-01-030-3355 | 73 | 14 |
| 5306-01-053-7366 | 40 | 52 |
| 5306-01-069-2669 | 59 | 6 |
| 5306-01-106-5213 | 60 | 2 |
| 5307-00-053-9023 | 63 | 13 |
| 5307-00-216-8603 | 53 | 17 |
| 5307-00-218-7504 | 52 | 94 |
| 5307-00-237-8829 | 7 | 7 |
| 5307-00-245-6648 | 34 | 45 |
| 5307-00-259-1623 | 34 | 44 |
| 5307-00-287-6471 | 34 | 37 |

| NSN | Figure No. | Item No. |
|---|---|---|
| 5307-00-419-4067 | 80 | 3 |
| 5307-00-471-0420 | 63 | 9 |
| 5307-01-070-2014 | 75 | 2 |
| 5307-01-103-3673 | 40 | 67 |
| 5307-01-107-4197 | 75 | 6 |
| 5307-01-146-7379 | 20 | 6 |
| 5307-02-136-5388 | 57 | 41 |
| 5310-00-004-5033 | 28 | 12 |
| 5310-00-006-8286 | 26 | 24 |
| 5310-00-010-3319 | 51 | 12 |
| 5310-00-014-5850 | 1 | 21 |
| 5310-00-014-5850 | 24 | 8 |
| 5310-00-020-4737 | 10 | 8 |
| 5310-00-026-2622 | 16 | 48 |
| 5310-00-036-6969 | 48 | 9 |
| 5310-00-043-0520 | 52 | 42 |
| 5310-00-043-0520 | 52 | 48 |
| 5310-00-043-0520 | 52 | 54 |
| 5310-00-045-3299 | 24 | 52 |
| 5310-00-045-3299 | 32 | 10 |
| 5310-00-045-3299 | 40 | 23 |
| 5310-00-045-4007 | 18 | 24 |
| 5310-00-045-4007 | 19 | 64 |
| 5310-00-045-4007 | 23 | 28 |
| 5310-00-045-4007 | 32 | 6 |
| 5310-00-045-4007 | 52 | 73 |
| 5310-00-045-4007 | 52 | 92 |
| 5310-00-045-5001 | 34 | 18 |
| 5310-00-052-3632 | 4 | 6 |
| 5310-00-052-3632 | 19 | 32 |
| 5310-00-052-3632 | 23 | 19 |
| 5310-00-052-3632 | 24 | 9 |
| 5310-00-052-3632 | 24 | 12 |
| 5310-00-052-3632 | 31 | 3 |
| 5310-00-052-3632 | 83 | 111 |
| 5310-00-052-3632 | 83 | 125 |
| 5310-00-059-9268 | 34 | 32 |
| 5310-00-061-1258 | 34 | 43 |
| 5310-00-063-7360 | 12 | 12 |
| 5310-00-063-7360 | 19 | 78 |
| 5310-00-063-7360 | 22 | 8 |
| 5310-00-063-7360 | 23 | 14 |
| 5310-00-063-7360 | 24 | 35 |
| 5310-00-063-7360 | 25 | 8 |
| 5310-00-063-7360 | 25 | 31 |
| 5310-00-063-7360 | 27 | 22 |
| 5310-00-063-7360 | 30 | 14 |
| 5310-00-063-7360 | 83 | 93 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5310-00-074-3833 | 66 | 9 |
| 5310-00-080-6004 | 3 | 16 |
| 5310-00-080-6004 | 11 | 36 |
| 5310-00-080-6004 | 26 | 2 |
| 5310-00-080-6004 | 28 | 11 |
| 5310-00-080-6004 | 29 | 3 |
| 5310-00-080-6004 | 33 | 2 |
| 5310-00-080-6004 | 52 | 39 |
| 5310-00-080-6004 | 53 | 5 |
| 5310-00-080-6004 | 81 | 40 |
| 5310-00-080-6004 | 61 | 3 |
| 5310-00-081-4219 | 1 | 43 |
| 5310-00-081-4219 | 4 | 19 |
| 5310-00-081-4219 | 7 | 2 |
| 5310-00-081-4219 | 27 | 2 |
| 5310-00-081-4219 | 28 | 22 |
| 5310-00-081-4219 | 43 | 8 |
| 5310-00-081-4219 | 50 | 3 |
| 5310-00-081-4219 | 81 | 2 |
| 5310-00-081-4219 | 81 | 50 |
| 5301-00-081-8087 | 2 | 2 |
| 5310-00-081-8087 | 25 | 37 |
| 5310-00-081-8087 | 25 | 53 |
| 5310-00-081-8087 | 82 | 167 |
| 5310-00-081-8087 | 83 | 3 |
| 5310-00-082-1404 | 32 | 7 |
| 5310-00-088-0551 | 22 | 26 |
| 5310-00-088-1251 | 27 | 35 |
| 5310-00-094-3421 | 1 | 17 |
| 5310-00-094-3421 | 3 | 5 |
| 5310-00-094-3421 | 8 | 2 |
| 5310-00-094-3421 | 11 | 39 |
| 5310-00-094-3421 | 19 | 55 |
| 5310-00-094-3421 | 24 | 49 |
| 5310-00-094-3421 | 27 | 6 |
| 5310-00-094-3421 | 28 | 19 |
| 5310-00-094-3421 | 32 | 2 |
| 5310-00-094-3421 | 33 | 36 |
| 5310-00-094-3421 | 42 | 4 |
| 5310-00-113-3757 | 18 | 14 |
| 5310-00-117-4788 | 45 | 2 |
| 5310-00-117-4788 | 54 | 2 |
| 5310-00-117-4788 | 56 | 13 |
| 5310-00-117-4788 | 60 | 3 |
| 5310-00-117-4788 | 62 | 22 |
| 5310-00-117-4788 | 63 | 2 |
| 5310-00-117-4788 | 69 | 2 |
| 5310-00-117-4788 | 71 | 7 |
| 5310-00-111-4788 | 72 | 2 |
| 5310-00-117-4788 | 73 | 15 |
| 5310-00-117-4788 | 79 | 2 |
| 5310-00-132-1525 | 10 | 26 |
| 5310-00-132-1526 | 10 | 32 |
| 5310-00-132-1527 | 10 | 15 |
| 5310-00-138-0258 | 40 | 22 |
| 5310-00-141-1795 | 52 | 21 |
| 5310-00-177-0978 | 52 | 93 |
| 5310-00-205-3461 | 57 | 58 |
| 5310-00-205-9982 | 43 | 30 |
| 5310-00-209-0786 | 52 | 4 |
| 5310-00-209-0786 | 52 | 10 |
| 5310-00-209-0786 | 52 | 15 |
| 5310-00-209-0786 | 52 | 38 |
| 5310-00-209-4516 | 55 | 16 |
| 5310-00-209-4771 | 61 | 54 |
| 5310-00-216-8392 | 10 | 5 |
| 5310-00-224-0488 | 10 | 4 |
| 5310-00-228-7546 | 16 | 28 |
| 5310-00-228-7546 | 16 | 30 |
| 5310-00-228-7546 | 16 | 41 |
| 5310-00-234-9726 | 81 | 43 |
| 5310-00-237-7457 | 83 | 73 |
| 5310-00-245-3419 | 34 | 2 |
| 5310-00-245-3419 | 34 | 1 |
| 5310-00-245-3424 | 1 | 44 |
| 5310-00-245-3424 | 5 | 19 |
| 5310-00-245-3424 | 7 | 1 |
| 5310-00-245-3424 | 43 | 7 |
| 5310-00-245-3424 | 53 | 2 |
| 5310-00-245-3424 | 81 | 3 |
| 5310-00-269-6797 | 55 | 27 |
| 5310-00-322-0135 | 29 | 11 |
| 5310-00-347-4123 | 57 | 52 |
| 5310-00-347-4123 | 73 | 3 |
| 5310-00-362-7988 | 81 | 12 |
| 5310-00-362-7988 | 81 | 26 |
| 5310-00-407-9566 | 1 | 42 |
| 5310-00-407-9566 | 3 | 2 |
| 5310-00-407-9566 | 4 | 18 |
| 5310-00-407-9566 | 7 | 6 |
| 5310-00-407-9566 | 9 | 2 |
| 5310-00-407-9566 | 27 | 3 |
| 5310-00-407-9566 | 44 | 50 |
| 5310-00-407-9566 | 50 | 2 |
| 5310-00-407-9566 | 61 | 25 |
| 5310-00-407-9566 | 63 | 2 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5310-00-407-9566 | 73 | 2 |
| 5310-00-425-5712 | 57 | 59 |
| 5310-00-431-7244 | 80 | 15 |
| 5310-00-432-4064 | 39 | 2 |
| 5310-00-432-4064 | 46 | 18 |
| 5310-00-432-4064 | 59 | 11 |
| 5310-00-432-4064 | 69 | 27 |
| 5310-00-432-4324 | 65 | 4 |
| 5310-00-436-1975 | 10 | 33 |
| 5310-00-445-4633 | 56 | 5 |
| 5310-00-450-0414 | 40 | 24 |
| 5310-00-470-5567 | 63 | 7 |
| 5310-00-483-8790 | 3 | 15 |
| 5310-00-483-8790 | 26 | 3 |
| 5310-00-483-8790 | 33 | 3 |
| 5310-00-483-8790 | 34 | 42 |
| 5310-00-483-8790 | 53 | 4 |
| 5310-00-483-8790 | 81 | 41 |
| 5310-00-483-8790 | 81 | 51 |
| 5310-00-483-8792 | 1 | 9 |
| 5310-00-483-8792 | 3 | 9 |
| 5310-00-483-8792 | 4 | 12 |
| 5310-00-483-8792 | 5 | 8 |
| 5310-00-483-8792 | 5 | 13 |
| 5310-00-483-8792 | 6 | 6 |
| 5310-00-483-8792 | 8 | 11 |
| 5310-00-483-8792 | 11 | 28 |
| 5310-00-483-8792 | 11 | 35 |
| 5310-00-483-8792 | 11 | 95 |
| 5310-00-483-8792 | 12 | 3 |
| 5310-00-483-8792 | 13 | 3 |
| 5310-00-483-8792 | 20 | 17 |
| 5310-00-483-8792 | 23 | 2 |
| 5310-00-483-8792 | 24 | 2 |
| 5310-00-483-8792 | 26 | 6 |
| 5310-00-483-8792 | 28 | 16 |
| 5310-00-483-8792 | 34 | 17 |
| 5310-00-483-8792 | 36 | 5 |
| 5310-00-483-8792 | 36 | 21 |
| 5310-00-483-8792 | 37 | 2 |
| 5310-00-483-8792 | 44 | 42 |
| 5310-00-483-8792 | 49 | 6 |
| 5310-00-483-8792 | 81 | 7 |
| 5310-00-483-8792 | 82 | 81 |
| 5310-00-483-8792 | 83 | 6 |
| 5310-00-486-2519 | 82 | 138 |
| 5310-00-497-3895 | 51 | 3 |
| 5310-00-498-2967 | 77 | 3 |
| 5310-00-514-6249 | 55 | 10 |
| 5310-00-514-6849 | 35 | 7 |
| 5310-00-514-6849 | 61 | 17 |
| 5310-00-514-6849 | 61 | 35 |
| 5310-00-514-6849 | 61 | 58 |
| 5310-00-514-6849 | 67 | 12 |
| 5310-00-514-6849 | 74 | 3 |
| 5310-00-533-9529 | 44 | 12 |
| 5310-00-543-5060 | 20 | 5 |
| 5310-00-543-5060 | 24 | 43 |
| 5310-00-543-5060 | 83 | 135 |
| 5310-00-551-0433 | 35 | 11 |
| 5310-00-557-9389 | 70 | 2 |
| 5310-00-551-0433 | 62 | 11 |
| 5310-00-557-9391 | 77 | 2 |
| 5310-00-577-5354 | 26 | 23 |
| 5310-00-582-5965 | 1 | 40 |
| 5310-00-582-5965 | 3 | 12 |
| 5310-00-582-5965 | 4 | 2 |
| 5310-00-582-5965 | 5 | 2 |
| 5310-00-582-5965 | 6 | 2 |
| 5310-00-582-5965 | 8 | 7 |
| 5310-00-582-5965 | 15 | 2 |
| 5310-00-582-5965 | 19 | 2 |
| 5310-00-582-5965 | 20 | 9 |
| 5310-00-582-5965 | 22 | 2 |
| 5310-00-582-5965 | 30 | 2 |
| 5310-00-582-5965 | 36 | 10 |
| 5310-00-582-5965 | 43 | 12 |
| 5310-00-582-5965 | 43 | 19 |
| 5310-00-582-5965 | 43 | 24 |
| 5310-00-582-5965 | 44 | 45 |
| 5310-00-582-5965 | 53 | 12 |
| 5310-00-582-5965 | 83 | 10 |
| 5310-00-582-5965 | 83 | 45 |
| 5310-00-584-5272 | 37 | 7 |
| 5310-00-584-5272 | 43 | 3 |
| 5310-00-584-5272 | 52 | 12 |
| 5310-00-584-5272 | 51 | 5 |
| 5310-00-584-5272 | 67 | 19 |
| 5310-00-584-5272 | 71 | 14 |
| 5310-00-584-5272 | 73 | 12 |
| 5310-00-584-8000 | 26 | 22 |
| 5310-00-595-6398 | 33 | 28 |
| 5310-00-595-7421 | 26 | 21 |
| 5310-00-595-7421 | 49 | 21 |
| 5310-00-637-9541 | 11 | 98 |
| 5310-00-637-9541 | 29 | 2 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5310-00-637-9541 | 29 | 7 |
| 5310-00-637-9541 | 33 | 5 |
| 5310-00-637-9541 | 34 | 24 |
| 5310-00-637-9541 | 37 | 10 |
| 5310-00-637-9541 | 44 | 5 |
| 5310-00-637-9541 | 59 | 2 |
| 5310-00-639-6385 | 34 | 33 |
| 5310-00-655-6534 | 44 | 11 |
| 5310-00-678-2152 | 65 | 10 |
| 5310-00-680-6823 | 29 | 12 |
| 5310-00-689-3877 | 38 | 3 |
| 5310-00-725-7382 | 65 | 12 |
| 5310-00-725-7382 | 65 | 16 |
| 5310-00-725-7382 | 72 | 1 |
| 5310-00-732-0558 | 28 | 13 |
| 5310-00-732-0558 | 29 | 6 |
| 5310-00-761-6882 | 8 | 6 |
| 5310-00-761-6882 | 36 | 9 |
| 5310-00-761-6882 | 52 | 9 |
| 5310-00-761-6882 | 52 | 37 |
| 5310-00-763-8920 | 52 | 113 |
| 5310-00-763-8921 | 66 | 2 |
| 5310-00-765-3197 | 24 | 11 |
| 5310-00-765-3197 | 28 | 18 |
| 5310-00-765-3197 | 32 | 20 |
| 5310-00-768-0318 | 43 | 2 |
| 5310-00-804-4806 | 56 | 23 |
| 5310-00-809-4058 | 1 | 8 |
| 5310-00-809-4058 | 3 | 8 |
| 5310-00-809-4058 | 4 | 13 |
| 5310-00-809-4058 | 5 | 3 |
| 5310-00-809-4058 | 5 | 14 |
| 5310-00-809-4058 | 6 | 3 |
| 5310-00-809-4058 | 8 | 8 |
| 5310-00-809-4058 | 12 | 2 |
| 5310-00-809-4058 | 13 | 2 |
| 5310-00-809-4058 | 20 | 18 |
| 5310-00-809-4058 | 26 | 5 |
| 5310-00-809-4058 | 27 | 34 |
| 5310-00-809-4058 | 28 | 15 |
| 5310-00-809-4058 | 34 | 16 |
| 5310-00-809-4058 | 36 | 6 |
| 5310-00-809-4058 | 36 | 22 |
| 5310-00-809-4058 | 43 | 13 |
| 5310-00-809-4058 | 44 | 43 |
| 5310-00-809-4058 | 53 | 13 |
| 5310-00-809-4058 | 81 | 6 |
| 5310-00-809-4058 | 82 | 83 |
| 5310-00-809-4058 | 83 | 44 |
| 5310-00-809-4085 | 37 | 36 |
| 5310-00-809-5998 | 49 | 20 |
| 5310-00-809-8540 | 51 | 2 |
| 5310-00-809-8544 | 19 | 70 |
| 5310-00-809-8544 | 52 | 61 |
| 5310-00-809-8544 | 83 | 126 |
| 5310-00-809-8546 | 8 | 3 |
| 5310-00-809-8546 | 19 | 58 |
| 5310-00-809-8546 | 31 | 2 |
| 5310-00-820-6653 | 11 | 31 |
| 5310-00-820-6653 | 16 | 53 |
| 5310-00-820-6653 | 62 | 9 |
| 5310-00-820-6653 | 81 | 36 |
| 5310-00-823-8804 | 20 | 2 |
| 5310-00-836-3520 | 12 | 6 |
| 5310-00-836-3520 | 15 | 6 |
| 5310-00-836-3520 | 22 | 6 |
| 5310-00-836-3520 | 22 | 43 |
| 5310-00-836-3520 | 24 | 20 |
| 5310-00-836-3520 | 25 | 43 |
| 5310-00-836-3520 | 27 | 25 |
| 5310-00-836-3520 | 30 | 6 |
| 5310-00-836-3520 | 49 | 14 |
| 5310-00-836-3520 | 81 | 17 |
| 5310-00-836-3520 | 83 | 90 |
| 5310-00-838-1702 | 81 | 34 |
| 5310-00-854-4342 | 44 | 29 |
| 5310-00-860-0341 | 44 | 25 |
| 5310-00-869-2528 | 34 | 18 |
| 5310-00-877-5797 | 20 | 3 |
| 5310-00-880-7744 | 34 | 38 |
| 5310-00-880-7744 | 52 | 91 |
| 5310-00-880-7744 | 81 | 48 |
| 5310-00-889-2527 | 81 | 47 |
| 5310-00-903-8282 | 56 | 3 |
| 5310-00-921-1547 | 16 | 47 |
| 5310-00-921-5366 | 17 | 36 |
| 5310-00-922-8691 | 69 | 4 |
| 5310-00-930-7013 | 73 | 11 |
| 5310-00-930-7014 | 61 | 37 |
| 5310-00-930-7014 | 67 | 13 |
| 5310-00-931-8167 | 7 | 5 |
| 5310-00-934-9738 | 83 | 134 |
| 5310-00-934-9747 | 32 | 5 |
| 5310-00-934-9747 | 83 | 129 |
| 5310-00-934-9751 | 24 | 42 |
| 5310-00-934-9757 | 24 | 51 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5310-00-934-9757 | 32 | 19 |
| 5310-00-959-7600 | 53 | 16 |
| 5310-00-975-2075 | 76 | 10 |
| 5310-00-983-8483 | 2 | 3 |
| 5310-00-983-8483 | 23 | 5 |
| 5310-00-983-8483 | 23 | 25 |
| 5310-00-983-8483 | 24 | 36 |
| 5310-00-983-8483 | 25 | 9 |
| 5310-00-983-8483 | 43 | 16 |
| 5310-00-983-8483 | 82 | 166 |
| 5310-00-983-8483 | 83 | 2 |
| 5310-00-991-2949 | 32 | 21 |
| 5310-00-999-8285 | 63 | 6 |
| 5310-00-999-8286 | 65 | 8 |
| 5310-00-999-8287 | 65 | 9 |
| 5310-00-999-8288 | 45 | 7 |
| 5310-01-013-0208 | 25 | 69 |
| 5310-01-020-5126 | 63 | 5 |
| 5310-01-023-9105 | 40 | 25 |
| 5310-01-023-9757 | 76 | 2 |
| 5310-01-027-1353 | 82 | 107 |
| 5310-01-030-3355 | 35 | 6 |
| 5310-01-030-3355 | 61 | 36 |
| 5310-01-030-3355 | 62 | 23 |
| 5310-01-030-3355 | 74 | 2 |
| 5310-01-051-2300 | 69 | 8 |
| 5310-01-051-2360 | 39 | 4 |
| 5310-01-062-0380 | 40 | 45 |
| 5310-01-064-1494 | 57 | 7 |
| 5310-01-095-4631 | 72 | 6 |
| 5310-01-098-0624 | 62 | 2 |
| 5310-01-128-4105 | 55 | 47 |
| 5310-01-128-5171 | 55 | 53 |
| 5310-01-128-8967 | 73 | 6 |
| 5310-01-129-0197 | 58 | 55 |
| 5310-01-129-0198 | 58 | 56 |
| 5310-01-129-0199 | 58 | 98 |
| 5310-01-129-0200 | 58 | 99 |
| 5310-01-129-0303 | 58 | 24 |
| 5310-01-129-0304 | 58 | 23 |
| 5310-01-129-0614 | 62 | 6 |
| 5310-01-130-0611 | 66 | 24 |
| 5310-01-130-1557 | 58 | 64 |
| 5310-01-130-1558 | 58 | 48 |
| 5310-01-130-1559 | 58 | 5 |
| 5310-01-130-1655 | 58 | 26 |
| 5310-01-130-1656 | 58 | 8 |
| 5310-01-130-7924 | 58 | 38 |
| 5310-01-130-9849 | 58 | 74 |
| 5310-01-131-7573 | 58 | 35 |
| 5310-01-131-7574 | 58 | 10 |
| 5310-01-131-9868 | 58 | 6 |
| 5310-01-132-4807 | 59 | 5 |
| 5310-01-149-7852 |  | KIT |
| 5310-01-210-6472 | 58 | 16 |
| 5310-01-210-6473 | 58 | 19 |
| 5310-01-211-1788 | 58 | 15 |
| 5310-01-236-9899 | 73 | 10 |
| 5310-01-335-7092 | 44 | 15 |
| 5310-01-338-7338 | 28 | 23 |
| 5315-00-010-6749 | 57 | 54 |
| 5315-00-018-9576 | 57 | 77 |
| 5315-00-133-3625 | 10 | 36 |
| 5315-00-173-8417 | 55 | 40 |
| 5315-00-213-5124 | 52 | 79 |
| 5315-00-213-5124 | 52 | 82 |
| 5315-00-221-9837 | 52 | 71 |
| 5315-00-236-8362 | 43 | 15 |
| 5315-00-240-0997 | 57 | 104 |
| 5315-00-281-6884 | 58 | 1 |
| 5315-00-363-8794 | 69 | 31 |
| 5315-00-406-7278 | 40 | 58 |
| 5315-00-406-7278 | 57 | 98 |
| 5315-00-449-2945 | 1 | 35 |
| 5315-00-449-2945 | 6 | 12 |
| 5315-00-449-2945 | 19 | 75 |
| 5315-00-457-6897 | 80 | 2 |
| 5315-00-532-5746 | 64 | 26 |
| 5315-00-533-9530 | 44 | 15 |
| 5315-00-616-5521 | 69 | 18 |
| 5315-00-760-7417 | 69 | 35 |
| 5315-00-760-7421 | 65 | 20 |
| 5315-00-842-3044 | 7 | 17 |
| 5315-00-921-7156 | 78 | 5 |
| 5315-00-944-7035 | 69 | 10 |
| 5315-00-983-5982 | 70 | 8 |
| 5315-00-999-8416 | 40 | 59 |
| 5315-01-068-9711 | 40 | 68 |
| 5315-01-063-9711 | 57 | 105 |
| 5315-01-068-9780 | 40 | 62 |
| 5315-01-069-0755 | 57 | 13 |
| 5315-01-069-1410 | 40 | 69 |
| 5315-01-069-1410 | 57 | 64 |
| 5315-01-079-6712 | 57 | 106 |
| 5315-01-107-4226 | 80 | 6 |
| 5315-01-129-6772 | 40 | 65 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5315-01-132-1188 | 80 | 1 |
| 5315-01-132-2297 | 58 | 31 |
| 5215-01-132-3579 | 58 | 82 |
| 5315-01-132-8781 | 56 | 10 |
| 5315-01-133-0602 | 58 | 77 |
| 5315-01-140-7191 | 58 | 39 |
| 5320-00-117-6830 | 52 | 58 |
| 5320-00-235-2770 | 52 | 60 |
| 5320-00-582-3303 | 82 | 78 |
| 5320-00-582-3304 | 1 | 13 |
| 5320-00-582-3304 | 2 | 6 |
| 5320-00-582-3305 | 82 | 76 |
| 5320-00-582-3495 | 2 | 12 |
| 5320-00-582-3561 | 1 | 37 |
| 5320-00-582-3561 | 26 | 8 |
| 5320-00-582-3561 | 26 | 12 |
| 5320-00-721-5239 | 23 | 39 |
| 5320-01-771-7530 | 26 | 27 |
| 5325-00-099-8827 | 19 | 77 |
| 5325-00-231-5165 | 36 | 33 |
| 5325-00-263-6632 | 3 | 19 |
| 5325-00-276-6100 | 83 | 30 |
| 5325-00-290-5012 | 6 | 13 |
| 5325-00-432-9902 | 20 | 76 |
| 5325-00-449-2967 | 1 | 38 |
| 5325-00-449-2967 | 26 | 9 |
| 5325-00-449-2967 | 26 | 13 |
| 5325-00-641-2802 | 1 | 36 |
| 5325-00-685-0615 | 25 | 11 |
| 5325-00-685-0615 | 25 | 62 |
| 5325-00-891-1826 | 25 | 15 |
| 5325-01-105-7162 | 82 | 160 |
| 5330-00-34-1908 | 78 | 11 |
| 5330-00-036-6825 | 62 | 20 |
| 5330-00-036-6825 | 78 | 12 |
| 5330-00-036-6995 | 1 | 6 |
| 5330-00-036-6995 | 5 | 15 |
| 5330-00-074-3547 | 68 | 6 |
| 5330-00-074-3600 | 71 | 16 |
| 5330-00-074-3773 | 54 | 12 |
| 5330-00-074-3773 | 55 | 7 |
| 5330-00-104-4371 | 66 | 21 |
| 5330-00-104-4371 | 80 | 8 |
| 5330-00-105-0357 | 57 | 5 |
| 5330-00-105-2660 | 59 | 21 |
| 5330-00-118-5267 | 66 | 11 |
| 5330-00-119-4732 | 82 | 151 |
| 5330-00-125-3343 | 66 | 10 |
| 5330-00-137-3450 | 16 | 16 |
| 5330-00-137-3451 | 16 | 5 |
| 5330-00-138-0251 | 16 | 22 |
| 5330-00-198-6169 | 41 | 6 |
| 5330-00-213-8856 | 42 | 8 |
| 5330-00-216-8375 | 43 | 5 |
| 5330-00-216-8512 | 38 | 2 |
| 5330-00-219-7192 | 56 | 34 |
| 5330-00-221-9846 | 38 | 9 |
| 5330-00-225-0161 | 36 | 28 |
| 5330-00-227-1538 | 25 | 39 |
| 5330-00-227-1538 | 25 | 52 |
| 5330-00-230-9806 | 83 | 71 |
| 5330-00-240-0834 | 30 | 17 |
| 5330-00-245-4070 | 83 | 72 |
| 5330-00-251-4082 | 44 | 33 |
| 5330-00-279-9205 | 67 | 25 |
| 5330-00-288-2557 | 16 | 8 |
| 5330-00-290-8365 | 66 | 31 |
| 5330-00-291-6881 | 61 | 56 |
| 5330-00-292-0577 | 40 | 28 |
| 5330-00-304-9092 | 16 | 17 |
| 5330-00-305-9734 | 58 | 84 |
| 5330-00-310-6575 | 40 | 47 |
| 5330-00-333-5032 | 41 | 7 |
| 5330-00-340-4731 | 58 | 16 |
| 5330-00-399-0242 | 43 | 21 |
| 5330-00-401-6569 | 60 | 5 |
| 5330-00-429-3727 | 61 | 60 |
| 5330-00-431-7137 | 45 | 11 |
| 5330-00-431-7140 | 56 | 28 |
| 5330-00-440-9323 | 53 | 7 |
| 5330-00-440-9325 | 53 | 9 |
| 5330-00-440-9791 | 63 | 10 |
| 5330-00-461-5732 | 82 | 137 |
| 5330-00-462-4524 | 82 | 131 |
| 5330-00-494-2764 | 80 | 19 |
| 5330-00-494-2765 | 66 | 8 |
| 5330-00-520-1552 | 64 | 4 |
| 5330-00-549-7691 | 80 | 18 |
| 5330-00-557-8514 | 61 | 27 |
| 5330-00-591-7543 | 39 | 11 |
| 5330-00-591-7543 | 56 | 20 |
| 5330-00-613-6500 | 40 | 20 |
| 5330-00-613-6500 | 57 | 63 |
| 5330-00-613-7263 | 79 | 6 |
| 5330-00-613-7468 | 67 | 17 |
| 5330-00-663-4773 | 34 | 31 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5330-00-663-4773 | 34 | 39 |
| 5330-00-663-5709 | 45 | 21 |
| 5330-00-663-5709 | 72 | 11 |
| 5330-00-730-8936 | 83 | 12 |
| 5330-00-760-7367 | 54 | 14 |
| 5330-00-760-7367 | 61 | 66 |
| 5330-00-763-9322 | 34 | 21 |
| 5330-00-776-0580 | 44 | 26 |
| 5330-00-782-4363 | 61 | 21 |
| 5330-00-828-9039 | 67 | 60 |
| 5330-00-828-9787 | 55 | 49 |
| 5330-00-828-9787 | 61 | 14 |
| 5330-00-843-7194 | 40 | 70 |
| 5330-00-843-7194 | 57 | 65 |
| 5330-00-846-9841 | 35 | 14 |
| 5330-00-865-5253 | 35 | 3 |
| 5330-00-890-8104 | 43 | 32 |
| 5330-00-891-0982 | 56 | 24 |
| 5330-00-913-8872 | 56 | 18 |
| 5330-00-914-5819 | 60 | 9 |
| 5330-00-914-5819 | 61 | 32 |
| 5330-00-914-5821 | 61 | 47 |
| 5330-00-920-6922 | 61 | 8 |
| 5330-00-921-7128 | 61 | 49 |
| 5330-00-924-0048 | 55 | 48 |
| 5330-00-931-8048 | 55 | 11 |
| 5330-00-945-0494 | 40 | 53 |
| 5330-00-949-1451 | 55 | 36 |
| 5330-00-989-3295 | 55 | 13 |
| 5330-01-002-5729 | 69 | 7 |
| 5330-01-024-3360 | 17 | 5 |
| 5330-01-024-3360 | 57 | 3 |
| 5330-01-024-3368 | 40 | 27 |
| 5330-01-024-4862 | 39 | 5 |
| 5330-01-038-7345 | 57 | 96 |
| 5330-01-048-0983 | 57 | 81 |
| 5330-01-061-9380 | 40 | 56 |
| 5330-01-061-9380 | 57 | 103 |
| 5330-01-061-9381 | 57 | 86 |
| 5330-01-063-9839 | 46 | 20 |
| 5330-01-067-5652 | 45 | 20 |
| 5330-01-067-5727 | 79 | 4 |
| 5330-01-067-5728 | 46 | 3 |
| 5330-01-068-6104 | 62 | 19 |
| 5330-01-068-7344 | 40 | 5 |
| 5330-01-068-7345 | 40 | 3 |
| 5330-01-069-0995 | 40 | 11 |
| 5330-01-069-4869 | 72 | 9 |
| 5330-01-069-9381 | 40 | 57 |
| 5330-01-091-3337 | 83 | 65 |
| 5330-01-093-7888 | 72 | 4 |
| 5330-01-097-8142 | 45 | 9 |
| 5330-01-100-2073 | 10 | 39 |
| 5330-01-103-3701 | 55 | 31 |
| 5330-01-106-8540 | 57 | 34 |
| 5330-01-107-3623 | 39 | 10 |
| 5330-01-107-4168 | 57 | 42 |
| 5330-01-117-5893 | 79 | KIT |
| 5330-01-117-7347 |  | KIT |
| 5330-01-124-1161 | 47 | 4 |
| 5330-01-127-0896 | 56 | 19 |
| 5330-01-127-2875 | 58 | 90 |
| 5330-01-127-8566 | 80 | 5 |
| 5330-01-127-8567 | 40 | 14 |
| 5330-01-127-8574 | 46 | 5 |
| 5330-01-127-8575 | 57 | 32 |
| 5330-01-128-4130 | 66 | 18 |
| 5330-01-128-4137 | 75 | 8 |
| 5330-01-128-4138 | 57 | 45 |
| 5330-01-128-5187 | 65 | 6 |
| 5330-01-128-5196 | 66 | 20 |
| 5330-01-128-6854 | 78 | 9 |
| 5330-01-128-8979 | 66 | 19 |
| 5330-01-129-0618 | 57 | 99 |
| 5330-01 129-0811 | 57 | 28 |
| 5330-01-129-4335 | 58 | 80 |
| 5330-01-129-5793 | 45 | KIT |
| 5330-01-129-6809 | 58 | 13 |
| 5330-01-130-1014 | 58 | 96 |
| 5330-01-130-9079 | 46 | 12 |
| 5330-01-132-1945 | 58 | 30 |
| 5330-01-132-2201 | 45 | 5 |
| 5330-01-132-8577 | 75 | 74 |
| 5330-01-150-5281 |  | KIT |
| 5330-01-211-1786 | 58 | 17 |
| 5330-01-217-4094 | 2 | 6 |
| 5340-00-036-3612 | 34 | 35 |
| 5340-00-050-2740 | 19 | 33 |
| 5340-00-053-8994 | 82 | 39 |
| 5340-00-057-2904 | 19 | 35 |
| 5340-00-057-3052 | 37 | 3 |
| 5340-00-079-7837 | 27 | 7 |
| 5340-00-080-9853 | 36 | 25 |
| 5340-00-081-5094 | 52 | 28 |
| 5340-00-081-5172 | 37 | 5 |
| 5340-00-081-5663 | 63 | 4 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5340-00-083-8455 | 61 | 19 |
| 5340-00-088-6655 | 11 | 29 |
| 5340-00-110-5679 | 10 | 28 |
| 5340-00-118-3015 | 44 | 28 |
| 5340-00-118-3095 | 54 | 3 |
| 5340-00-135-1074 | 43 | 33 |
| 5340-00-213-5112 | 7 | 10 |
| 5340-00-216-8355 | 73 | 7 |
| 5340-00-229-3643 | 1 | 26 |
| 5340-00-229-9287 | 64 | 22 |
| 5340-00-229-9294 | 65 | 26 |
| 5340-00-230-7278 | 51 | 7 |
| 5340-00-244-3875 | 1 | 2 |
| 5340-00-252-9161 | 20 | 12 |
| 5340-00-252-9692 | 24 | 40 |
| 5340-00-252-9692 | 82 | 35 |
| 5340-00-270-8112 | 82 | 74 |
| 5340-00-282-7519 | 37 | 54 |
| 5340-00-361-2522 | 59 | 14 |
| 5340-00-389-6137 | 61 | 43 |
| 5340-00-417-2920 | 80 | 23 |
| 5340-00-423-8320 | 82 | 171 |
| 5340-00-423-9937 | 61 | 26 |
| 5340-00-449-2612 | 76 | 11 |
| 5340-00-494-1996 | 68 | 4 |
| 5340-00-498-2945 | 66 | 23 |
| 5340-00-596-7614 | 11 | 37 |
| 5340-00-762-4115 | 43 | 34 |
| 5340-00-809-1494 | 33 | 14 |
| 5340-00-809-1499 | 11 | 73 |
| 5340-00-809-1500 | 33 | 33 |
| 5340-00-823-5322 | 11 | 3 |
| 5340-00-823-5322 | 11 | 11 |
| 5340-00-823-5322 | 11 | 76 |
| 5340-00-823-5322 | 33 | 9 |
| 5340-00-823-5322 | 33 | 17 |
| 5340-00-823-5322 | 33 | 74 |
| 5340-00-823-5322 | 83 | 82 |
| 5340-00-854-6729 | 11 | 33 |
| 5340-00-919-9389 | 82 | 170 |
| 5340-00-920-6755 | 71 | 2 |
| 5340-00-922-6300 | 33 | 35 |
| 5340-00-954-6014 | 11 | 96 |
| 5340-00-954-6014 | 82 | 2 |
| 5340-00-984-8540 | 11 | 93 |
| 5340-00-988-1162 | 11 | 41 |
| 5340-00-993-6207 | 37 | 55 |
| 5340-01-062-6748 | 33 | 39 |
| 5340-01-069-0904 | 61 | 5 |
| 5340-01-069-0905 | 61 | 4 |
| 5340-01-086-2049 | 81 | 22 |
| 5340-01-088-2385 | 36 | 11 |
| 5340-01-107-4130 | 46 | 19 |
| 5340-01-116-1312 | 41 | 10 |
| 5340-01-116-3799 | 41 | 11 |
| 5340-01-129-5917 | 65 | 21 |
| 5340-01-129-7839 | 41 | 13 |
| 5340-01-130-1070 | 61 | 52 |
| 5340-01-130-1963 | 41 | 14 |
| 5340-01-130-1964 | 41 | 12 |
| 5340-01-130-9431 | 81 | 45 |
| 5340-01-132-4699 | 58 | 79 |
| 5340-01-132-4700 | 58 | 28 |
| 5340-01-145-4311 | 82 | 105 |
| 5340-01-148-7396 | 69 | 28 |
| 5340-01-150-9807 | 72 | 10 |
| 5340-01-150-9810 | 77 | 3 |
| 5340-01-157-2034 | 57 | 2 |
| 5340-01-170-4494 | 43 | 9 |
| 5340-01-173-5104 | 37 | 8 |
| 5340-01-221-6005 | 43 | 20 |
| 5340-01-278-0440 | 72 | 8 |
| 5340-01-334-8514 | 56 | 33 |
| 5340-01-965-0981 | 82 | 163 |
| 5355-00-916-2060 | 19 | 17 |
| 5360-00-137-3464 | 61 | 53 |
| 5360-00-221-6558 | 82 | 128 |
| 5360-00-225-4410 | 83 | 62 |
| 5360-00-249-2203 | 61 | 28 |
| 5360-00-249-3504 | 65 | 28 |
| 5360-00-255-4408 | 83 | 74 |
| 5360-00-485-0715 | 82 | 139 |
| 5360-00-519-6605 | 66 | 14 |
| 5360-00-664-4194 | 61 | 44 |
| 5360-01-023-9435 | 40 | 30 |
| 5360-01-024-2608 | 40 | 44 |
| 5360-01-105-9599 | 40 | 46 |
| 5360-01-130-1167 | 58 | 58 |
| 5360-01-130-1168 | 58 | 94 |
| 5360-01-130-1618 | 58 | 60 |
| 5360-01-130-1620 | 58 | 43 |
| 5360-01-130-8058 | 58 | 12 |
| 5360-01-147-0056 | 17 | 4 |
| 5365-00-019-4854 | 58 | 62 |
| 5365-00-108-9788 | 61 | 41 |
| 5365-00-118-3000 | 62 | 13 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5365-00-119-0627 | 61 | 48 |
| 5365-00-141-1595 | 61 | 42 |
| 5365-00-173-8193 | 59 | 20 |
| 5365-00-181-7726 | 55 | 30 |
| 5365-00-191-3623 | 59 | 15 |
| 5365-00-194-4472 | 40 | 13 |
| 5365-00-200-2550 | 58 | 67 |
| 5365-00-216-1229 | 18 | 35 |
| 5365-00-216-1232 | 7 | 19 |
| 5365-00-225-2752 | 52 | 32 |
| 5365-00-252-4746 | 44 | 27 |
| 5365-00-262-9786 | 61 | 39 |
| 5365-00-303-0409 | 16 | 7 |
| 5365-00-419-3254 | 57 | 35 |
| 5365-00-424-0479 | 61 | 3 |
| 5365-00-432-8183 | 45 | 10 |
| 5365-00-442-5845 | 44 | 19 |
| 5365-00-449-2597 | 66 | 28 |
| 5365-00-584-6620 | 37 | 75 |
| 5365-00-598-6232 | 45 | 17 |
| 5365-00-920-0222 | 55 | 29 |
| 5365-00-920-8279 | 61 | 51 |
| 5365-00-921-3208 | 65 | 7 |
| 5365-00-938-5568 | 80 | 11 |
| 5365-00-938-5568 | 80 | 25 |
| 5365-00-948-3256 | 55 | 35 |
| 5365-01-012-3600 | 10 | 37 |
| 5365-01-024-5118 | 40 | 37 |
| 5365-01-069-0882 | 69 | 19 |
| 5365-01-105-9319 | 39 | 8 |
| 5365-01-125-4533 | 35 | 35 |
| 5365-01-129-0958 | 73 | 8 |
| 5365-01-129-9698 | 58 | 70 |
| 5365-01-129-9699 | 58 | 68 |
| 5365-01-130-2044 | 56 | 2 |
| 5365-01-132-8972 | 58 | 47 |
| 5840-00-115-2674 | 6 | 9 |
| 5903-00-978-9385 | 58 | 73 |
| 5905-00-104-8347 | 25 | 26 |
| 5905-00-110-0196 | 18 | 33 |
| 5905-00-110-0196 | 25 | 59 |
| 5905-00-116-8570 | 25 | 12 |
| 5905-00-141-1168 | 18 | 27 |
| 5905-00-173-4276 | 25 | 14 |
| 5905-00-224-7871 | 83 | 136 |
| 5905-00-264-7368 | 19 | 18 |
| 5905-00-347-3093 | 23 | 33 |
| 5905-00-357-3093 | 19 | 61 |
| 5905-00-378-0250 | 25 | 35 |
| 5905-00-401-6563 | 10 | 20 |
| 5905-00-403-2455 | 25 | 25 |
| 5905-00-405-8260 | 25 | 27 |
| 5905-00-410-3964 | 25 | 24 |
| 5905-00-417-7441 | 25 | 16 |
| 5905-00-430-2679 | 25 | 33 |
| 5905-00-435-1723 | 25 | 60 |
| 5905-00-448-5539 | 23 | 31 |
| 5905-00-468-4240 | 25 | 17 |
| 5905-00-518-5334 | 23 | 22 |
| 5905-00-636-7782 | 24 | 54 |
| 5905-00-636-8357 | 24 | 55 |
| 5905-00-642-5025 | 32 | 22 |
| 5905-00-759-8879 | 25 | 34 |
| 5905-00-879-1163 | 23 | 32 |
| 5905-00-883-8044 | 24 | 56 |
| 5905-01-021-9133 | 23 | 41 |
| 5905-60-435-1723 | 25 | 60 |
| 5910-00-009-9998 | 18 | 13 |
| 5910-00-061-1263 | 25 | 23 |
| 5910-00-147-6296 | 83 | 55 |
| 5910-00-254-2789 | 18 | 28 |
| 5910-00-483-4387 | 19 | 60 |
| 5910-01-036-3581 | 25 | 28 |
| 5910-01-061-1268 | 25 | 21 |
| 5910-01-063-4059 | 25 | 18 |
| 5920-00-106-1454 | 10 | 13 |
| 5920-00-131-9897 | 10 | 2 |
| 5920-00-144-7307 | 10 | 16 |
| 5920-00-230-9097 | 83 | 113 |
| 5920-00-280-4465 | 18 | 16 |
| 5920-00-450-8921 | 10 | 1 |
| 5920-00-687-1896 | 83 | 112 |
| 5920-00-875-4100 | 18 | 17 |
| 5920-00-892-9311 | 10 | 1 |
| 5925-00-686-3298 | 15 | 12 |
| 5925-00-686-3301 | 30 | 19 |
| 5925-00-686-3301 | 82 | 28 |
| 5925-01-048-7656 | 27 | 0 |
| 5925-01-050-9661 | 27 | 29 |
| 5930-00-044-3518 | 19 | 28 |
| 5930-00-208-4688 | 14 | 1 |
| 5930-00-214-0431 | 19 | 9 |
| 5930-00-227-3890 | 82 | 72 |
| 5930-00-430-3532 | 53 | 18 |
| 5930-01-342-8639 | 13 | 4 |
| 5930-00-475-5537 | 82 | 93 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5930-00-483-0446 | 83 | 123 |
| 5930-00-615-2280 | 18 | 15 |
| 5930-00-615-6731 | 19 | 21 |
| 5930-00-655-1514 | 19 | 26 |
| 5930-00-655-1522 | 19 | 30 |
| 5930-00-655-1575 | 82 | 31 |
| 5930-00-655-1581 | 19 | 22 |
| 5930-00-655-1582 | 19 | 25 |
| 5930-00-782-8590 | 19 | 29 |
| 5930-00-854-8344 | 82 | 92 |
| 5930-01-009-0953 | 14 | 2 |
| 5935-00-007-2179 | 18 | 7 |
| 5935-00-115-2306 | 83 | 49 |
| 5935-00-115-2307 | 11 | 14 |
| 5935-00-115-2307 | 83 | 80 |
| 5935-00-137-4670 | 23 | 44 |
| 5935-00-137-4671 | 83 | 91 |
| 5935-00-189-3932 | 11 | 13 |
| 5935-00-206-1400 | 19 | 66 |
| 5935-00-206-1400 | 23 | 30 |
| 5935-00-210-8648 | 12 | 9 |
| 5935-00-210-8648 | 18 | 34 |
| 5935-00-210-8648 | 27 | 13 |
| 5935-00-223-0572 | 33 | 76 |
| 5935-00-325-8389 | 16 | 11 |
| 5935-00-367-7625 | 32 | 12 |
| 5935-00-432-8607 | 23 | 60 |
| 5935-00-432-8967 | 11 | 15 |
| 5935-00-493-5854 | 8 | 17 |
| 5935-00-500-5008 | 23 | 45 |
| 5935-00-565-9503 | 11 | 10 |
| 5935-00-565-9503 | 33 | 18 |
| 5935-00-565-9503 | 83 | 81 |
| 5935-00-598-5416 | 33 | 77 |
| 5935-00-682-0567 | 23 | 62 |
| 5935-00-682-0570 | 11 | 77 |
| 5935-00-691-5591 | 83 | 51 |
| 5935-00-721-0488 | 11 | 84 |
| 5935-00-721-0490 | 12 | 8 |
| 5935-00-721-0496 | 24 | 29 |
| 5935-00-721-1081 | 11 | 82 |
| 5935-00-723-5281 | 11 | 9 |
| 5935-00-723-5281 | 33 | 8 |
| 5935-00-725-0888 | 22 | 15 |
| 5935-00-725-4153 | 82 | 4 |
| 5935-00-725-4153 | 82 | 11 |
| 5935-00-725-8233 | 33 | 20 |
| 5935-00-725-8233 | 33 | 73 |
| 5935-00-726-8317 | 23 | 59 |
| 5935-00-752-2770 | 33 | 75 |
| 5935-00-755-2787 | 22 | 14 |
| 5935-00-755-2787 | 27 | 27 |
| 5935-00-752-2793 | 11 | 75 |
| 5935-00-755-2892 | 83 | 101 |
| 5935-00-755-3144 | 11 | 2 |
| 5935-00-755-3493 | 11 | 12 |
| 5935-00-755-3493 | 11 | 89 |
| 5935-00-755-3493 | 82 | 10 |
| 5935-00-801-6620 | 23 | 57 |
| 5935-00-801-6621 | 23 | 63 |
| 5935-00-805-4992 | 33 | 19 |
| 5935-00-806-4588 | 12 | 7 |
| 5935-00-806-4588 | 15 | 11 |
| 5935-00-806-4588 | 83 | 103 |
| 5935-00-813-4364 | 25 | 47 |
| 5935-00-813-4717 | 11 | 16 |
| 5935-00-814-9781 | 33 | 21 |
| 5935-00-824-7883 | 23 | 58 |
| 5935-00-834-4904 | 24 | 28 |
| 5935-00-834-4904 | 24 | 30 |
| 5935-00-844-4467 | 19 | 46 |
| 5935-00-844-4467 | 23 | 61 |
| 5935-00-845-1701 | 11 | 17 |
| 5935-00-846-2329 | 11 | 4 |
| 5935-00-846-5602 | 33 | 10 |
| 5935-00-846-9841 | 62 | 14 |
| 5935-00-852-9611 | 82 | 18 |
| 5935-00-851-9080 | 33 | 16 |
| 5935-00-853-3749 | 30 | 11 |
| 5935-00-879-0235 | 83 | 83 |
| 5935-00-879-3265 | 82 | 5 |
| 5935-00-938-7841 | 36 | 24 |
| 5935-01-012-3080 | 30 | 18 |
| 5935-01-050-7485 | 8 | 4 |
| 5935-01-073-1240 | 23 | 56 |
| 5935-01-073-1240 | 82 | 19 |
| 5935-01-130-3899 | 27 | 15 |
| 5935-00-725-8233 | 33 | 73 |
| 5940-00-088-6357 | 19 | 59 |
| 5940-00-113-8184 | 19 | 42 |
| 5940-00-114-1320 | 33 | 47 |
| 5940-00-114-1320 | 33 | 51 |
| 5940-00-114-1320 | 33 | 55 |
| 5940-00-114-1320 | 33 | 59 |
| 5940-00-114-1320 | 33 | 63 |
| 5940-00-114-1320 | 33 | 67 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5940-00-114-1321 | 33 | 44 |
| 5940-00-114-1321 | 33 | 60 |
| 5940-00-114-1321 | 33 | 64 |
| 5940-00-114-1321 | 33 | 68 |
| 5940-00-114-1325 | 11 | 71 |
| 5940-00-115-2677 | 1 | 4 |
| 5940-00-115-2677 | 19 | 73 |
| 5940-00-115-2684 | 8 | 13 |
| 5940-00-115-2684 | 11 | 47 |
| 5940-00-115-2684 | 11 | 51 |
| 5940-00-115-2684 | 11 | 57 |
| 5940-00-115-2684 | 11 | 61 |
| 5940-00-115-2684 | 11 | 66 |
| 5940-00-115-5001 | 11 | 62 |
| 5940-00-115-5001 | 11 | 67 |
| 5940-00-115-5006 | 29 | 9 |
| 5940-00-143-4771 | 19 | 45 |
| 5940-00-143-4774 | 11 | 19 |
| 5940-00-143-4774 | 19 | 40 |
| 5940-00-143-4774 | 33 | 27 |
| 5940-00-143-4774 | 82 | 25 |
| 5940-00-143-4774 | 83 | 96 |
| 5940-00-143-4774 | 83 | 118 |
| 5940-00-143-4775 | 15 | 8 |
| 5940-00-143-4775 | 30 | 8 |
| 5940-00-143-4775 | 82 | 27 |
| 5940-00-143-4775 | 83 | 99 |
| 5940-00-143-4775 | 83 | 119 |
| 5940-00-143-4777 | 23 | 52 |
| 5940-00-143-4777 | 52 | 66 |
| 5940-00-143-4780 | 11 | 18 |
| 5940-00-143-4780 | 19 | 43 |
| 5940-00-143-4780 | 22 | 12 |
| 5940-00-143-4780 | 23 | 53 |
| 5940-00-143-4780 | 24 | 26 |
| 5940-00-143-4780 | 33 | 23 |
| 5940-00-143-4780 | 38 | 3 |
| 5940-00-143-4793 | 38 | 22 |
| 5940-00-143-4794 | 83 | 77 |
| 5940-00-204-8966 | 19 | 38 |
| 5940-00-204-8966 | 22 | 27 |
| 5940-00-204-8966 | 27 | 16 |
| 5940-00-204-8990 | 23 | 51 |
| 5940-00-204-8990 | 23 | 54 |
| 5940-00-204-8990 | 82 | 30 |
| 5940-00-204-8990 | 83 | 97 |
| 5940-00-204-8990 | 83 | 116 |
| 5940-00-221-8176 | 26 | 26 |
| 5940-00-223-7055 | 26 | 43 |
| 5940-00-226-9630 | 26 | 33 |
| 5940-00-226-9631 | 26 | 34 |
| 5940-00-226-9633 | 26 | 35 |
| 5940-00-226-9636 | 26 | 36 |
| 5940-00-226-9637 | 26 | 37 |
| 5940-00-226-9639 | 26 | 38 |
| 5940-00-226-9641 | 26 | 39 |
| 5940-00-226-9643 | 26 | 40 |
| 5940-00-226-9644 | 26 | 41 |
| 5940-00-226-9645 | 26 | 42 |
| 5940-00-226-9666 | 26 | 30 |
| 5940-00-226-9697 | 26 | 31 |
| 5940-00-226-9796 | 26 | 32 |
| 5940-00-230-0515 | 19 | 44 |
| 5940-00-230-0515 | 38 | 2 |
| 5940-00-230-0515 | 52 | 43 |
| 5940-00-230-0515 | 52 | 49 |
| 5940-00-230-0515 | 52 | 55 |
| 5940-00-234-3383 | 81 | 46 |
| 5940-00-237-2693 | 33 | 48 |
| 5940-00-237-2693 | 33 | 52 |
| 5940-00-237-2693 | 33 | 56 |
| 5940-00-237-2704 | 29 | 14 |
| 5940-00-237-2779 | 29 | 4 |
| 5940-00-283-5280 | 11 | 21 |
| 5940-00-283-5280 | 19 | 41 |
| 5940-00-283-5280 | 23 | 16 |
| 5940-00-283-5280 | 23 | 50 |
| 5940-00-283-5280 | 24 | 25 |
| 5940-00-283-5280 | 27 | 18 |
| 5940-00-283-5280 | 31 | 11 |
| 5940-00-283-5280 | 33 | 25 |
| 5940-00-283-5280 | 82 | 29 |
| 5940-00-283-5280 | 83 | 78 |
| 5940-00-283-5280 | 83 | 98 |
| 5940-00-283-5280 | 83 | 117 |
| 5940-00-549-6581 | 11 | 43 |
| 5940-00-549-6581 | 11 | 55 |
| 5940-00-549-6583 | 11 | 44 |
| 5940-00-549-6583 | 11 | 50 |
| 5940-00-557-1629 | 12 | 16 |
| 5940-00-557-1629 | 19 | 39 |
| 5940-00-660-3633 | 33 | 24 |
| 5940-00-682-2445 | 11 | 20 |
| 5940-00-682-2445 | 33 | 26 |
| 5940-00-704-8966 | 83 | 132 |
| 5940-00-767-1596 | 18 | 32 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5940-00-804-0520 | 11 | 70 |
| 5940-00-804-0520 | 52 | 99 |
| 5940-00-813-0698 | 25 | 4 |
| 5940-00-816-6103 | 25 | 38 |
| 5940-00-983-6049 | 83 | 130 |
| 5940-00-983-6053 | 27 | 23 |
| 5940-00-983-6067 | 24 | 37 |
| 5940-00-983-6069 | 25 | 32 |
| 5940-00-983-6073 | 23 | 26 |
| 5940-00-983-6084 | 31 | 14 |
| 5940-00-983-6087 | 22 | 21 |
| 5940-00-983-6105 | 19 | 54 |
| 5940-00-988-0317 | 23 | 10 |
| 5940-01-121-8122 | 82 | 37 |
| 5940-01-214-8722 | 36 | 17 |
| 5940-01-281-8845 | 36 | 16 |
| 5940-01-983-6082 | 82 | 90 |
| 5945-00-057-5655 | 22 | 34 |
| 5945-00-318-3050 | 22 | 38 |
| 5945-00-420-4561 | 22 | 35 |
| 5945-00-435-1833 | 12 | 10 |
| 5945-00-435-1833 | 18 | 25 |
| 5945-00-435-1833 | 19 | 65 |
| 5945-00-435-1833 | 23 | 29 |
| 5945-00-435-1833 | 27 | 10 |
| 5945-00-686-6877 | 23 | 20 |
| 5945-00-919-7749 | 22 | 36 |
| 5945-01-015-0354 | 27 | 14 |
| 5945-01-142-1053 | 58 | 101 |
| 5945-01-149-2903 | 17 | 7 |
| 5950-00-201-2437 | 25 | 10 |
| 5950-00-201-7438 | 24 | 15 |
| 5950-00-201-7439 | 24 | 13 |
| 5950-00-201-7439 | 24 | 45 |
| 5950-00-206-1431 | 23 | 15 |
| 5950-00-206-1466 | 31 | 4 |
| 5950-00-206-1496 | 31 | 9 |
| 5950-00-206-1516 | 31 | 6 |
| 5950-00-208-4819 | 31 | 7 |
| 5950-00-211-1028 | 24 | 16 |
| 5950-00-236-0390 | 83 | 127 |
| 5950-00-327-9625 | 32 | 25 |
| 5950-00-482-2167 | 36 | 31 |
| 5950-01-136-1975 | 12 | 10 |
| 5951-00-387-2527 | 52 | 34 |
| 5961-00-079-5958 | 18 | 29 |
| 5961-00-135-6168 | 17 | 62 |
| 5961-00-135-6168 | 23 | 35 |
| 5961-00-136-4145 | 10 | 29 |
| 5961-00-136-4146 | 10 | 30 |
| 5961-00-222-1754 | 25 | 40 |
| 5961-00-222-1754 | 25 | 54 |
| 5961-00-237-2384 | 18 | 31 |
| 5961-00-342-3676 | 36 | 14 |
| 5961-00-484-3034 | 10 | 18 |
| 5961-00-506-6434 | 83 | 131 |
| 5961-00-702-5763 | 23 | 36 |
| 5961-00-702-5763 | 82 | 36 |
| 5961-00-724-5970 | 24 | 44 |
| 5961-00-752-5701 | 52 | 41 |
| 5961-00-821-2309 | 25 | 22 |
| 5961-00-837-7262 | 25 | 61 |
| 5961-00-924-6981 | 12 | 17 |
| 5961-00-924-6981 | 36 | 15 |
| 5961-00-941-2050 | 25 | 19 |
| 5961-00-958-5391 | 25 | 13 |
| 5961-00-978-7660 | 23 | 34 |
| 5961-00-998-6947 | 32 | 24 |
| 5961-00-998-9317 | 24 | 47 |
| 5961-01-101-3967 | 57 | 46 |
| 5961-01-101-3967 | 52 | 53 |
| 5951-01-121-0624 | 17 | 2 |
| 5970-00-148-6300 | 10 | 9 |
| 5970-00-223-6842 | 25 | 41 |
| 5970-00-223-6843 | 24 | 39 |
| 5970-00-227-9278 | 24 | 31 |
| 5970-00-227-9278 | 83 | 102 |
| 5970-00-248-9191 | 23 | 65 |
| 5970-01-219-7662 | 24 | 41 |
| 5970-00-257-8055 | 4 | 7 |
| 5970-00-436-5271 | 10 | 17 |
| 5970-00-543-1098 | 15 | 9 |
| 5970-00-543-1098 | 18 | 12 |
| 5970-00-543-1098 | 30 | 9 |
| 5970-00-685-8377 | 83 | 104 |
| 5970-00-814-0393 | 24 | 53 |
| 5970-00-815-1295 | 19 | 50 |
| 5970-00-815-1300 | 8 | 14 |
| 5970-00-815-1300 | 11 | 46 |
| 5970-00-815-1300 | 11 | 52 |
| 5970-00-815-1300 | 11 | 60 |
| 5970-00-892-3391 | 23 | 16 |
| 5970-00-892-3391 | 23 | 64 |
| 5970-00-903-8733 | 32 | 14 |
| 5970-00-915-6133 | 25 | 48 |
| 5970-00-954-1622 | 18 | 8 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 5970-00-954-1622 | 18 | 30 |
| 5970-00-954-1622 | 19 | 47 |
| 5970-00-954-1622 | 19 | 51 |
| 5970-00-978-7677 | 8 | 15 |
| 5970-00-978-7677 | 11 | 45 |
| 5970-00-978-7677 | 11 | 56 |
| 5970-00-978-7677 | 11 | 65 |
| 5970-01-085-8994 | 24 | 41 |
| 5972-00-074-2072 | 25 | 5 |
| 5975-00-031-2249 | 83 | 56 |
| 5975-00-074-2072 | 11 | 6 |
| 5975-00-074-2072 | 11 | 25 |
| 5975-00-074-2072 | 11 | 78 |
| 5975-00-074-2072 | 11 | 85 |
| 5975-00-074-2072 | 18 | 9 |
| 5975-00-074-2072 | 19 | 37 |
| 5975-00-074-2072 | 22 | 10 |
| 5975-00-074-2072 | 23 | 48 |
| 5975-00-074-2072 | 24 | 23 |
| 5975-00-074-2072 | 33 | 11 |
| 5975-00-074-2072 | 33 | 30 |
| 5975-00-074-2072 | 33 | 41 |
| 5975-00-074-2072 | 33 | 79 |
| 5975-00-074-2072 | 82 | 6 |
| 5975-00-074-2072 | 82 | 12 |
| 5975-00-111-3208 | 18 | 11 |
| 5975-00-156-3253 | 32 | 13 |
| 5975-00-417-0543 | 30 | 15 |
| 5975-00-421-6952 | 4 | 9 |
| 5975-00-727-5153 | 11 | 24 |
| 5975-00-727-5153 | 22 | 11 |
| 5975-00-727-5153 | 23 | 49 |
| 5975-00-727-5153 | 24 | 24 |
| 5975-00-727-5153 | 27 | 26 |
| 5975-00-727-5153 | 30 | 7 |
| 5975-00-727-5153 | 33 | 31 |
| 5975-00-727-5153 | 83 | 70 |
| 5975-00-727-5153 | 83 | 96 |
| 5975-00-727-5153 | 83 | 115 |
| 5975-00-727-5753 | 25 | 45 |
| 5975-00-944-1499 | 11 | 7 |
| 5975-00-944-1499 | 11 | 26 |
| 5975-00-944-1499 | 33 | 13 |
| 5975-00-944-1499 | 11 | 91 |
| 5975-00-944-1499 | 33 | 32 |
| 5975-00-944-1499 | 23 | 55 |
| 5975-01-131-9854 | 52 | 96 |
| 5977-00-078-9102 | 82 | 142 |
| 5977-00-091-9283 | 16 | 25 |
| 5977-00-456-6097 | 82 | 141 |
| 5977-00-951-5446 | 83 | 57 |
| 5990-01-016-3058 | 23 | 12 |
| 5995-00-248-4020 | 10 | 21 |
| 5995-00-512-1024 | 18 | 6 |
| 5995-00-514-0849 | 22 | 9 |
| 5998-00-199-1278 | 18 | 26 |
| 5999-00-420-7393 | 23 | 20 |
| 5999-01-01b-3198 | 25 | 29 |
| 5999-01-031-5291 | 30 | 3 |
| 6105-00-105-8290 | 10 | 31 |
| 6105-00-229-6846 | 83 | 54 |
| 6105-00-400-0196 | 82 | 140 |
| 6110-00-199-1377 | 22 | 3 |
| 6110-00-202-2888 | 19 | 56 |
| 6110-00-258-8542 | 25 | 3 |
| 6110-01-052-8081 | 27 | 31 |
| 6115-00-033-6323 | 4 | 4 |
| 6115-00-148-5724 | 33 | 72 |
| 6115-00-168-6142 | 55 | 41 |
| 6115-00-182-7153 | 51 | 17 |
| 6115-00-182-7153 | 52 | |
| 6115-00-182-7155 | 52 | 26 |
| 6115-00-182-7160 | 52 | 70 |
| 6115-00-182-7157 | 56 | 34 |
| 6115-00-182-7162 | 52 | 90 |
| 6115-00-185-8005 | 52 | 24 |
| 6115-00-185-8021 | 24 | 3 |
| 6115-00-188-5333 | 31 | 3 |
| 6115-00-235-4703 | 82 | 15 |
| 6115-00-248-5905 | 52 | 31 |
| 6115-00-248-6125 | 7 | 20 |
| 6115-00-248-6126 | 7 | 18 |
| 6115-00-248-6180 | 24 | 22 |
| 6115-00-248-6185 | 25 | 44 |
| 6115-00-248-6187 | 25 | 58 |
| 6115-00-252-0799 | 11 | 81 |
| 6115-00-320-1514 | 52 | 30 |
| 6115-00-368-8651 | 52 | 25 |
| 6115-01-016-7742 | 52 | 77 |
| 6115-01-092-4498 | 1 | 14 |
| 6115-01-092-4499 | 1 | 15 |
| 6115-01-101-4059 | 6 | 14 |
| 6115-01-105-2149 | 1 | 19 |
| 6115-01-125-9368 | 83 | 0 |
| 6115-01-131-7228 | 82 | 0 |
| 6115-01-142-3072 | 23 | 3 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 6115-01-143-0350 | 44 | 46 |
| 6135-01-192-3143 | 7 | 3 |
| 6140-00-057-2554 | 7 | 4 |
| 6140-01-210-1964 | 7 | 4 |
| 6145-00-013-8659 | 11 | 88 |
| 6145-00-195-5602 | 33 | 45 |
| 6145-00-195-5602 | 33 | 49 |
| 6145-00-195-5602 | 33 | 53 |
| 6145-00-195-5602 | 33 | 57 |
| 6145-00-195-5602 | 33 | 61 |
| 6145-00-195-5602 | 33 | 65 |
| 6145-00-195-5602 | 33 | 69 |
| 6145-00-548-0969 | 18 | 10 |
| 6145-00-556-8850 | 52 | 89 |
| 6145-00-578-6601 | 29 | 10 |
| 6145-00-578-6601 | 11 | 72 |
| 6145-00-578-6602 | 19 | 48 |
| 6145-00-578-6602 | 22 | 28 |
| 6145-00-578-6602 | 27 | 19 |
| 6145-00-578-6604 | 52 | 45 |
| 6145-00-578-6604 | 52 | 51 |
| 6145-00-578-6604 | 52 | 57 |
| 6145-00-578-6604 | BULK | 5 |
| 6145-00-578-6605 | 11 | 5 |
| 6145-00-578-6605 | 11 | 23 |
| 6145-00-578-6605 | 11 | 79 |
| 6145-00-578-6605 | 11 | 86 |
| 6145-00-578-6605 | 19 | 49 |
| 6145-00-578-6605 | 22 | 17 |
| 6145-00-578-6605 | 23 | 17 |
| 6145-00-578-6605 | 23 | 67 |
| 6145-00-578-6605 | 24 | 32 |
| 6145-00-578-6605 | 27 | 17 |
| 6145-00-578-6605 | 27 | 30 |
| 6145-00-578-6605 | 33 | 12 |
| 6145-00-578-6605 | 33 | 28 |
| 6145-00-578-6605 | 33 | 78 |
| 6145-00-578-6605 | 38 | 4 |
| 6145-00-578-6605 | 82 | 25 |
| 6145-00-578-6605 | 83 | 50 |
| 6145-00-578-6605 | 83 | 85 |
| 6145-00-578-6605 | 83 | 106 |
| 6145-00-578-6605 | 83 | 122 |
| 6145-00-578-7514 | 11 | 22 |
| 6145-00-578-7514 | 15 | 10 |
| 6145-00-578-7514 | 23 | 66 |
| 6145-00-578-7514 | 30 | 10 |
| 6145-00-578-7514 | 33 | 29 |
| 6145-00-578-7514 | 82 | 8 |
| 6145-00-578-7514 | 82 | 14 |
| 6145-00-578-7514 | 82 | 24 |
| 6145-00-578-7514 | 83 | 83 |
| 6145-00-578-7514 | 83 | 105 |
| 6145-00-578-7514 | 83 | 121 |
| 6145-00-581-1627 | 25 | 65 |
| 6145-00-643-0647 | 32 | 15 |
| 6145-00-643-0648 | 25 | 6 |
| 6145-00-643-0648 | 25 | 49 |
| 6145-00-643-1255 | 8 | 16 |
| 6145-00-643-1255 | 11 | 48 |
| 6145-00-643-1255 | 11 | 53 |
| 6145-00-643-1255 | 11 | 58 |
| 6145-00-643-1255 | 11 | 63 |
| 6145-00-643-1255 | 11 | 68 |
| 6145-00-726-0285 | 25 | 63 |
| 6145-00-726-0637 | 24 | 64 |
| 6150-00-212-5772 | 16 | 10 |
| 6150-00-274-5536 | 52 | 13 |
| 6150-00-519-2714 | 22 | 20 |
| 6150-00-519-2714 | 31 | 12 |
| 6150-00-632-7234 | 27 | 20 |
| 6150-00-665-7230 | 19 | 53 |
| 6150-01-020-1980 | 26 | 28 |
| 6150-01-023-0398 | 82 | 3 |
| 6150-01-050-8268 | 83 | 107 |
| 6210-00-067-8357 | 83 | 107 |
| 6210-00-686-4999 | 19 | 19 |
| 6210-00-753-2289 | 83 | 108 |
| 6210-00-813-8265 | 18 | 20 |
| 6210-00-831-8247 | 19 | 23 |
| 6210-00-935-6919 | 19 | 15 |
| 6210-00-990-4637 | 18 | 18 |
| 6240-00-143-3060 | 19 | 24 |
| 6240-00-143-3060 | 83 | 109 |
| 6240-00-155-7836 | 18 | 19 |
| 6240-00-155-7878 | 19 | 16 |
| 6240-00-155-8714 | 19 | 20 |
| 6240-00-155-8714 | 82 | 23 |
| 6310-00-063-6716 | 53 | 11 |
| 6310-00-243-6947 | 55 | 2 |
| 6310-00-243-6947 | 55 | 15 |
| 6365-00-118-3656 | 70 | 7 |
| 6365-00-133-0904 | 10 | 40 |
| 6620-00-005-4879 | 19 | 11 |
| 6620-00-072-6834 | 83 | 31 |
| 6620-00-134-1593 | 21 | 2 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| NSN | Figure No. | Item No. |
|---|---|---|
| 6620-00-340-9303 | 44 | 24 |
| 6620-01-008-1893 | 47 | 5 |
| 6625-00-003-0971 | 19 | 8 |
| 6625-00-003-0973 | 19 | 68 |
| 6625-00-003-0975 | 19 | 7 |
| 6625-00-003-0976 | 18 | 2 |
| 6625-00-004-8066 | 19 | 5 |
| 6625-00-869-3141 | 19 | 13 |
| 6625-00-869-3144 | 19 | 6 |
| 6625-00-892-4342 | 23 | 19 |
| 6625-01-049-1615 | 12 | 20 |
| 6625-01-108-2600 | 19 | 27 |
| 6625-01-108-2600 | 82 | 22 |
| 6645-00-089-8842 | 19 | 14 |
| 6680-00-052-3544 | 19 | 12 |
| 6680-00-676-9242 | 21 | 3 |
| 6680-00-676-9292 | 38 | 16 |
| 6680-01-125-0064 | 66 | 4 |
| 6685-00-119-9852 | 21 | 1 |
| 6685-00-857-0662 | 19 | 10 |
| 6695-01-136-1975 | 13 | 5 |
| 6940-00-983-6082 | 22 | 24 |
| 6940-00-983-6082 | 24 | 18 |
| 9905-00-752-4649 | 25 | 46 |
| 9905-00-752-4649 | 82 | 7 |
| 9905-00-841-4445 | 11 | 87 |
| 9905-00-841-4445 | 24 | 27 |
| 9905-00-841-4445 | 82 | 13 |
| 9905-00-841-4445 | 83 | 79 |
| 9905-00-841-4445 | 83 | 120 |
| 9905-00-893-3570 | 11 | 80 |
| 9905-00-893-3570 | 23 | 13 |
| 9905-00-893-3570 | 33 | 80 |
| 9905-00-893-3570 | 83 | 100 |
| 9905-00-945-7637 | 11 | 26 |
| 9905-01-053-4809 | 54 | 19 |
| 9905-01-131-9161 | 34 | 21 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No | Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|---|---|---|---|
| AM8031-40 | 02368 | 51 | 9 | A400-3 | 16024 | 83 | 40 |
| AN2552-3 | 88044 | 8 | 4 | A400-4 | 16024 | 67 | 3 |
| AN816-8 | 88044 | 82 | 68 | A50177-G1 | 46522 | 82 | 102 |
| AN816-8 | 88044 | 83 | 22 | A50178-G1 | 46522 | 82 | 103 |
| AN910-2 | 88044 | 38 | 17 | A51695-G1 | 46522 | 82 | 99 |
| AN911-2 | 88044 | 34 | 6 | A51696-G1 | 46522 | 82 | 100 |
| AN912-5 | 88044 | 82 | 54 | A51701-G1 | 46522 | 82 | 98 |
| AN912-7 | 88044 | 21 | 4 | A51723-G1 | 46522 | 82 | 96 |
| AN912-7 | 88044 | 82 | 73 | A52789-G5 | 46522 | 82 | 115 |
| AN914-2 | 88044 | 82 | 62 | A53181 | 46522 | 82 | 118 |
| AN914-4 | 88044 | 44 | 38 | A54201-G1-1 | 46522 | 82 | 105 |
| AN916-2 | 88044 | 34 | 14 | A54814-G1 | 46522 | 82 | 160 |
| AN917-1 | 88044 | 82 | 46 | A54907-G1 | 46522 | 82 | 113 |
| AN917-3 | 88044 | 83 | 42 | A54940-G1 | 46522 | 82 | 88 |
| AN917-4 | 88044 | 82 | 55 | A54948-G2 | 46522 | 82 | 108 |
| AN960-416 | 88044 | 52 | 21 | A6005943 | 46522 | 82 | 90 |
| A.9000 | 08556 | 30 | 15 | A732 | 30161 | 25 | 41 |
| A14140 | 46522 | 82 | 111 | A8 | 05657 | 82 | 114 |
| A14141 | 46522 | 82 | 116 | B-598-40 | 06288 | 19 | 62 |
| A1522 | 46522 | 82 | 117 | B-598-40 | 06288 | 23 | 35 |
| A18167-G2 | 46522 | 82 | 112 | B1821BH025C088N | 80204 | 57 | 11 |
| A19 | 96309 | 44 | 13 | B1821BH038C138N | 80204 | 61 | 7 |
| A2096 | 46522 | 82 | 151 | BC220 | 95408 | 83 | 8 |
| A2322 | 46522 | 82 | 92 | B2185 | 46522 | 82 | 163 |
| A2480 | 46522 | 82 | 141 | B2283 | 46522 | 82 | 146 |
| A2481 | 46522 | 82 | 142 | B2615 | 46522 | 82 | 149 |
| A2610 | 46522 | 82 | 154 | B2714 | 46522 | 82 | 159 |
| A2612 | 46522 | 82 | 155 | B2793 | 46522 | 82 | 164 |
| A2631 | 46522 | 82 | 147 | B2798 | 46522 | 82 | 140 |
| A2657 | 46522 | 82 | 148 | B2859 | 46522 | 82 | 120 |
| A2822 | 46522 | 82 | 143 | B2894 | 46522 | 82 | 125 |
| A2823 | 46522 | 82 | 121 | B2929 | 46522 | 82 | 130 |
| A2829 | 46522 | 82 | 122 | B35676 | 95408 | 83 | 15 |
| A2841 | 46522 | 82 | 156 | B4700 | 96309 | 44 | 48 |
| A2896 | 46522 | 82 | 128 | B51725-G1 | 46522 | 82 | 97 |
| A2897 | 46522 | 82 | 126 | B51726-G1 | 46522 | 82 | 93 |
| A2898-1 | 46522 | 82 | 132 | B54028-G1-1 | 46522 | 82 | 110 |
| A2900 | 46522 | 82 | 135 | B54827-G1 | 46522 | 82 | 124 |
| A2901 | 46522 | 82 | 133 | B54941-G1 | 46522 | 82 | 106 |
| A2902 | 46522 | 82 | 134 | CP3050-24 | 46522 | 82 | 85 |
| A2903 | 46522 | 82 | 129 | C1126PL | 73370 | 34 | 30 |
| A2904 | 46522 | 82 | 137 | C15099 | 95408 | 83 | 11 |
| A2928 | 46522 | 82 | 136 | C2583 | 46522 | 82 | 152 |
| A2930 | 46522 | 82 | 139 | C2757 | 46522 | 82 | 150 |
| A2931 | 46522 | 82 | 138 | C3059X2 | 79470 | 37 | 35 |
| A2932 | 46522 | 82 | 131 | C3069X8X6 | 79470 | 82 | 47 |
| A400-3 | 16024 | 43 | 40 | C3069X8X6 | 79470 | 83 | 41 |
| A400-3 | 16024 | 82 | 48 | C54811-G1 | 46522 | 82 | 109 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| C54911-G1-1 | 46522 | 82 | 161 |
| C54919-G1-1 | 46522 | 82 | 86 |
| C70412-30 | 98245 | 4 | 7 |
| CW1331-1-1-0 | 24457 | | |
| D2691 | 46522 | 82 | 162 |
| EB054 | 72962 | 55 | 27 |
| FHN26G1 | 81349 | 10 | 1 |
| FHN26G2 | 81349 | 18 | 17 |
| F02A250V1AS | 81349 | 18 | 16 |
| F09A250V30A | 81349 | 83 | 113 |
| GBF-79 | 68505 | 16 | 21 |
| GS-2 | 95408 | 83 | 12 |
| HDI-10191 | 83616 | 36 | 1 |
| HF3C64C42617 | 73134 | 20 | 4 |
| JAN1N1188 | 81349 | 51 | 41 |
| JAN1N1188R | 81349 | 51 | 47 |
| JAN1N1188R | 81349 | 51 | 53 |
| JAN1N1204A | 81349 | 24 | 44 |
| JAN1N1204RA | 81349 | 24 | 47 |
| JAN1N4245 | 81349 | 12 | 17 |
| JAN1N4245 | 81349 | 36 | 15 |
| JAN1N4247 | 81349 | 25 | 13 |
| JAN1N4385 | 81349 | 32 | 24 |
| JAN1N540 | 81349 | 23 | 34 |
| JAN1N5614 | 81349 | 18 | 31 |
| JAN1N5624 | 81349 | 83 | 131 |
| JANIN751A | 81349 | 25 | 22 |
| JAN2N2904A | 81349 | 25 | 19 |
| JAN2N697 | 81349 | 25 | 61 |
| KS1012 | 95408 | 83 | 31 |
| LC12RN2 | 81349 | 18 | 18 |
| LC21YN3 | 81349 | 83 | 107 |
| LH73/1 | 81349 | 18 | 20 |
| LH80/1 | 81349 | 83 | 108 |
| LP-1507 | 61112 | 36 | 29 |
| LP-3478 | 61112 | 36 | 26 |
| LP1233 | 61112 | 36 | 28 |
| LP1305 | 61112 | 36 | 33 |
| LP1507 | 61112 | 36 | 29 |
| LP1395-1 | 61112 | 36 | 34 |
| LP1505 | 61112 | 36 | 30 |
| LP1530-1 | 61112 | 36 | 35 |
| LP15333 | 61112 | 36 | 31 |
| LP1728 | 61112 | 36 | 32 |
| LP2401-1 | 61112 | 36 | 27 |
| LS40820 | 04034 | 36 | 40 |
| L1026 | 11083 | 65 | 22 |
| L1143 | 11083 | 61 | 6 |
| L1143 | 11083 | 74 | 1 |
| L1329 | 11083 | 62 | 17 |
| L1351 | 11083 | 45 | 1 |
| L1351 | 11083 | 55 | 12 |
| L1351 | 11083 | 67 | 23 |
| L1351 | 11083 | 71 | 6 |
| L1351 | 11083 | 76 | 9 |
| L1351 | 11083 | 79 | 1 |
| L1352 | 11083 | 67 | 11 |
| L1352 | 11083 | 73 | 13 |
| L2070 | 11083 | 74 | 5 |
| L364 | 11083 | 68 | 2 |
| M5839 | 28298 | 55 | 16 |
| MBD-19AS | 19728 | 16 | 27 |
| MBD2466B | 68505 | 16 | 18 |
| MES-120 | 68505 | 16 | 10 |
| MES-2116B | 19728 | 16 | 14 |
| MES-95S | 68505 | 16 | 22 |
| MES117 | 68505 | 16 | 51 |
| MES61 | 68505 | 16 | 7 |
| MES71 | 19728 | 16 | 38 |
| MES72 | 19728 | 16 | 37 |
| MES78A | 19728 | 16 | 31 |
| MES93 | 19728 | 16 | 32 |
| MES94 | 19728 | 16 | 34 |
| MES99 | 19728 | 16 | 33 |
| MEU-2042B | 68505 | 16 | 12 |
| MEW-10125 | 19728 | 16 | 25 |
| MEW-1064A | 19728 | 16 | 26 |
| MFY-1002BS | 68505 | 16 | 20 |
| MFY-2052S | 68505 | 16 | 23 |
| MFY-34S | 68505 | 16 | 4 |
| MFY-35 | 68505 | 16 | 6 |
| MFV-36 | 68505 | 16 | 3 |
| MFY-40 | 68505 | 16 | 11 |
| MFY-63S | 68505 | 16 | 8 |
| MFY-6501EUT | 19728 | 16 | - |
| MFV33 | 68505 | 15 | 50 |
| QS1189 | 61112 | 36 | 11 |
| QS-4-2TC | 61112 | 36 | 26 |
| MIL-B-43436/1-2 | 81349 | 11 | 7 |
| MIL-B-43436/1-2 | 81349 | 11 | 87 |
| MIL-B-43436/1-3 | 81349 | 11 | 80 |
| MIL-B-43436/1-3 | 81349 | 33 | 32 |
| MIL-B-43436/1-3 | 81349 | 33 | 80 |
| MIL-C-3661/12 | 81349 | 17 | 18 |
| MIL-C-5756-1-0 | 81349 | 8 | 16 |
| MIL-C-5756-1-0 | 81349 | 11 | 48 |
| MIL-C-5756-1-0 | 81349 | 11 | 53 |
| MIL-C-5756-1-0 | 81349 | 11 | 58 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| MIL-C-5756-1-0 | 81349 | 11 | 63 |
| MIL-C-5756-1-0 | 81349 | 11 | 68 |
| MIL-C-5756-1-0 | 81349 | 11 | 58 |
| MIL-H-8294-5 | 81349 | 81 | 25 |
| MIL-H-8794-160 | 81349 | BULK | 2 |
| MIL-H-8794-4 | 81349 | 37 | 14 |
| MIL-H-8794-4 | 81349 | 37 | 23 |
| MIL-H-8794-4 | 81349 | 37 | 27 |
| MIL-H-8794-4 | 81349 | 37 | 31 |
| MIL-H-8794-4 | 81349 | 37 | 34 |
| MIL-H-8794-4 | 81349 | 37 | 41 |
| MIL-H-8794-4 | 81349 | 82 | 60 |
| MIL-H-8794-5 | 81349 | 37 | 50 |
| MIL-H-8794-6 | 81349 | 34 | 9 |
| MIL-H-8794-6 | 81349 | 37 | 17 |
| MIL-H-8794-6 | 81349 | 37 | 20 |
| MIL-H-8794-6 | 81349 | 37 | 44 |
| MIL-H-8794-6 | 81349 | 37 | 47 |
| MIL-H-8794-6 | 81349 | 37 | 53 |
| MIL-H-8794-8 | 81349 | 82 | 42 |
| MIL-H-8794-8 | 81349 | 82 | 52 |
| MIL-H-8794-8 | 81349 | 82 | 67 |
| MIL-H-8794-8 | 81349 | 83 | 20 |
| MIL-H-8794-8 | 81349 | 83 | 26 |
| MIL-H-8794-8 | 81349 | 83 | 34 |
| MIL-H-8794-8 | 81349 | 83 | 38 |
| MIL-H-8924-16 | 81349 | 81 | 18 |
| MIL-I-23053 CL1 RED | 81349 | 11 | 45 |
| MIL-I-3661/5 | 81349 | 17 | 20 |
| MIL-I-631, Type F, Class 1 | 81349 | 14 | 9 |
| MIL I 631, Type F, Class 1 | 81349 | 21 | 16 |
| MIL-I-631, Type F,Class 1 | 81349 | 83 | 102 |
| MIL-I-631, Type F,Class 1 | 81349 | 83 | 104 |
| MIL-I-631 Type F,Form UA, Grade A,Class 1 Category 1 | 81349 | 25 | 48 |
| MIL-P-79 Form TM,Type B | 81349 | 32 | 23 |
| MIL-R-17343 | 81349 | 19 | 74 |
| MIL-R-39009/1 | 81349 | 22 | 29 |
| MIL-T-55164/3 | 81349 | 19 | 54 |

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| MIL-W-16878/2 | 81349 | 25 | 6 |
| MIL-W-583 | 81349 | 52 | 89 |
| M1L6878/2-22-9 | 81349 | 25 | 6 |
| ML-24A | 19728 | 16 | 15 |
| ML129 | 19728 | 16 | 40 |
| MR1034A | 04713 | 23 | 36 |
| MS15567-1 | 96906 | 19 | 24 |
| MS15567-1 | 96906 | 83 | 109 |
| MS17795-128 | 96906 | 16 | 15 |
| MS16203-29 | 96906 | 26 | 22 |
| MS16203-41 | 96906 | 26 | 24 |
| MS16203-43 | 96906 | 29 | 11 |
| MS16535-153 | 96906 | 23 | 39 |
| MS16624-4275 | 96906 | 52 | 32 |
| MS16625-1315 | 96906 | 45 | 17 |
| MS16632-1037 | 96906 | 57 | 75 |
| MS16995-86 | 96906 | 44 | 10 |
| M516997-32 | 96906 | 56 | 22 |
| MS16997-62 | 96906 | 58 | 73 |
| MS17157-10 | 96906 | 18 | 32 |
| MS15795-512 | 96906 | 43 | 30 |
| MS17829-4C | 96906 | 1 | 9 |
| MS17829-4C | 96906 | 3 | 9 |
| MS17829-4C | 96906 | 4 | 12 |
| MS17829-4C | 96906 | 5 | 8 |
| MS17829-4C | 96906 | 5 | 13 |
| MS17829-4C | 96906 | 6 | 6 |
| MS17829-4C | 96906 | 8 | 11 |
| MS17829-4C | 96906 | 11 | 28 |
| MS17829-4C | 96906 | 11 | 35 |
| MS17829-4C | 96906 | 11 | 95 |
| MS17829-4C | 96906 | 12 | 3 |
| MS17829-4C | 96906 | 19 | 17 |
| MS17829-4C | 96906 | 22 | 2 |
| MS17829-4C | 96906 | 23 | 2 |
| MS17829-4C | 96906 | 25 | 6 |
| MS17829-4C | 96906 | 32 | 17 |
| MS17829-4C | 96906 | 34 | 5 |
| MS17829-4C | 96906 | 34 | 21 |
| MS17829-4C | 96906 | 35 | 2 |
| MS17829-4C | 96906 | 42 | 42 |
| MS17829-4C | 96906 | 47 | 6 |
| MS17829-4C | 96906 | 79 | 7 |
| MS17829-4C | 96906 | 80 | 81 |
| MS17829-4C | 96906 | 81 | 6 |
| MS17829-5C | 96906 | 1 | 44 |
| MS17829-5C | 96906 | 5 | 19 |
| MS17829-5C | 96906 | 7 | 1 |
| MS17829-5C | 96906 | 41 | 7 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| MS17829-5C | 96906 | 51 | 2 |
| MS17829-5C | 96906 | 79 | 3 |
| MS17829-6C | 96906 | 3 | 15 |
| MS17829-6C | 96906 | 25 | 3 |
| MS17829-6C | 96906 | 31 | 3 |
| MS17829-6C | 96906 | 32 | 42 |
| MS17829-6C | 96906 | 51 | 4 |
| MS17829-6C | 96906 | 79 | 41 |
| MS17829-6C | 96906 | 79 | 51 |
| MS17829-8C | 96906 | 25 | 21 |
| MS17829-8C | 96906 | 47 | 21 |
| MS17987-843 | 96906 | 7 | 10 |
| MS18154-58 | 96906 | 52 | 1 |
| MS18154-58 | 96906 | 61 | 1 |
| MS18154-58 | 96906 | 69 | 9 |
| MS18154-58 | 96906 | 75 | 1 |
| MS19059-4818 | 96906 | 7 | 14 |
| MS20470AD4-8 | 96906 | 50 | 58 |
| MS20600AD4W2 | 96906 | 1 | 13 |
| MS20600AD4W2 | 96906 | 2 | 6 |
| MS20600AD4W3 | 96906 | 80 | 76 |
| MS20600AD4W5 | 96906 | 80 | 78 |
| MS20600AD4W6 | 96906 | 2 | 12 |
| MS20601AD4W2 | 96906 | 1 | 37 |
| MS20601AD4W2 | 96906 | 25 | 8 |
| MS20601AD4W2 | 96906 | 25 | 12 |
| MS206154CU10 | 96906 | 25 | 27 |
| MS20659-108 | 96906 | 6 | 9 |
| MS20659-118 | 96906 | 8 | 13 |
| MS20659-118 | 96906 | 11 | 47 |
| MS20659-118 | 96906 | 11 | 51 |
| MS20659-118 | 96906 | 11 | 57 |
| MS20659-118 | 96906 | 11 | 61 |
| MS20659-118 | 96906 | 11 | 66 |
| MS20659-135 | 96906 | 11 | 62 |
| MS20659-135 | 96906 | 11 | 67 |
| MS20659-144 | 96906 | 1 | 4 |
| MS20659-144 | 96906 | 19 | 73 |
| MS20822-16-12 | 96906 | 67 | 1 |
| MS20822-16-12 | 96906 | 83 | 138 |
| MS20822-4 | 96906 | 82 | 64 |
| MS20822-4-4 | 96906 | 36 | 42 |
| MS20822-4-4 | 96906 | 37 | 24 |
| MS20822-5-4 | 96906 | 49 | 2 |
| MS20822-6 | 96906 | 34 | 2 |
| MS20822-6 | 96906 | 35 | 1 |
| MS20822-6 | 96906 | 49 | 3 |
| MS20822-6S | 96906 | 82 | 124 |
| MS20822-6-6 | 96906 | 36 | 41 |
| MS20822-8 | 96906 | 82 | 44 |
| MS20822-8 | 96906 | 83 | 17 |
| MS20823-16-12 | 96906 | 81 | 13 |
| MS20823-8 | 96906 | 82 | 71 |
| MS20823-8 | 96906 | 83 | 141 |
| MS209-1S | 96906 | 82 | 127 |
| MS20913-2 | 96906 | 34 | 4 |
| MS20913-2 | 96906 | 53 | 19 |
| MS20913-3 | 96906 | 82 | 45 |
| MS20913-3S | 96906 | 83 | 23 |
| MS20913-6 | 96906 | 81 | 14 |
| MS21044-N04 | 96906 | 22 | 26 |
| MS21044-N06 | 96906 | 2 | 2 |
| MS21044-N06 | 96906 | 25 | 37 |
| MS21044-N06 | 96906 | 25 | 53 |
| MS21044-N06 | 96906 | 82 | 167 |
| MS21044-N06 | 96906 | 83 | 3 |
| MS21044-N14 | 96906 | 51 | 3 |
| MS21044-N3 | 96906 | 20 | 3 |
| MS21318-23 | 96906 | 52 | 1 |
| MS21333-101 | 96906 | 11 | 29 |
| MS21333-102 | 96906 | 11 | 93 |
| MS21333-103 | 96906 | 11 | 33 |
| MS21333-105 | 96906 | 11 | 73 |
| MS21333-105 | 96906 | 31 | 14 |
| MS21333-107 | 96906 | 31 | 33 |
| MS21333-113 | 96906 | 11 | 41 |
| MS21333-114 | 96906 | 37 | 3 |
| MS21333-121 | 96906 | 11 | 96 |
| MS21333-121 | 96906 | 82 | 2 |
| MS21333-126 | 96906 | 82 | 39 |
| MS21333-67 | 96906 | 27 | 7 |
| MS21333-71 | 96906 | 19 | 35 |
| MS21333-75 | 96906 | 19 | 33 |
| MS21333-77 | 96906 | 33 | 35 |
| MS21333-97 | 96906 | 36 | 25 |
| MS21333-99 | 96906 | 37 | 55 |
| MS24087-8 | 96906 | 83 | 25 |
| MS24166-D1 | 96906 | 23 | 20 |
| MS24587-16 | 96906 | 81 | 15 |
| MS24587-16 | 96906 | 81 | 17 |
| MS24587-4 | 96906 | 37 | 13 |
| MS24587-4 | 96906 | 37 | 22 |
| MS24587-4 | 96906 | 37 | 26 |
| MS24587-4 | 96906 | 37 | 30 |
| MS24587-4 | 96906 | 37 | 33 |
| MS24587-4 | 96906 | 37 | 40 |
| MS24587-4 | 96906 | 82 | 59 |
| MS24587-5 | 96906 | 37 | 49 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No | Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|---|---|---|---|
| MS24587-5 | 96906 | 81 | 26 | MS25036-134 | 96906 | 52 | 99 |
| MS24587-6 | 96906 | 34 | 8 | MS25036-140 | 96906 | 33 | 47 |
| MS24587-6 | 96906 | 37 | 16 | MS25036-140 | 96906 | 33 | 51 |
| MS24587-6 | 96906 | 37 | 19 | MS25036-140 | 96906 | 33 | 55 |
| MS24587-6 | 96906 | 37 | 43 | M525036-140 | 96906 | 33 | 59 |
| MS24587-6 | 96906 | 37 | 46 | MS25036-140 | 96906 | 33 | 63 |
| MS24587-6 | 96906 | 37 | 52 | MS25036-140 | 96906 | 33 | 67 |
| MS24587-8 | 96906 | 82 | 41 | MS25036-141 | 96906 | 33 | 44 |
| MS24587-8 | 96906 | 82 | 51 | MS25036-141 | 96906 | 33 | 60 |
| MS24587-8 | 96906 | 82 | 66 | MS25036-141 | 96906 | 33 | 64 |
| MS24587-8 | 96906 | 83 | 19 | MS25036-141 | 96906 | 33 | 68 |
| MS24587-8 | 96906 | 83 | 33 | MS25036-149 | 96906 | 12 | 16 |
| MS24587-8 | 96906 | 83 | 37 | MS25036-149 | 96906 | 19 | 39 |
| MS24630-36 | 96906 | 82 | 153 | MS25036-150 | 96906 | 19 | 42 |
| MS24665-283 | 96906 | 7 | 17 | MS25036-153 | 96906 | 11 | 19 |
| MS24680-6 | 96906 | 34 | 32 | MS25036-153 | 96906 | 19 | 40 |
| MS25036-101 | 96906 | 25 | 4 | MS25036-153 | 96906 | 33 | 27 |
| MS25036-102 | 96906 | 19 | 38 | MS25036-153 | 96906 | 82 | 26 |
| MS25036-102 | 96906 | 22 | 27 | MS25036-153 | 96906 | 83 | 96 |
| MS25036-102 | 96906 | 27 | 16 | MS25036-153 | 96906 | 83 | 118 |
| MS25036-102 | 96906 | 83 | 132 | MS25036-154 | 96906 | 19 | 44 |
| MS25036-103 | 96906 | 19 | 45 | MS25036-154 | 96906 | 38 | 6 |
| MS25036-106 | 96906 | 11 | 21 | MS25036-154 | 96906 | 52 | 43 |
| MS25036-106 | 96906 | 19 | 41 | MS25036-154 | 96906 | 52 | 49 |
| MS25036-106 | 96906 | 22 | 12 | MS25036-154 | 96906 | 52 | 55 |
| MS25036-106 | 96906 | 23 | 16 | MS25036-155 | 96906 | 33 | 24 |
| MS25036-106 | 96906 | 23 | 50 | MS25036-156 | 96906 | 15 | 8 |
| MS25036-106 | 96906 | 24 | 25 | MS25036-156 | 96906 | 30 | 8 |
| MS25036-106 | 96906 | 27 | 18 | MS25036-156 | 96906 | 82 | 27 |
| MS25036-106 | 96906 | 31 | 11 | MS25036-156 | 96906 | 83 | 99 |
| MS25036-106 | 96906 | 33 | 25 | MS25036-156 | 96906 | 83 | 119 |
| MS25036-106 | 96906 | 82 | 29 | MS25036-157 | 96906 | 24 | 52 |
| MS25036-106 | 96906 | 83 | 78 | MS25036-157 | 96906 | 52 | 66 |
| MS25036-106 | 96906 | 83 | 98 | MS25036-158 | 96906 | 11 | 20 |
| MS25036-106 | 96906 | 83 | 117 | MS25036-158 | 96906 | 33 | 26 |
| MS25036-108 | 96906 | 11 | 18 | MS25043-160 | 96906 | 83 | 91 |
| MS25036-108 | 96906 | 19 | 43 | MS25043-180 | 96906 | 23 | 45 |
| MS25036-108 | 96906 | 23 | 53 | MS25043-220 | 96906 | 23 | 44 |
| MS25036-108 | 96906 | 24 | 26 | MS25068-23 | 96906 | 19 | 22 |
| MS25036-108 | 96906 | 33 | 23 | MS25201-6 | 96906 | 19 | 28 |
| MS25036-108 | 96906 | 38 | 7 | MS25224-1 | 96906 | 19 | 21 |
| MS25036-110 | 96906 | 33 | 22 | MS25231-313 | 96906 | 19 | 20 |
| M525036-111 | 96906 | 23 | 51 | MS25231-313 | 96906 | 82 | 23 |
| MS25036-111 | 96906 | 23 | 54 | MS25237-327 | 96906 | 18 | 19 |
| MS25036-111 | 96906 | 82 | 30 | MS25244-15 | 96906 | 30 | 19 |
| MS25036-112 | 96906 | 83 | 77 | MS25244-15 | 96906 | 82 | 28 |
| MS25036-132 | 96906 | 11 | 71 | MS25244-7-1/2 | 96906 | 15 | 12 |
| MS25036-133 | 96906 | 29 | 9 | MS25251-12 | 96906 | 11 | 10 |
| MS25036-134 | 96906 | 11 | 70 | MS25251-12 | 96906 | 33 | 18 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| MS25251-12 | 96906 | 83 | 81 |
| MS25251-16 | 96906 | 11 | 3 |
| MS25251-16 | 96906 | 11 | 11 |
| MS25251-16 | 96906 | 11 | 76 |
| MS25251-16 | 96906 | 11 | 83 |
| MS25251-16 | 96906 | 33 | 9 |
| MS25251-16 | 96906 | 33 | 17 |
| MS25251-16 | 96906 | 33 | 74 |
| MS25251-16 | 96906 | 83 | 82 |
| MS25331-2 | 96906 | 19 | 19 |
| MS25331-4 | 96906 | 19 | 27 |
| MS25331-4 | 96906 | 82 | 22 |
| MS25440-5 | 96906 | 52 | 93 |
| MS27142-3 | 96906 | 83 | 49 |
| MS27144-2 | 96906 | 11 | 14 |
| MS27144-2 | 96906 | 83 | 80 |
| MS27183-10 | 96906 | 1 | 8 |
| MS27183-10 | 96906 | 3 | 8 |
| MS27183-10 | 96906 | 4 | 13 |
| MS27183-10 | 96906 | 5 | 3 |
| MS27183-10 | 96906 | 5 | 14 |
| MS27183-10 | 96906 | 6 | 3 |
| MS27183-10 | 96906 | 8 | 8 |
| MS27183-10 | 96906 | 12 | 2 |
| MS27183-10 | 96906 | 20 | 18 |
| MS27183-10 | 96906 | 26 | 5 |
| MS27183-10 | 96906 | 27 | 34 |
| MS27183-10 | 96906 | 34 | 16 |
| MS27183-10 | 96906 | 35 | 6 |
| MS27183-10 | 96906 | 35 | 22 |
| MS27183-10 | 96906 | 43 | 13 |
| MS27183-10 | 96906 | 44 | 43 |
| MS27183-10 | 96906 | 53 | 13 |
| MS27183-10 | 96906 | 81 | 6 |
| MS27183-10 | 96906 | 82 | 83 |
| MS27183-10 | 96906 | 83 | 44 |
| MS27183-12 | 96906 | 1 | 43 |
| MS27183-12 | 96906 | 4 | 19 |
| MS27183-12 | 96906 | 7 | 2 |
| MS27183-12 | 96906 | 27 | 2 |
| MS27183-12 | 96906 | 43 | 8 |
| MS27183-12 | 96906 | 50 | 3 |
| MS27183-12 | 96906 | 81 | 2 |
| MS27183-14 | 96906 | 3 | 16 |
| MS27183-14 | 96906 | 11 | 36 |
| MS27183-14 | 96906 | 26 | 2 |
| MS27183-14 | 96906 | 29 | 3 |
| MS27183-14 | 96906 | 33 | 2 |
| MS27183-14 | 96906 | 52 | 39 |
| MS27183-14 | 96906 | 53 | 5 |
| MS27183-14 | 96906 | 81 | 40 |
| MS27183-14 | 96906 | 81 | 50 |
| MS27183-16 | 96906 | 37 | 36 |
| MS27183-14 | 96906 | 61 | 3 |
| MS27183-18 | 96906 | 49 | 20 |
| MS9320-18 | 96906 | 51 | 2 |
| MS27183-11 | 96906 |  |  |
| MS27183-41 | 96906 | 25 | 11 |
| MS27183-41 | 96906 | 32 | 20 |
| MS27183-42 | 96906 | 1 | 21 |
| MS27183-42 | 96906 | 24 | 8 |
| MS27183-5 | 96906 | 2 | 3 |
| MS27183-5 | 96906 | 23 | 25 |
| MS27183-5 | 96906 | 24 | 36 |
| MS27183-5 | 96906 | 25 | 9 |
| MS27183-5 | 96906 | 43 | 16 |
| MS27183-5 | 96906 | 82 | 166 |
| MS27183-5 | 96906 | 83 | 2 |
| MS27183-6 | 96906 | 32 | 7 |
| MS27183-7 | 96906 | 19 | 70 |
| MS27183-7 | 96906 | 23 | 5 |
| MS27183-7 | 96906 | 52 | 61 |
| MS27183-7 | 96906 | 83 | 126 |
| MS27183-8 | 96906 | 8 | 3 |
| MS27183-8 | 96906 | 19 | 58 |
| M527183-8 | 96906 | 31 | 2 |
| M527183-9 | 96906 | 20 | 2 |
| MS27401-2 | 96906 | 27 | 2 |
| MS27769-2 | 96906 | 43 | 34 |
| MS28741-16-0190 | 96906 | 81 | 16 |
| MS28741-4-0300 | 96906 | 37 | 39 |
| MS28741-4-0334 | 96906 | 37 | 25 |
| MS28741-4-0424 | 96906 | 37 | 29 |
| MS28741-4-0454 | 96906 | 37 | 21 |
| MS28741-4-0524 | 96906 | 37 | 32 |
| MS28741-4-0720 | 96906 | 37 | 12 |
| MS28741-4-0740 | 96906 | 82 | 58 |
| MS28741-5-0124 | 96906 | 49 | 1 |
| MS28741-5-0234 | 96906 | 37 | 48 |
| MS28741-5-2992 | 96906 | 81 | 24 |
| MS28741-6-0140 | 96906 | 34 | 7 |
| MS28741-6-0204 | 96906 | 37 | 51 |
| MS28741-6-0250 | 96906 | 37 | 45 |
| MS28741-6-0284 | 96906 | 37 | 42 |
| MS28741-6-0410 | 96906 | 37 | 15 |
| MS28741-6-0580 | 96906 | 37 | 18 |
| MS28741-8-0104 | 96906 | 83 | 32 |
| MS28741-8-0190 | 96906 | 83 | 24 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No | Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|---|---|---|---|
| MS28741-8-0300 | 96906 | 80 | 40 | MS3106R20-29S | 96906 | 33 | 20 |
| MS28741-8-0320 | 96906 | 82 | 36 | MS3106R20-29S | 96906 | 33 | 73 |
| MS28741-8-0450 | 96906 | 82 | 50 | MS3106R22-14S | 96906 | 33 | 21 |
| MS28741-8-0464 | 96906 | 82 | 65 | MS3106R28-12P | 96906 | 11 | 75 |
| MS28741-8-0464 | 96906 | 83 | 18 | M53106R28-12S | 96906 | 11 | 77 |
| MS28741-8-0464 | 96906 | 82 | 65 | MS3106R28-9P | 96906 | 83 | 83 |
| MS28775-007 | 96906 | 40 | 28 | MS3106R32-7S | 96906 | 33 | 16 |
| MS30347-6 | 96906 | 29 | 14 | MS3106R36-7P | 96906 | 33 | 10 |
| MS3057-12A | 96906 | 33 | 76 | MS3106R36-7S | 96906 | 11 | 9 |
| MS3101R10SL-4P | 96906 | 36 | 24 | MS3106R36-75 | 96906 | 33 | 8 |
| MS3102R14-6S | 96906 | 23 | 57 | MS3108R20-29S | 96906 | 33 | 75 |
| MS3102R14S-6P | 96906 | 24 | 30 | MS3367-1-9 | 96906 | 11 | 6 |
| MS3102R16-10P | 96906 | 12 | 7 | MS3367-1-9 | 96906 | 11 | 25 |
| MS3102R16-10P | 96906 | 15 | 11 | MS3367-1-9 | 96906 | 11 | 78 |
| MS3102R16-10P | 96906 | 83 | 103 | MS3367-1-9 | 96906 | 18 | 9 |
| MS3102R18-1P | 96906 | 12 | 8 | MS3367-1-9 | 96906 | 19 | 37 |
| M53102R18-1S | 96906 | 25 | 47 | MS3367-1-9 | 96906 | 23 | 10 |
| MS3102R18-11P | 96906 | 82 | 18 | MS3367-1-9 | 96906 | 23 | 48 |
| MS3102R18-11S | 96906 | 23 | 56 | M33367-1-9 | 96906 | 24 | 23 |
| MS3102R18-11S | 96906 | 82 | 19 | MS3367-1-9 | 96906 | 25 | 5 |
| MS3102R18-5P | 96906 | 30 | 11 | MS3367-1-9 | 96906 | 33 | 11 |
| MS3102R20-27S | 96906 | 23 | 63 | MS3367-1-9 | 96906 | 33 | 30 |
| MS3102R20-29P | 96906 | 22 | 14 | MS3367-1-9 | 96906 | 33 | 41 |
| MS3102R20-29P | 96906 | 27 | 27 | MS3367-1-9 | 96906 | 33 | 79 |
| MS3102R22-14P | 96906 | 24 | 29 | MS3367-1-9 | 96906 | 82 | 6 |
| MS3102R22-19S | 96906 | 23 | 62 | MS3367-1-9 | 96906 | 82 | 12 |
| MS3102R28-12P | 96906 | 22 | 15 | MS3367-2-9 | 96906 | 32 | 13 |
| MS3102R28-12S | 96906 | 23 | 60 | MS3367-4-9 | 96906 | 11 | 24 |
| MS3102R28-9S | 96906 | 83 | 101 | MS3367-4-9 | 96906 | 22 | 11 |
| MS3102R32-7P | 96906 | 23 | 59 | MS3367-4-9 | 96906 | 23 | 49 |
| MS3102R36-7P | 96906 | 19 | 46 | MS3367-4-9 | 96906 | 24 | 24 |
| MS3102R36-7P | 96906 | 23 | 61 | MS3367-4-9 | 96906 | 25 | 45 |
| MS3102R36-75 | 96906 | 23 | 58 | MS3367-4-9 | 96906 | 27 | 26 |
| MS3106F18-1S | 96906 | 11 | 13 | MS3367-4-9 | 96906 | 30 | 7 |
| MS3106R14S-2S | 96906 | 11 | 16 | MS3367-4-9 | 96906 | 33 | 31 |
| MS3106R14S-6P | 96906 | 11 | 82 | MS3367-4-9 | 96906 | 83 | 76 |
| MS3106R14S-6S | 96906 | 11 | 84 | MS3367-4-9 | 96906 | 83 | 95 |
| MS3106R16-10S | 96906 | 11 | 12 | MS3367-4-9 | 96906 | 83 | 115 |
| MS3106R16-10S | 96906 | 11 | 89 | MS3367-5-9 | 96906 | 18 | 11 |
| MS3106R16-10S | 96906 | 82 | 10 | MS3368-1-9A | 96906 | 11 | 7 |
| MS3106R18 1P | 96906 | 24 | 28 | MS3368-1-9A | 96906 | 11 | 26 |
| MS3106R18-11P | 96906 | 82 | 5 | MS3368-1-9A | 96906 | 11 | 91 |
| M53106R18-11S | 96906 | 82 | 4 | MS3368-1-9A | 96906 | 23 | 55 |
| MS3106R18-11S | 96906 | 82 | 11 | MS3368-1-9A | 96906 | 33 | 13 |
| MS3106R18-5P | 96906 | 11 | 17 | MS3368-1-9A | 96906 | 33 | 32 |
| MS3106R18-5P | 96906 | 11 | 18 | MS3420-12 | 96906 | 33 | 77 |
| MS3106R18-5S | 96906 | 33 | 19 | MS35000-3 | 96906 | 7 | 4 |
| M53106R20-27P | 96906 | 11 | 2 | MS35058-22 | 96906 | 19 | 26 |
| MS3106R20-27S | 96906 | 11 | 4 | MS35058-30 | 96906 | 19 | 30 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No | Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|---|---|---|---|
| MS35059-22 | 96906 | 82 | 31 | MS35338-44 | 96906 | 20 | 9 |
| MS35059-23 | 96906 | 19 | 25 | MS35338-44 | 96906 | 21 | 2 |
| MS35059-26 | 96906 | 18 | 15 | MS35338-44 | 96906 | 30 | 2 |
| MS3506-1 | 96906 | 8 | 4 | MS35338-44 | 96906 | 36 | 10 |
| MS35190-236 | 96906 | 30 | 16 | MS35338-44 | 96906 | 43 | 12 |
| MS35198-42 | 96906 | 19 | 69 | MS35338-44 | 96906 | 43 | 19 |
| MS35206-25 | 96906 | 19 | 34 | MS35338-44 | 96906 | 43 | 24 |
| MS35206-204 | 96906 | 83 | 133 | MS35338-44 | 96906 | 44 | 45 |
| MS35206-217 | 96906 | 82 | 16 | MS35338-44 | 96906 | 53 | 12 |
| MS35206-225 | 96906 | 18 | 23 | MS35338-44 | 96906 | 83 | 10 |
| MS35206-225 | 96906 | 19 | 63 | MS35338-44 | 96906 | 83 | 45 |
| MS35206-225 | 96906 | 23 | 27 | MS35338-45 | 96906 | 1 | 42 |
| M535206-230 | 96906 | 24 | 38 | MS35338-45 | 96906 | 3 | 2 |
| MS35206-234 | 96906 | 23 | 24 | MS35338-45 | 96906 | 4 | 18 |
| MS35206-245 | 96906 | 4 | 5 | MS3533d-45 | 96906 | 7 | 6 |
| MS35206-245 | 96906 | 19 | 31 | MS35338-45 | 96906 | 9 | 2 |
| MS35206-247 | 96906 | 19 | 52 | MS35338-45 | 96906 | 28 | 3 |
| MS35206-252 | 96906 | 31 | 8 | MS35338-45 | 96906 | 44 | 50 |
| MS35206-268 | 96906 | 19 | 57 | MS35338-45 | 96906 | 50 | 2 |
| MS35207-267 | 96906 | 20 | 1 | MS35338-45 | 96906 | 52 | 73 |
| MS35265-15 | 96906 | 23 | 25 | MS35338-45 | 96906 | 52 | 92 |
| MS35265-28 | 96906 | 32 | 16 | MS35338-45 | 96906 | 61 | 25 |
| MS35265-41 | 96906 | 32 | 9 | MS35338-45 | 96906 | 73 | 2 |
| MS35265-55 | 96906 | 32 | 18 | MS35338-46 | 96906 | 11 | 98 |
| MS35303-78 | 96906 | 65 | 5 | MS35338-46 | 96906 | 29 | 2 |
| MS35335-33 | 96906 | 52 | 4 | MS35338-46 | 96906 | 29 | 7 |
| MS35335-33 | 96906 | 52 | 10 | MS35338-46 | 96906 | 33 | 5 |
| MS35335-33 | 96906 | 52 | 15 | MS35338-46 | 96906 | 34 | 24 |
| MS35335-33 | 96906 | 52 | 38 | MS35338-46 | 96906 | 37 | 10 |
| MS35338-105 | 96906 | 26 | 23 | MS35338 46 | 96906 | 44 | 5 |
| MS35338-108 | 96906 | 28 | 12 | MS35338-46 | 96906 | 59 | 2 |
| MS35338-33 | 96906 | 34 | 28 | M535338-48 | 96906 | 37 | 7 |
| MS35338-39 | 96906 | 24 | 43 | MS35338-48 | 96906 | 43 | 3 |
| MS35338 39 | 96906 | 83 | 135 | MS35338-48 | 96906 | 51 | 5 |
| MS35338 41 | 96906 | 18 | 24 | MS35338-48 | 96906 | 52 | 12 |
| MS35338-41 | 96906 | 19 | 64 | MS35338-48 | 96906 | 67 | 20 |
| MS35338-41 | 96906 | 23 | 28 | MS35338-50 | 96906 | 11 | 31 |
| MS35338-41 | 96906 | 32 | 6 | MS35338-50 | 96906 | 16 | 53 |
| MS35338-42 | 96906 | 24 | 52 | MS35338-50 | 96906 | 62 | 9 |
| MS35338-42 | 96906 | 32 | 10 | MS35338-50 | 96906 | 81 | 36 |
| MS35338-42 | 96906 | 40 | 23 | MS35338-6 | 96906 | 51 | 12 |
| MS35338-44 | 96906 | 1 | 40 | MS35426-14 | 96906 | 53 | 11 |
| MS35338-44 | 96906 | 3 | 12 | MS35431-8 | 96906 | 24 | 45 |
| MS35338-44 | 96906 | 4 | 2 | MS35489-6 | 96906 | 3 | 19 |
| MS35338-44 | 96906 | 5 | 2 | MS35490-14 | 96906 | 83 | 30 |
| MS35338-44 | 96906 | 6 | 2 | M535645-1 | 96906 | 42 | 5 |
| MS35338-44 | 96906 | 8 | 7 | MS35649-222 | 96906 | 83 | 134 |
| MS35338-44 | 96906 | 15 | 2 | MS35649-262 | 96906 | 32 | 5 |
| MS35338-44 | 96906 | 19 | 2 | MS35649-262 | 96906 | 83 | 129 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| MS35649-282 | 96906 | 25 | 51 |
| MS35649-282 | 96906 | 32 | 19 |
| MS35650-302 | 96906 | 20 | 5 |
| MS35650-302 | 96906 | 24 | 42 |
| MS35650-3252 | 96906 | 52 | 42 |
| MS35650-3252 | 96906 | 52 | 48 |
| MS35650-3252 | 96906 | 52 | 54 |
| MS35650-3394 | 96906 | 18 | 14 |
| MS35670-2A | 96906 | 59 | 9 |
| MS35691-57 | 96906 | 81 | 34 |
| MS35756-13 | 96906 | 69 | 19 |
| MS35756-33 | 96906 | 57 | 77 |
| MS35782-4 | 96906 | 35 | 10 |
| MS35802-3 | 96906 | 61 | 55 |
| MS35840-1 | 96906 | 44 | 57 |
| MS35842-10 | 96906 | 44 | 55 |
| MS35842-11 | 96906 | 44 | 35 |
| MS35842-14 | 96906 | 44 | 1 |
| MS35842-14 | 96906 | 83 | 46 |
| MS35842-16 | 96906 | 42 | 1 |
| MS35842-16 | 96906 | 43 | 10 |
| MS39230-3 | 96906 | 46 | 16 |
| MS45 904-68 | 96906 | 34 | 18 |
| MS45904-72 | 96906 | 81 | 47 |
| MS45904-76 | 96906 | 34 | 43 |
| MS500040-2 | 86348 | 21 | 3 |
| MS51021-83 | 96906 | 52 | 35 |
| MS51066C46-2 | 96906 | 48 | 1 |
| MS51500A6 | 96906 | 34 | 13 |
| MS51500A6 | 96906 | 49 | 4 |
| MS51503A6 | 96906 | 38 | 10 |
| MS51503A6 | 30327 | 34 | 12 |
| MS51503B5-4 | 96906 | 38 | 11 |
| MS51527A6 | 96906 | 35 | 2 |
| MS51825-7 | 96906 | 55 | 45 |
| MS51884-7ZH | 46522 | 82 | 157 |
| MS51922-1 | 96906 | 27 | 35 |
| MS51922-5 | 96906 | 53 | 16 |
| MS51953-101 | 96906 | 67 | 2 |
| MS51953-101 | 96906 | 83 | 140 |
| MS51953-121 | 96906 | 83 | 29 |
| MS51953-36 | 96906 | 38 | 18 |
| MS51953-49 | 96906 | 81 | 12 |
| MS51953-73 | 96906 | 44 | 39 |
| MS51953-73 | 96906 | 82 | 57 |
| MS51957-54 | 96906 | 25 | 50 |
| MS51963-47 | 96906 | 21 | 14 |
| MS51963-73 | 96906 | 44 | 39 |
| MS51963-73 | 96906 | 82 | 57 |
| MS51967-14 | 96906 | 43 | 2 |
| M551967-2 | 96906 | 8 | 6 |
| MS51967-2 | 96906 | 36 | 9 |
| MS51967-2 | 96906 | 52 | 9 |
| MS51967-2 | 96906 | 52 | 37 |
| MS51967-20 | 96906 | 52 | 113 |
| MS51967-5 | 96906 | 52 | 91 |
| MS51967-5 | 96906 | 81 | 48 |
| MS51967-6 | 96906 | 7 | 5 |
| MS51967-8 | 96906 | 29 | 6 |
| MS52149-1 | 96906 | 7 | 4 |
| MS43011-1 | 96906 | 16 | 15 |
| MS75004-1 | 96906 | 11 | 43 |
| MS75004-1 | 96906 | 11 | 55 |
| MS75004-2 | 96906 | 11 | 44 |
| MS75004-2 | 96906 | 11 | 50 |
| MS75009-2 | 96906 | 24 | 53 |
| MS75058-1 | 96906 | 8 | 17 |
| MS77066-2 | 96906 | 25 | 38 |
| MS87006-13 | 96906 | 1 | 3 |
| MS87006-13 | 96906 | 19 | 72 |
| MS87006-33 | 96906 | 36 | 38 |
| MS87006-33 | 96906 | 7 | 8 |
| MS87006-33 | 96906 | 38 | 15 |
| MS90725-10 | 96906 | 8 | 10 |
| MS90725-10 | 96906 | 12 | 1 |
| MS90725-10 | 96906 | 20 | 20 |
| MS90725-109 | 96906 | 37 | 6 |
| MS90725-113 | 96906 | 51 | 4 |
| MS90725-113 | 96906 | 52 | 11 |
| MS90725-114 | 96906 | 49 | 22 |
| MS90725-116 | 96906 | 43 | 44 |
| MS90725-116 | 96906 | 49 | 19 |
| MS90725-156 | 96906 | 11 | 30 |
| MS90725-163 | 96906 | 51 | 6 |
| MS90725-163 | 96906 | 81 | 35 |
| MS90725-187 | 96906 | 81 | 33 |
| MS90725-219 | 96906 | 51 | 1 |
| MS90725-3 | 96906 | 1 | 46 |
| MS90725-3 | 96906 | 37 | 1 |
| MS90725-3 | 96906 | 43 | 11 |
| MS90725-3 | 96906 | 52 | 3 |
| MS90725-3 | 96906 | 52 | 14 |
| MS90725-5 | 96906 | 37 | 4 |
| MS90725-32 | 96906 | 3 | 1 |
| MS90725-32 | 96906 | 4 | 17 |
| MS90725-32 | 96906 | 9 | 1 |
| MS90725-32 | 96906 | 27 | 1 |
| MS90725-32 | 96906 | 43 | 6 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No | Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|---|---|---|---|
| MS90725-32 | 96906 | 50 | 1 | MS90725-62 | 96906 | 29 | 1 |
| MS90725-33 | 96906 | 7 | 13 | MS90725-62 | 96906 | 33 | 1 |
| MS90725-34 | 96906 | 5 | 18 | MS90725-62 | 96906 | 81 | 39 |
| MS90725-34 | 96906 | 7 | 21 | MS90725-63 | 96906 | 62 | 8 |
| MS90725-34 | 96906 | 52 | 72 | MS90725-64 | 96906 | 33 | 4 |
| MS90725-34 | 96906 | 81 | 1 | MS90725-65 | 96906 | 55 | 10 |
| MS90725-35 | 96906 | 1 | 41 | MS90725-68 | 96906 | 44 | 4 |
| MS90725-35 | 96906 | 73 | 1 | MS90725-68 | 96906 | 82 | 1 |
| MS90725-38 | 96906 | 7 | 11 | MS90725-7 | 96906 | 5 | 5 |
| MS90725-43 | 96906 | 53 | 1 | MS90725-7 | 96906 | 44 | 51 |
| MS90725-5 | 96906 | 1 | 18 | MS90725-7 | 96906 | 81 | 5 |
| MS90725-5 | 96906 | 3 | 7 | MS90725-70 | 96906 | 59 | 1 |
| MS90725-5 | 96906 | 4 | 1 | MS90725-8 | 96906 | 3 | 11 |
| MS90725-5 | 96906 | 5 | 12 | MS90725-8 | 96906 | 11 | 34 |
| MS90725-5 | 96906 | 6 | 1 | MS90725-8 | 96906 | 19 | 3 |
| MS90725-5 | 96906 | 15 | 1 | MS90725-8 | 96906 | 20 | 16 |
| MS90725-5 | 96906 | 19 | 1 | MS90725-8 | 96906 | 26 | 4 |
| MS90725-5 | 96906 | 22 | 1 | MS90725-8 | 96906 | 44 | 41 |
| MS90725-5 | 96906 | 30 | 1 | MS90725-8 | 96906 | 57 | 6 |
| MS90725-5 | 96906 | 36 | 8 | MS90725-8 | 96906 | 81 | 27 |
| MS90725-5 | 96906 | 43 | 23 | MS90725-8 | 96906 | 82 | 80 |
| MS90725-57 | 96906 | 51 | 14 | MS90725-8 | 96906 | 83 | 5 |
| MS90725-58 | 96906 | 11 | 97 | MS90725-64 | 96906 | 46 | 9 |
| MS90725-58 | 96906 | 29 | 5 | MS90725-66 | 96906 | 46 | 1 |
| MS90725-58 | 96906 | 37 | 9 | MS90725-80 | 96906 | 53 | 3 |
| MS90725-58 | 96906 | 51 | 11 | MS90726-115 | 96906 | 52 | 27 |
| MS90725-59 | 96906 | 34 | 23 | MS90727-90 | 96906 | 34 | 27 |
| MS90725-6 | 96906 | 1 | 7 | MS90728-5 | 96906 | 17 | 2 |
| MS90725-6 | 96906 | 3 | 13 | MS90728-12 | 96906 | 52 | 8 |
| MS90725-6 | 96906 | 4 | 11 | MS90728-17 | 96906 | 57 | 39 |
| MS90725-6 | 96906 | 5 | 1 | MS90728-33 | 96906 | 59 | 13 |
| MS90725-6 | 96906 | 6 | 5 | MS90728-34 | 96906 | 59 | 10 |
| MS90725-6 | 96906 | 8 | 5 | MS90728-38 | 96906 | 7 | 11 |
| MS90725-6 | 96906 | 11 | 27 | MS907728-40 | 96906 | 69 | 26 |
| MS90725-6 | 96906 | 11 | 94 | MS90728-75 | 96906 | 45 | 3 |
| MS90725-6 | 96906 | 20 | 8 | MS90728-113 | 96906 | 65 | 20 |
| MS90725-6 | 96906 | 23 | 1 | MS90728-114 | 96906 | 4 | 1 |
| MS90725-6 | 96906 | 24 | 1 | MS90728-52 | 96906 | 57 | 22 |
| MS90725-6 | 96906 | 34 | 15 | MS90908-1 | 96906 | 42 | 6 |
| MS90725-6 | 96906 | 36 | 4 | MS91528-2P4B | 96906 | 19 | 17 |
| MS90725-6 | 96906 | 36 | 20 | MS91586-10 | 96906 | 23 | 19 |
| MS90725-6 | 96906 | 43 | 18 | MU54 | 19728 | 16 | 39 |
| MS90725-6 | 96906 | 44 | 49 | MU54 | 19728 | 16 | 39 |
| MS90725-6 | 96906 | 49 | 5 | M12883/41-01 | 81349 | 27 | 15 |
| MS90725-6 | 96906 | 82 | 82 | M1401 | 14926 | 52 | 89 |
| MS90725-6 | 96906 | 83 | 43 | M16878/2-20-9 | 81349 | 32 | 15 |
| MS90725-60 | 96906 | 26 | 1 | M16878/2-22-2 | 81349 | 25 | 63 |
| MS90725-60 | 96906 | 81 | 49 | M16878/2-22-4 | 81349 | 25 | 64 |
| MS90725-62 | 96906 | 3 | 14 | M16878/2-22-5 | 81349 | 25 | 65 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No | Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|---|---|---|---|
| M16878/2-22-9 | 81349 | 25 | 49 | M5086/2-12-9 | 81349 | 82 | 14 |
| M23053/5-105-0 | 81349 | 18 | 8 | M5086/2-12-9 | 81349 | 82 | 24 |
| M23053/5-105-0 | 81349 | 18 | 30 | M5086/2-12-9 | 81349 | 83 | 84 |
| M23053/5-105-0 | 81349 | 19 | 47 | M5086/2-12-9 | 81349 | 83 | 105 |
| M23053/5-105-0 | 81349 | 19 | 51 | M5086/2-12-9 | 81349 | 83 | 121 |
| M23053/5-106-0 | 81349 | 19 | 50 | M5086/2-14-9 | 81349 | 52 | 45 |
| M23053/5-110-0 | 81349 | 8 | 14 | M5086/2-14-9 | 81349 | 52 | 51 |
| M23053/5-110-0 | 81349 | 11 | 46 | M5086/2-14-9 | 81349 | 52 | 57 |
| M23053/5-110-0 | 81349 | 11 | 52 | M5086/2-14-9 | 81349 | BULK | 5 |
| M23053/5-110-0 | 81349 | 11 | 60 | M5086/2-16-9 | 81349 | 11 | 5 |
| M23053/5-110-2 | 81349 | 8 | 15 | M5086/2-16-9 | 81349 | 11 | 23 |
| M23053/5-110-2 | 81349 | 11 | 56 | M5086/2-16-9 | 81349 | 11 | 79 |
| M23053/5-110-2 | 81349 | 11 | 65 | M5086/2-16-9 | 81349 | 11 | 86 |
| M23053/5-203C | 81349 | 32 | 14 | M5086/2-16-9 | 81349 | 19 | 49 |
| M30002-83 | 46522 | 82 | 107 | M5086/2-16-9 | 81349 | 22 | 17 |
| M39006/02-1268 | 81349 | 19 | 60 | M5086/2-16-9 | 81349 | 23 | 17 |
| M39006/02-1300 | 81349 | 18 | 13 | M5086/2-16-9 | 81349 | 23 | 67 |
| M39006/09-8674 | 81349 | 25 | 21 | M5086/2-16-9 | 81349 | 24 | 32 |
| M39006/09-8728 | 81349 | 25 | 28 | M5086/2-16-9 | 81349 | 27 | 17 |
| M39006/09-8731 | 81349 | 25 | 18 | M5086/2-16-9 | 81349 | 27 | 30 |
| M39006/09-8734 | 81349 | 25 | 23 | M5086/2-16-9 | 81349 | 33 | 12 |
| M39022/01-1661 | 81349 | 18 | 28 | M5086/2-16-9 | 81349 | 33 | 28 |
| M43436/1-1 | 81349 | 25 | 46 | M5086/2-16-9 | 81349 | 33 | 78 |
| M43436/1-1 | 81349 | 82 | 7 | M5086/2-16-9 | 81349 | 37 | 8 |
| M43436/1-2 | 81349 | 11 | 91 | M5086/2-16-9 | 81349 | 82 | 25 |
| M43436/1-2 | 81349 | 24 | 27 | M5086/2-16-9 | 81349 | 83 | 50 |
| M43436/1-2 | 81349 | 82 | 13 | M5086/2-16-9 | 81349 | 83 | 85 |
| M43436/1-2 | 81349 | 83 | 79 | M5086/2-16-9 | 81349 | 83 | 106 |
| M43436/1-2 | 81349 | 83 | 120 | M5086/2-16-9 | 81349 | 83 | 122 |
| M43436/1 3 | 81349 | 22 | 13 | M5086/2-18-9 | 81349 | 19 | 48 |
| M43436/1-3 | 81349 | 83 | 100 | M5086/2-18-9 | 81349 | 22 | 28 |
| M43436/1-4 | 81349 | 11 | 26 | M5086/2-18-9 | 81349 | 27 | 19 |
| M43436/1-4 | 81349 | 23 | 55 | M5501/8-F6 | 81349 | 81 | 22 |
| M43436/1-4 | 81349 | 33 | 13 | M5757/23-003 | 81349 | 12 | 10 |
| M5086/2-01-9 | 81349 | 11 | 72 | M5757/23-003 | 81349 | 18 | 25 |
| M5086/2-01-9 | 81349 | 29 | 10 | M5757/23-003 | 81349 | 19 | 65 |
| M5086/2-04-9 | 81349 | 33 | 45 | M5757/23-003 | 81349 | 23 | 29 |
| M5086/2-04-9 | 81349 | 33 | 49 | M5757/23-003 | 81349 | 27 | 10 |
| M5086/2-04-9 | 81349 | 33 | 53 | M8372/23R1104N | 81349 | 11 | 15 |
| M5086/2-04-9 | 81349 | 33 | 57 | NA5549P8 | 80205 | 32 | 21 |
| M5086/2-04-9 | 81349 | 33 | 61 | NR1034A | 04713 | 32 | 36 |
| M5086/2-04-9 | 81349 | 33 | 65 | PC3 | 58553 | 46 | 23 |
| M5086/2-04-9 | 81349 | 33 | 69 | PC3 | 58553 | 56 | 14 |
| M5086/2-12-9 | 81349 | 11 | 22 | PD-8A | 68505 | 16 | 13 |
| M5086/2-12-9 | 81349 | 15 | 10 | PEMI2 | 73389 | 52 | 96 |
| M5086/2-12-9 | 81349 | 23 | 66 | PS-139-0B | 68505 | 16 | 2 |
| M5086/2-12-9 | 81349 | 29 | 10 | PI23ZNGB | 00656 | 83 | 55 |
| M5086/2-12-9 | 81349 | 33 | 29 | P196N8 | 64560 | 83 | 54 |
| M5086/2-12-9 | 81349 | 82 | 8 | P391 | 64560 | 83 | 70 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| P392 | 64560 | 83 | 66 |
| P393 | 64560 | 83 | 64 |
| P394 | 64560 | 83 | 69 |
| P395 | 64560 | 83 | 68 |
| P397 | 64560 | 83 | 67 |
| P398 | 64560 | 83 | 63 |
| P399 | 64560 | 83 | 72 |
| P400 | 64560 | 83 | 58 |
| P400-B1 | 64560 | 83 | 52 |
| P401 | 64560 | 83 | 53 |
| P401 | 64560 | 83 | 59 |
| P403 | 64560 | 83 | 62 |
| P404 | 64560 | 83 | 74 |
| P405 | 64560 | 83 | 73 |
| P406 | 64560 | 83 | 71 |
| P408 | 64560 | 83 | 65 |
| P90-803 | 19728 | 16 | 24 |
| P90-809 | 68505 | 16 | KIT |
| P90-810 | 68505 | 16 | KIT |
| P90-810 | 68505 | 16 | 19 |
| RA20TASB103A | 81349 | 25 | 35 |
| RA20TASB502A | 81349 | 25 | 34 |
| RA20TASB751A | 81349 | 25 | 33 |
| RCR20G102JS | 81349 | 18 | 33 |
| RCR20G102JS | 81349 | 25 | 59 |
| RCR20G222JM | 81349 | 18 | 27 |
| RCR20G912JS | 81349 | 25 | 12 |
| RCR32C101JS | 81349 | 25 | 26 |
| RCR32G512JS | 81349 | 25 | 60 |
| RCR42G471JS | 81349 | 25 | 27 |
| RER65F249IM | 81349 | 83 | 136 |
| RER75F7R500R | 81349 | 22 | 29 |
| RL-2955 | 10009 | 1 | 6 |
| RL-2955 | 10009 | 5 | 15 |
| RNR65C2211FS | 81349 | 25 | 25 |
| RNR65C5620FS | 81349 | 25 | 17 |
| RNR65C6810FS | 81349 | 25 | 24 |
| RNR70C4990FS | 81349 | 25 | 14 |
| RNR70C6810FS | 81349 | 25 | 16 |
| RP101FD251KK | 44655 | 19 | 18 |
| RR-C-271 | 81349 | 36 | 39 |
| RR-C-271TY2CL3 | 81349 | 7 | 9 |
| RR-C-271TY2CL6 | 81349 | 81 | 21 |
| RWR78S1501FM | 81349 | 19 | 61 |
| RWR78S1501FR | 81349 | 23 | 33 |
| RWR78S2671FR | 81349 | 23 | 31 |
| RW29V100 | 81349 | 23 | 22 |
| RW31V100 | 81349 | 24 | 55 |
| RW31V200 | 81349 | 24 | 54 |
| RW31V911 | 81349 | 24 | 56 |
| RW56V512 | 81349 | 23 | 32 |
| R322024-16 | 12014 | 52 | 60 |
| S-6045 | 07707 | 25 | 15 |
| SA-1707-10 | 78388 | 11 | 90 |
| SA-2171 | 30554 | 12 | 12 |
| SDT1061 | 21845 | 25 | 40 |
| SDT1061 | 21845 | 25 | 54 |
| SE-1050 | 78388 | 12 | 20 |
| SE-45 | 07707 | 25 | 11 |
| SP-2201 | 70411 | 49 | 7 |
| SP-2282-V | 70411 | 34 | 46 |
| SP1Z15FA | 85814 | 14 | 1 |
| SP6056 | 68505 | 16 | 9 |
| S174C | 15434 | 28 | 33 |
| S1566 | 11083 | 72 | 5 |
| S1587 | 11083 | 59 | 7 |
| S1587 | 11083 | 62 | 1 |
| S1588 | 11083 | 35 | 5 |
| S1588 | 11083 | 54 | 13 |
| S1588 | 11083 | 61 | 1 |
| S1588 | 11083 | 61 | 16 |
| S1588 | 11083 | 67 | 20 |
| S1589 | 11083 | 84 | 45 |
| S1590 | 11083 | 46 | 1 |
| S1590 | 11083 | 55 | 1 |
| S1590 | 11083 | 56 | 27 |
| S1590 | 11083 | 69 | 1 |
| S1591 | 11083 | 60 | 4 |
| S1591 | 11083 | 67 | 14 |
| S1594 | 11083 | 47 | 1 |
| S1594 | 11083 | 56 | 12 |
| S1594 | 11083 | 68 | 3 |
| S1594 | 11083 | 74 | 6 |
| S1594 | 11083 | 77 | 5 |
| S1597 | 11083 | 56 | 1 |
| S1601 | 11083 | 71 | 1 |
| S1603 | 11083 | 76 | 1 |
| S1603 | 11083 | 84 | 49 |
| S1615 | 11083 | 40 | 1 |
| S1615 | 11083 | 57 | 68 |
| S1617 | 11083 | 64 | 1 |
| S1618 | 11083 | 61 | 31 |
| S1618 | 11083 | 76 | 7 |
| S1619 | 11083 | 44 | 12 |
| S1619 | 11083 | 46 | 4 |
| S1619 | 11083 | 67 | 15 |
| S1619 | 11083 | 69 | 5 |
| S1748 | 11083 | 76 | 16 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| TA72652-11 | 84971 | 37 | 5 |
| TA77452-14 | 84971 | 11 | 37 |
| TC-125B-50M-2AN | 85814 | 82 | 72 |
| TC-150-222-4N5L | 85814 | 14 | 2 |
| T102 | 11083 | 68 | 1 |
| T102 | 11083 | 82 | 169 |
| T65 | 11083 | 46 | 2 |
| T65 | 11083 | 69 | 13 |
| T79516 | 31361 | 84 | 28 |
| T79623 | 31361 | 84 | 27 |
| T79679 | 31361 | 84 | 29 |
| T79733 | 31361 | 84 | 32 |
| T82192 | 31361 | 84 | 31 |
| T94063 | 31361 | 84 | 25 |
| T94157 | 31361 | 84 | 26 |
| T94312 | 31361 | 84 | 24 |
| VB8/1FA11-80 | 05574 | 19 | 66 |
| VB8/1FA11-80 | 05574 | 23 | 30 |
| VB8-1UA11-8000P300-1147 | 05574 | 27 | 13 |
| VB8-1UA11-8000P300-1147 | 05574 | 12 | 9 |
| VB8-1UA11-8000P300-1147 | 05574 | 18 | 34 |
| VRB50B | 19728 | 16 | 43 |
| V5L8720 | 81978 | 34 | 3 |
| WC596/12-4 | 81348 | 30 | 18 |
| XA-1026 | 19728 | 16 | 17 |
| XA-1086 | 68505 | | |
| XA-744AP5 | 19728 | 16 | 24 |
| 1/4x20x3.5 LONG | 93742 | 27 | 33 |
| XA-744AQ | 19728 | 16 | 5 |
| XA-744Z | 68505 | 16 | 16 |
| XBN8190 | 90202 | 49 | 18 |
| X1817 | 73540 | 44 | 58 |
| X1817112B | 73540 | 44 | 54 |
| X1817112T | 73540 | 44 | 53 |
| X3060 | 68505 | 16 | 44 |
| Y1176-2-206 | 08484 | 58 | 67 |
| ZZH-428 | 81349 | 44 | 36A |
| ZZH-428 | 81349 | BULK | 3 |
| 00000-4831 | 93568 | 25 | 10 |
| 00000-4836 | 93568 | 25 | 15 |
| 00000-4840 | 93568 | 83 | 127 |
| 00000-4921 | 93568 | 31 | 7 |
| 00000-4922 | 93568 | 31 | 6 |
| 00000-4923 | 93568 | 24 | 16 |
| 00000-4924 | 93568 | 24 | 15 |

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 00000-4925 | 93568 | 24 | 13 |
| 00664-0281 | 93568 | 33 | 22 |
| 00364-0354 | 93568 | 6 | 11 |
| 02K02-6 | 30757 | 81 | 11 |
| 04U0714 | 66503 | 58 | 92 |
| 04306-0304 | 93568 | 7 | 20 |
| 04306-0311 | 93568 | 7 | 7 |
| 04306-8072 | 93568 | 32 | 25 |
| 04306-8074 | 93568 | 32 | 11 |
| 1-10 | 31211 | 10 | 29 |
| 1-11 | 94990 | 10 | 30 |
| 1-4KMMOOS | 30780 | 37 | 38 |
| 1-4MROS | 30780 | 34 | 5 |
| 1-4SHPS | 30780 | 35 | |
| 1-4X1-8PTRB | 30780 | 36 | 3 |
| 1-65 | 31211 | 10 | 18 |
| 1/4-2OUNC-1A x 3/4 | 96906 | 83 | 9 |
| 1/4MRO-S | 08752 | 53 | 20 |
| 1/4NPT | 95408 | 83 | 14 |
| 1/4 x 1/8 FFS | 45681 | 37 | 37 |
| 1A113 | 96309 | 44 | 19 |
| 1A136 | 96309 | 44 | 20 |
| 1A1460 | 11083 | 71 | 12 |
| 1A2029 | 11083 | 56 | 25 |
| 1A2029 | 11083 | 60 | 1 |
| 1A5350 | 11083 | 37 | 54 |
| 1A5822 | 11083 | 73 | 5 |
| 1A588 | 96309 | 44 | 12 |
| 1A77452-14 | 84971 | 11 | 37 |
| 1B2257 | 11083 | 59 | 21 |
| 1B2714 | 11083 | 67 | 30 |
| 1B3057 | 11083 | 82 | 171 |
| 1B4203 | 11083 | 65 | 12 |
| 1B4203 | 11083 | 65 | 16 |
| 1B4203 | 11083 | 72 | 1 |
| 1B4205 | 11083 | 57 | 32 |
| 1B4205 | 11083 | 73 | 3 |
| 1B4331 | 11083 | 66 | 2 |
| 1B4367 | 11083 | 34 | 17 |
| 1B4367 | 11083 | 62 | 10 |
| 1B5174 | 11083 | 46 | 14 |
| 1B7709 | 11083 | 65 | 2 |
| 1B8702 | 11083 | 57 | 54 |
| 1C2251 | 11083 | 35 | 20 |
| 1C2251 | 11083 | 74 | 4 |
| 1D4533 | 11083 | 84 | 6 |
| 1D4538 | 11083 | 84 | 7 |
| 1D4541 | 11083 | 61 | 30 |

## SECTION IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| REFERENCE NUMBER | FSCM | FIG NO | ITEM NO |
|---|---|---|---|
| 1D4595 | 11083 | 65 | 3 |
| 1D4595 | 11083 | 84 | 47 |
| 1D4717 | 11083 | 35 | 6 |
| 1D4717 | 11083 | 62 | 23 |
| 1D4717 | 11083 | 61 | 36 |
| 1D4717 | 11083 | 73 | 14 |
| 1D4717 | 11083 | 74 | 2 |
| 1D4719 | 11083 | 73 | 10 |
| 1F1006 | 11083 | 69 | 13 |
| 1G409 | 96309 | 44 | 6 |
| 1G40905 | 21102 | 44 | 18 |
| 1G40906 | 96309 | 44 | 21 |
| 1G4091 | 96309 | 44 | 7 |
| 1G4092 | 96309 | 44 | 24 |
| 1G4094 | 96309 | 44 | 9 |
| 1H4143 | 11083 | 61 | 43 |
| 1H4147 | 11083 | 61 | 39 |
| 1H5514 | 11083 | 39 | 1 |
| 1J9671 | 11083 | 40 | 20 |
| 1J9671 | 11083 | 57 | 63 |
| 1L5072 | 11083 | 65 | 26 |
| 1M3735 | 11083 | 69 | 35 |
| 1M7341 | 11083 | 71 | 2 |
| 1N3216 | 11083 | 78 | 9 |
| 1P1420 | 11083 | 40 | 7 |
| 1P2298 | 11083 | 40 | 66 |
| 1P2394 | 11083 | 84 | 42 |
| 1P2402 | 11083 | 84 | 40 |
| 1P2403 | 11083 | 84 | 38 |
| 1P4001 | 11083 | 40 | 50 |
| 1P4001 | 11083 | 57 | 70 |
| 1P436 | 11083 | 39 | 5 |
| 1P5507 | 11083 | 84 | 41 |
| 1P5510 | 11083 | 84 | 37 |
| 1P5512 | 11083 | 84 | 39 |
| 1P6367 | 11083 | 61 | 65 |
| 1P7326 | 11083 | 40 | 25 |
| 1P7346 | 11083 | 69 | 8 |
| 1P7379 | 11083 | 84 | 18 |
| 1P7988 | 11083 | 68 | 10 |
| 1P9956 | 11083 | 68 | 3 |
| 1W5300 | 11083 | 66 | 13B |
| 153062 | 11083 | 66 | 25 |
| 15379 | 11083 | 84 | 46 |
| 154295 | 11083 | 55 | 48 |
| 154810 | 11083 | 55 | 13 |
| 156595 | 11083 | 55 | 11 |
| 159540 | 11083 | 80 | 7 |
| 159543 | 11083 | 70 | 7 |
| 159836 | 11083 | 84 | 22 |

| REFERENCE NUMBER | FSCM | FIG NO | ITEM NO |
|---|---|---|---|
| 1T765 | 11083 | 60 | 2 |
| 1W1172 | 11083 | 46 | 12 |
| 10A500 | 63743 | 32 | 22 |
| 101487 | 73370 | 34 | 28 |
| 101489 | 73370 | 34 | 31 |
| 101489 | 73370 | 34 | 39 |
| 102458 | 73370 | 34 | 32 |
| 1028 | 96309 | 44 | 22 |
| 103647 | 72582 | 35 | 9 |
| 1045-04741-01 | 75418 | 1 | 19 |
| 106498 | 73370 | 34 | 26 |
| 10947053 | 46522 | 82 | 102 |
| 10947054 | 46522 | 82 | 103 |
| 10947055 | 46522 | 82 | 101 |
| 11-25 | 31211 | 10 | 39 |
| 11-3 | 31211 | 10 | 40 |
| 11-41 | 31211 | 10 | 38 |
| 11-42 | 31211 | 10 | 41 |
| 1101 | 11083 | 80 | 3 |
| 1107A | 96309 | 44 | 23 |
| 11486 | 12670 | 23 | 34 |
| 1155 | 96309 | 44 | 8 |
| 1176 | 96309 | 44 | 16 |
| 1189 | 96309 | 44 | 15 |
| 12-11 | 31211 | 10 | 43 |
| 12X198 | 19728 | 16 | 29 |
| 12X198 | 19728 | 16 | 42 |
| 1207 | 21760 | 44 | 13 |
| 1269 | 21960 | 59 | 17 |
| 13-5 | 31211 | 10 | 31 |
| 13616 | 96309 | 44 | 17 |
| 14-1 | 31211 | 10 | 42 |
| 14-33 | 31211 | 10 | 14 |
| 14-34 | 31211 | 10 | 12 |
| 14-35 | 31211 | 10 | 27 |
| 14T3 | 62119 | 83 | 56 |
| 147-0292 | 44940 | 58 | 81 |
| 14803 | 96309 | 44 | 33 |
| 1490 | 96309 | 44 | 14 |
| 15001 | 74400 | 19 | 14 |
| 15-1 | 94990 | 10 | 28 |
| 15-2 | 31211 | 10 | 17 |
| 15-3 | 31211 | 10 | 9 |
| 15-4 | 31211 | 10 | 16 |
| 15V-5L | 70411 | 36 | 37 |
| 151328 | 73370 | 34 | 33 |
| 16-004-013-20P0RM5PSIG | 43990 | 82 | 53 |
| 16-79 | 31211 | 10 | 21 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 16-80 | 31211 | 10 | 6 |
| 16-81 | 31211 | 10 | 10 |
| 16-82 | 31211 | 10 | 7 |
| 16-93 | 31211 | 10 | 11 |
| 16-93 | 31211 | 10 | 11 |
| 170C-N | 70411 | 82 | 69 |
| 170C-N | 70411 | 83 | 21 |
| 1709 | 23050 | 37 | 59 |
| 187C704P433 | 89954 | 25 | 48 |
| 19X3439 | 19728 | 16 | 28 |
| 19X3439 | 19728 | 16 | 30 |
| 19X3439 | 19728 | 16 | 41 |
| 1930611 | 24617 | 16 | 45 |
| 2-8 | 31211 | 10 | 1 |
| 2-9 | 31211 | 10 | 2 |
| 2A1913 | 11083 | 61 | 42 |
| 2A4429 | 11083 | 66 | 12 |
| 2A762 | 11083 | 17 | 1 |
| 2A762 | 11083 | 57 | 1 |
| 2B2695 | 11083 | 61 | 24 |
| 2B858 | 11083 | 66 | 6 |
| 2B858 | 11083 | 67 | 10 |
| 2B858 | 11083 | 70 | 24 |
| 2D1785 | 11083 | 69 | 11 |
| 2D6392 | 11083 | 40 | 70 |
| 2D6392 | 11083 | 57 | 65 |
| 2F808 | 11083 | 55 | 18 |
| 2H3740 | 11083 | 84 | 11 |
| 2H3934 | 11083 | 56 | 34 |
| 2H5759 | 11083 | 61 | 18 |
| 2H9866 | 11083 | 56 | 17 |
| 2L1331 | 11083 | 57 | 58 |
| 2L1333 | 11083 | 57 | 59 |
| 2L5893 | 11083 | 45 | 15 |
| 2L9038 | 11083 | 56 | 3 |
| 2M3403 | 11083 | 69 | 12 |
| 2M5407 | 11083 | 61 | 8 |
| 2M5471 | 11083 | 40 | 17 |
| 2N1596 | 81349 | 19 | 29 |
| 2N2658 | 11083 | 40 | 32 |
| 2N2658 | 11083 | 57 | 71 |
| 2N2766 | 11083 | 63 | 5 |
| 2N3872 | 11083 | 64 | 3 |
| 2P1168 | 11083 | 76 | 5 |
| 2P1169 | 11083 | 69 | 33 |
| 2P1170 | 11083 | 69 | 32 |
| 2P1262 | 11083 | 66 | 17 |
| 2P1692 | 11083 | 62 | 19 |
| 2P1732 | 11083 | 68 | 11 |
| 2P1739 | 11083 | 68 | 8 |
| 2P1751 | 11083 | 68 | 5 |
| 2P1781 | 11083 | 69 | 19 |
| 2P1785 | 11083 | 69 | 11 |
| 2P218 | 11083 | 72 | 8 |
| 2P220 | 11083 | 72 | 9 |
| 2P2720 | 11083 | 79 | 4 |
| 2P3200 | 11083 | 40 | 19 |
| 2P3858 | 11083 | 78 | 10 |
| 2P3859 | 11083 | 78 | 4 |
| 2P3912 | 11083 | 62 | 4 |
| 2P6132 | 11083 | 46 | 3 |
| 2P6245 | 11083 | 69 | 20 |
| 2P691 | 11083 | 69 | 22 |
| 2P7732 | 11083 | 60 | 11 |
| 2P7734 | 11083 | 60 | 10 |
| 2P8701 | 11083 | 72 | 3 |
| 2P8746 | 11083 | 69 | 7 |
| 2P8797 | 11083 | 60 | 8 |
| 2P8870 | 11083 | 46 | 10 |
| 2P8889 | 11083 | 80 | 20 |
| 2S1541 | 11083 | 68 | 12 |
| 2S42 | 11083 | 75 | 2 |
| 2S5658 | 11083 | 80 | 15 |
| 2S736 | 11083 | 65 | 4 |
| 2S736 | 11083 | 84 | 48 |
| 2S7905 | 11083 | 57 | 35 |
| 2S8959 | 11083 | 66 | 10 |
| 2S8960 | 11083 | 66 | 11 |
| 2S932 | 11083 | 59 | 5 |
| 20-2 | 31211 | 10 | 25 |
| 20-3 | 94990 | 10 | 26 |
| 20-4 | 94990 | 10 | 32 |
| 20-5 | 31211 | 10 | 33 |
| 20-7 | 94990 | 10 | 36 |
| 20-32 | 94990 | 10 | 22 |
| 20-33 | 94990 | 10 | 15 |
| 20-34 | 31211 | 10 | 8 |
| 20-62 | 94990 | 10 | 5 |
| 20-81 | 94990 | 10 | 4 |
| 20-92 | 31211 | 10 | 37 |
| 20-99 | 31211 | 10 | 19 |
| 20-121 | 31211 | 10 | 3 |
| 20X4222 | 68505 | 16 | 49 |
| 2010-0632-16-13 | 46522 | 82 | 94 |
| 16-462 | 72781 | | |
| 202712-5-5B | 01276 | 81 | 20 |
| 2028-4-45 | 01276 | 37 | 28 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 206282 | 31361 | 58 | 84 |
| 21024 | 08484 | 43 | 27 |
| 2130109E | 81343 | 82 | 111 |
| 21690-1 | 12670 | 22 | 36 |
| 21820A | 12670 | 19 | 68 |
| 224-6 | 99103 | 82 | 70 |
| 224-6 | 99103 | 83 | 16 |
| 2251-0832-06-13 | 46522 | 82 | 91 |
| 2251-0832-06-13 | 46522 | 82 | 119 |
| 2251-0832-06-13 | 46522 | 82 | 158 |
| 2251-0832-06-17 | 46522 | 82 | 104 |
| 2251-0832 10-13 | 46522 | 82 | 89 |
| 2251-0832-10-13 | 46522 | 82 | 145 |
| 227033 | 73370 | 34 | 34 |
| 2290-0632-05-13 | 46522 | 82 | 87 |
| 2290-0632-05-13 | 46522 | 82 | 144 |
| 23380 | 12670 | 22 | 35 |
| 23873-8-12 | 99103 | 82 | 49 |
| 23873-8-12 | 99103 | 83 | .39 |
| 23916-6 | 99103 | 81 | 10 |
| 23916-8 | 99103 | 44 | 37 |
| 23916-8-6 | 99103 | 83 | 9 |
| 240903 | 73370 | 34 | 25 |
| 24201G2 | 82121 | 83 | 123 |
| 242672 | 73370 | 34 | 40 |
| 244607 | 73370 | 34 | 37 |
| 244608 | 73370 | 34 | 38 |
| 244611 | 73370 | 34 | 29 |
| 247-16-8 | 99103 | 83 | 28 |
| 25A18A3 | 62119 | 83 | 57 |
| 2520 | 80672 | 43 | 22 |
| 253633 | 65092 | 19 | 13 |
| 254013 | 65092 | 19 | 6 |
| 260935 | 65092 | 19 | 7 |
| 267842 | 65092 | 19 | 5 |
| 268420 | 65092 | 19 | 8 |
| 2701-18540-T140 | 06540 | 25 | 39 |
| 271-631-51 | 00970 | 20 | 7 |
| 2713-250125-T144 | 06540 | 24 | 39 |
| 267-1012P6 | 49956 | 23 | 65 |
| 267-1012P10 | 49956 | 23 | 64 |
| 295901-2 | 76530 | 19 | 77 |
| 30S130498-6-9 | 98738 | 18 | 10 |
| 3-2 | 31211 | 10 | 24 |
| 3-5 | 31211 | 10 | 23 |
| 3/8MRO-S | 30757 | 82 | 70 |
| 3B1915 | 11083 | 61 | 34 |
| 3B1915 | 11083 | 61 | 57 |
| 3B1915 | 11083 | 69 | 3 |
| 3B1915 | 11083 | 72 | 7 |
| 3B4505 | 11083 | 64 | 2 |
| 3B4506 | 11083 | 35 | 7 |
| 3B4506 | 11083 | 55 | 10 |
| 3B4506 | 11083 | 61 | 17 |
| 3B4506 | 11083 | 61 | 35 |
| 3B4506 | 11083 | 61 | 58 |
| 3B4506 | 11083 | 67 | 12 |
| 3B4508 | 11083 | 71 | 14 |
| 3B4508 | 11083 | 73 | 12 |
| 3B4510 | 11083 | 35 | 18 |
| 3B551 | 11083 | 46 | 13 |
| 3B551 | 11083 | 71 | 15 |
| 3B623 | 11083 | 66 | 26 |
| 3B6554 | 11083 | 61 | 23 |
| 3B7270 | 11083 | 61 | 15 |
| 3B817 | 11083 | 71 | 8 |
| 3B9053 | 11083 | 56 | 16 |
| 3H3243 | 11083 | 43 | 29 |
| 3H465 | 11083 | 84 | 44 |
| 3H5368 | 11083 | 59 | 4 |
| 3J1907 | 11083 | 35 | 3 |
| 3J5389 | 11083 | 80 | 27 |
| 3K8460 | 11083 | 57 | 62 |
| 3K9756 | 11083 | 57 | 53 |
| 3L1474 | 11083 | 58 | 1 |
| 3L5987 | 11083 | 57 | 4 |
| 3M198 | 11083 | 61 | 55 |
| 3N2813 | 11083 | 57 | 28 |
| 3N2815 | 11083 | 57 | 11 |
| 3N2819 | 11083 | 57 | 18 |
| 3N2820 | 11083 | 57 | 16 |
| 3N2823 | 11083 | 57 | 25 |
| 3N2824 | 11083 | 57 | 23 |
| 3N2825 | 11083 | 56 | 11 |
| 3N4906 | 11083 | 61 | 22 |
| 3N9633 | 11083 | 57 | 12 |
| 3N9634 | 11083 | 57 | 14 |
| 3P1540 | 11083 | 88 | 16 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 3P1545 | 11083 | 84 | 23 |
| 3P1565 | 11083 | 84 | 12 |
| 3P1567 | 11083 | 84 | 13 |
| 3P1568 | 11083 | 84 | 19 |
| 3P1569 | 11083 | 84 | 8 |
| 3P2200 | 11083 | 84 | 15 |
| 3P2226 | 11083 | 84 | 20 |
| 3R1059 | 11083 | 61 | 59 |
| 3R36 | 11083 | 61 | 52 |
| 3R3952 | 11083 | 61 | 41 |
| 3R9266 | 11083 | 61 | 33 |
| 354484 | 11083 | 55 | 27 |
| 354487 | 11083 | 55 | 38 |
| 354488 | 11083 | 55 | 37 |
| 355126 | 11083 | 55 | 22 |
| 355127 | 11083 | 55 | 24 |
| 355128 | 11083 | 55 | 23 |
| 355129 | 11083 | 55 | 20 |
| 355135 | 11083 | 55 | 36 |
| 355496 | 11083 | 66 | 21 |
| 355496 | 11083 | 80 | 8 |
| 358313 | 11083 | 66 | 27 |
| 303737 | 32195 | 27 | 6 |
| 307947 | 11083 | 35 | 2 |
| 31-3 | 50999 | 36 | 2 |
| 3186-047 | 31361 | 58 | 31 |
| 31904LT | 82121 | 20 | 9 |
| 3200X2 | 79470 | 82 | 63 |
| 320634 | 00779 | 83 | 97 |
| 320634 | 00779 | 83 | 116 |
| 3208 | 43334 | 44 | 18 |
| 321268 | 11083 | 35 | 4 |
| 35066 | 73370 | 34 | 35 |
| 35070 | 73370 | 34 | 36 |
| 35405 | 79260 | 82 | 74 |
| 36-754 | 59534 | 16 | 6 |
| 37TB-12 | 81349 | 28 | 23 |
| 37TB-8 | 81349 | 83 | 130 |
| 370014 | 66503 | 58 | 72 |
| 370109 | 31361 | 84 | 30 |
| 37013-57 | 31361 | 58 | 29 |
| 33797S36 | 23040 | 56 | 24 |
| 370276 | 66503 | 58 | 49 |
| 370394 | 66503 | 58 | 27 |
| 370495 | 31361 | 58 | 48 |
| 38TB-10 | 81349 | 22 | 21 |
| 38TB-14 | 81349 | 23 | 10 |
| 38TB-4 | 81349 | 22 | 23 |
| 38TB-4 | 81349 | 24 | 18 |
| 38TB-6 | 81349 | 31 | 14 |
| 383 | 96309 | 44 | 32 |
| 3903 | 96309 | 44 | 25 |
| 3906 | 96309 | 44 | 26 |
| 3910 | 96309 | 44 | 30 |
| 3911 | 96309 | 44 | 31 |
| 3912 | 96309 | 44 | 28 |
| 3913 | 96309 | 44 | 27 |
| 3914 | 96309 | 44 | 29 |
| 4A308-21 | 78493 | 47 | 5 |
| 4B2042 | 11083 | 40 | 22 |
| 4B2152 | 11083 | 56 | 7 |
| 4B4278 | 11083 | 61 | 37 |
| 4B4278 | 11083 | 67 | 13 |
| 4B4280 | 11083 | 73 | 11 |
| 4B4910 | 11083 | 65 | 28 |
| 4B5387 | 11083 | 80 | 23 |
| 4B5984 | 11083 | 61 | 20 |
| 4B8756 | 11083 | 54 | 5 |
| 4D3088 | 11083 | 56 | 2 |
| 4D514 | 11083 | 57 | 67 |
| 4F7957 | 11083 | 57 | 69 |
| 4H89 | 11083 | 57 | 100 |
| 4J7533 | 11083 | 40 | 13 |
| 4K1456 | 11083 | 55 | 47 |
| 4K1457 | 11083 | 55 | 45 |
| 4K9890 | 11083 | 43 | 30 |
| 4L1227 | 11083 | 66 | 3 |
| 4L6454 | 11083 | 45 | 6 |
| 4L7124 | 11083 | 57 | 56 |
| 4L7547 | 11083 | 57 | 41 |
| 4L8337 | 11083 | 54 | 12 |
| 4L8337 | 11083 | 55 | 7 |
| 4M6646 | 11083 | 55 | 40 |
| 4M8743 | 11083 | 75 | 6 |
| 4N117 | 11083 | 17 | 5 |
| 4N117 | 11083 | 57 | 3 |
| 4N0592 | 11083 | 40 | 34 |
| 4N145 | 11083 | 40 | 74 |
| 4N1584 | 11083 | 40 | 56 |
| 4N1584 | 11083 | 57 | 103 |
| 4N159 | 11083 | 57 | 34 |
| 4N1591 | 11083 | 40 | 18 |
| 4N1762 | 11083 | 40 | 41 |
| 4N1763 | 11083 | 40 | 33 |
| 4N1764 | 11083 | 40 | 40 |
| 4N1767 | 11083 | 40 | 31 |
| 4N1826 | 11083 | 40 | 69 |
| 4N1826 | 11083 | 57 | 64 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 4N1828 | 11083 | 40 | 4A |
| 4N2034 | 11083 | 40 | 39 |
| 4N209 | 11083 | 40 | 42 |
| 4N218 | 11083 | 40 | 35 |
| 4N218 | 11083 | 84 | 17 |
| 4N224 | 11083 | 40 | 37 |
| 4N2333 | 11083 | 40 | 68 |
| 4N2333 | 11083 | 57 | 105 |
| 4N2511 | 11083 | 39 | 6 |
| 4N2512 | 11083 | 39 | 7 |
| 4N2513 | 11083 | 39 | 8 |
| 4N256 | 11083 | 40 | 71 |
| 4N260 | 11083 | 57 | 42 |
| 4N2685 | 11083 | 40 | 49 |
| 4N2728 | 11083 | 40 | 45 |
| 4N2954 | 11083 | 40 | 51 |
| 4N3371 | 11083 | 76 | 2 |
| 4N3371 | 11083 | 84 | 51 |
| 4N3711 | 11083 | 40 | 73 |
| 4N3732 | 11083 | 69 | 28 |
| 4N3779 | 11083 | 40 | 62 |
| 4N3840 | 11083 | 46 | 19 |
| 4N3841 | 11083 | 46 | 20 |
| 4N3890 | 11083 | 18 | 6 |
| 4N3890 | 78388 | 58 | 101 |
| 4N4054 | 11083 | 69 | 16 |
| 4N4055 | 11083 | 69 | 14 |
| 4N406 | 11083 | 40 | 54 |
| 4N4122 | 11083 | 66 | 4 |
| 4N429 | 11083 | 40 | 61 |
| 4N4313 | 11083 | 40 | 63 |
| 4N4351 | 11083 | 40 | 15 |
| 4N4431 | 11083 | 40 | 11 |
| 4N4526 | 11083 | 79 | 3 |
| 4N5050 | 11083 | 40 | 9 |
| 4N508 | 11083 | 40 | 27 |
| 4N528 | 11083 | 40 | 29 |
| 4N5353 | 11083 | 69 | 6 |
| 4N5383 | 11083 | 57 | 82 |
| 4N5481 | 11083 | 40 | 67 |
| 4N5574 | 11083 | 57 | 85 |
| 4N5575 | 11083 | 57 | 74 |
| 4N5620 | 11083 | 57 | 20 |
| 4N5621 | 11083 | 57 | 21 |
| 4N5622 | 11083 | 57 | 19 |
| 4N5623 | 11083 | 57 | 91 |
| 4N5624 | 11083 | 57 | 92 |
| 4N5626 | 11083 | 57 | 94 |
| 4N5627 | 11083 | 56 | 8 |
| 4N5628 | 11083 | 57 | 84 |
| 4N5629 | 11083 | 57 | 87 |
| 4N5629 | 11083 | 57 | 102 |
| 4N594 | 11083 | 57 | 96 |
| 4N605 | 11083 | 40 | 30 |
| 4N6309 | 11083 | 56 | 29 |
| 4N6313 | 11083 | 56 | 32 |
| 4N6314 | 11083 | 57 | 88 |
| 4N6317 | 11083 | 57 | 45 |
| 4N6322 | 11083 | 57 | 72 |
| 4N6323 | 11083 | 54 | 15 |
| 4N6326 | 11083 | 57 | 61 |
| 4N6327 | 11083 | 56 | 21 |
| 4N636 | 11083 | 40 | 57 |
| 4N636 | 11083 | 57 | 86 |
| 4N7572 | 11083 | 40 | 4 |
| 4N7693 | 11083 | 78 | 3 |
| 4N7696 | 11083 | 78 | 8 |
| 4N8312 | 11083 | 57 | 95 |
| 4N8385 | 11083 | 69 | 29 |
| 4N8507 | 11083 | 57 | 2 |
| 4N8626 | 11083 | 57 | 89 |
| 4N8898 | 11083 | 40 | 36 |
| 4N9057 | 11083 | 40 | 14 |
| 4N9336 | 11083 | 40 | 6 |
| 4N9337 | 11083 | 40 | 5 |
| 4N9467 | 11083 | 57 | 27 |
| 4N9642 | 11083 | 56 | 19 |
| 40TB12 | 81349 | 23 | 26 |
| 40TB-6 | 81349 | 24 | 37 |
| 40TB-8 | 81349 | 25 | 32 |
| 405157 | 70210 | 55 | 38 |
| 406063 | 70210 | 55 | 24 |
| 406064 | 70210 | 55 | 23 |
| 406482-23 | 08179 | 55 | 25 |
| 406834-2 | 70210 | 55 | 33 |
| 406845-5 | 70210 | 55 | 43 |
| 406943 | 70210 | 55 | 19 |
| 407009-73 | 70210 | 55 | 21 |
| 407484-1 | 70210 | 55 | 32 |
| 407640-9 | 70210 | 55 | 17 |
| 408049 | 70210 | 55 | 42 |
| 408126-6 | 70210 | 55 | 28 |
| 408593 | 70210 | 55 | 34 |
| 40866-5004 | 70210 | 55 | 39 |
| 4165-3 | 08244 | 79 | 7 |
| 42-0632-13 | 46522 | 82 | 95 |
| 42C14154 | 10001 | 7 | 9 |
| 42C16550 | 81349 | 38 | 18 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 42T136 | 81349 | 19 | 59 |
| 44-SN | 30327 | 37 | 56A |
| 44-SN | 30327 | 37 | 57A |
| 44-SN | 30327 | 37 | 58A |
| 44-SN | 30327 | 37 | 60A |
| 44-SN | 30327 | 37 | 61A |
| 44-SN | 30327 | BULK | 1 |
| 444577 | 70040 | 35 | 12 |
| 444688 | 24617 | 61 | 68 |
| 460426 | 22038 | 59 | 3 |
| 47-0901-2900-201 | 72619 | 19 | 1. |
| 479130 | 72850 | 34 | 20 |
| 479136 | 72850 | 34 | 21 |
| 479729 | 72850 | 34 | 22 |
| 48B44003F06 | 31211 | 10 | 18 |
| 480517 | 72850 | 34 | 19 |
| 48280 | 11083 | 84 | 50 |
| 5-LHBTX-B | 30780 | 81 | 20 |
| 5-58 | 31211 | 10 | 20 |
| 5-8113 | 20796 | 9 | 4 |
| 5B213 | 11083 | 62 | 21 |
| 5B3390 | 11083 | 59 | 14 |
| 5B3718 | 11083 | 41 | 6 |
| 5B7652 | 11083 | 80 | 6 |
| 5B7890 | 11083 | 42 | 36 |
| 5B7890 | 11083 | 63 | 11 |
| 5B9079 | 11083 | 76 | 10 |
| 5F3106 | 11083 | 45 | 21 |
| 5F3106 | 11083 | 72 | 11 |
| 5F4899 | 11083 | 46 | 11 |
| 5F6371 | 11083 | 61 | 21 |
| 5H2671 | 11083 | 78 | 5 |
| 5H4276 | 11083 | 73 | 6 |
| 5H7225 | 11083 | 41 | 4 |
| 5H8985 | 11083 | 57 | 13 |
| 5J5314 | 11083 | 40 | 52 |
| 5L1100 | 11083 | 57 | 90 |
| 5L2908 | 11083 | 71 | 10 |
| 5L2952 | 11083 | 79 | 7 |
| 5L4544 | 11083 | 66 | 1 |
| 5L5344 | 11083 | 53 | 8 |
| 5L7631 | 11083 | 43 | 33 |
| 5L7632 | 11083 | 55 | 4 |
| 5L8854 | 11083 | 55 | 3 |
| 5L8855 | 11083 | 55 | 5 |
| 5M2667 | 11083 | 66 | 9 |
| 5M2894 | 11083 | 45 | 2 |
| 5M2894 | 11083 | 54 | 2 |
| 5M2894 | 11083 | 56 | 13 |
| 5M2894 | 11083 | 60 | 3 |
| 5M2894 | 11083 | 62 | 22 |
| 5M2894 | 11083 | 63 | 2 |
| 5M2894 | 11083 | 69 | 2 |
| 5M2894 | 11083 | 71 | 7 |
| 5M2894 | 11083 | 72 | 2 |
| 5M2894 | 11083 | 73 | 15 |
| 5M2894 | 11083 | 74 | 3 |
| 5M2894 | 11083 | 79 | 2 |
| 5M4606 | 11083 | 65 | 20 |
| 5M6213 | 11083 | 45 | 22 |
| 5M6213 | 11083 | 46 | 22 |
| 5M6213 | 11083 | 47 | 2 |
| 5M6213 | 11083 | 61 | 11 |
| 5M6213 | 11083 | 80 | 28 |
| 5M6214 | 11083 | 56 | 26 |
| 5M6214 | 11083 | 57 | 66 |
| 5M6214 | 11083 | 59 | 18 |
| 5M6214 | 11083 | 80 | 22 |
| 5M6509 | 11083 | 40 | 53 |
| 5P1198 | 11083 | BULK | 4 |
| 5P1198 | 11083 | 54 | 6 |
| 5P299 | 11083 | 84 | 2 |
| 5P4203 | 11083 | 84 | 1 |
| 5P4205 | 11083 | 84 | 4 |
| 5P4209 | 11083 | 84 | 10 |
| 5P4346 | 11083 | 57 | 106 |
| 5P4443 | 11083 | 67 | 7 |
| 5P4448 | 11083 | 67 | 8 |
| 5P4809 | 11083 | 84 | 9 |
| 5P4868 | 11083 | 46 | 7 |
| 5P4908 | 11083 | 67 | 6 |
| 5P5034 | 11083 | 57 | 9 |
| 5P537 | 11083 | 39 | 4 |
| 5P5598 | 11083 | 65 | 6 |
| 5P5756 | 11083 | 55 | 31 |
| 5P5877 | 11083 | 55 | 46 |
| 5P6510 | 11083 | 84 | 21 |
| 5P6602 | 11083 | 84 | 3 |
| 5P7298 | 11083 | 84 | 34 |
| 5P7312 | 11083 | 84 | 35 |
| 5P8245 | 11083 | 62 | 2 |
| 5P8247 | 11083 | 72 | 6 |
| 5P8767 | 11083 | 79 | KIT |
| 5P8771 | 11083 | 45 | KIT |
| 5P9116 | 11083 | 61 | KIT |
| 5P9117 | 11083 | 55 | KIT |
| 5P9568 | 11083 | 79 | KIT |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 5R1076 | 11083 | 61 | 62 |
| 5R1077 | 11083 | 61 | 61 |
| 5R1106 | 11083 | 61 | 50 |
| 5R1130 | 11083 | 67 | 16 |
| 5R1183 | 11083 | 71 | 5 |
| 5R1190 | 11083 | 71 | 4 |
| 5R1191 | 11083 | 71 | 3 |
| 5R1226 | 11083 | 55 | 44 |
| 5R1237 | 11083 | 55 | 50 |
| 5R1260 | 11083 | 71 | 17 |
| 5R1453 | 11083 | 35 | 8 |
| 5R1815 | 11083 | 73 | 4 |
| 5R2167 | 11083 | 61 | 38 |
| 5R2204 | 11083 | 67 | 4 |
| 5R2793 | 11083 | 71 | 13 |
| 5R2794 | 11083 | 67 | 22 |
| 5R2814 | 11083 | 67 | 25 |
| 5R2976 | 11083 | 67 | 21 |
| 5R3054 | 11083 | 56 | 4 |
| 5R3119 | 11083 | 61 | 10 |
| 5R3122 | 11083 | 61 | 13 |
| 5R3512 | 11083 | 67 | 24 |
| 5R3522 | 11083 | 57 | 50 |
| 5R3524 | 11083 | 57 | 51 |
| 5R3525 | 11083 | 57 | 55 |
| 5R3526 | 11083 | 57 | 47 |
| 5R3625 | 11083 | 56 | 6 |
| 5R3630 | 11083 | 73 | 16 |
| 5R3632 | 11083 | 58 | 3 |
| 5R3635 | 11083 | 54 | - |
| 5R3668 | 11083 | 61 | 64 |
| 5R3882 | 11083 | 40 | - |
| 5R3906 | 11083 | 35 | 19 |
| 5R4147 | 11083 | 35 | 21 |
| 5R4182 | 11083 | 43 | 37 |
| 5R678 | 11083 | 61 | 46 |
| 5R679 | 11083 | 61 | 40 |
| 5R778 | 11083 | 82 | 172 |
| 5S5878 | 11083 | 65 | 24 |
| 5S5917 | 11083 | 65 | 13 |
| 5S5917 | 11083 | 65 | 17 |
| 5S5918 | 11083 | 65 | 29 |
| 5S6296 | 11083 | 62 | 20 |
| 5S6296 | 11083 | 78 | 12 |
| 5S6348 | 11083 | 70 | 2 |
| 5S6670 | 11083 | 80 | 19 |
| 5S6735 | 11083 | 54 | 14 |
| 5S6735 | 11083 | 61 | 66 |
| 5S6750 | 11083 | 70 | 11 |
| 5S7221 | 11083 | 66 | 23 |
| 5S7611 | 11083 | 76 | 11 |
| 5S7630 | 11083 | 76 | 14 |
| 5S8055 | 11083 | 79 | 6 |
| SWTBX-B | 98441 | 49 | 12 |
| 505-BC | 57733 | 19 | 12 |
| 505-BD | 57733 | 19 | 11 |
| 505-BE | 57733 | 19 | 10 |
| 506-AD | 57733 | 20 | 2 |
| 506-AE | 57733 | 21 | 1 |
| 51-3502-0137-203 | 72619 | 19 | 23 |
| 51-464-1 | 12670 | 32 | 4 |
| 511-041800-00 | 78189 | 12 | 6 |
| 511-041800-00 | 78189 | 15 | 6 |
| 511-041800-00 | 78189 | 22 | 6 |
| 511-041800-00 | 78189 | 23 | 43 |
| 511-041800-00 | 78189 | 24 | 20 |
| 511-041800-00 | 78189 | 25 | 43 |
| 511-041800-00 | 78189 | 27 | 25 |
| 511-041800-00 | 78189 | 30 | 6 |
| 511-041800-00 | 78189 | 49 | 14 |
| 511-041800-00 | 78189 | 82 | 17 |
| 511-041800-00 | 78189 | 83 | 90 |
| 511-061800-00 | 78189 | 12 | 12 |
| 511-061800-00 | 78189 | 19 | 78 |
| 511-061800-00 | 78189 | 23 | 14 |
| 511-061800-00 | 78189 | 24 | 35 |
| 511-061800-00 | 78189 | 25 | 8 |
| 511-061800-00 | 78189 | 25 | 31 |
| 511-061800-00 | 78189 | 27 | 22 |
| 511-061800-00 | 78189 | 30 | 14 |
| 511-061800-00 | 78189 | 83 | 93 |
| 511-081800-00 | 78189 | 4 | 6 |
| 511-081800-00 | 78189 | 19 | 32 |
| 511-081800-00 | 78189 | 22 | 8 |
| 511-081800-00 | 78189 | 22 | 19 |
| 511-081800-00 | 78189 | 23 | 9 |
| 511-081800-00 | 78189 | 24 | 12 |
| 511-081800-00 | 78189 | 31 | 3 |
| 511-081800-00 | 78189 | 83 | 111 |
| 511-081800-00 | 78189 | 83 | 125 |
| 511-101800-00 | 78189 | 1 | 17 |
| 511-101800-00 | 78189 | 3 | 5 |
| 511-101800-00 | 78189 | 8 | 2 |
| 511-101800-00 | 78189 | 11 | 39 |
| 511-101800-00 | 78189 | 19 | 55 |
| 511-101800-00 | 78189 | 24 | 49 |
| 511-101800-00 | 78189 | 27 | 6 |

## SECTION IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| REFERENCE NUMBER | FSCM | FIG NO | ITEM NO |
|---|---|---|---|
| 511-101800-00 | 78189 | 32 | 2 |
| 511-101800-00 | 78189 | 33 | 36 |
| 511-101800-00 | 78189 | 42 | 4 |
| 511-101800-00 | 78189 | 49 | 9 |
| 511-101800-50-532-4102 | 78189 | 44 | 11 |
| 5573723 | 70040 | 35 | 10 |
| 5573725 | 70040 | 35 | 14 |
| 55773725 | 11083 | 62 | 14 |
| 5577646 | 70040 | 35 | 16 |
| 5578186 | 80463 | 35 | 8 |
| 56-10-801-10 | 94222 | 1 | 25 |
| 5622759 | 70040 | 39 | 12 |
| 571004 | 75915 | 83 | 112 |
| 6-400/1 | 12670 | 31 | 9 |
| 6B8208 | 11083 | 61 | 45 |
| 6B830 | 11083 | 61 | 26 |
| 6CCCTX-S | 08752 | 34 | 10 |
| 6DTXS | 08752 | 35 | 11 |
| 6D9442 | 11083 | 57 | 93 |
| 6F1069 | 11083 | 41 | 7 |
| 6F4855 | 11083 | 56 | 31 |
| 6F6672 | 11083 | 40 | 47 |
| 6F7062 | 11083 | 80 | 12 |
| 6F7062 | 11083 | 80 | 26 |
| 6F8007 | 11083 | 61 | 28 |
| 6F9163 | 11083 | 61 | 56 |
| 6GTXS | 08752 | 34 | 12 |
| 6H3957 | 11083 | 45 | 18 |
| 6H411 | 11083 | 61 | 54 |
| 6H9954 | 11083 | 41 | 9 |
| 6L1559 | 11083 | 57 | 39 |
| 6L2324 | 11083 | 59 | 15 |
| 6L3052 | 11083 | 54 | 11 |
| 6L3052 | 11083 | 55 | 8 |
| 6L3528 | 11083 | 56 | 24 |
| 6L4704 | 11083 | 59 | 20 |
| 6L5359 | 11083 | 43 | 32 |
| 6L5773 | 11083 | 57 | 5 |
| 6L5874 | 11083 | 73 | 7 |
| 6L7283 | 11083 | 58 | 6 |
| 6L8562 | 11083 | 63 | 13 |
| 6L8850 | 11083 | 55 | 14 |
| 6L8968 | 11083 | 55 | 6 |
| 6N1022 | 11083 | 54 | 4 |
| 6N1035 | 11083 | 69 | 21 |
| 6N1035 | 11083 | 69 | 24 |
| 6N1036 | 11083 | 67 | 17 |
| 6N1078 | 11083 | 40 | 72 |
| 6N1133 | 11083 | 57 | KIT |
| 6N123 | 11083 | 46 | 21 |
| 6N205 | 11083 | 40 | 16 |
| 6N265 | 11083 | 57 | 24 |
| 6N2810 | 11083 | 40 | 10 |
| 6N2843 | 11083 | 40 | 3 |
| 6N3321 | 11083 | 57 | 73 |
| 6N3321 | 11083 | 57 | 83 |
| 6N411 | 11083 | 40 | 26 |
| 6N412 | 11083 | 40 | 21 |
| 6N5933 | 11083 | 57 | 8 |
| 6N6403 | 11083 | 41 | 10 |
| 6N6404 | 11083 | 41 | 11 |
| 6N6597 | 11083 | 57 | 32 |
| 6N6958 | 11083 | 57 | 57 |
| 6N7174 | 11083 | 66 | 13A |
| 6N7523 | 11083 | 57 | 7 |
| 6N7527 | 11083 | 40 | 38 |
| 6N7887 | 11083 | 72 | 4 |
| 6N8001 | 11083 | 80 | 16 |
| 6N8002 | 11083 | 80 | 17 |
| 6N8103 | 11083 | 66 | 5 |
| 6N8625 | 11083 | 57 | 80 |
| 6N8626 | 11083 | 57 | 78 |
| 6N8627 | 11083 | 57 | 79 |
| 6N9060 | 11083 | 75 | 5 |
| 6N9061 | 11083 | 75 | 7 |
| 6N9312 | 11083 | 45 | 9 |
| 6S630V | 08805 | 19 | 16 |
| 6V190 | 11083 | 84 | 14 |
| 600J | 75382 | 27 | 20 |
| 601J | 75382 | 22 | 20 |
| 601J | 75382 | 31 | 12 |
| 602J | 83330 | 19 | 53 |
| 61-040741-40-0142B-0542B | 78189 | 15 | 5 |
| 61-040741-40-0142B-0542B | 78189 | 24 | 19 |
| 61-040741-40-0142B-0542B | 78189 | 12 | 5 |
| 61-040741-40-0142B-0542B | 78189 | 23 | 42 |
| 61-040741-40-0142B-0542B | 78189 | 24 | 21 |
| 61-040741-40-0142B-0542B | 78189 | 26 | 42 |
| 61-040741-40-0142B-0542B | 78189 | 27 | 24 |
| 61-040741-40-0142B-0542B | 78189 | 30 | 5 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 61-040741-40-0142B-0542B | 78189 | 49 | 13 |
| 61-040741-40-0142B-0542B | 78189 | 83 | 89 |
| 61-040841-40-0142B-0542B | 78189 | 22 | 5 |
| 61-060041-40-0142B-0542B | 78189 | 83 | 128 |
| 61-06041-40-0142B-0542B | 78189 | 24 | 4 |
| 61-060441-10-0142B-0542B | 78189 | 27 | 9 |
| 61-060441-40-0142B-0542B | 78189 | 12 | 14 |
| 61-060441-40-0142B-0542B | 78189 | 25 | 1 |
| 61-060441-40-0142B-0542B | 78189 | 35 | 12 |
| 61-060441-40-0142B-0542B | 78189 | 81 | 20 |
| 61-060441-40 0142B-0542B | 78189 | 81 | 33 |
| 61-06051-40-0142B-0542B | 78189 | 83 | 1 |
| 61-060541-40-0142B-0542B | 78189 | 15 | 4 |
| 61-060641-40-0142B-0542B | 78189 | 2 | 1 |
| 61-060641-40-0142B-0542B | 78189 | 18 | 3 |
| 61-060641-40-0142B-0542B | 78189 | 22 | 31 |
| 61-060641-40-0142B-0542B | 78189 | 23 | 13 |
| 61-060641-40-0142B-0542B | 78189 | 25 | 36 |
| 61-060641-40-0142B-0542B | 78189 | 30 | 4 |
| 61-060641-40-0142B-0542B | 78189 | 82 | 165 |
| 61-060641-40-0142B-0542B | 78189 | 83 | 87 |
| 61-060741-40-0142B-0542B | 78189 | 23 | 46 |
| 61-060741-40-0142B-0542B | 78189 | 25 | 7 |
| 61-060741-40-0142B-0542B | 78189 | 26 | 11 |
| 61-060841-40-0142B-0542B | 78189 | 12 | 11 |
| 61-060841-40-0142B-0542B | 78189 | 22 | 7 |
| 61-060841-10-0142B-0542B | 78189 | 25 | 51 |
| 61-060841-40-0142B-0542B | 78189 | 30 | 13 |
| 61-061041-40-0142B-0542B | 78189 | 26 | 30 |
| 61-061041-40-0142B-0542B | 78189 | 27 | 21 |
| 61-061041-40-0142B-0542B | 78189 | 83 | 92 |
| 61-061241-40 0142B-0542B | 78189 | 24 | 34 |
| 61-061241-40-0142B-0542B | 78189 | 52 | 19 |
| 61-080641-40-0142B-0542B | 78189 | 18 | 5 |
| 61-080641-40-0142B-0542B | 78189 | 22 | 33 |
| 61-080641-40-0142B-0542B | 78189 | 23 | 4 |
| 61-080841-40-0142B-0542B | 78189 | 1 | 20 |
| 61-080841-40-0142B-0542B | 78189 | 24 | 10 |
| 61-080841-40-0142B-0542B | 78189 | 83 | 124 |
| 61-081041-40-0142B-0542B | 78189 | 23 | 18 |
| 61-081041-40-0142B-0542B | 78189 | 24 | 17 |
| 61-081241-40-0142B-0542B | 78189 | 22 | 18 |
| 61-081241-40-0142B-0542B | 78189 | 23 | 8 |
| 61-081241-40-0142B-0542B | 78189 | 31 | 13 |
| 61-081241-40-0142B-0542B | 78189 | 83 | 110 |
| 61-100841-40-0142B-0542B | 78189 | 1 | 16 |
| 61-100841-40-0142B-0542B | 78189 | 3 | 4 |
| 61-100841-10-0142B-0542B | 78189 | 11 | 38 |
| 61-100841-40-0142B-0542B | 78189 | 22 | 22 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 61-100841-40-0142B-0542B | 78189 | 23 | 37 |
| 61-100841-40-0142B-0542B | 78189 | 24 | 7 |
| 61-100841-40-0142B-0542B | 78189 | 31 | 5 |
| 61-100841-40-0142B-0542B | 78189 | 33 | 34 |
| 61-101041-40-0142B-0542B | 78189 | 18 | 1 |
| 61-101041-40-0142B-0542B | 78189 | 31 | 1 |
| 61-101041-40 0142B-0542B | 78189 | 32 | 1 |
| 61-101041-40-0142B-0542B | 78189 | 42 | 3 |
| 61-101041-40-0142B-0542B | 78189 | 49 | 8 |
| 61-101441-40-0142B-0542B | 78189 | 8 | 1 |
| 61-102441-90-0142B-0542B | 78189 | 20 | 11 |
| 6105-0001 | 93742 | 22 | 38 |
| 63030-211-50 | 12670 | 27 | 31 |
| 6435735 | 70040 | 35 | 13 |
| 6438472 | 70040 | 35 | 15 |
| 650T45 | 95408 | 83 | 13 |
| 6700 | 79470 | 82 | 61 |
| 67941 | 55284 | 43 | 15 |
| 69-500 Rev C | 12670 | 32 | 3 |
| 69-502-2 | 30554 | 32 | 12 |
| 69-502-7 | 30554 | 18 | 7 |
| 69-503 | 30554 | 32 | 8 |
| 69-504 | 30554 | 32 | 17 |
| 69-505 | 30554 | 32 | 22 |
| 69-506 | 30554 | 32 | 4 |
| 69-507 | 30554 | 32 | 26 |
| 69-508 | 30554 | 32 | 25 |
| 69-511 | 30554 | 32 | 11 |
| 69-512 | 30554 | 32 | 24 |
| 69-530 | 30554 | 18 | 2 |
| 69-532 | 30554 | 18 | 21 |
| 69-533 | 30554 | 18 | 22 |
| 69-536 | 30554 | 18 | 4 |
| 69-539-2 | 30554 | 36 | 36 |
| 69-539-2 | 93742 | 38 | 13 |
| 69-539-2 | 30554 | 38 | 13 |
| 69-539-2 | 30554 | 49 | 10 |
| 69-540 | 30554 | 18 | 26 |

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 69-541 | 30554 | 18 | 36 |
| 69-542 | 30554 | 18 | 29 |
| 69-545 | 30554 | 18 | 37 |
| 69-547 | 30554 | 12 | 9 |
| 69-547 | 30554 | 18 | 34 |
| 69-547 | 30554 | 27 | 13 |
| 69-548 | 30554 | 19 | 18 |
| 69-549 | 30554 | 19 | 23 |
| 69-561-1 | 30554 | 12 | 6 |
| 69-561-1 | 30554 | 15 | 6 |
| 69-561-1 | 30554 | 22 | 6 |
| 69-561-1 | 30554 | 23 | 43 |
| 69-561-1 | 30554 | 24 | 20 |
| 69-561-1 | 30554 | 25 | 43 |
| 69-561-1 | 30554 | 27 | 25 |
| 69-561-1 | 30554 | 30 | 6 |
| 69-561-1 | 30554 | 49 | 14 |
| 69-561-1 | 30554 | 82 | 17 |
| 69-561-1 | 30554 | 83 | 90 |
| 69-561-2 | 30554 | 12 | 12 |
| 69-561-2 | 30554 | 19 | 78 |
| 69-561-2 | 30554 | 22 | 8 |
| 69-561-2 | 30554 | 23 | 14 |
| 69-561-2 | 30554 | 24 | 35 |
| 69-561-2 | 30554 | 25 | 8 |
| 69-561-2 | 30554 | 25 | 31 |
| 69-561-2 | 30554 | 27 | 22 |
| 69-561-2 | 30554 | 30 | 14 |
| 69-561-2 | 30554 | 83 | 93 |
| 69-561-3 | 30554 | 4 | 6 |
| 69-561-3 | 30554 | 19 | 32 |
| 69-561-3 | 30554 | 22 | 19 |
| 69-561-3 | 30554 | 22 | 9 |
| 69-561-3 | 30554 | 24 | 12 |
| 69-561-3 | 30554 | 31 | 3 |
| 69-561-3 | 30554 | 83 | 111 |
| 69-561-3 | 30554 | 83 | 125 |
| 69-561-4 | 30554 | 1 | 17 |
| 69-561-4 | 30554 | 3 | 5 |
| 69-561-4 | 30554 | 8 | 2 |
| 69-561-4 | 30554 | 11 | 39 |
| 69-561-4 | 30554 | 19 | 55 |
| 69-561-4 | 30554 | 24 | 49 |
| 69 561 4 | 30554 | 27 | 6 |
| 69-561-4 | 30554 | 32 | 2 |
| 69-561-4 | 30554 | 33 | 36 |
| 69-561-4 | 30554 | 42 | 4 |
| 69-561-4 | 30554 | 49 | 9 |
| 69-561-6 | 30554 | 43 | 11 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No | Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|---|---|---|---|
| 69-570-3 | 30554 | 4 | 7 | 69-662-18 | 30554 | 83 | 87 |
| 69-572 | 30554 | 19 | 29 | 69-662-19 | 30554 | 23 | 46 |
| 69-574 | 30554 | 19 | 13 | 69-662-19 | 30554 | 27 | 11 |
| 69-575 | 30554 | 19 | 12 | 69-662-20 | 30554 | 12 | 11 |
| 69-576-2 | 30554 | 19 | 11 | 69-662-20 | 30554 | 22 | 7 |
| 69-577 | 30554 | 19 | 10 | 69-662-20 | 30554 | 25 | 51 |
| 69-580 | 93472 | 4 | 4 | 69-662-20 | 30554 | 30 | 13 |
| 69-581 | 30554 | 4 | 10 | 69-662-21 | 30554 | 26 | 30 |
| 69-582 | 30554 | 4 | 9 | 69-662-21 | 30554 | 28 | 21 |
| 69-583 | 30554 | 4 | 8 | 69-662-21 | 30554 | 83 | 92 |
| 69-589-1 | 30554 | 19 | 68 | 69-662-21 | 30554 | 83 | 128 |
| 69-590-6 | 30554 | 19 | 4 | 69-662-22 | 30554 | 24 | 34 |
| 69-591 | 30554 | 19 | 80 | 69-662-22 | 30554 | 52 | 19 |
| 69-592-2 | 30554 | 19 | 79 | 69-662-3 | 30554 | 15 | 5 |
| 69-593 | 30554 | 19 | 15 | 69-662-3 | 30554 | 24 | 19 |
| 69-594 | 30554 | 19 | 16 | 69-662-33 | 30554 | 18 | 5 |
| 69-595 | 30554 | 19 | 8 | 69-662-33 | 30554 | 22 | 33 |
| 69-597 | 30554 | 19 | 5 | 69-662-33 | 30554 | 23 | 4 |
| 69-599 | 30554 | 19 | 6 | 69-662-35 | 30554 | 1 | 20 |
| 69-651-1 | 30554 | 27 | 20 | 69-662-35 | 30554 | 24 | 10 |
| 69-651-2 | 30554 | 22 | 20 | 69-662-35 | 30554 | 83 | 124 |
| 69-651-2 | 30554 | 31 | 12 | 69-662-36 | 30554 | 23 | 18 |
| 69-654 | 30554 | 82 | 32 | 69-662-36 | 30554 | 24 | 17 |
| 69-655 | 30554 | 82 | 38 | 69-662-36 | 30554 | 83 | 110 |
| 69-656 | 30554 | 82 | 21 | 69-662-37 | 30554 | 22 | 18 |
| 69-657 | 30554 | 1 | 26 | 69-662-37 | 30554 | 23 | 8 |
| 69-658 | 30554 | 19 | 66 | 69-662-37 | 30554 | 31 | 13 |
| 69-658 | 30554 | 23 | 30 | 69-662-4 | 30554 | 12 | 5 |
| 69-659 | 30554 | 44 | 40 | 69-662-4 | 30554 | 23 | 42 |
| 69-659 | 30554 | 82 | 48 | 69-662-4 | 30554 | 24 | 21 |
| 69-659 | 30554 | 83 | 40 | 69-662-4 | 30554 | 25 | 42 |
| 69-661-14 | 30554 | 19 | 46 | 69-662-4 | 30554 | 27 | 24 |
| 69-662-16 | 30554 | 12 | 14 | 69-662-4 | 30554 | 30 | 5 |
| 69-662-16 | 30554 | 25 | 1 | 69-662-4 | 30554 | 49 | 13 |
| 69-662-16 | 30554 | 27 | 9 | 69-662-4 | 30554 | 83 | 89 |
| 69-662-16 | 30554 | 36 | 12 | 69-662-49 | 30554 | 27 | 5 |
| 69-662-16 | 30554 | 82 | 33 | 69-662-5 | 30554 | 22 | 5 |
| 69-662-17 | 30554 | 15 | 4 | 69-662-50 | 30554 | 1 | 16 |
| 69-662-17 | 30554 | 82 | 20 | 69-662-50 | 30554 | 3 | 4 |
| 69-662-18 | 30554 | 2 | 1 | 69-662-50 | 30554 | 11 | 38 |
| 69-662-18 | 30554 | 18 | 3 | 69-662-50 | 30554 | 24 | 7 |
| 69-662-18 | 30554 | 22 | 31 | 69-662-50 | 30554 | 31 | 5 |
| 69-662-18 | 30554 | 23 | 13 | 69-662-50 | 30554 | 33 | 34 |
| 69-662-18 | 30554 | 24 | 4 | 69-662-51 | 30554 | 18 | 1 |
| 69-662-18 | 30554 | 25 | 7 | 69-662-51 | 30554 | 31 | 1 |
| 69-662-18 | 30554 | 25 | 36 | 69-662-51 | 30554 | 32 | 1 |
| 69-662-18 | 30554 | 30 | 4 | 69-662-51 | 30554 | 42 | 3 |
| 69-662-18 | 30554 | 82 | 165 | 69-662-51 | 30554 | 49 | 8 |
| 69-662-18 | 30554 | 83 | 1 | 69-662-53 | 30554 | 8 | 1 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 69-662-64 | 30554 | 22 | 22 |
| 69-662-64 | 30554 | 22 | 37 |
| 69-662-70 | 30554 | 20 | 11 |
| 69-668 | 30554 | 81 | 19 |
| 69-668-04 | 30554 | 81 | 23 |
| 69-669 | 30554 | 30 | 17 |
| 69-677-2 | 30554 | 19 | 36 |
| 69-691 | 30554 | 30 | 18 |
| 69-692-5 | 30554 | 29 | 14 |
| 69-692-6 | 30554 | 81 | 46 |
| 69-693-2 | 30554 | 1 | 38 |
| 69-693-2 | 30554 | 26 | 9 |
| 69-693-2 | 30554 | 26 | 13 |
| 69-694-1 | 30554 | 1 | 36 |
| 69-694-6 | 30554 | 19 | 76 |
| 69-694-7 | 30554 | 6 | 13 |
| 69-695 | 30554 | 1 | 35 |
| 69-695 | 30554 | 6 | 12 |
| 69-695 | 30554 | 19 | 75 |
| 69-697-4 | 30554 | 14 | 2 |
| 69-739 | 30554 | 19 | 62 |
| 69-739 | 30554 | 23 | 35 |
| 69-740 | 30554 | 23 | 36 |
| 69-740 | 30554 | 82 | 36 |
| 69-741 | 30554 | 23 | 34 |
| 69-763 | 30554 | 19 | 71 |
| 69-764 | 30554 | 19 | 67 |
| 69-765 | 30554 | 19 | 56 |
| 69-766 | 30554 | 19 | 77 |
| 69-767 | 30554 | 23 | 37 |
| 69-768 | 30554 | 23 | 23 |
| 69-769 | 30554 | 4 | 16 |
| 69-771 | 30554 | 1 | 6 |
| 69-771 | 30554 | 5 | 15 |
| 69-774 | 30554 | 49 | 7 |
| 69-775-01 | 30554 | 82 | 85 |
| 69-777 | 30554 | 36 | 11 |
| 69-778 | 30554 | 36 | 26 |
| 69-779-2 | 30554 | 21 | 2 |
| 69-780-2 | 30554 | 10 | - |
| 69-781 | 30554 | 21 | 1 |
| 69-782 | 30554 | 49 | 18 |
| 69-785 | 30554 | 32 | 3 |
| 69-787-2 | 30554 | 34 | 3 |
| 695 | 79470 | 34 | 14 |
| 69979-11 | 81349 | 18 | 12 |
| 7-75 | 31211 | 10 | 34 |
| 7-8 | 949901 | 10 | 35 |
| 7D9749 | 11083 | 57 | 81 |
| 7F7590 | 11083 | 61 | 19 |
| 7F8607 | 11083 | 39 | 11 |
| 7F8607 | 11083 | 56 | 20 |
| 7H3171 | 11083 | 61 | 67 |
| 7H3171 | 11083 | 80 | 29 |
| 7H3639 | 11083 | 57 | 104 |
| 7J9018 | 11083 | 56 | 9 |
| 7L2031 | 11083 | 53 | 9 |
| 7L382 | 11083 | 63 | 14 |
| 7L383 | 11083 | 63 | 8 |
| 7L384 | 11083 | 63 | 12 |
| 7L4346 | 11083 | 63 | 4 |
| 7L494 | 11083 | 66 | 9 |
| 7L496 | 11083 | 53 | 15 |
| 7L4975 | 11083 | 57 | 48 |
| 7L4984 | 11083 | 56 | 10 |
| 7L520 | 11083 | 63 | 9 |
| 7L7640 | 11083 | 53 | 7 |
| 7M4046 | 11083 | 80 | 10 |
| 7M7027 | 11083 | 61 | 9 |
| 7M8322 | 11083 | 54 | 3 |
| 7M9107 | 11083 | 61 | 51 |
| 7N109 | 11083 | 60 | 7 |
| 7N110 | 11083 | 60 | 6 |
| 7N1338 | 11083 | 57 | 17 |
| 7N172 | 11083 | 46 | 6 |
| 7N196 | 11083 | 45 | 23 |
| 7N200 | 11083 | 46 | 5 |
| 7N208 | 11083 | 47 | 5 |
| 7N2299 | 11083 | 58 | 2 |
| 7N2377 | 11083 | 57 | 107 |
| 7N2404 | 11083 | 57 | 40 |
| 7N2585 | 11083 | 57 | 44 |
| 7N2586 | 11083 | 57 | 97 |
| 7N2626 | 11083 | 41 | 2 |
| 7N2871 | 11083 | 41 | 15 |
| 7N2872 | 11083 | 41 | 16 |
| 7N2874 | 11083 | 41 | 18 |
| 7N2970 | 11083 | 63 | 3 |
| 7N3094 | 11083 | 57 | 26 |
| 7N3095 | 11083 | 57 | 29 |
| 7N3096 | 11083 | 57 | 33 |
| 7N3181 | 11083 | 41 | 12 |
| 7N3515 | 11083 | 76 | 17 |
| 7N3524 | 11083 | 76 | 15 |
| 7N3536 | 11083 | 74 | 3 |
| 7N3759 | 11083 | 55 | 42 |
| 7N3760 | 11083 | 55 | 41 |
| 7N4448 | 11083 | 66 | 24 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 7N450 | 11083 | 40 | 8 |
| 7N4525 | 11083 | 78 | 6 |
| 7N4534 | 11083 | 69 | 9 |
| 7N4716 | 11083 | 76 | 6 |
| 7N4722 | 11083 | 76 | 4 |
| 7N4791 | 11083 | 76 | 13 |
| 7N5193 | 11083 | 45 | 16 |
| 7N5195 | 11083 | 45 | 14 |
| 7N5899 | 11083 | 45 | 19 |
| 7N5900 | 11083 | 45 | |
| 7N5910 | 11083 | 45 | 8 |
| 7N7193 | 11083 | 57 | 76 |
| 7N7248 | 11083 | 54 | 26 |
| 7N7252 | 11083 | 54 | 39 |
| 7N7997 | 11083 | 80 | 5 |
| 7N7998 | 11083 | 80 | 4 |
| 7N7999 | 11083 | 66 | 20 |
| 7N8015 | 11083 | 65 | 21 |
| 7N8018 | 11083 | 66 | 18 |
| 7N8025 | 11083 | 66 | 19 |
| 7N8374 | 11083 | 72 | 10 |
| 7N8516 | 11083 | 66 | 28 |
| 7N9342 | 11083 | 78 | 2 |
| 7N944 | 11083 | 47 | 4 |
| 7N9635 | 11083 | 17 | 3 |
| 7N9805 | 11083 | 70 | 8 |
| 752204 | 11083 | 77 | 3 |
| 753161 | 11083 | 65 | 30 |
| 753206 | 11083 | 66 | 8 |
| 753224 | 11083 | 80 | 14 |
| 753916 | 11083 | 60 | 5 |
| 753919 | 11083 | 60 | 4 |
| 756744 | 11083 | 60 | 27 |
| 756798 | 11083 | 57 | 99 |
| 757144 | 11083 | 66 | 14 |
| 70-1135 | 30554 | 22 | 38 |
| 70-1136 | 30554 | 22 | 36 |
| 70-1137 | 30554 | 22 | 35 |
| 70-1138 | 30554 | 22 | 34 |
| 70-1251 | 30554 | 53 | 15 |
| 70-1310 | 30554 | 53 | 18 |
| 70-1539 | 30554 | 36 | 11 |
| 70-1594 | 30554 | 36 | 40 |
| 70-4001 | 30554 | 51 | 17 |
| 70-4001 | 30554 | 52 | - |
| 70-4012 | 30554 | 19 | 7 |
| 70-4016 | 30554 | 19 | 9 |
| 70-4024 | 30554 | 24 | 40 |
| 70-4024 | 30554 | 82 | 35 |
| 70-4031 | 30554 | 24 | 15 |
| 70-4032 | 30554 | 25 | 10 |
| 70-4033 | 30554 | 25 | 41 |
| 70-4034 | 30554 | 25 | 11 |
| 70-4034 | 30554 | 25 | 62 |
| 70-4035 | 30554 | 25 | 20 |
| 70-4037 | 30554 | 25 | 68 |
| 70-4040 | 30554 | 12 | 13 |
| 70-4040 | 30554 | 24 | 13 |
| 70-4041 | 30554 | 24 | 16 |
| 70-4042 | 30554 | 24 | 39 |
| 70-4043 | 30554 | 14 | 1 |
| 70-4044 | 30554 | 82 | 72 |
| 70-4046 | 30554 | 16 | - |
| 70-4048 | 30554 | 83 | 52 |
| 70-4050-01 | 30554 | 36 | 2 |
| 70-4053 | 30554 | 42 | 7 |
| 70-4054 | 30554 | 81 | 43 |
| 70-4054 | 30554 | 81 | 44 |
| 70-4059 | 30554 | 36 | 37 |
| 70-4059 | 30554 | 38 | 14 |
| 70-4064 | 30554 | 23 | 15 |
| 70-4065 | 30554 | 83 | 127 |
| 70-4066 | 30554 | 83 | 123 |
| 70-4067 | 30554 | 31 | 7 |
| 70-4073 | 30554 | 83 | 8 |
| 70-4074 | 30554 | 83 | 31 |
| 70-4084 | 30554 | 31 | 4 |
| 70-4085 | 30554 | 31 | 9 |
| 70-4086 | 30554 | 31 | 6 |
| 70-4088 | 30554 | 44 | 58 |
| 70-4092 | 30554 | 44 | 6 |
| 70-4094 | 30554 | 59 | 3 |
| 70-4096-01 | 30554 | 20 | 7 |
| 70-4101 | 30554 | 30 | 3 |
| 70-4102 | 30554 | 30 | 21 |
| 70-4103 | 30554 | 30 | 12 |
| 70-4104 | 30554 | 30 | 20 |
| 70-4105 | 30554 | 25 | 66 |
| 70-4106 | 30554 | 25 | 55 |
| 70-4110 | 30554 | 24 | 57 |
| 70-4111 | 30554 | 25 | 2 |
| 70-4112 | 30554 | 25 | 39 |
| 70-4112 | 30554 | 25 | 52 |
| 70-4113 | 30554 | 25 | 57 |
| 70-4115 | 30554 | 24 | 14 |
| 70-4115 | 30554 | 25 | |
| 70-4116 | 30554 | 25 | 67 |
| 70-4116-01 | 30554 | 25 | 69 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No | Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|---|---|---|---|
| 70-4117 | 30554 | 25 | 50 | 70-4266 | 30554 | 7 | 18 |
| 70-4118 | 30554 | 25 | 56 | 70-4267 | 30554 | 7 | 19 |
| 70-4119 | 30554 | 25 | 3 | 70-4268 | 30554 | 7 | 7 |
| 70-4120 | 30554 | 25 | 29 | 70-4270 | 30554 | 81 | 53 |
| 70-4120 | 30554 | 38 | - | 70-4289 | 30554 | 26 | 20 |
| 70-4121 | 30554 | 25 | 44 | 70-4290 | 30554 | 26. | 43 |
| 70-4123 | 30554 | 25 | 58 | 70-4291 | 30554 | 26 | 28 |
| 70-4145 | 30554 | 24 | 3 | 70-4292 | 30554 | 26 | 25 |
| 70-4146 | 30554 | 24 | 58 | 70-4293-01 | 30554 | 26 | 30 |
| 70-4147 | 30554 | 24 | 9 | 70-4293-02 | 30554 | 26 | 31 |
| 70-4148 | 30554 | 24 | 33 | 70-4293-03 | 30554 | 26 | 32 |
| 70-4149 | 30554 | 24 | 48 | 70-4293-04 | 30554 | 26 | 33 |
| 70-4150 | 30554 | 24 | 46 | 70-4293-05 | 30554 | 26 | 34 |
| 70-4151 | 30554 | 24 | 41 | 70-4293-06 | 30554 | 26 | 35 |
| 70-4152 | 30554 | 24 | 22 | 70-4293-07 | 30554 | 26 | 36 |
| 70-4156 | 30554 | 23 | 40 | 70-4293-08 | 30554 | 26 | 37 |
| 70-4158 | 30554 | 23 | 7 | 70-4293-09 | 30554 | 26 | 38 |
| 70-4159 | 30554 | 23 | 11 | 70-4293-10 | 30554 | 26 | 39 |
| 70-4163 | 30554 | 42 | 2 | 70-4293-11 | 30554 | 26 | 40 |
| 70-4164 | 30554 | 38 | 2 | 70-4293-12 | 30554 | 26 | 41 |
| 70-4165 | 30554 | 38 | 9 | 70-4293-13 | 30554 | 26 | 42 |
| 70-4166 | 30554 | 40 | 8 | 70-4294 | 30554 | 26 | 26 |
| 70-4170 | 30554 | 38 | 19 | 70-4295 | 30554 | 26 | 29 |
| 70-4172 | 30554 | 81 | 45 | 70-4296 | 30554 | 29 | 4 |
| 70-4173 | 30554 | 38 | 12 | 70-4297 | 30554 | 29 | 15 |
| 70-4175 | 30554 | 15 | 3 | 70-4307 | 30554 | 11 | 81 |
| 70-4176 | 30554 | 15 | 13 | 70-4308 | 30554 | 33 | 72 |
| 70-4177 | 30554 | 15 | 7 | 70-4324 | 30554 | 1 | 39 |
| 70-4190 | 30554 | 22 | 4 | 70-4325 | 30554 | 43 | 14 |
| 70-4196 | 30554 | 83 | 86 | 70-4326 | 30554 | 3 | 17 |
| 70-4197 | 30554 | 83 | 137 | 70-4328 | 30554 | 1 | 45 |
| 70-4198 | 30554 | 83 | 88 | 70-4329 | 30554 | 1 | 48 |
| 70-4202 | 30554 | 83 | 94 | 70-4332 | 30554 | 44 | 52 |
| 70-4203 | 30554 | 43 | 17 | 70-4333 | 30554 | 3 | 20 |
| 70-4206 | 30554 | 22 | 3 | 70-4336 | 30554 | 3 | 18 |
| 70-4207 | 30554 | 22 | 39 | 70-4337 | 30554 | 3 | 3 |
| 70-4209 | 30554 | 22 | 23 | 70-4338 | 30554 | 3 | 6 |
| 70-4210 | 30554 | 22 | 30 | 70-4339 | 30554 | 8 | 9 |
| 70-4211 | 30554 | 22 | 9 | 70-4340 | 30554 | 1 | 11 |
| 70-4214 | 30554 | 22 | 32 | 70-4345 | 30554 | 82 | 3 |
| 70-4217 | 30554 | 23 | 6 | 70-4347 | 30554 | 49 | 23 |
| 70-4238 | 30554 | 23 | 12 | 70-4348 | 30554 | 50 | 4 |
| 70-4239 | 30554 | 23 | 38 | 70-4349 | 30554 | 50 | 5 |
| 70-4246 | 30554 | 36 | 7 | 70-4351 | 30554 | 26 | 11 |
| 70-4247 | 30554 | 36 | 44 | 70-4351-01 | 30554 | 26 | 14 |
| 70-4262 | 30554 | 7 | 20 | 70-4354 | 30554 | 79 | 42 |
| 70-4263 | 30554 | 7 | 3 | 70-4358 | 30554 | 53 | 17 |
| 70-4264-01 | 30554 | 7 | 15 | 70-4361 | 30554 | 51 | 15 |
| 70-4264-02 | 30554 | 7 | 16 | 70-4362 | 30554 | 1 | 10 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No | Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|---|---|---|---|
| 70-4363 | 30554 | 81 | 4 | 70-4571-1 | 30554 | 52 | 84 |
| 70 4364-01 | 30554 | 5 | 6 | 70-4571-2 | 30554 | 52 | 85 |
| 70-4364-02 | 30554 | 5 | 7 | 70-4576-2 | 30554 | 52 | 83 |
| 70-4367 | 30554 | 5 | 17 | 70-4577 | 30554 | 52 | 36 |
| 70-4370 | 30554 | 5 | 16 | 70-4579 | 30554 | 52 | 94 |
| 70-4371 | 30554 | 5 | 9 | 70-4582 | 30554 | 52 | 78 |
| 70-4372 | 30554 | 5 | 20 | 70-4584 | 30554 | 52 | 88 |
| 70-4373 | 30554 | 5 | 10 | 70-4592 | 30554 | 52 | 74 |
| 70-4374 | 30554 | 26 | 16 | 70-4594 | 30554 | 52 | 25 |
| 70-4375 | 30554 | 26 | 18 | 70-4596 | 30554 | 52 | 63 |
| 70-4398 | 30554 | 53 | 14 | 70-4597 | 30554 | 52 | 59 |
| 70-4501 | 30554 | 52 | 2 | 70-4598 | 30554 | 52 | 62 |
| 70-4506 | 30554 | 52 | 26 | 70-4603 | 30554 | 52 | 80 |
| 70-4507 | 30554 | 52 | 90 | 70-4606 | 30554 | 52 | 64 |
| 70-4508 | 30554 | 52 | 13 | 70-4615 | 30554 | 52 | 81 |
| 70-4509 | 30554 | 52 | 77 | 70-4626-1 | 30554 | 52 | 44 |
| 70-4511 | 30554 | 52 | 70 | 70-4626-1 | 30554 | 52 | 50 |
| 70-4512 | 30554 | 52 | 34 | 70-4626-2 | 30554 | 52 | 56 |
| 70-4513 | 30554 | 52 | 97 | 70-4628 | 30554 | 52 | 17 |
| 70-4514 | 30554 | 52 | 24 | 70-4629-1 | 30554 | 52 | 100 |
| 70-4528 | 30554 | 52 | 29 | 70-4629-2 | 30554 | 52 | 101 |
| 70-4529 | 93568 | 52 | 30 | 70-4629-3 | 30554 | 52 | 102 |
| 70-4529-16 | 30554 | 52 | 68 | 70-4629-4 | 30554 | 52 | 103 |
| 70-4530 | 30554 | 52 | 28 | 70-4629-5 | 30554 | 52 | 104 |
| 70-4531 | 30554 | 52 | 31 | 70-4629-6 | 30554 | 52 | 105 |
| 70-4532 | 30554 | 51 | 8 | 70-4629-7 | 30554 | 52 | 106 |
| 70-4533 | 30554 | 51 | 10 | 70-4629-8 | 30554 | 52 | 107 |
| 70-4534-1 | 30554 | 51 | 9 | 70-4629-9 | 30554 | 52 | 108 |
| 70-4535-1 | 30554 | 52 | 71 | 70-4629-10 | 30554 | 52 | 109 |
| 70-4535-3 | 30554 | 52 | 79 | 70-4629-11 | 30554 | 52 | 110 |
| 70-4535-4 | 30554 | 52 | 82 | 70-4629-12 | 30554 | 52 | 111 |
| 70-4537 | 30554 | 52 | 65 | 70-4629-13 | 30554 | 52 | 22 |
| 70-4539 | 30554 | 52 | 16 | 70-4629-14 | 30554 | 52 | 23 |
| 70-4540 | 30554 | 52 | 18 | 70-4629-15 | 30554 | 52 | 69 |
| 70-4542 | 30554 | 52 | 6 | 70-4629-17 | 30554 | 52 | 67 |
| 70-4543 | 30554 | 52 | 5 | 70-4629-18 | 30554 | 52 | 75 |
| 70-4544 | 30554 | 52 | 7 | 70-4629-19 | 30554 | 52 | 76 |
| 70-4545-1 | 30554 | 52 | 114 | 70-502 | 30554 | 4 | 3 |
| 70-4546 | 30554 | 52 | 95 | 70-507 | 30554 | 34 | 25 |
| 70-4547-1 | 30554 | 52 | 40 | 70-513 | 30554 | 36 | 23 |
| 70-4547-2 | 30554 | 52 | 46 | 70-514 | 30554 | 18 | 35 |
| 70-4547-3 | 30554 | 52 | 52 | 70-515 | 30554 | 18 | 6 |
| 70-4552-1 | 30554 | 52 | 60 | 70D44672B-02 | 31211 | 10 | - |
| 70 4564 | 30554 | 52 | 33 | 704112 | 30554 | 26 | 52 |
| 70-4565 | 30554 | 52 | 20 | 70920416 | 89926 | 80 | 27 |
| 70-4566 | 30554 | 52 | 96 | 71-4126 | 30554 | 12 | 15 |
| 70-4568 | 30554 | 52 | 112 | 71-4166 | 30554 | 42 | 8 |
| 70-4569-1 | 30554 | 52 | 87 | 71-4376 | 30554 | 43 | 9 |
| 70-4569-2 | 30554 | 52 | 86 | 71-4378 | 30554 | 43 | 20 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 71-4380-01 | 30554 | 34 | 44 |
| 71-4380-02 | 30554 | 34 | 45 |
| 71-4382 | 30554 | 51 | 13 |
| 71-4386 | 30554 | 26 | 17 |
| 71-4387 | 30554 | 26 | 19 |
| 71-4390 | 30554 | 4 | 14 |
| 71-4395 | 30554 | 34 | 41 |
| 71-4396 | 30554 | 43 | 21 |
| 71-4397 | 30554 | 53 | 21 |
| 71-4399 | 30554 | 53 | 10 |
| 71-4401 | 30554 | 5 | 11 |
| 71-4402 | 30554 | 7 | 22 |
| 71-4404 | 30554 | 31 | 15 |
| 71-4411 | 30554 | 44 | 34 |
| 71-4414 | 30554 | 82 | 84 |
| 71-4415 | 30554 | 82 | 75 |
| 71-4417 | 30554 | 81 | 8 |
| 71-4425 | 30554 | 1 | 22 |
| 71-4427 | 30554 | 1 | 23 |
| 71-4427-01 | 30554 | 1 | 24 |
| 71-4433 | 30554 | 83 | 75 |
| 71-4434 | 30554 | 83 | 7 |
| 71-4435 | 30554 | 83 | 47 |
| 71-4441 | 30554 | 43 | 37 |
| 71-4442 | 30554 | 79 | 8 |
| 71-4453 | 30554 | 3 | 10 |
| 71-4454 | 30554 | 81 | 31 |
| 71-4455 | 30554 | 81 | 32 |
| 71-4456 | 30554 | 81 | 29 |
| 71-4457 | 30554 | 81 | 28 |
| 71-4463 | 30554 | 6 | 14 |
| 71-4470 | 30554 | 51 | 7 |
| 71-4471 | 30554 | 34 | 1 |
| 71-4472 | 30554 | 31 | - |
| 71-4484 | 30554 | 5 | 4 |
| 71-4487 | 30554 | 1 | 47 |
| 71-4491 | 30554 | 4 | 15 |
| 71-4500 | 30554 | 82 | 77 |
| 71-4501 | 30554 | 49 | 17 |
| 71-4502-02 | 30554 | 2 | 13 |
| 71-4502-03 | 30554 | 2 | 22 |
| 71-4502-04 | 30554 | 82 | 79 |
| 71-4502-05 | 30554 | 2 | 8 |
| 71-4502-07 | 30554 | 2 | 14 |
| 71-4502-08 | 30554 | 2 | 17 |
| 71-4502-10 | 30554 | 49 | 16 |
| 71-4502-11 | 30554 | 49 | 15 |
| 71-4503 | 30554 | 2 | 5 |
| 71-4506 | 30554 | 12 | 18 |
| 71-4512 | 30554 | 2 | 7 |
| 71-4513 | 30554 | 2 | 15 |
| 71-4514 | 30554 | 2 | 16 |
| 71-4520 | 30554 | 83 | 4 |
| 71-4521 | 30554 | 82 | 168 |
| 71-4524 | 30554 | 2 | 18 |
| 71-4525 | 30554 | 2 | 20 |
| 71-4535 | 30554 | 1 | 28 |
| 71-4536 | 30554 | 1 | 30 |
| 71-4537 | 30554 | 1 | 33 |
| 71-4538 | 30554 | 1 | 31 |
| 71-4539 | 30554 | 1 | 32 |
| 71-4546 | 30554 | 1 | 15 |
| 71-4557 | 30554 | 1 | 27 |
| 71-4560 | 30554 | 26 | 15 |
| 71-4561 | 30554 | 8 | 12 |
| 71-4562-01 | 30554 | 11 | 42 |
| 71-4563-03 | 30554 | 11 | 54 |
| 71-4564-03 | 30554 | 11 | 49 |
| 71-4567-02 | 30554 | 11 | 64 |
| 71-4568-02 | 30554 | 11 | 59 |
| 71-4571-01 | 30554 | 44 | 46 |
| 71-4571-02 | 30554 | 44 | 47 |
| 71-4616 | 30554 | 20 | 22 |
| 71-4616 | 30554 | 43 | 26 |
| 71-4619 | 30554 | 43 | 25 |
| 71-4620 | 30554 | 20 | 10 |
| 71-4622-01 | 30554 | 81 | 37 |
| 71-4622-02 | 30554 | 81 | 38 |
| 71-4623 | 30554 | 53 | 6 |
| 71-4624 | 30554 | 43 | 5 |
| 71-4626 | 30554 | 11 | 92 |
| 71-4631 | 30554 | 43 | 4 |
| 71-4633 | 30554 | 26 | 7 |
| 71-4633-01 | 30554 | 26 | 10 |
| 71-4635 | 30554 | 81 | 52 |
| 71-4677 | 30554 | 24 | 5 |
| 71-4678 | 30554 | 24 | 6 |
| 71-4679 | 30554 | 6 | 7 |
| 71-4680 | 30554 | 49 | 1 |
| 71-4700 | 30554 | 36 | 14 |
| 71-4701 | 30554 | 36 | 16 |
| 71-4701-01 | 30554 | 36 | 19 |
| 71-4702 | 30554 | 36 | 13 |
| 71-4703 | 30554 | 29 | 13 |
| 71-4704 | 30554 | 1 | 29 |
| 71-4705 | 30554 | 11 | 40 |
| 71-4709 | 30554 | 20 | 21 |
| 71-4714 | 30554 | 29 | 8 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No | Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|---|---|---|---|
| 71-4726 | 30554 | 1 | 1 | 71-4859 | 30554 | 67 | 3 |
| 71-4726-01 | 30554 | 1 | 5 | 71-4859 | 30554 | 83 | 139 |
| 71-4739 | 30554 | 6 | 4 | 71-4867 | 30554 | 83 | 112 |
| 71-4740 | 30554 | 81 | 30 | 71-4878-01 | 30554 | 33 | 43 |
| 71-4744 | 30554 | 83 | 114 | 71-4878-01 | 30554 | 33 | 48 |
| 71-4745-01 | 30554 | 33 | 42 | 71-4878-01 | 30554 | 33 | 52 |
| 71-4751 | 30554 | 1 | 2 | 71-4878-01 | 30554 | 33 | 56 |
| 71-4752 | 30554 | 20 | 13 | 71-4879 | 30554 | 16 | 52 |
| 71-4753 | 30554 | 1 | 12 | 71-4881-01 | 30554 | 82 | 47 |
| 71-4754 | 30554 | 7 | 12 | 71-4881-01 | 30554 | 83 | 41 |
| 71-4758 | 30554 | 11 | 32 | 71-4881-03 | 30554 | 37 | 37 |
| 71-4766 | 30554 | 20 | 12 | 71-4893 | 30554 | 1 | 14 |
| 71-4767 | 30554 | 20 | 19 | 71-4897 | 30554 | 38 | 11 |
| 71-4775 | 30554 | 31 | 10 | 71-4901 | 30554 | 20 | 4 |
| 71-4777 | 30554 | 83 | 48 | 71-4908 | 30554 | 82 | 53 |
| 71-4786-01 | 30554 | 33 | 70 | 71-4914 | 30554 | 23 | 21 |
| 71-4786-02 | 30554 | 33 | 37 | 71-4915 | 30554 | 37 | 38 |
| 71-4786-03 | 30554 | 33 | 38 | 71-4916 | 30554 | 37 | 28 |
| 71-4786-04 | 30554 | 33 | 71 | 71-4917 | 30554 | 37 | 35 |
| 71-4789 | 30554 | 11 | 69 | 71-4918 | 30554 | 82 | 63 |
| 71-4801-01 | 30554 | 44 | 56 | 71-4919-03 | 30554 | 37 | 5 |
| 71-4802-03 | 30554 | 44 | 36 | 71-4919-04 | 30554 | 11 | 37 |
| 71-4803 | 30554 | 34 | 46 | 71-4924 | 30554 | 23 | 54 |
| 71-4804 | 30554 | 82 | 69 | 71-4925 | 30554 | 36 | 1 |
| 71 4804 | 30554 | 83 | 21 | 71-4934 | 30554 | 43 | 22 |
| 71-4811 | 30554 | 82 | 70 | 71-4936 | 30554 | 25 | 40 |
| 71-4811 | 30554 | 83 | 16 | 71-4936 | 30554 | 25 | 54 |
| 71-4814 | 30554 | 81 | 11 | 71-4937 | 30554 | 82 | 74 |
| 71-4818 | 30554 | 81 | 10 | 71-4938-03 | 30554 | 9 | 4 |
| 71-4820 | 30554 | 44 | 37 | 71-4939 | 30554 | 36 | 17 |
| 71-4821 | 30554 | 81 | 9 | 71-4939 | 30554 | 82 | 37 |
| 71-4822 | 30554 | 83 | 28 | 71-4940 | 30554 | 36 | 18 |
| 71-4825 | 30554 | 82 | 49 | 71-4944 | 30554 | 1 | 19 |
| 71-4825 | 30554 | 83 | 39 | 71-4945 | 30554 | 1 | 25 |
| 71-4833 | 30554 | 81 | 43 | 71-4960 | 30554 | 6 | 11 |
| 71-4840 | 30554 | 34 | 12 | 72-5313 | 30554 | 34 | 19 |
| 71-4840 | 30554 | 38 | 10 | 73-0507 | 30554 | 19 | 14 |
| 71-4842-05 | 30554 | 34 | 10 | 74-0501 | 30554 | 82 | 34 |
| 71-4842-10 | 30554 | 82 | 43 | 74-0650 | 30554 | 82 | 15 |
| 71-4842-10 | 30554 | 83 | 27 | 75-0851 | 30554 | 23 | 41 |
| 71-4842-11 | 30554 | 83 | 35 | 76-4108-02 | 30554 | 2 | 9 |
| 71-4843 | 30554 | 36 | 3 | 76-4115 | 30554 | 82 | - |
| 71-4844-06 | 30554 | 82 | 56 | 76-4116 | 30554 | 83 | - |
| 71-4845 | 30554 | 82 | 61 | 76-4117-07 | 30554 | 2 | 19 |
| 71-4848 | 30554 | 49 | 11 | 76-4117-08 | 30554 | 2 | 11 |
| 71-4849 | 30554 | 49 | 12 | 76-4117-09 | 30554 | 2 | 21 |
| 71-4853 | 30554 | 34 | 5 | 76-4117-10 | 30554 | 2 | 10 |
| 71-4853 | 30554 | 53 | 20 | 76-4122 | 30554 | 44 | 2 |
| 71-4855 | 30554 | 34 | 11 | 76-4123-02 | 30554 | 12 | 4 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No | Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|---|---|---|---|
| 76-4124-02 | 30554 | 12 | 19 | 79-4515 | 30554 | 4 | 20 |
| 76-4125 | 30554 | 12 | 13 | 79-4517 | 30554 | 37 | 8 |
| 76-4130 | 30554 | 11 | 88 | 8-4CTX-S | 08752 | 83 | 35 |
| 76-4132-01 | 30554 | 33 | 46 | 8-8CTX-S | 08752 | 82 | 43 |
| 76-4132-02 | 30554 | 33 | 50 | 8-8CTX-S | 08752 | 83 | 27 |
| 76-4132-03 | 30554 | 33 | 54 | 8B6349 | 11083 | 80 | 2 |
| 76-4132-04 | 30554 | 33 | 58 | 8B7548 | 11083 | 84 | 43 |
| 76-4132-05 | 30554 | 33 | 62 | 8B8679 | 11083 | 59 | 3 |
| 76-4132-06 | 30554 | 33 | 66 | 8F1326 | 11083 | 40 | 24 |
| 76-4133 | 30554 | 33 | 39 | 8F1635 | 11083 | 65 | 1 |
| 76-4134 | 30554 | 33 | 40 | 8F6302 | 11083 | 57 | 31 |
| 76-4139 | 30554 | 9 | 5 | 8F8178 | 11083 | 57 | 37 |
| 76-4153 | 30554 | 44 | 15 | 8F8804 | 11083 | 73 | 9 |
| 76-4161 | 30554 | 20 | 15 | 8F9538 | 11083 | 57 | 60 |
| 76-4164 | 30554 | 20 | 6 | 8H9520 | 11083 | 45 | 20 |
| 76-4169 | 30554 | 50 | 16 | 8H9789 | 11083 | 45 | 13 |
| 76-4170 | 30554 | 28 | 32 | 8H9789 | 11083 | 59 | 17 |
| 76-4171 | 30554 | 33 | 6 | 8H9804 | 11083 | 40 | 59 |
| 76-4172 | 30554 | 27 | 8 | 8K1207 | 11083 | 80 | 1 |
| 76-4173 | 30554 | 27 | 28 | 8M2296 | 11083 | 55 | 2 |
| 76-4177 | 30554 | 82 | 9 | 8M2296 | 11083 | 55 | 15 |
| 76-4182-01 | 30554 | 27 | 29 | 8M4445 | 11083 | 61 | 47 |
| 76-4184 | 30554 | 1 | 34 | 8M4988 | 11083 | 60 | 9 |
| 76-4189 | 30554 | 12 | 20 | 8M4988 | 11083 | 61 | 32 |
| 76-4190 | 30554 | 6 | 8 | 8M5248 | 11083 | 56 | 18 |
| 76-4190-01 | 30554 | 6 | 10 | 8M5253 | 11083 | 56 | 30 |
| 76-4191 | 30554 | 27 | - | 8M5260 | 11083 | 56 | 28 |
| 76-4192 | 30554 | 27 | 4 | 8M5599 | 11083 | 69 | 10 |
| 76-4193 | 30554 | 27 | 31 | 8M7145 | 11083 | 63 | 6 |
| 76-4195 | 30554 | 36 | 43 | 8M7587 | 11083 | 69 | 4 |
| 76-4199 | 30554 | 28 | 12 | 8M7640 | 11083 | 82 | 170 |
| 76-4210-01 | 30554 | 37 | 56 | 8M9024 | 11083 | 63 | 7 |
| 76-4210-02 | 30554 | 37 | 57 | 8M904 | 11083 | 68 | 6 |
| 76-4210-03 | 30554 | 37 | 58 | 8M9307 | 11083 | 80 | 11 |
| 76-4210-04 | 30554 | 37 | 60 | 8M9307 | 11083 | 80 | 25 |
| 76-4210-05 | 30554 | 37 | 61 | 8N109 | 11083 | 75 | 1 |
| 76-4211 | 30554 | 37 | 59 | 8N110 | 11083 | 75 | 8 |
| 76-4212 | 30554 | 44 | 3 | 8N1187 | 11083 | 66 | 22 |
| 76-4216 | 30554 | 33 | 15 | 8N1317 | 11083 | 40 | 48 |
| 7717-5NRED | 13103 | 26 | 20 | 8N1570 | 11083 | 40 | 64 |
| 79-1001-1 | 30554 | 52 | 98 | 8N1720 | 11083 | 70 | 5 |
| 79-4502 | 30554 | 11 | 74 | 8N1721 | 11083 | 70 | 1 |
| 79-4503 | 30554 | 11 | 1 | 8N1849 | 11083 | 70 | 4 |
| 79-4504 | 30554 | 33 | 7 | 8N2156 | 11083 | 39 | 12 |
| 79-4509 | 30554 | 2 | 4 | 8N3251 | 11083 | 64 | 23 |
| 79-4510 | 30554 | 24 | 47 | 8N3252 | 11083 | 64 | 19 |
| 79-4512 | 30554 | 24 | 3 | 8N3324 | 11083 | 64 | 14 |
| 79-4513 | 30554 | 24 | 68 | 8N3325 | 11083 | 64 | 11 |
| 79-4514 | 30554 | 11 | 8 | 8N3326 | 11083 | 64 | 18 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 8N3327 | 11083 | 64 | 15 |
| 8N3981 | 11083 | 77 | 4 |
| 8N4110 | 11083 | 80 | 9 |
| 8N4694 | 11083 | 41 | 5 |
| 8N4698 | 11083 | 41 | 1 |
| 8N4775 | 11083 | 80 | 13 |
| 8N4776 | 11083 | 80 | 21 |
| 8N4959 | 11083 | 76 | 12 |
| 8N4960 | 11083 | 76 | 8 |
| 8N533 | 11083 | 75 | 4 |
| 8N535 | 11083 | 75 | 3 |
| 8N5928 | 11083 | 45 | 5 |
| 8N5929 | 11083 | 45 | 4 |
| 8N7316 | 11083 | 61 | 12 |
| 8N743 | 11083 | 47 | 3 |
| 8N7782 | 11083 | 66 | 13 |
| 8N794 | 11083 | 62 | 6 |
| 8N81 | 11083 | 62 | 18 |
| 8N8219 | 11083 | 70 | 6 |
| 8N8224 | 11083 | 78 | 1 |
| 8N8635 | 11083 | 69 | 36 |
| 8N8636 | 11083 | 69 | 30 |
| 8N875 | 11083 | 66 | 15 |
| 8N9616 | 11083 | 41 | 8 |
| 8N9733 | 11083 | 41 | 17 |
| 8N9735 | 11083 | 41 | 19 |
| 8N9736 | 11083 | 41 | 20 |
| 8N9809 | 11083 | 41 | 13 |
| 8N9810 | 11083 | 41 | 14 |
| 8N984 | 11083 | 40 | 65 |
| 8S1326 | 11083 | 67 | 5 |
| 8S1326 | 11083 | 82 | 173 |
| 8S1491 | 11083 | 77 | 2 |
| 8S1498 | 11083 | 65 | 27 |
| 8S1499 | 11083 | 65 | 25 |
| 8S1605 | 11083 | 64 | 4 |
| 8S1918 | 11083 | 55 | 17 |
| 8S1965 | 11083 | 67 | 17 |
| 8S2241 | 11083 | 84 | 36 |
| 8S2243 | 11083 | 84 | 5 |
| 8S2389 | 11083 | 41 | 3 |
| 8S3970 | 11083 | 66 | 7 |
| 8S490 | 11083 | 69 | 25 |
| 8S493 | 11083 | 69 | 23 |
| 8S5165 | 11083 | 55 | 25 |
| 8S5166 | 11083 | 55 | 21 |
| 8S5167 | 11083 | 55 | 43 |
| 8S5168 | 11083 | 55 | 28 |
| 8S5169 | 11083 | 55 | 33 |
| 8S5409 | 11083 | 60 | 5 |
| 8S6410 | 11083 | 63 | 10 |
| 8S6511 | 11083 | 68 | 15 |
| 8S6511 | 11083 | 68 | 34 |
| 8S6814 | 11083 | 40 | 58 |
| 8S6814 | 11083 | 57 | 98 |
| 8S7762 | 11083 | 4 | 10 |
| 8S780 | 11083 | 43 | 28 |
| 8S8042 | 11083 | 55 | 32 |
| 8S8043 | 11083 | 55 | 30 |
| 8S8097 | 11083 | 55 | 19 |
| 8S8821 | 11083 | 45 | 11 |
| 8S8874 | 11083 | 67 | 4 |
| 8X1681 | 68505 | 16 | 48 |
| 8X3147 | 19728 | 16 | 1 |
| 8X3360 | 68505 | 16 | 46 |
| 8X4632 | 19728 | 16 | 35 |
| 8000A | 16258 | 36 | 17 |
| 8000A | 16258 | 82 | 37 |
| 8034668-48 | 18876 | 23 | 65 |
| 8085-1 | 13520 | 34 | 30 |
| 80965-D | 04009 | 30 | 18 |
| 8376101 | 46522 | 82 | 93 |
| 8396A0632-16 | 06540 | 24 | 40 |
| 8397-A-0632 | 06540 | 27 | 12 |
| 8441 | 16428 | 11 | 88 |
| 853562 | 70040 | 35 | 11 |
| 853562 | 11083 | 62 | 11 |
| 8561-295 | 31361 | 58 | 3 |
| 8561-295-37013-1 | 31361 | 58 | 100 |
| 8561-295-37013-2 | 31361 | 58 | 88 |
| 8561-295-37013-3 | 31361 | 58 | 53 |
| 8561-295-37013-3A | 31361 | 58 | 54 |
| 8561-295-37013-4 | 31361 | 58 | 56 |
| 858159 | 11083 | 58 | 34 |
| 8561-295-37013-5 | 31361 | 58 | 55 |
| 8561-295-37013-6 | 31361 | 58 | 89 |
| 8561-295-37013-7 | 31361 | 58 | 90 |
| 8561-295-37013-8 | 31361 | 58 | 99 |
| 8561-295- | | | |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 37013-9 | 31361 | 58 | 98 |
| 8561-295-37013-10 | 31361 | 58 | 97 |
| 8561-295-37013-11 | 31361 | 58 | 62 |
| 8561-295-37013-12 | 31361 | 58 | 61 |
| 8561-295-37013-13 | 31361 | 58 | 60 |
| 8561-295-37013-14 | 31361 | 58 | 59 |
| 8561-295-37013-15 | 31361 | 58 | 58 |
| 8561-295-37013-17 | 31361 | 58 | 95 |
| 8561-295-37013-18 | 31361 | 58 | 91 |
| 8561-295-37013-19 | 31361 | 58 | 94 |
| 8561-295-37013-20 | 31361 | 58 | 93 |
| 8561-295-37013-22 | 31361 | 58 | 96 |
| 8561-295-37013-23 | 31361 | 58 | 87 |
| 8561-295-37013-24 | 31361 | 58 | 83 |
| 8561-295-37013-25 | 31361 | 58 | 82 |
| 8561-295-37013-26 | 31361 | 58 | 79 |
| 8561-295-37013-26A | 31361 | 58 | 78 |
| 8561-295-37013-27 | 31361 | 58 | 80 |
| 8561-295-37013-28 | 31361 | 58 | 76 |
| 8561-295-37013-29 | 31361 | 58 | 77 |
| 8561-295-37013-30 | 31361 | 58 | 75 |
| 8561-295-37013-32 | 31361 | 58 | 71 |
| 8561-295-37013-33 | 31361 | 58 | 70 |
| 8561-295-37013-34 | 31361 | 58 | 69 |
| 8561-295-37013-37 | 31361 | 58 | 68 |
| 8561-295-37013-39 | 31361 | 58 | 66 |
| 8561-295-37013-40 | 31361 | 58 | 65 |
| 8561-295-37013-41 | 31361 | 58 | 64 |
| 8561-295-37013-42 | 31361 | 58 | 63 |
| 8561-295-37013-43 | 31361 | 58 | 85 |
| 8561-295-37013-44 | 31361 | 58 | 86 |
| 8561-295-37013-45 | 31361 | 58 | 51 |
| 8561-295-37013-46 | 31361 | 58 | 52 |
| 8561-295-37013-47 | 31361 | 58 | 30 |
| 8561-295-37013-65 | 31361 | 58 | 28 |
| 8561-295-37013-75 | 31361 | 58 | 74 |
| 8561-295-37013-76 | 31361 | 58 | 73 |
| 8561-295-37013-209 | 31361 | 58 | 21 |
| 8561-295-37013-231 | 31361 | 58 | 19 |
| 8561-295-37013-232 | 31361 | 58 | 18 |
| 8561-295-37013-233 | 31361 | 58 | 14 |
| 8561-295-37013-234 | 31361 | 58 | 15 |
| 8561-295-37013-235 | 31361 | 58 | 16 |
| 8561-295-37013-236 | 31361 | 58 | 17 |
| 8561-295-37013-237 | 31361 | 58 | 20 |
| 8561-295-37013-238 | 31361 | 58 | 22 |
| 8561-295-37013-243 | 31361 | 58 | 45 |
| 8561-295-37013-245 | 31361 | 58 | 38 |
| 8561-295-37013-246 | 31361 | 58 | 44 |
| 8561-295- | | | |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|
| 37013-247 | 31361 | 58 | 43 |
| 8561-295-37013-249 | 31361 | 58 | 37 |
| 8561-295-37013-283 | 31361 | 58 | 48 |
| 8561-295-37013-288 | 31361 | 58 | 47 |
| 8561-295-37013-289 | 31361 | 58 | 46 |
| 8561-295-37013-290 | 31361 | 58 | 50 |
| 8561-295-37013-291 | 31361 | 58 | 41 |
| 8561-295-37013-292 | 31361 | 58 | 42 |
| 8561-295-37013-293 | 31361 | 58 | 39 |
| 8561-295-37013-294 | 31361 | 58 | 40 |
| 8561-295-37013-341 | 31361 | 58 | 13 |
| 8561-295-37013-342 | 31361 | 58 | 36 |
| 8561-295-37013-343 | 31361 | 58 | 35 |
| 8561-295-37013-344 | 31361 | 58 | 34 |
| 8561-295-37013-345 | 31361 | 58 | 33 |
| 8561-295-37013-347 | 31361 | 58 | 32 |
| 8561-295-37013-348 | 31361 | 58 | 25 |
| 8561-295-37013-349 | 31361 | 58 | 26 |
| 8561-295-37013-350 | 31361 | 58 | 24 |
| 8561-295-37013-351 | 31361 | 58 | 23 |
| 8561-295-37013-352 | 31361 | 58 | 12 |
| 8561-295-37013-353 | 31361 | 58 | 11 |
| 8561-295-37013-354 | 31361 | 58 | 8 |
| 8561-295-37013-355 | 31361 | 58 | 7 |
| 8561-295-37013-356 | 31361 | 58 | 10 |
| 8561-295-37013-357 | 31361 | 58 | 9 |
| 8561-295-37013-358 | 31361 | 58 | 6 |
| 8561-295-37013-359 | 31361 | 58 | 5 |
| 8561-295-37013-360 | 31361 | 58 | 4 |
| 8561-295-37013-361 | 31361 | 58 | 57 |
| 8652 | 64560 | 83 | 61 |
| 8724495 | 19207 | 83 | 51 |
| 8906K1359 | 27192 | 19 | 29 |
| 89 54-9 | 70903 | 25 | 49 |
| 895-8D | 80049 | 54 | 10 |
| 899-0001 | 07988 | 53 | 18 |
| 8995 | 64560 | 83 | 60 |
| 9-11 | 31211 | 10 | 13 |
| 9B1320 | 11083 | 40 | 43 |
| 9B887 | 11083 | 43 | 35 |
| 9F1707 | 11083 | 57 | 15 |
| 9F2247 | 11083 | 78 | 7 |
| 9F4522 | 11083 | 61 | 49 |
| 9F6580 | 11083 | 40 | 2 |
| 9F6705 | 11083 | 61 | 44 |
| 9F7022 | 11083 | 39 | 3 |
| 9F7022 | 11083 | 57 | 46 |
| 9H1110 | 11083 | 64 | 8 |
| 9H1112 | 11083 | 64 | 9 |
| 9H1113 | 11083 | 64 | 7 |
| 9H5921 | 11083 | 71 | 16 |
| 9H6067 | 11083 | 55 | 49 |
| 9H6067 | 11083 | 61 | 14 |
| 9H7553 | 11083 | 61 | 53 |
| 9L1366 | 11083 | 73 | 8 |
| 9L1480 | 11083 | 61 | 60 |
| 9L1680 | 11083 | 61 | 63 |
| 9L1794 | 11083 | 46 | 8 |
| 9L2006 | 11083 | 59 | 16 |
| 9L5613 | 11083 | 59 | 8 |
| 9L5614 | 11083 | 59 | 19 |
| 9L5615 | 11083 | 59 | 12 |
| 9L5617 | 11083 | 59 | 22 |
| 9L572 | 11083 | 61 | 48 |
| 9L5854 | 11083 | 80 | 18 |
| 9L6257 | 11083 | 62 | 7 |
| 9L6261 | 11083 | 62 | 3 |
| 9L6588 | 11083 | 17 | 4 |
| 9L6788 | 11083 | 40 | 60 |

## Section IV. NATIONAL STOCK NUMBER AND REFERENCE NUMBER INDEX

| Reference Number | FSCM | Fig No | Item No | Reference Number | FSCM | Fig No | Item No |
|---|---|---|---|---|---|---|---|
| 9L6863 | 11083 | 40 | 55 | 9S3111 | 11083 | 78 | 11 |
| 9L8492 | 11083 | 54 | 8 | 9S3187 | 11083 | 74 | 7 |
| 9L865 | 11083 | 62 | 15 | 953188 | 11083 | 74 | 8 |
| 9L875 | 11083 | 62 | 12 | 9S4180 | 11083 | 40 | 12 |
| 9L878 | 11083 | 62 | 16 | 9S7720 | 11083 | 54 | 7 |
| 9L901 | 11083 | 62 | 13 | 9S7788 | 11083 | 70 | 12 |
| 9L9045 | 11083 | 54 | 9 | 9S8611 | 11083 | 39 | 10 |
| 9L9068 | 11083 | 57 | 49 | 9S8614 | 11083 | 39 | 9 |
| 9L9424 | 11083 | 40 | 44 | 9S8615 | 11083 | 39 | 13 |
| 9M1179 | 11083 | 57 | 101 | 9S8871 | 11083 | 84 | 33 |
| 9M1311 | 11083 | 56 | 5 | 9S9332 | 11083 | 57 | 36 |
| 9M1974 | 11083 | 39 | 2 | 90-2206 | 68505 | 16 | KIT |
| 9M1974 | 11083 | 46 | 18 | 90-2207 | 68505 | 16 | KIT |
| 9M1974 | 11083 | 59 | 11 | 9034661 | 18876 | 25 | 31 |
| 9M1974 | 11083 | 69 | 27 | 9034663 | 18876 | 30 | 9 |
| 9M4252 | 11083 | 57 | 43 | 9034663 | 18876 | 15 | 30 |
| 9M4849 | 11083 | 68 | 7 | 9093668 | 19207 | 65 | 10 |
| 9M6527 | 11083 | 44 | 7 | 9421423 | 19728 | 16 | 36 |
| 9M7021 | 11083 | 68 | 9 | 9421423 | 68505 | 16 | 47 |
| 9M853 | 11083 | 61 | 29 | 98265-4-380 | 60119 | 1 | 3 |
| 9M8915 | 11083 | 55 | 35 | 98292-2-250 | 76530 | 19 | 76 |
| 9M8919 | 11083 | 55 | 29 | 98292-3-310 | 76530 | 6 | 13 |
| 9N5250 | 11083 | 70 | 13 | 99836 | 60119 | 1 | 35 |
| 9N5251 | 11083 | 70 | 9 | 99836 | 76530 | 6 | 12 |
| 9N5862 | 11083 | 40 | 46 | 99836 | 76530 | 19 | 75 |
| 9N6117 | 11083 | 66 | 16 | 99947P130 | 60119 | 1 | 38 |
| 9S1364 | 11083 | 62 | 5 | 99947P130 | 76530 | 26 | 9 |
| 9S1366 | 11083 | 71 | 11 | 99947P130 | 76530 | 26 | 13 |
| 9S3029 | 11083 | 70 | 10 | | | | |

## Section V. REFERENCE DESIGNATOR INDEX

| Reference Designator | Figure & Item No. | Reference Number |
|---|---|---|
| A10 | 24-14 | 70-4115 |
| A10C1 | 25-28 | M39006/09-8728 |
| A10C2 | 25-23 | M39006/09-8734 |
| A10C3 | 25-18 | M39006/09-8731 |
| A10C4 | 25-21 | M39006/09-8674 |
| A10C5 | 25-23 | M39006/09-8734 |
| A10CR7 | 25-13 | JAN1N4247 |
| A10CR8 | 25-13 | JAN1N4247 |
| A10CR9 | 25-13 | JAN1N4247 |
| A10CR10 | 25-13 | JAN1N4247 |
| A10CR11 | 25-13 | JAN1N4247 |
| A10CR12 | 25-13 | JAN1N4247 |
| A10CR13 | 25-13 | JAN1N4247 |
| A10CR14 | 25-13 | JAN1N4247 |
| A10CR15 | 25-13 | JAN1N4247 |
| A10CR16 | 25-13 | JAN1N4247 |
| A10CR17 | 25-13 | JAN1N4247 |
| A10J11 | 25-47 | MS3102R18-1S |
| A10Q1 | 25-19 | JAN2N2904A |
| A10Q2 | 25-19 | JAN2N2904A |
| A10Q3 | 25-40 | 71-4936 |
|  |  | SDT1061 |
| A10Q3 | 25-61 | JAN2N697 |
| A10Q4 | 25-54 | 71-4936 |
|  |  | SDT1061 |
| A10Q6 | 25-61 | JAN2N697 |
| A10R2 | 25-16 | RNR70C6810FS |
| A10R20 | 25-60 | RCR32G512JS |
| A10R21 | 25-12 | RCR206912JS |
| A10R3 | 25-17 | RNR65C5620FS |
| A10R4 | 25-24 | RNR65C6810FS |
| A10R5 | 25-17 | RNR65C5620FS |
| A10R6 | 25-17 | RNR65C5620FS |
| A10R7 | 25-17 | RNR65C5620FS |
| A10R8 | 25-25 | RNR65C2211FS |
| A10R9 | 25-26 | RCR32C101JS |
| A10R14 | 25-27 | RCR42G471JS |
| A10R16 | 25-14 | RNR70C4990FS |
| A10R18 | 25-59 | RCR20G102JS |
| A10R19 | 25-59 | RCR20G102JS |
| A10T5 | 25-10 | 70-4032 |
|  |  | 00000-4831 |
| A10VR1 | 24-22 | JAN1N751A |
| A2 | 19-8 | 69-595 |
|  |  | 268420 |
| A20 | 22-3 | 70-4206 |
| A20A7 | 22-23 | 70-4209 |
| A20A7TB2 | 22-24 | 38TB-4 |
| A20J4 | 22-14 | MS3102R20-29P |
| A20J51 | 22-15 | MS3102R28-12P |
| A20K2 | 22-34 | 70-1138 |
|  |  | 11486 |
| A20K3 | 22-35 | 70-1137 |
|  |  | 23380 |
| A20K14 | 22-38 | 70-1135 |
|  |  | 6105-0001 |
| A20K15 | 22-36 | 70-1136 |
|  |  | 21690-1 |
| A20TB2 | 22-21 | 38TB-10 |
| A5 | 23-23 | 69-768 |
| A5CR3 | 23-34 | 69-741 |
|  |  | 1N1695 |
| A5CR4 | 23-35 | 69-739 |
|  |  | B-598-40 |
| A5CR6 | 23-36 | 69-740 |
|  |  | MR1034A |
| A5K5 | 23-29 | M5757/23-003 |
| A5K6 | 23-29 | M5757/23-003 |
| A5K7 | 23-29 | M5757/23-003 |
| A5R3 | 23-33 | RWR78S1501FR |
| A5R4 | 23-31 | RWR78S2671FR |
| A5R5 | 23-32 | RW56V512 |
| A5R6 | 23-32 | RW56V512 |
| A5R7 | 23-31 | RWR78S2671FR |
| A8 | 32-3 | 69-785 |
|  |  | 69-500 Rev C |
| A8A6 | 32-11 | 69-511 |
|  |  | 04306-8074 |
| A8A6J7 | 32-12 | 69-502-2 |
| A8T1 | 32-25 | 69-508 |
|  |  | 04306-8072 |
| A9 | 18-2 | 69-530 |
| A9C1 | 18-28 | M39022/01-1661 |
| A9C10 | 18-28 | M39022/01-1661 |
| A9C2 | 18-28 | M39022/01-1661 |
| A9C3 | 18-28 | M39022/01-1661 |
| A9C4 | 18-28 | M39022/01-1661 |
| A9C5 | 18-28 | M39022/01-1661 |
| A9C6 | 18-28 | M39022/01-1661 |
| A9C7 | 18-28 | M39022/01-1661 |
| A9C8 | 18-28 | M39022/01-1661 |
| A9C9 | 18-28 | M39022/01-1661 |
| A9CR1 | 18-31 | JAN1N5614 |
| A9CR10 | 18-31 | JAN1N5614 |
| A9CR2 | 18-31 | JAN1N5614 |
| A9CR3 | 18-31 | JAN1N5614 |
| A9CR4 | 18-31 | JAN1N5614 |
| A9CR5 | 18-31 | JAN1N5614 |

## Section V. REFERENCE DESIGNATOR INDEX

| Reference Designator | Figure & Item No. | Reference Number |
|---|---|---|
| A9CR6 | 18-31 | JAN1N5614 |
| A9CR7 | 18-31 | JAN1NS614 |
| A9CR8 | 18-31 | JAN1N5614 |
| A9CR9 | 18-31 | JAN1N5614 |
| A9DS1 | 18-20 | MIL-I-3661/5<br>LH73/1 |
| A9DS10 | 18-20 | MIL-I-3551/5<br>LH73/1 |
| A9DS2 | 18-20 | MIL-I-3661/5<br>LH73/1 |
| A9DS3 | 18-20 | MIL-I-3661/S<br>LH73/1 |
| A9DS4 | 18-20 | MIL-I-3661/5<br>LH73/1 |
| A9DS5 | 18-20 | MIL-I-3661/5<br>LH73/1 |
| A9DS6 | 18-20 | MIL-I-3661/5<br>LH73/1 |
| A9DS7 | 18-20 | MIL-I-3661/5<br>LH73/1 |
| A9DS8 | 18-20 | MIL-I-3661/5<br>LH73/1 |
| A9DS9 | 18-20 | MIL-I-3661/5<br>LH73/1 |
| A9J12 | 18-7 | 69-502-7 |
| A9SCR1 | 18-29 | 2N1596<br>69-542 |
| A9SCR10 | 18-29 | 2N1596<br>69-542 |
| A9SCR2 | 18-29 | 2N1596<br>69-542 |
| A9SCR3 | 18-29 | 2N1596<br>69-542 |
| A9SCR4 | 18-29 | 2N1596<br>69-542 |
| A9SCR5 | 18-29 | 2N1596<br>69-542 |
| A9SCR6 | 18-29 | 2N1596<br>69-542 |
| A9SCR7 | 18-29 | 2N1596<br>69-542 |
| A9SCR8 | 18-29 | 2N1596<br>69-542 |
| A9SCR9 | 18-29 | 2N1596<br>69-542 |
| A9R1 | 18-27 | RCR20G222JM |
| A9R10 | 18-27 | RCR20G222JM |
| A9R11 | 18-33 | RCR20G102JM |
| A9R12 | 18-33 | RCR20G102JM |

| Reference Designator | Figure & Item No. | Reference Number |
|---|---|---|
| A9R13 | 18-33 | RCR20G102JM |
| A9R14 | 18-33 | RCR20G102JM |
| A9R15 | 18-33 | RCR20G102JM |
| A9R16 | 18-33 | RCR20G102JM |
| A9R17 | 18-33 | RCR20G102JM |
| A9R18 | 18-33 | RCR20G102JM |
| A9R19 | 18-33 | RCR20G102JM |
| A9R2 | 18-27 | RCR20G222JM |
| A9R20 | 18-33 | RCR20G102JM |
| A9R3 | 18-27 | RCR20G222JM |
| A9R4 | 18-27 | RCR20G222JM |
| A9R5 | 18-27 | RCR20G222JM |
| A9R6 | 18-27 | RCR20G222JM |
| A9R7 | 18-27 | RCR20G222JM |
| A9R8 | 18-27 | RCR20G222JM |
| A9R9 | 18-27 | RCR20G222JM |
| B2 | 11-14 | MS27144-2 |
| B3 | 11-14 | MS27144-2 |
| CB1 | 15-12 | MS25244-7-1/2 |
| CB2 | 27-29 | 76-4182-01 |
| CB3 | 30-19 | MS25244-15 |
| CR1 | 19-62 | 69-739<br>B-598-40 |
| CR1 | 82-36 | NR1034A<br>69-740 |
| CR23 | 83-131 | JAN1N5624 |
| CR24 | 83-131 | JAN1N5624 |
| CR25 | 83-131 | JAN1N5624 |
| CR26 | 83-131 | JAN1N5b24 |
| CR29 | 12-17 | JAN1N4245 |
| CT1 | 31-4 | 70-4084<br>51-464-1 |
| CT2 | 31-4 | 70-4084<br>51-464-1 |
| CT3 | 31-4 | 70-4084<br>51-464-1 |
| CT4 | 31-7 | 70-4067<br>00000-4921 |
| CT5 | 31-6 | 70-4086<br>00000-4922 |
| CT6 | 31-6 | 70-4086<br>00000-4922 |
| CT7 | 31-9 | 70-4085<br>6-400/1 |
| C2 | 19-60 | M39006/02-1240 |
| DS1 | 19-15 | 69-593<br>47-0901-2900-201 |
| DS11 | 83-108 | LH80/1 |
| DS2 | 19-15 | 69-593 |

## Section V. REFERENCE DESIGNATOR INDEX

| Reference Designator | Figure & Item No. | Reference Number | Reference Designator | Figure & Item No. | Reference Number |
|---|---|---|---|---|---|
| | | 47-0901-2900-201 | MT2 | 21-1 | 69-781 |
| DS3 | 19-15 | 69-593 | | | 506-AE |
| | | 47-0901-2900-201 | MT3 | 11-14 | MS27144-2 |
| DS4 | 19-23 | 69-549 | MT3 | 21-3 | MS500040-2 |
| | | 51-3502-0137-203 | M1 | 19-11 | 69-576-2 |
| DS5 | 19-23 | 69-549 | | | 505BD |
| | | 51-3502-0137-203 | M2 | 19-10 | 69-577 |
| DS6 | 19-19 | MS25331-2 | | | 505-BE |
| DS7 | 19-19 | MS25331-2 | M3 | 19-12 | 69-575 |
| DS8 | 19-27 | MS25331-4 | | | 505-BC |
| F2 | 83-112 | 571004 | M4 | 19-13 | 69-574 |
| | | 71-4867 | | | 253633 |
| J1 | 19-46 | 69-661-14 | M5 | 19-14 | 73-0507 |
| | | MS3102R36-7P | | | M-5600 |
| J10 | 23-59 | MS3102R32-7P | M6 | 19-8 | 69-595 |
| J13 | 24-29 | MS3102R22-14P | | | 268420 |
| J19 | 83-101 | MS3102R28-9S | M7 | 19-7 | 70-4012 |
| J2 | 23-58 | MS3102R36-7S | | | 260935 |
| J26 | 82-18 | MS3102R18-11P | M8 | 19-5 | 69-597 |
| J27 | 82-19 | MS3102R18-11S | | | 267842 |
| J29 | 23-62 | MS3102R22-19S | M9 | 19-6 | 69-599 |
| J3 | 23-57 | MS3102R-6S | | | 254013 |
| J37 | 12-8 | MS3102R18-1P | OP | 14-1 | 70-4043 |
| J39 | 15-11 | MS3102R16-10P | | | SP1Z15FA |
| J41 | 27-27 | MS3102R20-29P | P1 | 33-8 | MS3106R36-7S |
| J48 | 30-11 | MS3102R18-5P | P1 | 83-83 | MS3106R28-9P |
| J49 | 83-103 | MS3102R16-10P | P10 | 33-16 | MS3106R32-7S |
| J5 | 24-61 | MS3102R36-7P | P11 | 25-28 | MS3106R18-1P |
| J50 | 24-60 | MS3102R28-12S | P12 | 11-4 | MS3106R20-27S |
| J55 | 30-18 | 69-691 | P13 | 33-21 | MS3106R22-14S |
| | | 80965-D | P14 | 11-16 | MS3106R14S-2S |
| J6 | 23-63 | MS3102R20-27S | P16 | 33-75 | MS3108R20-29S |
| J62 | 12-7 | MS3102R16-10P | P2 | 33-10 | MS3106R36-7P |
| J7 | 23-56 | MS3102R18-11S | P26 | 82-4 | MS3106R18-11S |
| J9 | 24-30 | MS3102R14S-6P | P27 | 82-11 | MS3106R18-11S |
| K1 | 19-65 | M5757/23-003 | P3 | 11-82 | MS3106R14S-6P |
| K23 | 12-10 | M5757/23-003 | P30 | 82-10 | MS3106R16-10S |
| K26 | 27-10 | M5757/23-003 | P33 | 11-16 | MS3106R14-2S |
| K27 | 27-14 | MS27401-2 | P35 | 11-12 | MS3106E16-10S |
| K3 | 23-20 | MS241660D1 | P36 | 11-15 | M83723/23R1104N |
| K6 | 19-65 | M5757/23-003 | P37 | 11-13 | MS3106F18-1S |
| L0 | 29-14 | 69-692-5 | P38 | 11-15 | M83723/23R1104N |
| L1 | 24-13 | 70-4040 | P39 | 11-15 | M83723/23R1104N |
| | | 00000-4925 | P4 | 33-73 | MS3106R20-29S |
| L1 | 29-14 | 69-692-5 | P41 | 33-20 | MS3106R20-29S |
| L2 | 29-14 | 69-692-5 | P42 | 11-16 | MS3106R14S-2S |
| L3 | 29-14 | 69-692-5 | P43 | 11-17 | MS3106R18-5P |
| MT1 | 21-2 | 69-779-2 | P48 | 33-19 | MS3106R18-5S |
| | | 506-AD | P5 | 11-9 | MS3106R36-7S |

## Section V. REFERENCE DESIGNATOR INDEX

| Reference Designator | Figure & Item No. | Reference Number |
|---|---|---|
| P50 | 11-75 | MS3106R28-12P |
| P51 | 11-77 | MS3106R28-12S |
| P6 | 11-2 | MS3106R20-27P |
| P61 | 33-19 | MS3106R18-5S |
| P7 | 82-5 | MS3106R18-11P |
| P9 | 11-84 | MS3106R14S-6S |
| R1 | 23-22 | RW29V100 |
| R1 | 24-56 | RW31V911 |
| R10 | 19-61 | RWR78S150FM |
| R10A | 24-54 | RW31V200 |
| R10B | 24-54 | RW31V200 |
| R13 | 23-19 | MS91586-10 |
| R17 | 24-55 | RW31V100 |
| R2 | 19-18 | 69-548<br>RP101FD251KK |
| R20 | 83-136 | RER65F249IM |
| R29 | 23-41 | 75-0851 |
| S1 | 19-30 | MS35058-30 |
| S2 | 19-29 | 69-572<br>8906K1359 |
| S22 | 83-123 | 24201G2<br>70-4066 |
| S3 | 19-28 | MS25201-6 |
| S4 | 19-26 | MS35058-22 |
| S5 | 19-25 | MS3S5059-23 |
| S6 | 19-22 | MS25068-23 |
| S7 | 19-22 | MS25068-23 |
| S8 | 19-9 | 70-4016<br>31904LT |
| S9-1 | 12-4 | 76-4123-02 |
| S9-3 | 12-4 | 76-4123-02 |
| TB1 | 23-10 | 38TB-14 |
| TB1 | 24-37 | 40TB-6 |
| TB1 | 27-23 | 37TB-12 |
| TB1 | 83-130 | 37TB-6 |
| TB2 | 23-10 | 38TB-14 |
| TB2 | 31-14 | 38TB-6 |
| TB3 | 23-10 | 38TB-14 |
| TB4 | 23-10 | 38TB-14 |
| T1 | 23-15 | 70-4064<br>00000-4836 |
| T1 | 24-16 | 70-4041<br>00000-4923 |
| T4 | 24-15 | 70-4031<br>00000-4924 |
| WT | 14-2 | 69-697-4<br>TC-150-222-4-ANSL |

**RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS**

## SOMETHING WRONG **WITH THIS PUBLICATION**

*THEN ... JOT DOWN THE INFO ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT. FOLD IT AND DROP IT IN THE MAIL.*

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)
Commander
Stateside Army Depot
ATTN: AMSTA-US
Stateside, N.J. 07703-5007

DATE SENT
10 July 1975

| PUBLICATION NUMBER | PUBLICATION DATE | PUBLICATION TITLE |
|---|---|---|
| TM 11-5840-340-20P | 23 Jan 74 | Radar Set AN/PRC-76 |

| BE EXACT PIN-POINT WHERE IT IS | | | | IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT: |
|---|---|---|---|---|
| PAGE NO | PARA GRAPH | FIGURE NO | TABLE NO | |
| 2-25 | 2-28 | | | Recommend that the installation antenna alignment procedure be changed throughout to specify a 20 IFF antenna lag rather than 10.<br>REASON: Experience has shown that with only a 10 lag, the antenna servo system is too sensitive to wind gusting in excess of 25 knots, and has a tendency to rapidly accelerate and decelerate as it hunts, causing strain to the drive train. Hunting is minimized by adjusting the lag to 20 without degradation of operation. |
| 3-10 | 3-3 | | 3-1 | Item 5, Functional column. Change •2 dB" to •3 dB".<br>REASON: The adjustment procedure for the TRANS POWER FAULT indicator calls for a 3 dB (500 watts) adjustment to light the TRANS POWER FAULT indicator. |
| 5-6 | 5-8 | | | Add new step f.1 to read, •Replace cover plate removed in step e.1, above."<br>REASON: To replace the cover plate. |
| | | FO-3 | | Zone C 3. On J1-2, change •+24 VDC" to •+5 VDC".<br>REASON: This is the output line of the 5 VDC power supply. +24 VDC is the input voltage. |

SAMPLE

| PRINTED NAME, GRADE OR TITLE AND TELEPHONE NUMBER | SIGN HERE |
|---|---|
| SSG I. M. DeSpiritof 999-1776 | SSG I. M. DeSpiritof |

**DA** FORM 1 JUL 79 **2028-2**

PREVIOUS EDITIONS ARE OBSOLETE

P.S. - IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

**TEAR ALONG DOTTED LINE**

REVERSE OF DA FORM 2028-2

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PLEASE
AFFIX
STAMP
POSTAGE
REQUIRED

**Commander**
**U.S. Army Communications-Electronics Command**
**and Fort Monmouth**
**ATTN: AMSEL-LC-LEO-D-CS-CFO**
**Fort Monmouth, New Jersey 07703-5006**

SAMPLE

**TEAR ALONG DOTTED LINE**

TEAR ALONG DOTTED LINE

**RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS**

# SOMETHING WRONG WITH THIS PUBLICATION

*THEN ... JOT DOWN THE INFO ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT. FOLD IT AND DROP IT IN THE MAIL.*

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

| | | |
|---|---|---|
| PUBLICATION NUMBER | PUBLICATION DATE | PUBLICATION TITLE |

BE EXACT PIN-POINT WHERE IT IS

| PAGE NO | PARA GRAPH | FIGURE NO | TABLE NO |
|---|---|---|---|

**IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:**

| | |
|---|---|
| PRINTED NAME, GRADE OR TITLE AND TELEPHONE NUMBER | SIGN HERE |

**DA** FORM 1 JUL 79 **2028-2**

PREVIOUS EDITIONS ARE OBSOLETE

P.S. - IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

REVERSE OF DA FORM 2028-2

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PLEASE
AFFIX
STAMP
POSTAGE
REQUIRED

TEAR ALONG DOTTED LINE

**Commander**
**U.S. Army Communications-Electronics Command**
**and Fort Monmouth**
**ATTN: AMSEL-LC-LEO-D-CS-CFO**
**Fort Monmouth, New Jersey 07703-5006**

**TEAR ALONG DOTTED LINE**

## RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS

# SOMETHING WRONG WITH THIS PUBLICATION

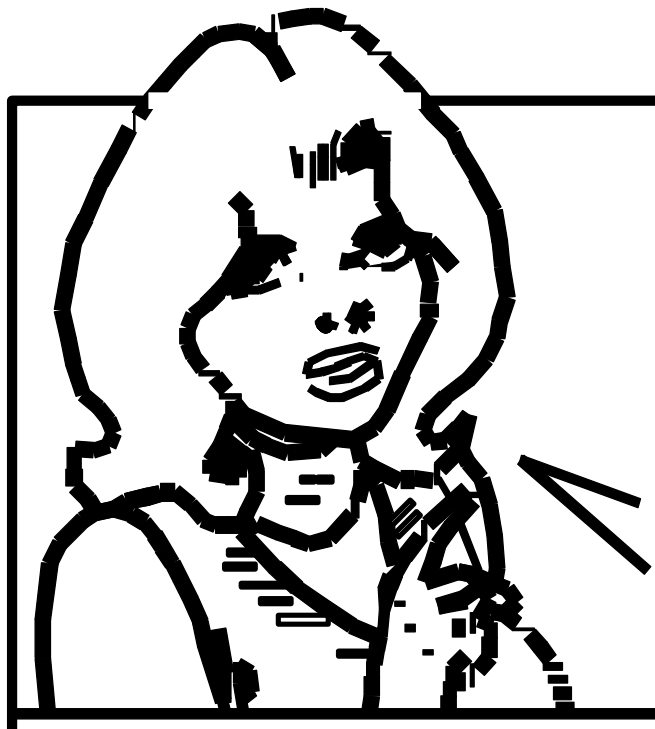

*THEN ... JOT DOWN THE INFO ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT. FOLD IT AND DROP IT IN THE MAIL.*

| |
|---|
| FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS) |
| DATE SENT |

| | | |
|---|---|---|
| PUBLICATION NUMBER | PUBLICATION DATE | PUBLICATION TITLE |

| | | | | |
|---|---|---|---|---|
| BE EXACT PIN-POINT WHERE IT IS | | | | **IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:** |
| PAGE NO | PARA GRAPH | FIGURE NO | TABLE NO | |

| | |
|---|---|
| PRINTED NAME, GRADE OR TITLE AND TELEPHONE NUMBER | SIGN HERE |

**DA** FORM 1 JUL 79 **2028-2**

PREVIOUS EDITIONS ARE OBSOLETE

P.S. - IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

REVERSE OF DA FORM 2028-2

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PLEASE
AFFIX
STAMP
POSTAGE
REQUIRED

TEAR ALONG DOTTED LINE

**Commander**
**U.S. Army Communications-Electronics Command**
**and Fort Monmouth**
**ATTN: AMSEL-LC-LEO-D-CS-CFO**
**Fort Monmouth, New Jersey 07703-5006**

**RECOMMENDED CHANGES TO EQUIPMENT TECHNICAL PUBLICATIONS**

# SOMETHING WRONG WITH THIS PUBLICATION

*THEN ... JOT DOWN THE INFO ABOUT IT ON THIS FORM. CAREFULLY TEAR IT OUT. FOLD IT AND DROP IT IN THE MAIL.*

FROM: (PRINT YOUR UNIT'S COMPLETE ADDRESS)

DATE SENT

| | | |
|---|---|---|
| PUBLICATION NUMBER | PUBLICATION DATE | PUBLICATION TITLE |

| | | | | |
|---|---|---|---|---|
| BE EXACT PIN-POINT WHERE IT IS | | | | **IN THIS SPACE TELL WHAT IS WRONG AND WHAT SHOULD BE DONE ABOUT IT:** |
| PAGE NO | PARA GRAPH | FIGURE NO | TABLE NO | |

| | |
|---|---|
| PRINTED NAME, GRADE OR TITLE AND TELEPHONE NUMBER | SIGN HERE |

**DA** FORM 1 JUL 79 **2028-2**

PREVIOUS EDITIONS ARE OBSOLETE

P.S. - IF YOUR OUTFIT WANTS TO KNOW ABOUT YOUR RECOMMENDATION MAKE A CARBON COPY OF THIS AND GIVE IT TO YOUR HEADQUARTERS.

**TEAR ALONG DOTTED LINE**

REVERSE OF DA FORM 2028-2

FILL IN YOUR
UNIT'S ADDRESS

FOLD BACK

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

PLEASE
AFFIX
STAMP
POSTAGE
REQUIRED

TEAR ALONG DOTTED LINE

**Commander**
**U.S. Army Communications-Electronics Command**
**and Fort Monmouth**
**ATTN: AMSEL-LC-LEO-D-CS-CFO**
**Fort Monmouth, New Jersey 07703-5006**

By Order of the Secretary of the Army:

ERIC K. SHINSEKI
*General, United States Army*
*Chief of Staff*

Official:

Joel B. Hud
JOEL B. HUDSON
*Administrative Assistant to the*
*Secretary of the Army*
0214311

By Order of the Secretary of the Air Force:

JOHN P. JUMPER
*General, United States Air Force*
*Chief of Staff*

Official:

GEORGE T. BABBITT
*General, United States Air Force*
*Commander, AFMC*

By Order of the Secretary of the Navy:

WALTER H. CANTRELL
*Rear Admiral, United States Navy*
*Commander, Space and Naval Warfare*
*Systems Command*

By Order of the Secretary of the Marine Corps:

RANDALL P. SHOCKEY
*Director, Program Support*
*Marine Corps Systems Command*

DISTRIBUTION:

To be distributed in accordance with the initial distribution number (IDN) 250863 requirements for TM 5-6115-600-24P.